

Professional Quality


All the information you will need on Liebherr commercial appliances can be found in our catalogue “Commercial appliances for catering use”.

Our “Special” brochures provide more information on our ranges of wine cabinets and chest and upright ice-cream freezers.



DRINKS SPECIAL

Chiller cabinets for Professional use




Top performance with top quality


Cold drinks are in demand throughout the whole year. And to keep them at exactly the right temperature all the time you need a high performance refrigerator that can run continuously. Liebherr's refrigerators for drinks, chill products quickly even when the doors are opened frequently. They have a powerful refrigeration system, they are reliable, and thanks to their high


quality finish they have an extremely long service life. Liebherr is setting standards in this field with the introduction of environmentally-friendly CFC/FC-free appliances. Quality for professional use from the refrigeration specialists. We would be happy to design a customised appliance to suit your own specific needs. Contact us for a quotation.





Liebherr has the right drinks refrigerator for every application

Branded appliances	Pages	6-7			
					

Forced-air display Refrigerators	Pages	10-11			
		FKDv 4312 FKvsl 4112 FKDv 3712 FKDv 1002			

Forced-air drinks Refrigerators	Pages	14-15	16-17	18-19	20-21	22-23
		FKvsl 5412 FKvsl 5410 FKvsl 3612 FKvsl 3610 FKv 5412 FKv 5410 FKv 3612 FKv 3610	FKvsl 2612 FKvsl 2610 FKv 502 FKv 2612 FKv 2610	FKv 4360 FKv 4310 UKS 1800 UKS 1801	GKv 6410 GKv 5710 FKSBv 3600	UKU 1852 UKU 1850 UKU 1805 UKU 1802 UKU 1800

Static drinks refrigerators	Pages	26-27	28-29	30-31	
		FKS 5002 FKS 3602 FKS 2602 FKS 1802	FKS 5000 FKS 3600 FKS 2600 FKS 1800 FKU 1800 FKU 1805	FKZ 1800	

Chest bottle coolers	Pages	32-35			
		FTI 2902 FT 2902 FT 2900 FT 1401			

Accessories and technical data	Pages	36-39			
					

Always the perfect solution

Whether you choose an appliance that is branded to your own design or one equipped with special features: Liebherr's refrigerators for drinks are designed to meet every need. Our wide range of models and exten-

sive choice of accessories make it easy to create the perfect solution for every use – tailor-made for successful sales.

The illuminated focal point

The illuminated display canopy, which is switched on with the interior light, is sure to attract a lot of attention to the appliance and its contents. The display canopy can be branded to meet your own requirements.

Colourful appliances

To help you maximise sales, the outside and the inside of Liebherr's refrigerators can both be perfectly adapted to suit every need. Brightly coloured, with vinyls or silk-screen printing: there is plenty of scope for customising our appliances. We can even create graphic design to your own specifications. With Liebherr's unique thermal sublimation technique, appliances can be coated with high-resolution designs. The graphics are transferred directly into the surface of the appliance, creating a high quality, durable, scratch proof solution.

For information or advertising: the scanner rail

Your individual, low-cost advertising solution is bound to catch the consumer's eye on the practical scanner rail. The rail, which is attached to the front of the shelves, is also the perfect location for price labels and bar codes. So customers can see at a glance what the products cost. And products are easy to scan for re-ordering or stocktaking purposes.



Display refrigerators with forced-air cooling

With their comprehensive features, these drinks refrigerators meet all the requirements for the successful presentation of products. From the illuminated display canopy to the double-glazed door and the customer-friendly interior, these appliances really allow fresh products to be presented to their best advantage. And they offer the impressive professional

performance you expect from all Liebherr's refrigerators with forced-air cooling. Drinks are chilled quickly, and the cold air is evenly distributed throughout the interior. The temperature can be set between +2°C and +15°C. Another very important feature is the extra re-inforcement inside the front edge of the cabinet for greater stability and strength.

Dynamic cooling with the forced-air system

The powerful forced-air system ensures that fresh goods are chilled quickly and the temperature is evenly distributed throughout the interior. Door-operated fan cut-out switches turn the fan off when the door is opened, saving valuable energy and preventing warm outside air from flowing into the appliance. These appliances are defrosted automatically.

Sturdy shelves

The clear-coated wire shelves are height adjustable, so you can vary the interior to suit your own requirements.

Door


A lock integrated into the door separately from the sturdy handle prevents unauthorised access. The door can be reversed on site and the plug-in magnetic gasket is easily replaceable.

Temperature display

The accurate analogue thermometer is located inside the cabinet at eye level and is easy to read, even with the door shut.

The illuminated focal point

The illuminated display canopy, which is switched on with the interior light, is sure to attract a lot of attention to the appliance and its contents. The display canopy can be branded to meet your own requirements.

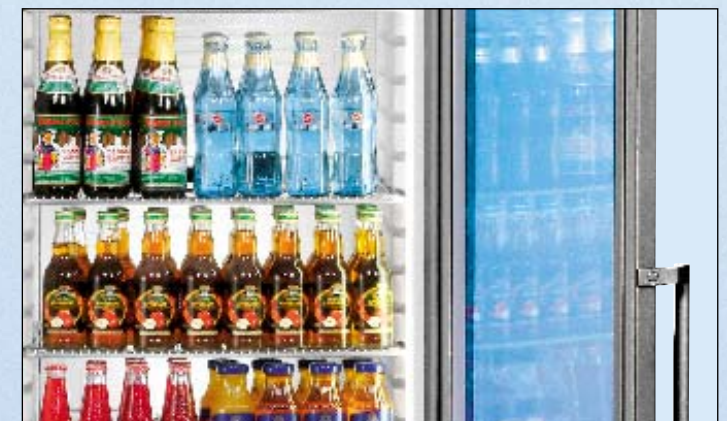

Forced-air drinks refrigerators with display

Equipment benefits

- Powerful forced-air system
- Large rear wall evaporator
- Back-lit display panel, lights up at the same time as interior light (FKDv models)
- Lockable double-glazed door
- Interchangeable door hinges
- Replaceable door seal
- Appliance mounting slots at the rear for FKDv 1002
- Adjustable feet at front



Transportation aids

Brackets are fitted to the rear wall to simplify carrying the appliance and to protect it during transport. In addition, the FKDv 3712 even comes with 2 transport rollers.

Accessories

Scanner rail

Price labels and bar codes can be read perfectly on the practical scanner rail, which is attached to the front of the grid shelves.

	<div>FKDv 3712</div> <div></div>	<div>FKDv 4312</div> <div></div>	<div>FKvsl 4112</div> <div>ProfiPremiumline</div>	<div>FKDv 1002</div> <div></div>
Total gross/net capacity	368/292 l	421/414 l	365/346 l	92/82 l
Interior dimensions in cm (h/w/d)	143,5/46,4/47,8	161,9/46,8/50,8	161,2/47/44	56,5/43/36
Exterior dimensions in cm (h/w/d)	199,6/60/67	199/60/67	180/60/61	83,6/49,7/52,6
Energy consumption (in 24 hours)	2,1 kWh	2,5 kWh	2 kWh	1,3 kWh
Equipment				
Housing material/colour	Steel/silver	Steel/silver	Steel/silver	Steel/silver
Material door/lid	Double-glazed door	Double-glazed door	Double-glazed door	Double-glazed door
Self-closing door	•	•	•	•
Lock	•	•	•	•
Interior light	Lengthwise lighting, switchable in parallel with display	Lengthwise lighting, switchable in parallel with display	Ceiling lighting, with separate switch	Lengthwise lighting, switchable in parallel with display
Number of grid shelves	5	5	5	2

Forced-air drinks Refrigerators

Liebherr drinks refrigerators with forced-air cooling are always the right choice when fresh goods have to be chilled quickly. The forced-air system enables you to quickly chill even large quantities of drinks down to the right temperature. This refrigeration system ensures even temperature distribution throughout the interior. The temperature can be set between +0°C and

+15°C. In addition, these appliances offer all the practical benefits that Liebherr refrigerators feature as standard: they can put up with lots of punishment, have a long service life and are extremely versatile. Another very important feature is the extra re-inforcement inside the front edge of the cabinet for greater stability and strength.

For an effective display of goods

Your products can be convincingly displayed behind the toughened double glazed door. Glass door appliances are equipped with an interior light with separate switch to put your goods in the right light – tempting your customers to buy.

Digital temperature display

The battery operated thermometer on the ~~UKS series~~ appliances shows the exact temperature inside the appliance.

Dynamic cooling with the forced-air system

Rapid chilling and an even temperature are crucial advantages for professional appliances. The powerful forced-air system on these appliances ensures even temperature distribution throughout the interior. The appliances are defrosted automatically.

Under lock and key

Our forced-air universal refrigerators can be locked with a sturdy lock that is fitted separately from the handle.

Door


The doors can be reversed enabling the user to site the cabinet in a convenient location. The plug-in magnetic gasket is easily replaceable.

Custom interior

The spacious interior can be laid out to suit your own requirements. The sturdy, ~~plastic~~ coated grid shelves are height adjustable, allowing you to make optimum use of the space. They can withstand loads of up to 45 kg – the shelves on the UKS 50.. and on ~~UGK~~ series appliances can even withstand loads of up to 60 kg.

Easy to clean

Both the seam-free polystyrene inner liner in food-safe commercial quality and the internal fittings are particularly easy and quick to clean and keep hygienic. Two recessed grips at the top of the back wall make carrying the appliance easier.

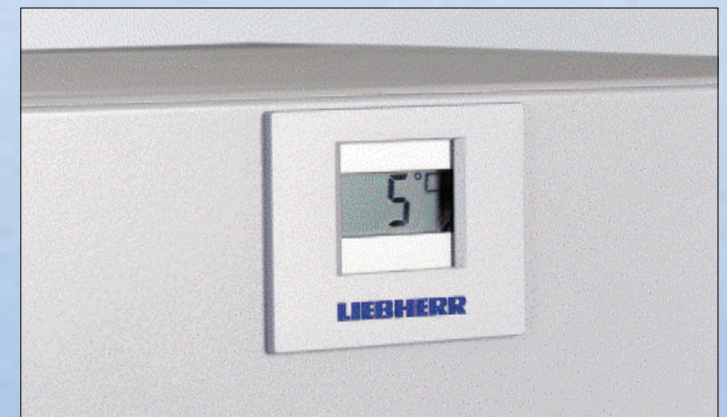



Forced-air drinks refrigerators

Equipment benefits

- Powerful forced-air system
- Fan is turned off when the door is opened
- Large rear wall evaporator
- Grid shelves are removable when the door is opened 90°
- Interchangeable door hinges
- Replaceable door seal
- Adjustable feet at front



	FKvsl 5412 ProfiPremiumline		FKvsl 5410 ProfiPremiumline	
Total gross/net capacity	544/520 l		544/520 l	
Exterior dimensions in cm (h/w/d)	164/75/73		164 / 75 / 73	
Interior dimensions in cm (h/w/d)	145,2/59/56		145,2/59/56	
Energy consumption (in 24 hours)	2 kWh		1,1 kWh	
Equipment				
Housing material/colour	Steel/silver		Steel/silver	
Material door/lid	Double-glazed door		Double-glazed door	
Self-closing door	<ul style="list-style-type: none">		<ul style="list-style-type: none">	
Temperature display	External digital		External digital	
Lock	<ul style="list-style-type: none">		<ul style="list-style-type: none">	
Interior light	Ceiling lighting, with separate switch			
Number of grid shelves	5		5	
	Model also available in white, as FKv 5412		Model also available in white, as FKv 5410	

ProfiPremiumline



Easy to clean



Both the seam-free plastic inner liner and the fittings are particularly easy and quick to clean and keep hygienic. Two grips in the rear wall make carrying the ProfiPremiumline appliances easier.



Digital temperature display

The battery operated thermometer in the Profi-Premiumline appliances shows the exact inside temperature on the external display.



FKVsl 3612 ProfiPremiumline 	FKVsl 3610 ProfiPremiumline 
335/329 1	335/329 1
164/60/61	164/60/61
145,2/47/44	145,2/47/44
1,1 kWh	0,8 kWh
Steel/silver	Steel/silver
Double-glazed door	Steel
•	•
External digital	External digital
•	•
Ceiling lighting, with separate switch	
5	5
Model also available in white, as FKV 3612	Model also available in white, as FKV 3610

Equipment benefits




- Powerful forced-air system
- Fan is turned off when the door is opened
- Large rear wall evaporator
- Grid shelves are removable when the door is open 90°
- Interchangeable door hinges
- Replaceable door seal
- Adjustable feet at front



FKv 502 - CoolMini

The rear wall cover of the FKv 502 means you can place the elegant refrigerator anywhere.

The 2 slots at the rear also permit wall-mounting.



	FKvsl 2612 ProfiPremiumline 	FKvsl 2610 ProfiPremiumline 	FKv 502 
Total gross/net capacity	236/230 l	236/230 l	45/42 l
Exterior dimensions in cm (h/w/d)	125/60/61	125/60/61	61,2/42,5/45
Interior dimensions in cm (h/w/d)	106,2/47/44	106,2/47/44	51,6/33,8/27
Energy consumption (in 24 hours)	1 kWh	0,7 kWh	0,8 kWh
Equipment			
Housing material/colour	Steel/silver	Steel/silver	Stainless steel/stainless steel
Material door/lid	Double-glazed door	Steel	Double-glazed door
Self-closing door	•	•	
Temperature display	External digital	External digital	
Lock	•	•	•
Interior light	Ceiling lighting, with separate switch		Ceiling lighting, with separate switch
Number of grid shelves	4	4	2
	Model also available in white, as FKv 2612	Model also available in white, as FKv 2610	

Forced-air drinks refrigerators

Equipment benefits

- Powerful forced-air system
- Fan is turned off when the door is opened
- Large rear wall evaporator
- Grid shelves are removable when the door is open 90°
- Interchangeable door hinges
- Replaceable door seal
- Adjustable feet at front



	FKv 4310 	FKv 4360 
Total gross/net capacity	421/414 l	421/414 l
Exterior dimensions in cm (h/w/d)	186/60/65	186/60/65
Interior dimensions in cm (h/w/d)	161/49,2/47,7	161/49,2/47,7
Energy consumption (in 24 hours)	1,2 kWh	1,2 kWh
Equipment		
Housing material/colour	Steel/white	Stainless steel/stainless steel effect
Material door/lid	Steel	Stainless steel
Temperature display	External digital	External digital
Lock	•	•
Number of grid shelves	5	5

Accessories

Adjustable feet

When day-to-day room hygiene is particularly important, the adjustable feet allow plenty of clearance for easy and convenient cleaning under the appliance.

Castor base

The sturdy castor base makes it much easier to move refrigerators from place to place. A solid quality accessory design to last.



Optional castor set

The optional castor set can be permanently fitted on the UKS 1800 and 1801 models, making these appliances much easier to transport. The optional castor set consists of 4 castors and all necessary fittings such as screws and washers.

Protection bracket

In the ~~UKS 3600, 3650, 5000 and 5050~~ models, the transport bracket protects the rear wall condenser and the underside of the appliance ~~optimally~~ against impact during transportation.




UKS 1800	UKS 1801
	
174/169 1	174/169 1
88,5/60/60	88,5/60/60
73,4/51,3/44,1	73,4/51,3/44,1
0,8 kWh	1,2 kWh
Steel/white	Steel/white
Steel	Double-glazed door
External digital	External digital
•	•
3	3

Forced-air drinks refrigerators

Equipment benefits

- Powerful forced-air system
- Fan is turned off when the door is opened
- Large rear wall evaporator
- Grid shelves are removable when the door is open 90°
- Interchangeable door hinges
- Replaceable door seal
- Adjustable feet at front

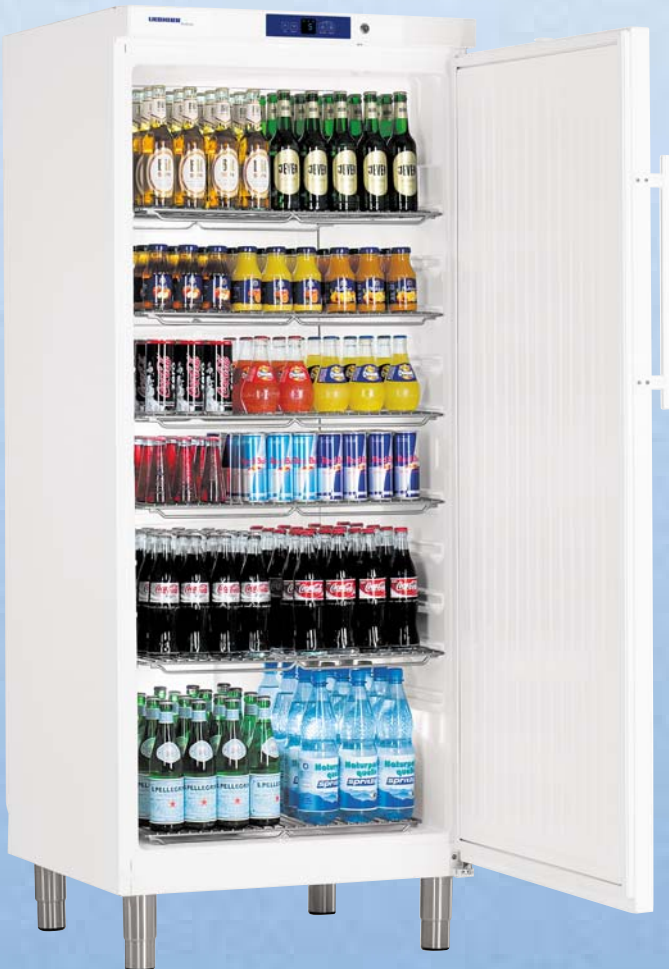

Plenty of floor clearance

When day-to-day room hygiene is particularly important, the height-adjustable feet variable from 100 to 150 mm on the GKv models allow plenty of floor clearance for easy and convenient cleaning under the appliance. Two recessed grips at the top of the rear wall make carrying the appliance easier.

Accessories

Castors

Sturdy castors are optionally available for the GKv models, making them even easier to move.

	<div>GKv 6410<div>FCKW/FKW frei</div></div>	<div>GKv 5710<div>FCKW/FKW frei</div></div>	<div>FKSBv 3600<div>FCKW/FKW frei</div></div>
Total gross/net capacity	663/647 l	583/569 l	352/331 l
Exterior dimensions in cm (h/w/d)	206,4/75/75	186,4/75/75	161/60/61,6
Interior dimensions in cm (h/w/d)	171/65/58,1	151/65/58,1	141,8/51,3/44,1
Energy consumption (in 24 hours)	1,3 kWh	1,2 kWh	1,1 kWh
Equipment			
Housing material/colour	Steel/white	Steel/white	Steel/stainless steel
Material door/lid	Steel	Steel	Steel
Self-closing door	•	•	
Temperature display	External digital	External digital	External digital
Lock	•	•	•
Number of grid shelves	6	5	5

Forced air under-worktop drinks refrigerators

Equipment benefits

- Powerful forced-air system
- ~~Fan is turned off when the door is opened~~
- Large rear wall evaporator
- Appliances are suitable for under-worktop installation as top is removable (~~rear air extraction necessary~~)
- Interchangeable door hinges
- Replaceable door seal
- Adjustable feet at front



Temperature display

The UKU 1800, 1805 and UKU 1850 models are equipped with a digital temperature display in the door.

Removable worktop

All the models are suitable for being installed under the worktop and in a row of kitchen units thanks to the removable top and front ventilation. The outgoing air is conducted away via a ventilation grille in the worktop.

Under lock and key

The under-worktop appliances can be locked with a sturdy lock that is fitted separately from the handle.









Custom interior

The interior is particularly spacious: ~~there is~~ even room for a 50-litre standard barrel or keg.
(Please note interior dimensions).

Decor frames

Decor frames matching the appliances are available in white or aluminium colours.



	UKU 1852	UKU 1802	UKU 1850	UKU 1805	UKU 1800
					
Total gross/net capacity	180/157 l	180/157 l	180/160 l	180/160 l	180/160 l
Exterior dimensions in cm (h/w/d)	85/60/60	85/60/60	85/60/60	85/60/60	85/60/60
Interior dimensions in cm (h/w/d)	70,2/51,3/44,1	70,2/51,3/44,1	70,2/51,3/44,1	70,2/51,3/44,1	70,2/51,3/44,1
Energy consumption (in 24 hours)	1,2 kWh	1,2 kWh	0,9 kWh	0,9 kWh	0,9 kWh
Equipment					
Housing material/colour	Stainless steel/stainless steel	Steel/white	Stainless steel/stainless steel	Steel/white	Steel/white
Material door/lid	Double-glazed door	Double-glazed door	Stainless steel	Stainless steel	Steel
Temperature display	External digital	interior analog	External digital	External digital	External digital
Lock	<ul style="list-style-type: none">	<ul style="list-style-type: none">	<ul style="list-style-type: none">	<ul style="list-style-type: none">	<ul style="list-style-type: none">
Interior light	Ceiling lighting, with separate switch	Ceiling lighting, with separate switch	Bulb 	Bulb 	Bulb 
Number of grid shelves	3	3	3	3	3

Drinks refrigerators with static cooling

Robust quality on the outside and well designed practical and convenient features on the inside: Liebherr's drinks refrigerators are designed to withstand all the rigours of everyday commercial usage. The polyester-coated steel housing is robust and the especially sturdy door hinges ensure that the door will operate perfectly even if opened and closed frequently. The doors can be easily re-hinged to the other side if necessary, so the appliance is easy to access wherever

it is set up. And on the inside, our drinks refrigerators are characterised by the fact that the useful space is maximised. The inner liner is seam-free and easy to clean. These appliances defrost automatically. The temperature is fully adjustable between +2°C and +10°C. Another very important feature is the extra re-inforcement inside the front edge of the cabinet for greater stability and strength.

For an effective display of goods

Your products can be convincingly displayed behind the double-glazed door. Glass door appliances are equipped with an interior light with separate switch to put your goods in the right light – tempting your customers to buy. The temperature control is conveniently located in the operating panel on the outside of the appliance.

Full volume refrigeration


FKS series appliances have a reliable, efficient static cooling system with a large rear wall evaporator.

Easy to clean

Both the seam-free ~~plastic~~ inner liner in commercial quality and the fittings are particularly easy and quick to clean and keep hygienic. Two recessed grips at the top of the rear wall make carrying the cabinets easier.

Door

The door hinges can be transferred to the other side, so these appliances can be easily accessed wherever they are positioned. The appliances can also be installed in a row of kitchen units. The magnetic gasket is replaceable.

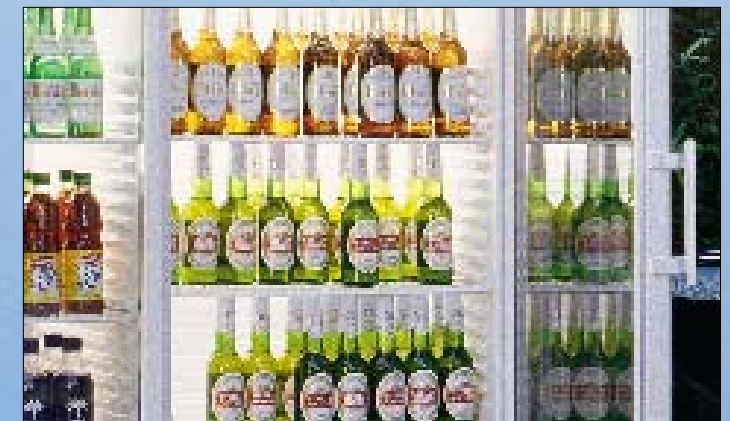

Drinks refrigerators with static cooling and double-glazed door

Equipment benefits

- Static cooling
- Large rear wall evaporator
- Interchangeable door hinges
- Replaceable door seal
- Adjustable feet at front

Accessories

Scanner rail

Price labels and bar codes can be read perfectly on the practical scanner rail, which is attached to the front of the grid shelves.

Castor base

The sturdy castor base makes moving appliances easier, especially when several of them have to be moved from one place to another.





Optional castor set

The FKS 18.. series comes with recessed grips on the back as standard, and an optional castor set is available to make the appliances even easier to move.

Protection bracket

The transport bracket available for the FKS 3600 and 5000 protects the rear-wall condenser and the underside of the appliance optimally against impact during transportation.



	<div>FKS 5002</div> <div></div>	<div>FKS 3602</div> <div></div>	<div>FKS 2602</div> <div></div>	<div>FKS 1802</div> <div></div>
<div>Total gross/net capacity</div>	500/433 l	360/335 l	260/247 l	180/174 l
<div>Exterior dimensions in cm (h/w/d)</div>	151,6/75,2/71	159/60/60	121,6/60/60	88,5/60/60
<div>Interior dimensions in cm (h/w/d)</div>	133,8/65,2/53,7	141,8/51,3/44,1	104,7/51,3/44,1	73,4/51,3/44,1
<div>Energy consumption (in 24 hours)</div>	1,5 kWh	1,5 kWh	1,4 kWh	1,2 kWh
<div>Equipment</div>				
<div>Housing material/colour</div>	Steel/white	Steel/white	Steel/white	Steel/white
<div>Material door/lid</div>	Double-glazed door	Double-glazed door	Double-glazed door	Double-glazed door
<div>Lock</div>	<ul style="list-style-type: none">	<ul style="list-style-type: none">	<ul style="list-style-type: none">	<ul style="list-style-type: none">
<div>Number of grid shelves</div>	5	5	4	3

Drinks refrigerators with static cooling and

solid door

Equipment benefits

- Static cooling
- Large rear wall evaporator
- FKU models are suitable for under-worktop installation as top is removable (rear air extraction necessary)
- FKU models have room for a 50-litre standard barrel or a 50-litre keg (note the interior dimensions of the appliance)
- Interchangeable door hinges
- Replaceable door seal
- Adjustable feet at front

Full volume refrigeration

FKS series appliances have a reliable, efficient static cooling system with a large rear wall evaporator.

Easy to clean

Both the seam-free plastic inner liner and the fittings are particularly easy and quick to clean and keep hygienic.

Door

The appliances are suitable for installation in a row of kitchen units and the door hinges are interchangeable, meaning the appliances can be positioned exactly where you want them.. The magnetic seal is easily replaceable if need be.

Under lock and key

The drinks refrigerators can be locked. The lock is fitted separately from the sturdy handle.



	<div>FKS 5000</div> <div>FCKW FKW frei</div>	<div>FKS 3600</div> <div>FCKW FKW frei</div>	<div>FKS 2600</div> <div>FCKW FKW frei</div>	<div>FKS 1800</div> <div>FCKW FKW frei</div>	<div>FKU 1800</div> <div>FCKW FKW frei</div>	<div>FKU 1805 not ill.</div> <div>FCKW FKW frei</div>
Total gross/net capacity	500/433 l	360/335 l	260/247 l	180/174 l	180/160 l	180/160 l
Exterior dimensions in cm (h/w/d)	151,6/75,2/71	159/60/60	121,6/60/60	8/60/60	85/60/60	85/60/60
Interior dimensions in cm (h/w/d)	133,8/65,2/53,7	141,8/51,3/44,1	104,7/51,3/44,1	73,4/51,3/44,1	70,2/51,3/44,1	70,2/51,3/44,1
Energy consumption (in 24 hours)	0,9 kWh	0,9 kWh	0,8 kWh	0,7 kWh	0,7 kWh	0,7 kWh
Equipment						
Housing material/colour	Steel/white	Steel/white	Steel/white	Steel/white	Steel/white	Steel/white
Material door/lid	Steel	Steel	Steel	Steel	Steel	Stainless steel
Temperature display					External digital	External digital
Lock	•	•	•	•	•	•
Interior light					Bulb	Bulb
Number of grid shelves	5	5	4	3	3	3

The beer cooler with integrated tap

A good, thick head on a glass of cold beer is essential to enjoy its full flavour. This depends to a large extent on the beer being served at the right temperature. With the FKZ 1800 beer cooler from Liebherr, beer can be easily stored and served at exactly the right

temperature at any time. This temperature is between +7°C and +9°C. And once it has been tapped, beer stored in the FKZ 1800 will remain fresh and retain its full flavour for days.



Connection to standard or KEG barrels
Standard flat fitting for connection to commonly used 15 – 50 litre standard or KEG barrels.




Safety first
For optimum convenience, the beer pressure system is fitted with pressure reduction, CO2 cylinder, manometer and safety valve.



- Equipment benefits**
- Luxury, chrome-plated, swan-neck tap system
 - Baseplate
 - Drip tray
 - Beer pressure system with pressure reduction, CO₂ cylinder, manometer, safety valve and flat fitting for connection to 15 to 50-litre barrels
 - Compensation lever for controlling the dispensing rate
 - Static cooling
 - Large rear wall evaporator
 - Spacious liner, accommodates 15 to 50-litre standard barrels or kegs (note interior dimensions of appliance)
 - Interchangeable door hinges
 - Replaceable door seal
 - Adjustable feet at front

Total gross/net capacity
Exterior dimensions in cm (h/w/d)
Interior dimensions in cm (h/w/d)
Energy consumption (in 24 hours)
Equipment
Housing material/colour
Material door/lid
Lock
Interior light

FKZ 1800	
180/160 l	
85/60/60	
70,2/51,3/44,1	
0,7 kWh	
Steel/anthracite	
Steel	
•	
Bulb	



Chest bottle coolers

Liebherr chest bottle coolers are designed with the rigours of commercial use – continual operation, often under extreme conditions – in mind. They can put up with all stresses and strains of everyday professional use. The efficient seal on the sturdy sliding or flip-top lids keeps temperature loss to a minimum. The fully adjustable temperature control ensures that the temperature setting is maintained at a constant level

(temperature range from +2°C to +12°C). Thanks to their highly efficient insulation, our chest bottle coolers feature a roomy interior and yet have a compact footprint. With a sheet steel body and a corrosion-resistant inner liner, these chest refrigerators are hardwearing and easy to clean. The durable and quiet running compressor unit ensures reliable operation.

Sliding glass lid

The sliding glass lids provide a clear view of the contents. They are made of a single pane of toughened safety glass.




Extremely robust

The composite aluminium and rigid PVC tops are designed for maximum stability. An optional cylinder lock is available. The top of the insulated, lockable sliding lid is protected with a scratch-resistant aluminium worktop.



Flip-top lid

The two halves of the lockable flip-top lid are connected with sturdy hinges. So the lid retains its shape and stays tightly closed to keep the cold in even if it is opened frequently. It has highly effective 30 mm insulation.

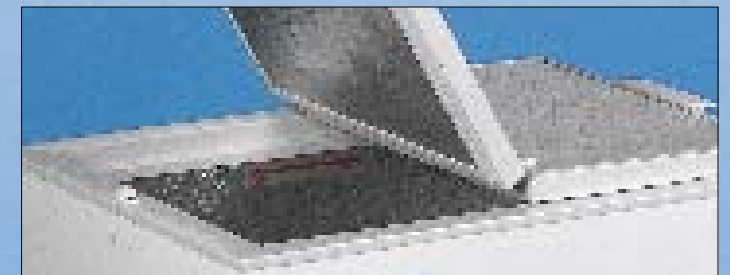

Chest bottle coolers

Equipment benefits

- Sliding lid
- ~~Steering~~ castors
- ~~Aluminium frame~~



Accessories

Baskets

On FT 2900 and FT 2902 models the frame is designed for suspended baskets.





Cylinder lock

The sturdy cylinder lock protects against unauthorised access.



Opens with a flick of the wrist


The sturdy bottle opener with crown cork bin is fitted at a user-friendly height.

	FTI 2902 	FT 2902 	FT 2900 	FT 1401 
Total gross/net capacity	283/210 l	302/234 l	282/247 l	138/130 l
Exterior dimensions in cm (h/w/d)	82,9-70,9/104,5/63,4	99/103/62,8	88,1/103/62,8	89/60,5/54,5
Interior dimensions in cm (h/w/d)	55/91,6/50,2	60/90,2/50	60/90,2/50	69,3/50/44,2
Energy consumption (in 24 hours)	1,3 kWh	1,3 kWh	0,9 kWh	0,5 kWh
Cooling system	Dynamic	Static	Dynamic	Static
Equipment				
Housing material/colour	Steel/white	Steel/white	Steel/white	Steel/white
Lid material	Glass	Glass	Aluminium	Aluminium
Number of baskets	3		•	•
Bottle opener with crown cork bin				

Accessories for every need

Commercial refrigerators for drinks need to be flexible and versatile in order to accommodate the wide range of different uses to which they are put. Liebherr offers

a broad selection of accessories to meet all requirements. Easy to fit and highly effective – for individual, customised professional appliances.

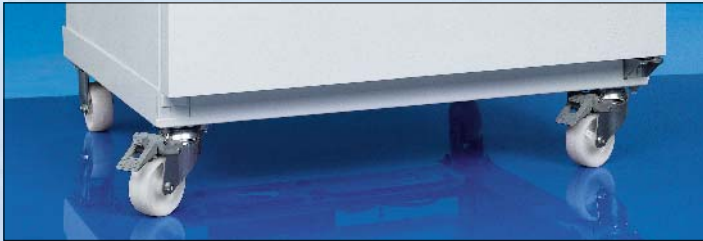

Castor base
The sturdy castor base makes it much easier to move refrigerators from place to place. A solid quality accessory designed to last.

Suitable for FKS, UKS, ~~UGK models~~ and ~~ProfiPremiumline~~



Scanner rail
Price labels and bar codes are easy to read on the practical scanner rail attached to the front of the shelf. So customers can see at a glance what the products cost. The scanner rails can also be branded for additional sales impact.

For all FKDv, FKS 18.. - 36.., FKv, UKS 18.. - 43.



Optional castor set
The optional castor set for permanent fitting makes appliances much easier to transport. The set consists of four castors and all necessary fittings such as screws and washers.

For FKS 18.., FKU 18.., UKS 18.., UKU 18.. and FKZ models.



Gravity feed shelf for bottles
On the practical gravity feed shelf, the 0.5 l bottles are always ready to hand at the front. The gravity feed shelf can be drawn out on telescopic rails for replenishing supplies.

Suitable for FKS 18.. - 36.. and UKS 18.. - 36.. models.



Adjustable feet
The adjustable feet allow plenty of clearance for easy and convenient cleaning under the appliance for when day-to-day room hygiene is particularly important.

Suitable for FKS, UKS ~~models~~ and ~~ProfiPremiumline~~




Optional castor set
The very sturdy castors can be fitted directly to the housing for moving the appliances easily from one place to another.

Suitable for GKv models.



Protection bracket with display protection
This protection bracket additionally safeguards the advertising display. The display protector can be folded back after the appliance has been installed, making it unnecessary to dismantle it if the appliance is often moved.

Suitable for FKDv 3712.

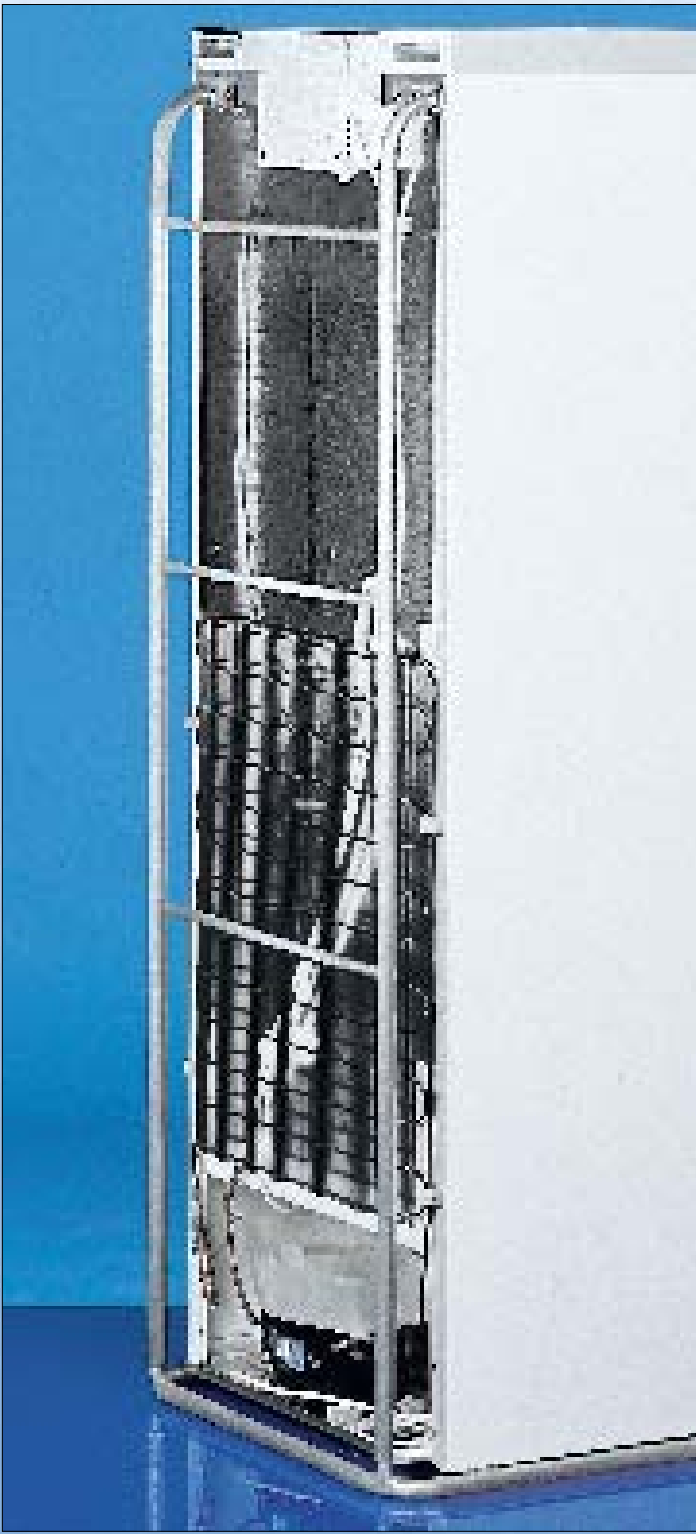

Transport protection bracket
This sturdy transport bracket for use on larger FKS and UKS models protects the condenser on the back of the appliance and the underside of the appliance optimally against impact during transportation. Ideal for use when transporting appliances.

For FKS 3600 and 5000 and UKS 3600/3650 and 5000/5050.

	Forced-air drinks refrigerators with display				Forced-air drinks refrigerators – ProfiPremiumline							Forced-air drinks refrigerators						
Appliance type	FKDv 3712*	FKDv 4312*	FKvsl 4112*	FKDv 1002*	FKvsl 5412*	FKvsl 5410	FKvsl 3612*	FKvsl 3610	FKvsl 2612*	FKvsl 2610	FKv 502*	FKv 4310	FKv 4360	UKS 1800	UKS 1801	GKv 6410	GKv 5710	FKSBv 3600
Illustration see page	10	11	11	11	14	14	15	15	16	17	17	18	18	19	19	20	21	21
Housing	Silver	White	Silver	Silver	Silver	Silver	Silver	Silver	Silver	Silver	Stainless steel	White	Stainless steel	White	White	White	White	Stainless steel look
Material door/lid	Double-glazed door	Double-glazed door	Double-glazed door	Double-glazed door	Double-glazed door	Steel	Double-glazed door	Steel	Double-glazed door	Steel	Double-glazed door	Steel	Stainless steel	Steel	Double-glazed door	Steel	Steel	Steel
Settable temperature range	+2°C up to +15°C	+2°C up to +15°C	0°C up to +15°C	+2°C up to +15°C	0°C up to +15°C	0°C bis +15°C	0°C up to +15°C	0°C up to +15°C	0°C up to +15°C	0°C up to +15°C	0°C up to +15°C	0°C up to +15°C	0°C up to +15°C	0°C up to +15°C	0°C up to +15°C	+1°C up to +15°C	+1°C up to +15°C	0°C up to +15°C
Gross capacity	l	368	421	365	92	544	544	335	335	236	236	45	421	421	174	174	663	352
Exterior dimensions																		
Height	cm	199,6	199	180	83,6	164	164	164	125	125	61,2	186	186	88,5	88,5	206,4	186,4	161
Width	cm	60	60	60	49,7	75	75	60	60	60	42,5	60	60	60	60	75	75	60
Depth	cm	67	67	61	52,6	73	73	61	61	61	45	65	65	60	60	75	75	61,6
Interior dimensions																		
Height	cm	143,5	161,9	161,2	56,5	145,2	145,2	145,2	145,2	106,2	106,2	51,6	161	161	73,4	73,4	171	141,8
Width	cm	46,4	46,8	47	43	59	59	47	47	47	33,8	49,2	49,2	51,3	51,3	65	65	51,3
Depth	cm	47,8	50,8	44	36	56	56	44	44	44	27	47,7	47,7	44,1	44,1	58,1	58,1	44,1
Weight																		
Gross	ca. kg	104	101	87	39	97	78	82	64	67	54	34	79	77	38	46	96	69
Net	ca. kg	98	95	82	37	92	72	77	59	63	50	33	74	72	35	43	90	64
Voltage	V	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	230	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Connection rating	A	3,0	3,0	1,4	1,0	1,5	1,5	1,5	0,8	1,5	1,1	1,0	1,5	1,5	1,0	1,3	1,3	1,0
Energy consumption in kWh/24h		2,1	2,5	2	1,3	2	1,1	1,1	0,8	1	0,7	0,8	1,2	1,2	0,8	1,2	1,3	1,1
Suited for ambient temperatures from/to °C		+10°C up to 38°C	+10°C up to 38°C	+10°C up to 43°C	+10°C up to 38°C	+10°C up to 38°C	+10°C bis 43°C	+10°C up to 38°C	+10°C up to 43°C	+10°C up to 38°C	+10°C up to 43°C	+10°C up to 38°C	+10°C up to 38°C	+10°C up to 38°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 43°C	+10°C up to 43°C
Storage capacity																		
Storage capacity 0.33l can		420	484	512	108	788	788	466	466	328	328	60	557	557	232	232	786	427
Storage capacity 0.5l PET		230	242	256	56	426	426	210	210	164	164	27	277	277	116	116	359	226
Refrigerant		R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a

Appliance type	Forced air under-worktop drinks refrigerators					Drinks refrigerators with static cooling and double-glazed door				Drinks refrigerators with static cooling and solid door						Beer cooler with integrated tap	Chest bottle coolers			
	UKU 1852**	UKU 1802**	UKU 1850**	UKU 1805**	UKU 1800*	FKS 5002*	FKS 3602*	FKS 2602*	FKS 1802*	FKS 5000	FKS 3600	FKS 2600	FKS 1800	FKU 1800**	FKU 1805**	FKZ 1800*	FTI 2902	FT 2902	FT 2900	FT 1401
Illustration see page	22	22	23	23	23	26	27	27	27	28	28	29	29	29	29	31	34	34	35	35
Housing	Stainless steel	White	Stainless steel	White	White	White	White	White	White	White	White	White	White	White	White	Anthracite	White	White	White	White
Material door/lid	Double-glazed door	Double-glazed door	Stainless steel	Stainless steel	Steel	Double-glazed door	Double-glazed door	Double-glazed door	Double-glazed door	Steel	Steel	Steel	Steel	Steel	Stainless steel	Steel	Glass	Glass	Aluminium	Aluminium
Settable temperature range	0°C up to +15°C	0°C up to +15°C	0°C up to +15°C	0°C up to +15°C	0°C up to +15°C	+2°C up to +15°C	+2°C up to +15°C	+2°C up to +15°C	+2°C up to +12°C	+2°C up to +15°C	+2°C up to +15°C	+2°C up to +15°C	+2°C up to +12°C	+2°C up to +11°C	+2°C up to +11°C	+2°C up to +11°C	+2°C up to +12°C	+2°C up to +12°C	+2°C up to +15°C	+2°C up to +12°C
Gross capacity	l	180	180	180	180	500	360	260	180	500	360	260	180	180	180	180	283	302	282	138
Exterior dimensions																				
Height	cm	85	85	85	85	151,6	159	121,6	88,5	151,6	159	121,6	85	85	85	85	82,9 - 70,9	99	88,1	89
Width	cm	60	60	60	60	75,2	60	60	60	75,2	60	60	60	60	60	60	104,5	103	103	60,5
Depth	cm	60	60	60	60	71	60	60	60	71	60	60	60	60	60	60	63,4	62,8	62,8	54,5
Interior dimensions																				
Height	cm	70,2	70,2	70,2	70,2	133,8	141,8	104,7	73,4	133,8	141,8	104,7	73,4	70,2	70,2	70,2	55	60	60	69,3
Width	cm	51,3	51,3	51,3	51,3	65,2	51,3	51,3	51,3	65,2	51,3	51,3	51,3	51,3	51,3	51,3	91,6	90,2	90,2	50
Depth	cm	44,1	44,1	44,1	44,1	53,7	44,1	44,1	44,1	53,7	44,1	44,1	44,1	44,1	44,1	44,1	50,2	50	50	44,2
Weight																				
Gross	ca. kg	47	48	38	38	91	76	62	46	73	59	45	37	38	38	47	68	58	55	36
Net	ca. kg	44	45	35	35	86	71	58	43	68	54	42	34	35	35	44	60	50	47	34
Voltage	V	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-230	220-230
Connection rating	A	1,2	1,2	1,0	1,0	1,3	1,1	1,1	1,0	1,0	0,8	1,0	1,0	1,0	1,0	1,0	1,5	1,0	1,0	1,1
Energy consumption in kWh/24h		1,2	1,2	0,9	0,9	0,9	1,5	1,4	1,2	0,9	0,9	0,8	0,7	0,7	0,7	0,7	1,3	1,3	0,9	0,5
Suited for ambient temperatures from/to °C		+10°C up to 38°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 32°C	+10°C up to 38°C	+10°C up to 38°C	+10°C up to 32°C	+10°C up to 38°C
Storage capacity																				
Storage capacity 0.33l can		217	217	217	217	702	430	325	236	702	430	325	236	221	221		349	370	370	226
Storage capacity 0.5l PET		115	115	115	115	371	230	173	137	371	371	173	137	118	118		183	198	198	132
Refrigerant		R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 600a	R 134a	R 134a	R 134a	R 134a	R 134a

* with interior light
** without tabletop 820 mm