




Y YACHTS
BY MICHAEL SCHMIDT YACHTBAU

TECHNICAL SPECIFICATIONS



LOA (Hull)	21.86m
Bowsprit extension	23.13m
LWL	20.35m
Beam	5.75m
Draft	
Fixed keel	3.50m
Telescopic keel	2.70m – 3.90m
Displacement (light ship)	approx. 29.5t
Ballast	approx. 9.6t
P	28.90m
E	10.00m
J	8.80m
I	30.85m
Mainsail	approx. 174m²
Self-tacking jib	approx. 123m²
Code 0	approx. 350m²
Gennaker	approx. 550m²
Engine	2x NANNI N4.80SD, each 52.9kW (72hp)
Drive	Saildrive
Generator	FISCHER PANDA 8000i, PMS – 8.00kVA / 6.40kW, 230V/50Hz
Service battery bank	8x 12V/200Ah AGM (800Ah at 24V)
Engine battery	12V 95Ah AGM per engine
Generator battery bank	12V 95Ah AGM
Genoa furler & bow thruster battery bank	4x 12V 95Ah AGM (180Ah at 24V)
Fuel capacity	approx. 800l
Freshwater capacity	approx. 800l
Blackwater capacity	approx. 180l

Yard

Michael Schmidt
Yachtbau GmbH

Naval Architect

Tripp Design Naval Architecture

Interior Design / Styling


Norm Architects


Structural Engineering

AMS Italia

Classification

CE Category „A“

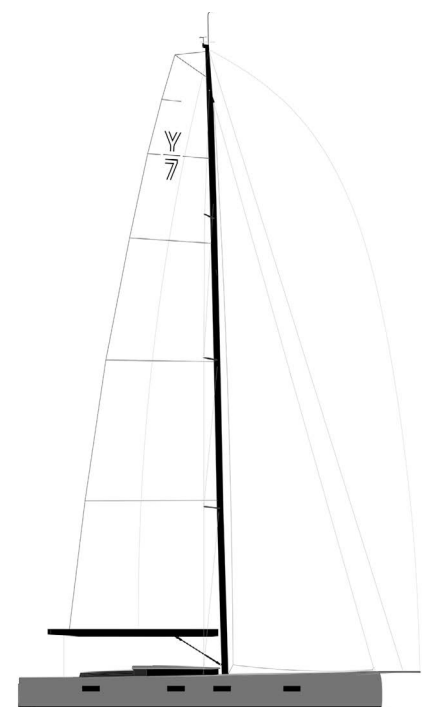




GENERAL

1.1	HULL
	The hull is made of sandwich-construction with CORECELL™ M-foam. The complete hull is vacuum infused and consolidated, where the inner structure consists exclusively of carbon.
1.1.1	HULL COLOR
	The hull topsides are finished in gelcoat, RAL 9010. Hull bottom is finished in clear gelcoat.
1.1.2	HULL PORTLIGHTS
	There are 5 hull portlights on each side of the yacht, 4 in owner's cabin, 1 in galley, 1 in office area, 2 in salon and 1 in each guest cabin. The portlights are made from toughened and laminated safety glass.
1.2	DECK
	The deck is made of carbon / vinyl ester / CORECELL™ sandwich, vacuum consolidated. All bulkheads and reinforcements are made in carbon as well.
1.2.1	SUPERSTRUCTURE COLOR
	Superstructure is finished in gelcoat, RAL 9010.
1.3	BOW COMPARTMENT
	Custom flush deck hatch. Anchor chain storage. Solid laminated anchor windlass foundation. Watertight bulkhead. Crash box in the lower bow section for additional safety.
1.4	SAIL LOCKER
	Flush carbon deck hatch, stainless-steel ladder for easy access. Floorboards, LED overhead light, electric bilge pump and a 230V socket. Topsides are top-coated in grey.
1.5	LAZARETTE
	Large powered custom hatch incl. 2 carbon inspection hatches in cockpit floor for dinghy storage. Possibility of storing a dinghy of maximum size 3.25m by 1.78m. The carbon bathing platform is integrated in the stern while the transom stays fully closed, even with bathing platform lowered. This significantly increases the boat's safety and keeps the lazarette dry. The transom swimming platform opens electrically. There are steps from deck level to swimming platform.
1.6	CHAINPLATES
	Shrouds V1 / D1 carbon chainplates with stainless-steel bushings structurally integrated into the hull laminate to achieve maximum bonding and excellent load distribution. The forestay is connected with an integrated electric RECKMANN furler. Spreaders are swept back approx. 30°.
1.7	ENGINE COMPARTMENT
	The engine tray is fully incorporated in the hull positioned under the salon floor with space for 2 engines and special attention was paid for best thermal and sound insulation using 50mm open cell PU foam. To achieve extra strength and rigidity, the engine tray foundation is fully laminated to the hull. SEAFIRE automatic fire extinguisher system is installed in complete engine compartment. Engine compartment is finished in gelcoat, RAL 9010, for practical and maintenance reasons.
1.8	STRUCTURAL BULKHEADS
	All bulkheads are made in carbon / epoxy / DIVINYCELL® foam, vacuum consolidated. For more strength and better load distribution there are additional carbon fibre reinforcements around doors, cut outs and cable penetrations.
1.9	BOWSPRIT
	Integrated carbon bow sprit, fixed, with stainless-steel anchor roller and fixing point for the code 0 or gennaker, well separated from the forestay.

DECK EQUIPMENT

2.1	DECKING
	All walking areas plus cockpit are covered with synthetic teak material and light grey caulking. Complete decking is vacuum glued. 35mm high toe rail is mounted along the complete outer side of the deck. All the deck fittings like padeyes, railings, cleats and deck infills are finished in high-gloss marine stainless-steel. All deck gear like HARKEN winches, stoppers are matte-black anodized.
2.2	STEMHEAD FITTINGS
	The deck is incorporating a bowsprit which holds the stainless-steel anchor fitting with rollers together with chain guide. The bow has a gennaker tack on fwd nose and fixed padeye for the code 0.
2.3	PULPIT, PUSHPTS, STANCHIONS AND LIFELINES
	Pulpits port and stbd are made in stainless-steel with LED navigation lights. Stainless-steel push pit with LED stern light and bracket for stainless-steel flagpole. 2x6 stanchions and 2x rail gates. 2x padeyes in cockpit for safety harness.
2.4	CLEATS
	There are 6 ANTAL 420mm aluminium roller mooring cleats in total: 2 at the bow section, 2 midships and 2 aft mounted on the bulwark. 2 stainless-steel fairleads in the bow section.
2.5	WINDOWS, HATCHES AND PORTLIGHTS
	The fixed flat windows in deckhouse are made of tempered glass, securely attached and sealed off to the deck. Manually operating custom made acrylic sliding hatch for main companionway with lock and washboard. All hatches are flush mount in numerous positions. Large custom carbon flush hatch on aft deck for dinghy storage. Opening portlights in cockpit for aft guest cabins. All windows, hatches and portlights are tinted.
2.6	MAINSHEET SYSTEM
	For safety reason the mainsheet fixing point is as far as possible separated from the guests. A single point 2:1 purchase mainsheet on aft deck close to steering consoles. Mainsheet is operated by electric winches.
2.7	HEADSAIL SYSTEM
	HARKEN custom self-tacking system to make single hand tacking easy. Custom track for self-tacking jib. Mini-maxi hi-load car with stand-up block and stoppers. Sheet for self-tacking jib, 2:1 purchase via sheave at mast and halyard block.





2.8	BLOCKS, JAMMERS AND FITTINGS 2x5 aluminium halyard blocks at mast foot. 4x padeyes on bulwark for halyards. 2x5 jammers.
2.9	COCKPIT TABLES 2x ample cockpit tables with folding leaves. Built in composite lightweight material, massive teak countertop.
2.10	ANCHOR, CHAIN AND WINDLASS Anchor LEWMAR Delta 40kg, galvanized, incl. 80m 12mm galvanized chain and LOFRANS X4 electric windlass installed in anchor locker. Electric windlass is controlled by remote control on foredeck.
2.11	WINCHES 2x electrical HARKEN B80.2STEA primary winches for easy single-handed use next to steering position. Additional 2x manual HARKEN B80.2STA winches for gennaker, code 0 or mooring lines.


MAST & RIGGING

3.1	MAST Carbon mast from AXXON, high modulus prepreg, autoclave cured, 3 spreaders swept back approx. 30°, modern fractional rig, tapered top, spray painted black, standing rod rigging, 2x down lights at the first spreader used also as deck light, track to hold jib halyard. Mast jack with hydraulic hand pump and wedges. RECKMANN electric jib furler. Main halyard 2:1 purchase, jib halyard 1:1, boom topping lift as spare main halyard, self-tacking jib sheet 2:1 purchase, 2x lazyjacks 4 in 1, 2x flag lines to first spreader.
3.2	BOOM Carbon monocoque boom from AXXON, high modulus prepregs in female mould, autoclave cured, spray painted in black, 2x single line reefing, outhaul track and car with line, hydraulic boom vang RECKMANN manually operated from aft cockpit side.

INTERIOR

4.1	FURNITURE Joinery built partly from extra lightweight panels. All surfaces are either painted or covered with veneer, according to YYachts mood board. Ceilings made of lightweight panels covered with fabrics or painted.
4.1.1	FLOOR Floor according to Y Yachts mood board. The floor support grid consists of sound isolated material (plywood / rubber / cork) which is attached to the structure by laminate and/or epoxy glued.
4.1.2	ACCESSORIES Salon upholstery material by KVADRAT according to individual choice. Mattresses on all beds are high quality "Softec visco" type offering optimal underside ventilation. All interior accessories (fabric, lamps, taps, switches, tables, handrails...) according to Y Yachts mood board.
4.2	LAYOUT
4.2.1	OWNER'S CABIN Owner's cabin features a queen size double island bed and full height hanging wardrobe, drawers and lockers, 230V sockets, indirect lighting, direct lighting, reading lights and night courtesy lights. En-suite bathroom is at the forward end of the cabin with PLANUS KONOS electrical toilet, separate shower stall, mirror, washbasin mounted on satin white CORIAN countertop.
4.2.2	GUEST CABIN - AFT PORT Guest cabin on port features twin beds with hanging wardrobe, drawers and lockers incl. 230V sockets, indirect lighting, direct lighting, reading lights and night courtesy lights. En-suite bathroom is at the forward end of the cabin with PLANUS NEW ARCTIC electrical toilet, separate shower stall, mirror, washbasin mounted on satin white CORIAN countertop. Access to crew quarters via a door at the aft end of the cabin.
4.2.3	GUEST CABIN - AFT STARBOARD Guest cabin on starboard features twin beds with large hanging wardrobe, drawers and lockers incl. 230V sockets, indirect lighting, direct lighting, reading lights and night courtesy lights. En-suite bathroom is at the forward end of the cabin with PLANUS NEW ARCTIC electrical toilet, separate shower stall, mirror, washbasin mounted on satin white CORIAN countertop.
4.2.4	SALON Salon features a minimalistic open space arrangement yet with emphasis on different working areas. L-shaped lounge sofa on port. Dining table incl. 3x upholstered chairs and large linear dining bench on starboard. Lots of storage space under the sofa and dining bench. 230V sockets, indirect lighting, direct lighting, reading lights and night courtesy lights.
4.2.5	GALLEY Galley features a very safe U-shape and it is located on the starboard side forward. Single piece CORIAN countertop in satin white with integrated stainless-steel double sink, faucet and niche with gimbaled gas cooker with oven. Stainless-steel refrigerator with 2 drawers. Lockers, drawers, waste bin are provided. Indirect lighting, direct lighting and night courtesy light, 230V sockets.
4.2.6	OFFICE AREA Office area is located on portside opposite galley forward and it features a wooden desk facing aft and loose chair with generous storage space for books, documents and stationery. Reading light, indirect lighting, direct lighting and night courtesy lights, 230V sockets + 12V USB charging sockets.
4.2.7	CHART TABLE Chart table is located on the starboard side aft facing outboard. Chart table offers a generous working area with ergonomically positioned instruments and gauges and space for documents. Chart table chair as per mood board. Red and white reading light, direct lighting and night courtesy light at stairway, 2x 230V sockets, 2x USB sockets.
4.2.8	CREW QUARTERS Located on port aft and features 2 single bunks, lockers and drawers, en-suite bathroom with sink, mirror, PLANUS NEW ARCTIC electric toilet and shower. Direct lighting, reading lights and courtesy light and 2x 230V sockets. Access using ladder via cockpit hatch or via guest's aft port cabin.





PROPULSION & STEERING

5.1	MAIN ENGINE
	Twin NANNI diesel engines N4.80SD 52.9kW/72hp. Each engine has a 12V 120A alternator to charge its individual starter battery. One engine has an additional 24V 75A alternator to charge the service batteries. Transmission via 2 saildrives for low maintenance and vibration reduction. Two 3-blade folding propellers. 2x fuel filter with water separator. Independent fuel supply lines for each engine. Electric twin-lever engine controls for throttle and gear, engine panels, all installed at starboard steering console. The twin engine combination allows easy docking without stern thruster and offers a safe redundant system.
5.2	BOW THRUSTER
	Bow thruster MAX POWER VIP250 electric, approx. 9.5kW of thrust, retractable.
5.3	RUDDERS
	Double rudder system features 2 semi-balanced rudders made of glass composite, aluminium stock, self-aligning roller bearings. Bearings and housing are in fully laminated fittings to achieve maximum connection to the hull.
5.4	STEERING SYSTEM
	2x steering pedestals with instrument consoles incl. magnetic compass, 2x white painted composite steering wheels, cross spoke design, diameter 1,100 mm. Transmission via chain, wires, traveller and drag-link tubes. Emergency tiller, aluminium.

ELECTRICS

6.1	CHARGER AND INVERTER
	Two independent shore power connections, shore one: 230V/32A/50Hz shore power for charging the service batteries and powering all 230V consumers / sockets. Uninterrupted power supply through inverter with 6.5kW, charging service batteries with 150A at 24V. Shore two: 230V/16A/45-65Hz shore power for charging the service batteries with 100A at 24V.
6.2	DC SYSTEM
	Switch panel 24V at chart table with toggle switches, circuit breakers, bus system for control functions, tank levels and voltage gauge. DC consumers: LED navigation lights, LED anchor light, LED deck light, anchor winch, winches, bilge pumps, water pressure pumps, air vents, toilets, refrigerator, interior lighting, direct and indirect plus reading light. Night lights (red) inside and outside, various USB 3.2A 5V charging point at chart table and all cabins.
6.3	BATTERIES
	24V service battery bank AGM 8x 12V/200Ah for 800Ah at 24V. Dedicated battery bank for headsail furler and bow thruster hi-load batteries 150Ah at 24V with separate DC/DC charger. Individual engine starter batteries for each engine, 2x 12V 95Ah. Individual engine starter battery for generator 1x 12V/95Ah. Separate battery charger for engine starter batteries.
6.4	AC SYSTEM
	Water heater, 230V AC outlets throughout the yacht, power supply via inverter, automatic switch-over from generator / shore power.
6.5	GENERATOR
	FISCHER PANDA 8000i PMS diesel generator, 230V/50Hz, 6,4kW/8,000kVA installed in engine compartment.


SYSTEM

7.1	GAS SYSTEM
	The yacht features a FORCE 10 gas 4 burner cooker with oven. Gas supply by a remote-controlled magnetic valve. Gas bottle with 5kg capacity stored in a dedicated space in the lazarette. Gas Alarm sensor
7.2	WASTEWATER SYSTEM
	4x PLANUS electric toilet 24V with freshwater flush system. Through-hull fittings and seacocks made of non-corrosive fibre-reinforced high-grade marine polyamide. Blackwater hoses are made out of special odour free grade PVC. 3x blackwater tank with capacity approx. 60l each. Discharge possible via own sea cock or deck suction line. 3x greywater transfer boxes.
7.3	FRESHWATER SYSTEM
	Water tank approx. 800l polyethylene, filler on deck. Dual-pressure water pump. Semi-rigid pipes with swaged terminals. Water heater, 75l capacity, heated by engine and/or 230V immersion heater. Faucets hot/cold in galley and each head/shower. 1x hot/cold shower on bathing platform.
7.4	BILGE PUMPS
	5x electric bilge pump 24V WHALE Orca 80l/min with automatic float switches in: sail locker, forward cabin, saloon, engine room and lazarette and 1x emergency hand operated pump WHALE Gusher Urchin in cockpit.
7.5	FUEL SYSTEM
	Fuel tank with a total capacity of approx. 800l, filler on deck. Tank welded in high grade marine polyethylene.

MISCELLANEOUS

8.1	GENERAL CONDITIONS
	This specification of standard equipment is valid and correct at the time of issue and supersede any previous versions. The specification of standard equipment acts as an attachment to the sail plan, deck drawings and interior layout. The Builder reserves the right to modify or substitute any equipment, materials or components stipulated in this specification with equivalent equipment, materials or components without prior notice. It is in Builder's best interest to guarantee workmanship in highest quality manner and keeping with the best yacht practice for a vessel of this size and in conformity with the specifications and drawings. All right reserved. This specification is a property of the Builder. Any misuse of this specification is prohibited. All measurements are given to best notice and may differ slightly.
8.2	DOCUMENTATION
	The Builder will supply useful documentation of the vessel according to applying law.
8.3	OWNER'S MANUAL
	The Owner's manual provides guidelines for the correct use of the vessel together with explanations, graphical images and diagrams.





8.4	BUILDER'S CERTIFICATE The Builder's certificate is handed over, according to the Sales contract, when full payment has been executed.
8.5	BILL OF SALE The Bill of Sale is handed over, according to the Sales contract, when full payment has been executed. The Bill of Sale verifies that there are no liens on the specific vessel.
8.5	DELIVERY CERTIFICATE A Delivery certificate is to be signed by both parties at the time of the acceptance of the vessel, the Delivery certificate determines the date of formal transfer of the ownership and start of the warranty period.
8.5	WARRANTY The general warranty period for the yacht is defined in the sales contract.

To ensure that the Yacht is built in accordance with the preliminary specification Y Yachts undertakes to use the best available materials.

Light ship is the weight of the Yacht, fitted with all the equipment listed in the preliminary specifications without fuel, freshwater, grey-/blackwater, provisions, passengers and crew.


The displacement is subject to change and will increase by the installation on board of additional equipment, options requested by the client and listed as optional equipment or additional components ordered by the Buyer and not included in the preliminary specification.

The weight can increase by the installation of additional options, equipment, different General Arrangement plan, Classification or Flag Administration Compliance requirements and choice of keel options. Materials and equipment described in the specification may change in accordance with Classification society or Flag State requirements.


The builder reserves the right to adjust the ballast for trimming reasons.

Y Yachts reserves the right to substitute equipment described in the specification with equipment having equal characteristics.





LAYOUT option 1

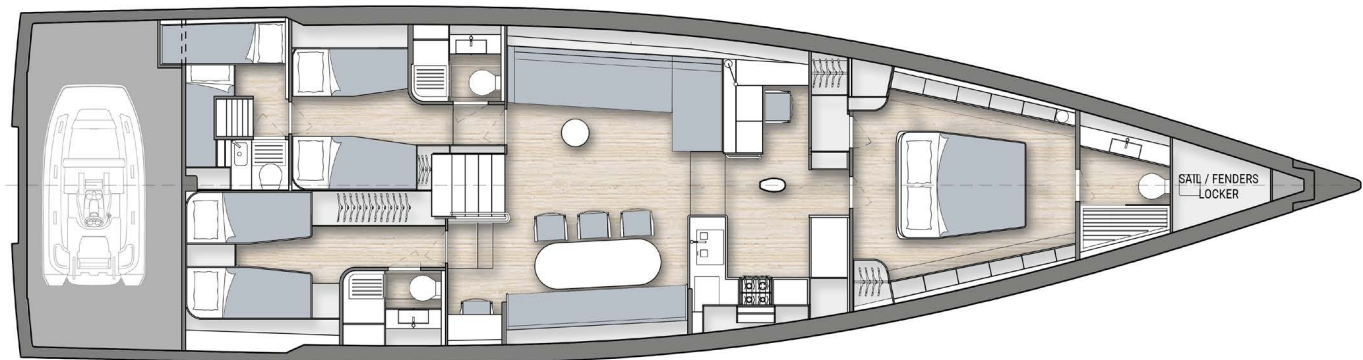


LAYOUT option 2




LAYOUT option 3




LAYOUT option 4

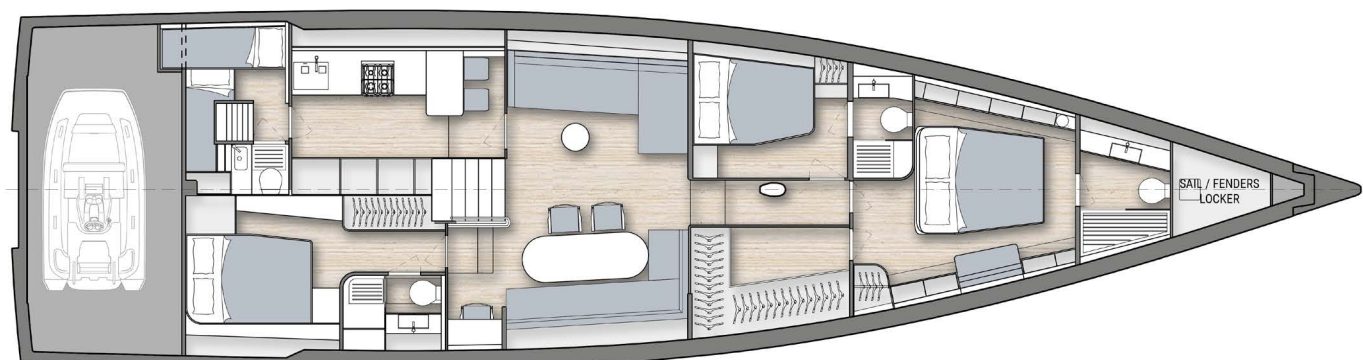




HULL | COACHROOF PAINTED LIGHT UNICOLORS


COLOURS - ALEXSEAL (optional)



cloud white



mattehorn white




eggshell white



pegasus gray




camel beige



yellow mellow




pearl gray




whisper gray




kingston gray



blue tone white




ice blue



sea frost

Price list code Y7.07101





EXTERIOR COVER | SHADES | AWNING

COLOURS - SUNBRELLA PLUS (optional)




natural




oyster



silver




cadet grey




charcoal grey



graphite



captain navy



taupe



dune

Price list code Y7.11111
Y7.11112
Y7.04203





UPHOLSTERY

COLOURS - SUNBRELLA TERRY (optional)



terry white



terry beige



terry cocoa



terry char




terry navy







terry spa

Price list code Y7.11111
Y7.11112





MOODBOARD A

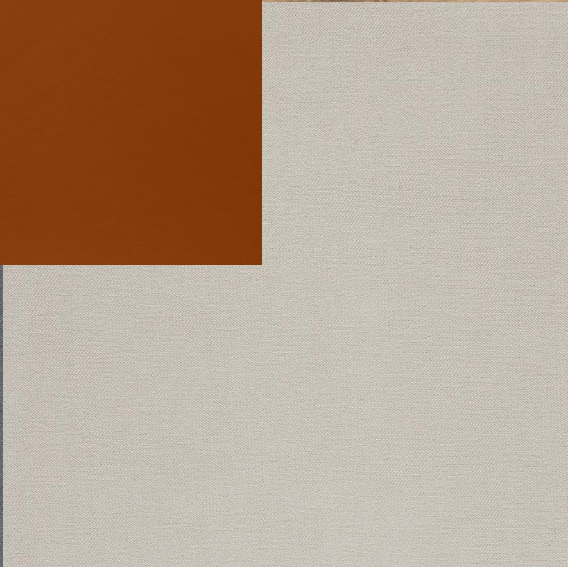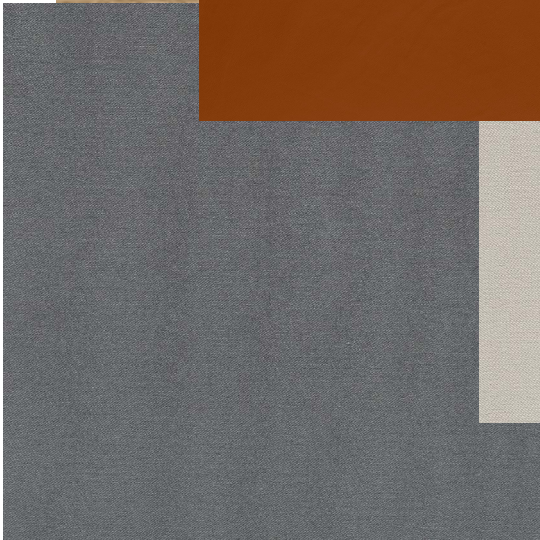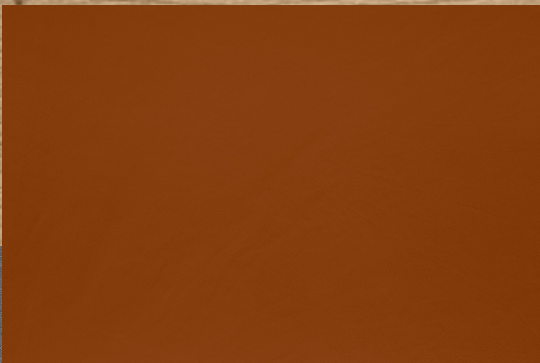





Price list code Y7.00001



MOODBOARD B



floorboard f

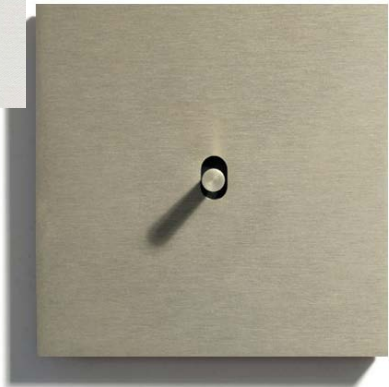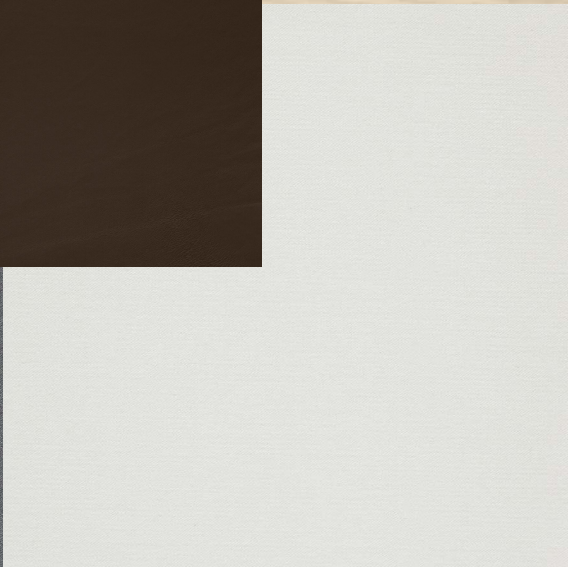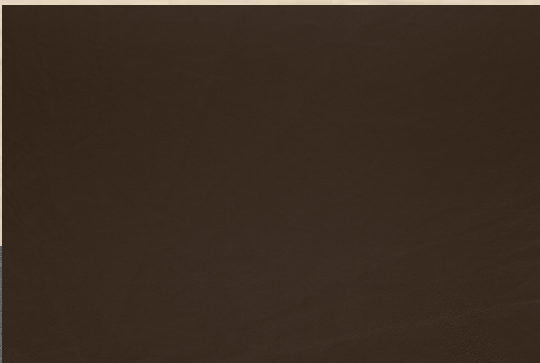

Price list code Y7.00002



MOODBOARD C


floorboard f








Price list code Y7.00003



MOODBOARD D

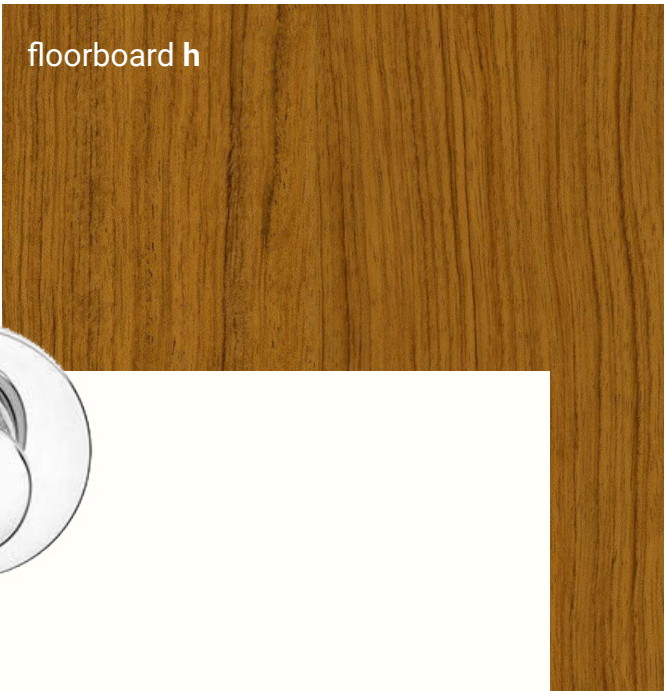

floorboard h

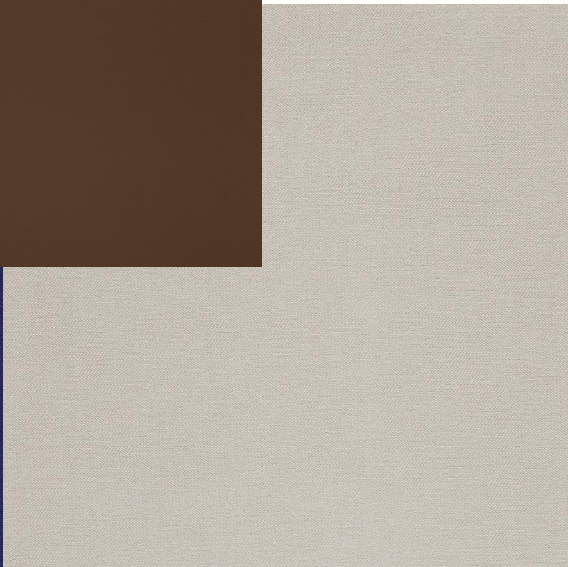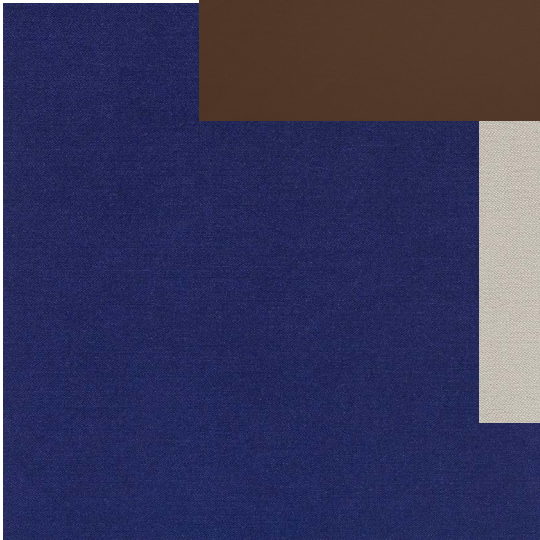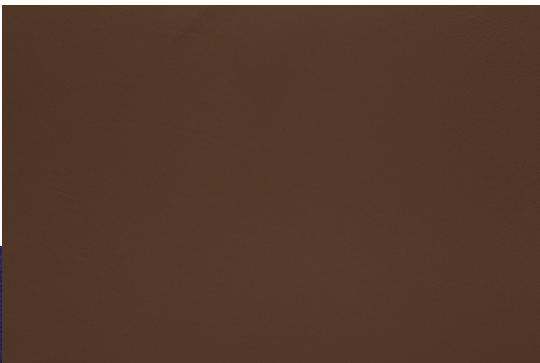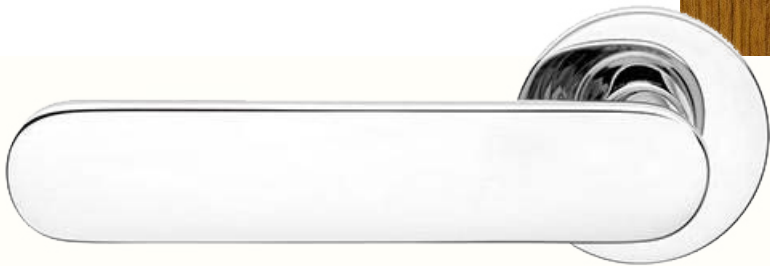

Price list code Y7.00004