CRANE BRIDGE – TOP VIEW

CRANE BRIDGE, HOIST AND MOTORS – NOT IN MAIMAAR SCOPE (BY OTHERS)

SIDE VIEW — ALONG THE GIRDER

HT BOX, ONLY 200 DEEP
E BOTTOM, ON THE RAIL

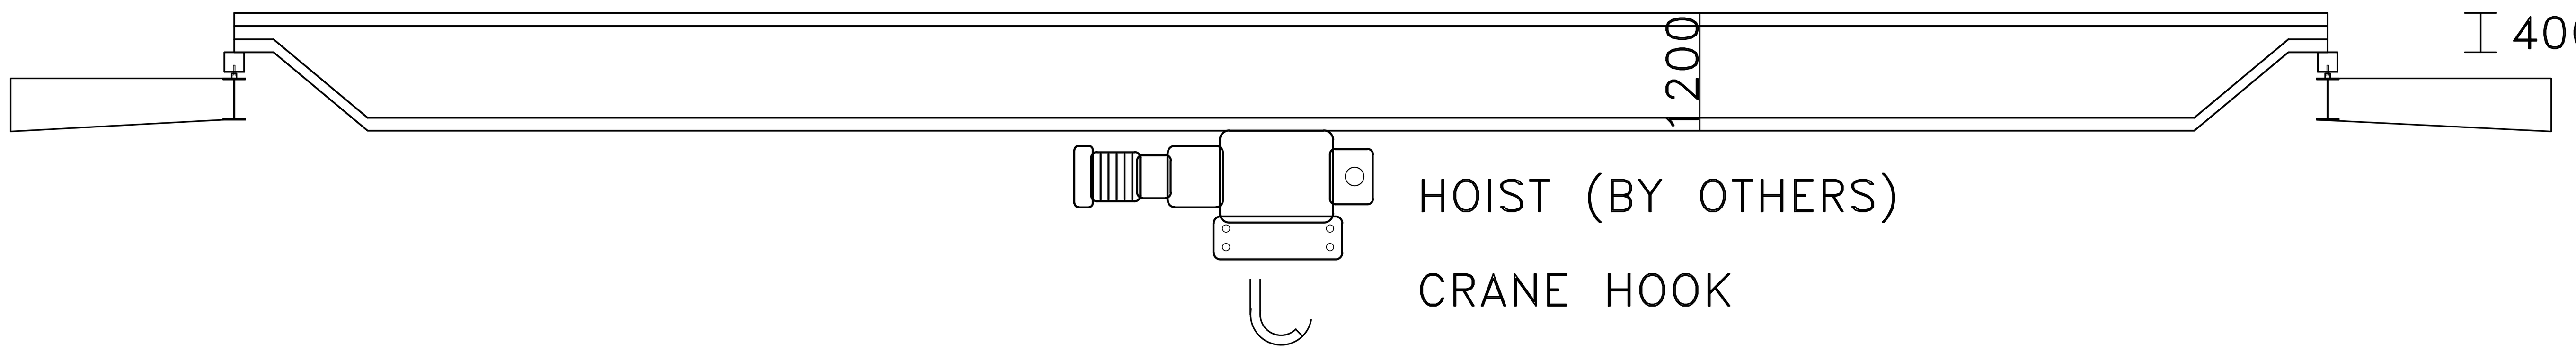

CRANE BRIDGE — GIRDER DEPTH 1200 (RULE: 500 + SPAN/30.5)

CRANE BEAM + RAIL (MAIMAAR SCOPE — SOLID)

CRANE BEAM BRACKET (MAIMAAR SCOPE)

HOOK HEIGHT IS MEASURED FFL TO THE HOOK — IT SETS THE EAVE HEIGHT

HOIST DETAIL — ENLARGED

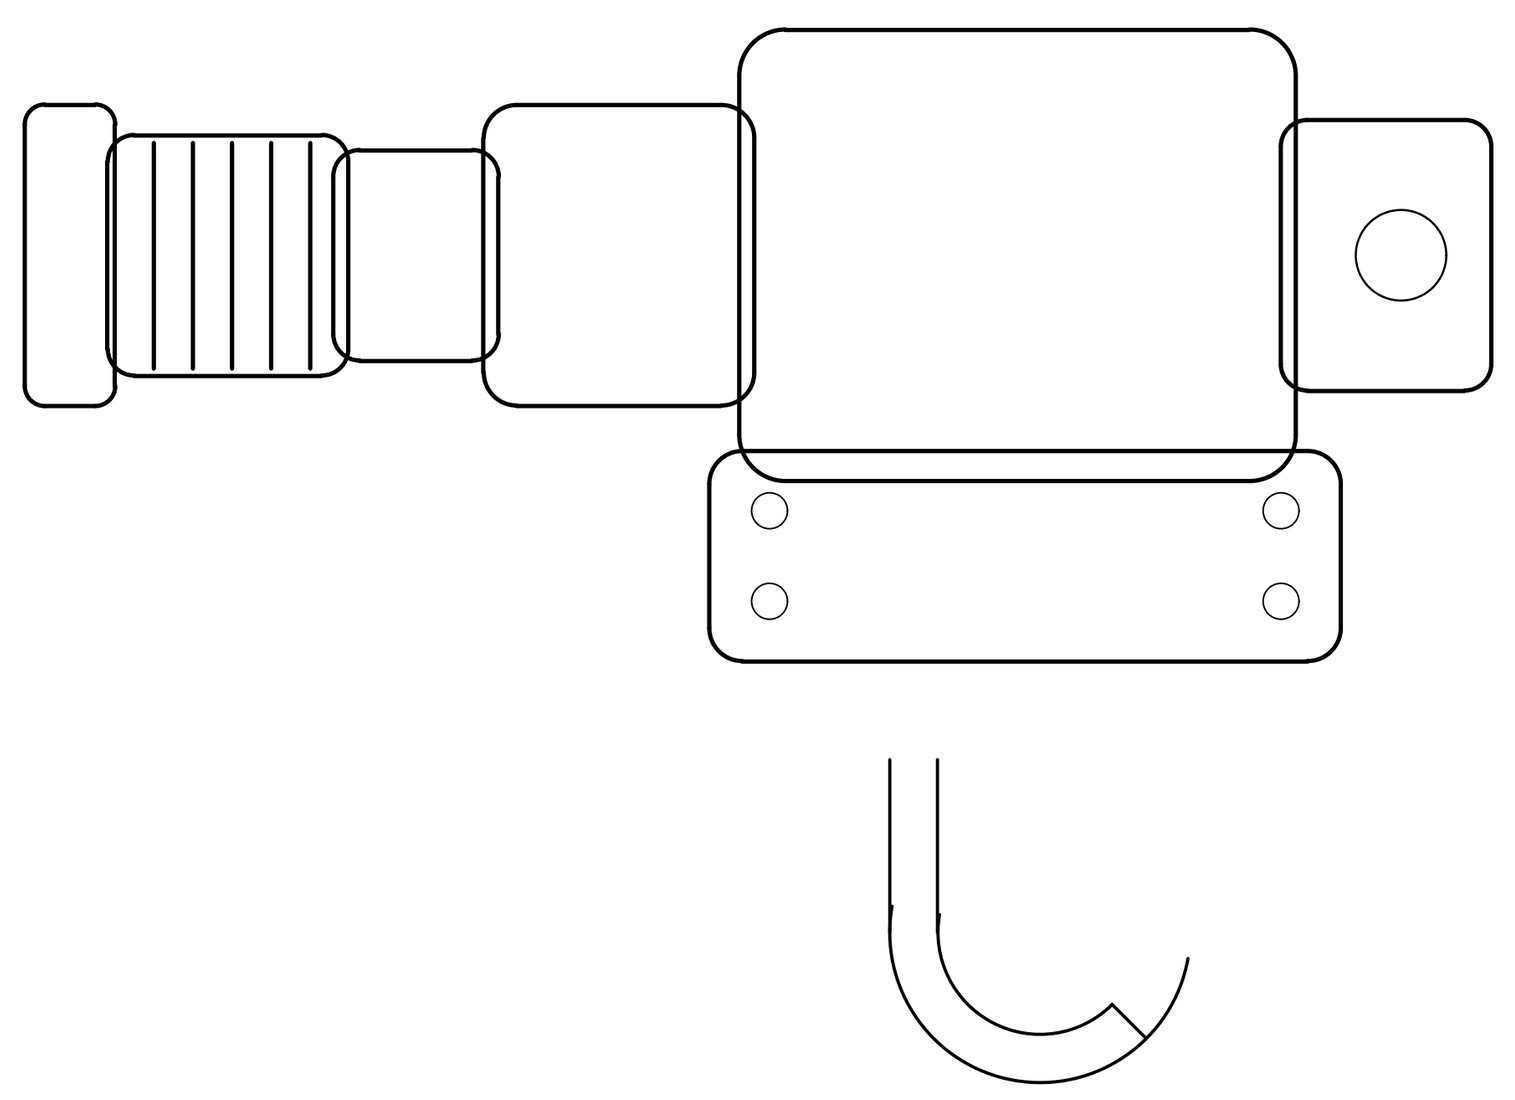

TRACED FROM REFERENCE/CRANE-IN-PEB-SECTION_REFERENCE.WEBP

END CAP / FINNED MOTOR / SHOULDER / MID BOX / DRUM HOUSING / SHEAVE / PLATE / HOOK

CRANE BEAM — SECTION, ELEVATION AND RAIL

PLATE SIZES READ OFF THE MSPL-032 SINGLE-PART SHEET (MAIMAAR FACTORY, 10 MT)

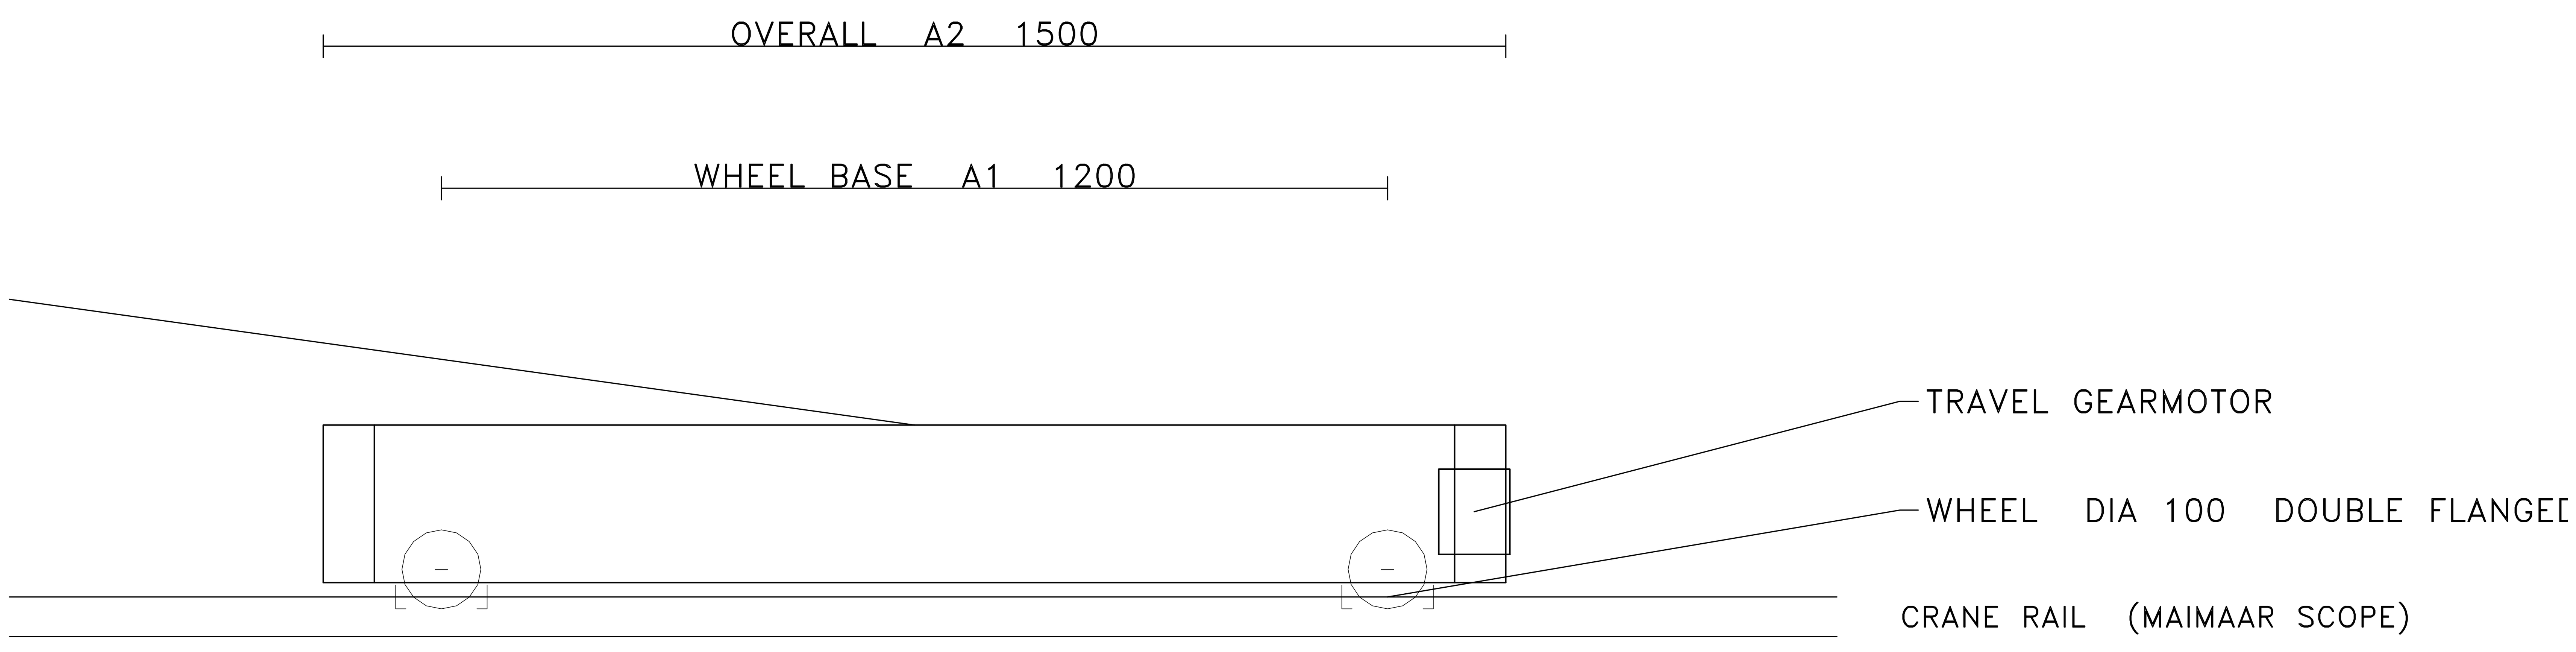

END CARRIAGE – ONE AT EACH END OF THE BRIDGE
OWNER'S MEASURED SIZES – CRANE SUPPLIER'S SCOPE, SHOWN FOR CLEARANCE

CAPACITY 10 MT
TYPE TOP RUNNING (TR) – MANUAL CH.8 LISTS TR / MONORAIL / UNDERHUNG / JIB / SEMI–GANTRY
END CARRIAGE WHEELS 2 PER END, 4 TOTAL – MANUAL CH.8 NWB = 2 (WORKED 10 MT EXAMPLE)
WHEEL 100 HIGH X 18 WIDE; 15 LAPS DOWN ONTO THE RAIL – OWNER, 5–SEP–2026
   18 OF OPEN GAP ABOVE THE RAIL, THEN 67 INSIDE THE CARRIAGE – THE 67 IS DERIVED
   (THE GH CATALOGUE BAND WOULD GIVE 250 AT 10 MT – THE MEASURED FIGURE IS USED)
RUNWAY TOLERANCE RAIL TO WEB ECCENTRICITY <= 0.75 X WEB THICKNESS – CMAA/AISC
END CARRIAGE WELDED BOX, WHEELS ON THE BOTTOM; THE BRIDGE JUST RESTS ON TOP
   200 X 200 SQUARE BOX, 1500 LONG, UNDER A 1000–1400 GIRDER – OWNER, 5–SEP–2026
WHEEL BASE 1200, FROM A 1500 CARRIAGE LESS 150 EACH END – OWNER
   NOTE THE LIVE BSF (MSPL–26–276) CARRIES 3,900 ; CMAA GUIDANCE IS >= SPAN/7 = 3,048
   A SHORT WHEEL BASE UNDER A LONG SPAN IS WHAT LETS A CRANE SKEW ON ITS RUNWAY
   STACK TOR –15 WHEEL BOTTOM / 0 RAIL / +18 BOX SOFFIT / +85 WHEEL TOP / +218 BOX TOP
VERTICAL IMPACT 10% PENDANT OPERATED – MANUAL TABLE 8.3
CMAA SERVICE CLASS C – MANUAL TABLE 8.1
LONGITUDINAL 10% OF MAX WHEEL LOAD, AT TOP OF RAILS – MANUAL CH.8 SEC 2.4.4
RUNWAY BEAM BUILT–UP, DOUBLE SIDE FILLET WELD (<= 15 MT) – THAL 125–23 SPEC
SCOPE IS SAID BY THE LABEL, NOT BY THE LINETYPE – REF: CRANE–IN–PEB–SECTION
HOOK HEIGHT FFL–TO–HOOK SETS THE EAVE HEIGHT – MANUAL, EAVE HEIGHT GUIDELINE
GIRDER DEPTH (500 + SPAN/30.5) X (CAP/10)^0.20 – 1000 AT 15,240 SPAN, 1200 AT 21,335
GIRDER END ONE TAPERED CUT TO A 400 DEEP STUB ~400 LONG, RESTING ON THE END CARRIAGE
CRANE BEAM BAY/15 X (CAP/10)^0.25, SNAPPED TO 25 ; 400 WEB AT A 6,096 BAY, 10 MT