



CRANE BRIDGE — TOP VIEW

CRANE BRIDGE, HOIST AND MOTORS — NOT IN MAIMAAR SCOPE (BY OTHERS)

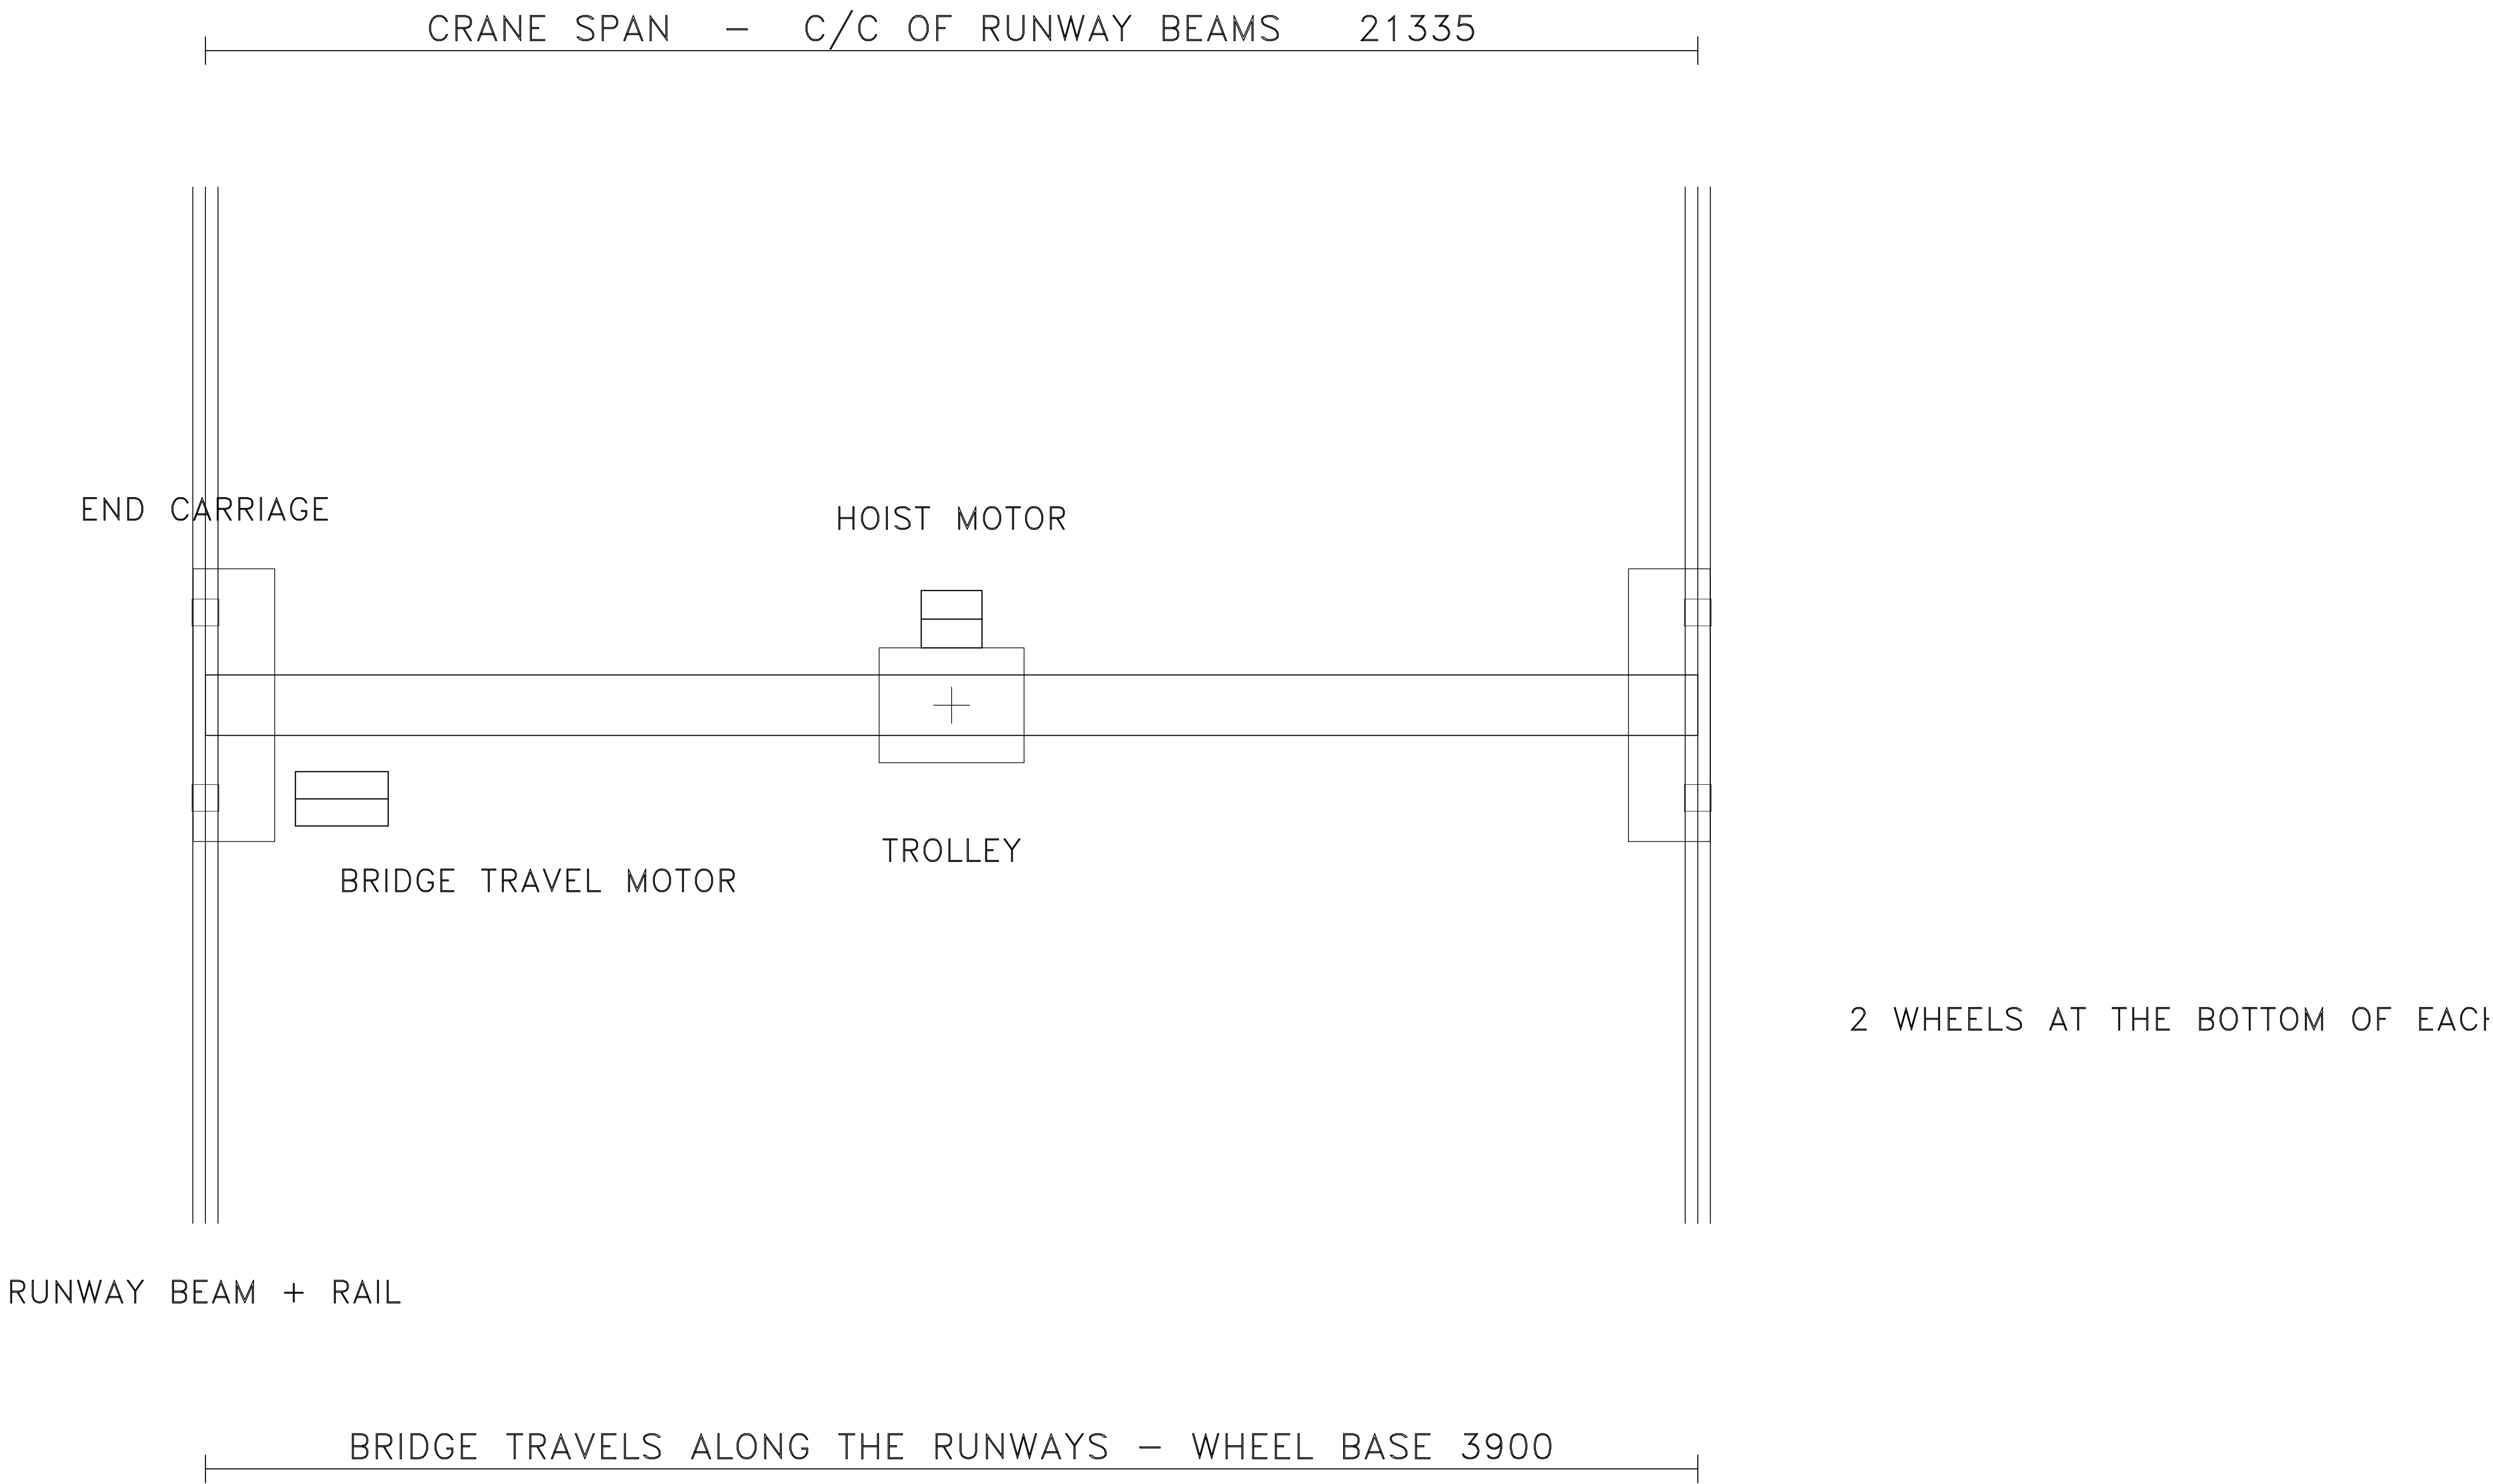

IT BOX, ONLY 300 DEEP
E BOTTOM, ON THE RAIL

SIDE VIEW – ALONG THE GIRDER

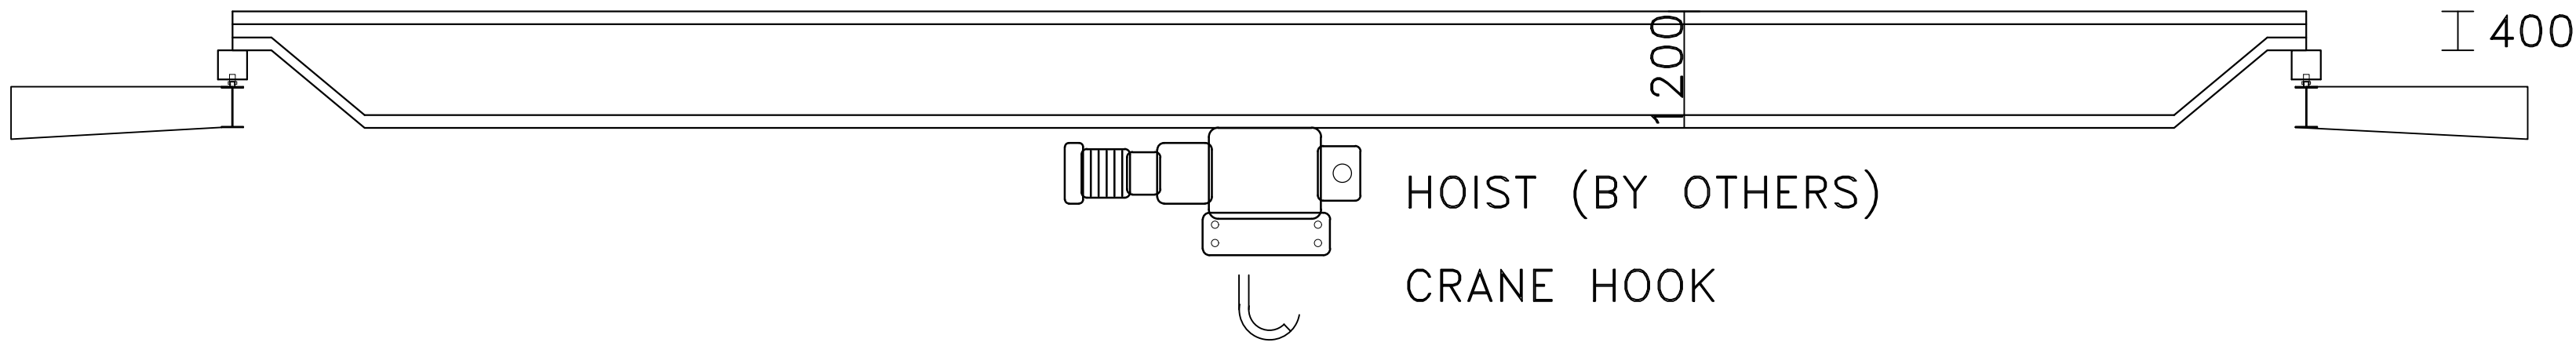


CRANE BRIDGE – GIRDER DEPTH 1200 (RULE: 500 + SPAN/30.5)

CRANE BEAM + RAIL (MAIMAAR SCOPE – SOLID)

CRANE BEAM BRACKET (MAIMAAR SCOPE)

HOOK HEIGHT IS MEASURED FFL TO THE HOOK – IT SETS THE EAVE HEIGHT

HOIST DETAIL – ENLARGED

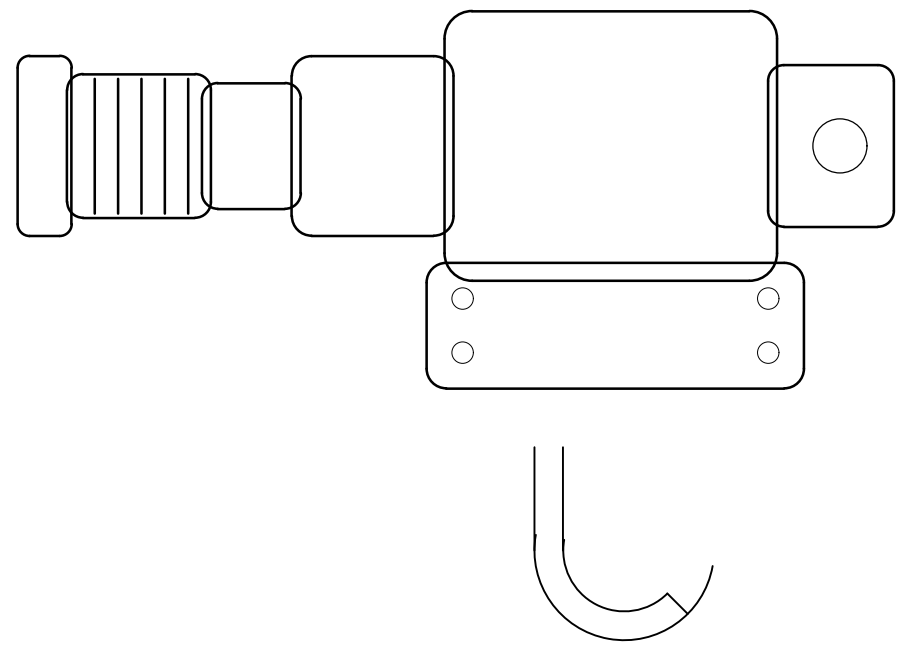


TRACED FROM REFERENCE/CRANE-IN-PEB-SECTION_REFERENCE.WEBP

END CAP / FINNED MOTOR / SHOULDER / MID BOX / DRUM HOUSING / SHEAVE / PLATE / HOOK

CRANE BEAM – SECTION, ELEVATION AND RAIL


PLATE SIZES READ OFF THE MSPL-032 SINGLE-PART SHEET (MAIMAAR FACTORY, 10 MT)

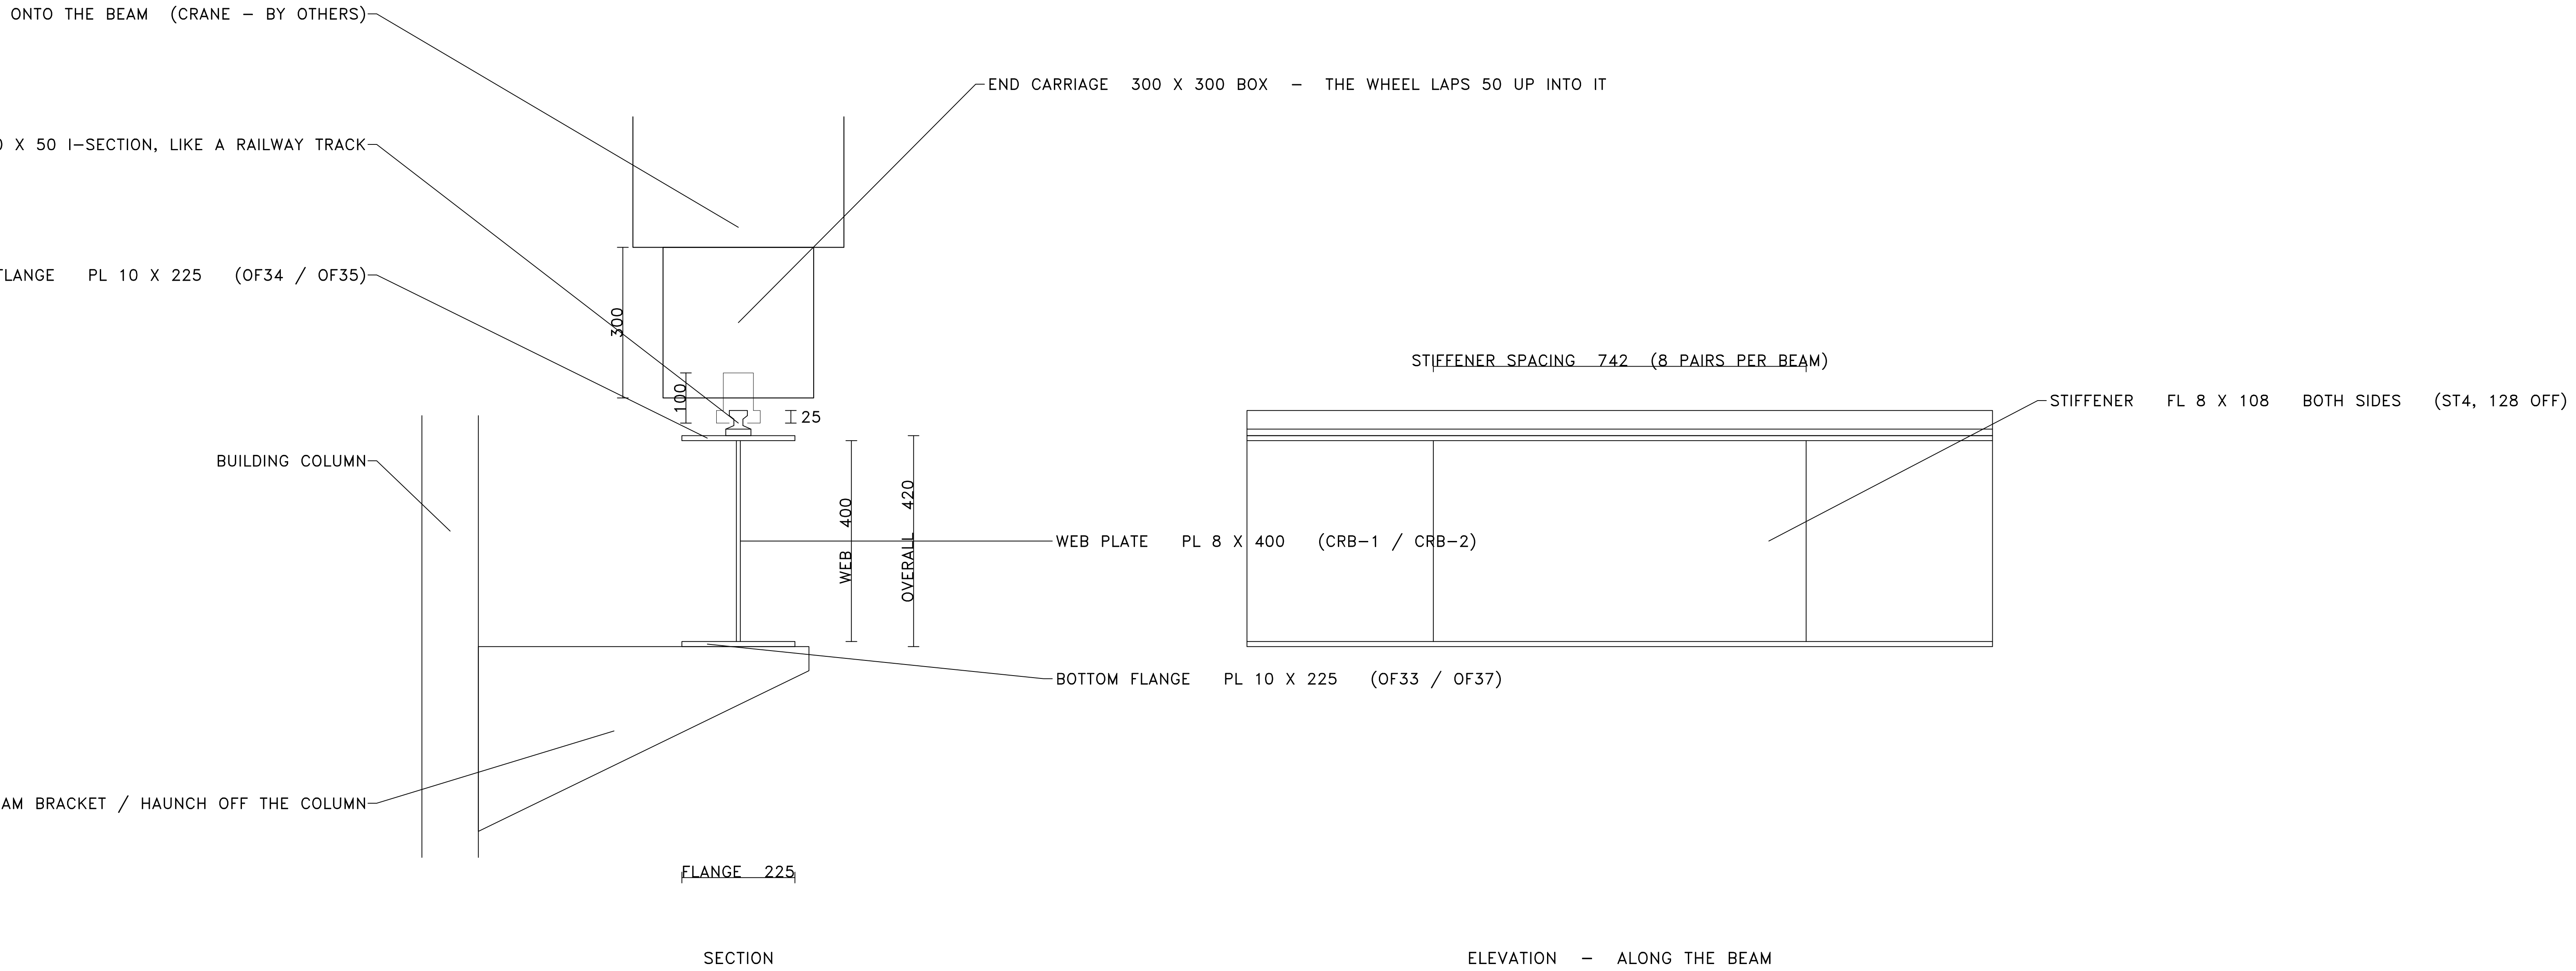


RAIL FOOT 50

RAIL HEAD WIDTH 36

HEIGHT 50



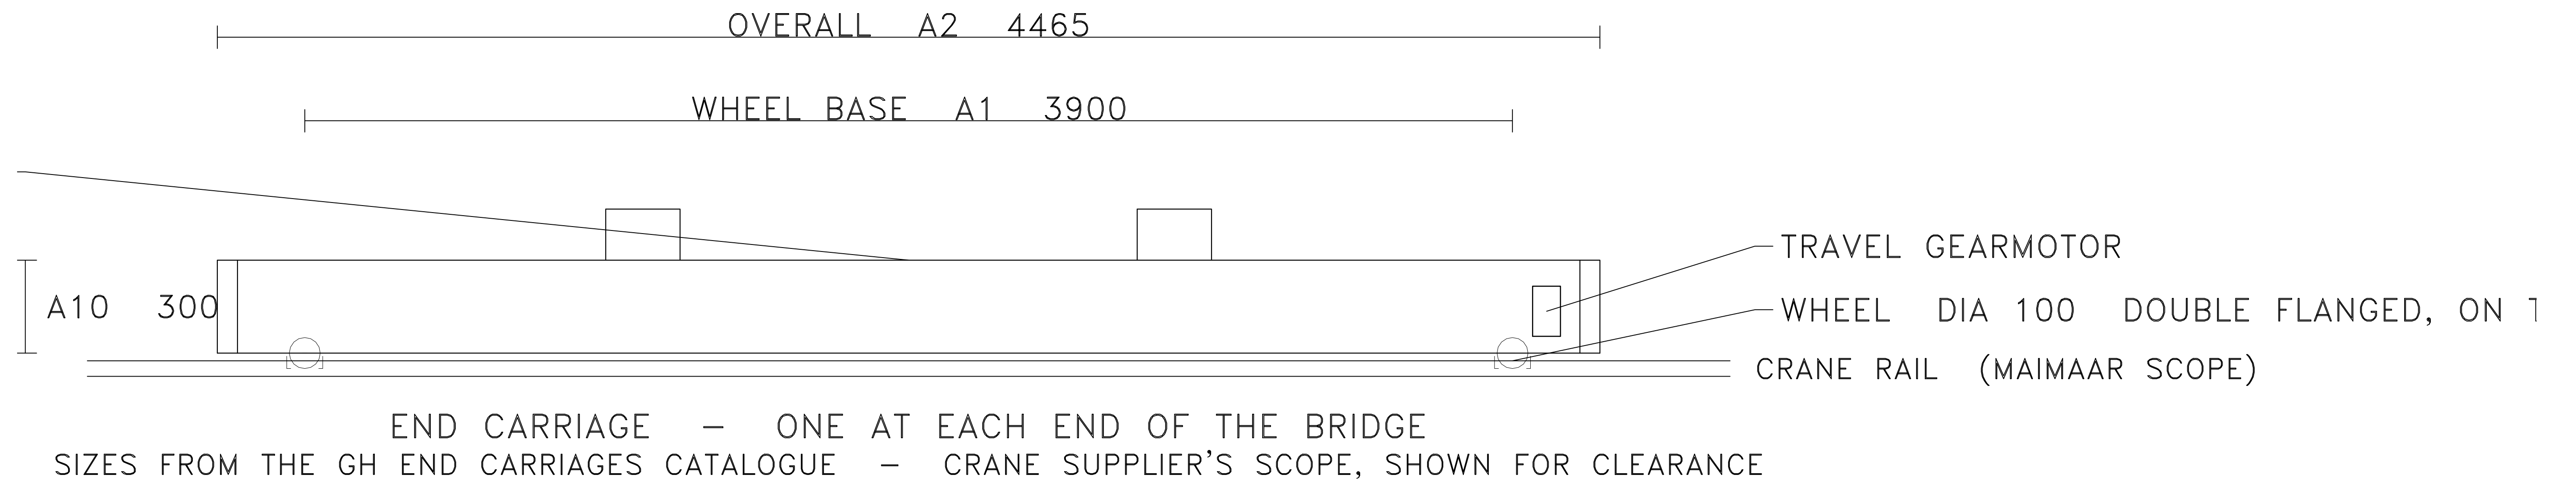

CAPACITY 10 MT

TYPE TOP RUNNING (TR) – MANUAL CH.8 LISTS TR / MONORAIL / UNDERHUNG / JIB / SEMI-GANTRY

END CARRIAGE WHEELS 2 PER END, 4 TOTAL – MANUAL CH.8 NWB = 2 (WORKED 10 MT EXAMPLE)

WHEEL 100 HIGH; 25 LAPPED DOWN ONTO THE BEAM, 50 UP INTO THE CARRIAGE – OWNER

(THE GH CATALOGUE BAND WOULD GIVE 250 AT 10 MT – THE MEASURED FIGURE IS USED)

RUNWAY TOLERANCE RAIL TO WEB ECCENTRICITY $\leq 0.75 \times \text{WEB THICKNESS}$ – CMAA/AISC

END CARRIAGE WELDED BOX, WHEELS ON THE BOTTOM RUNNING ON THE RAIL – GH CATALOGUE

300 X 300 SQUARE BOX UNDER A 1000–1400 GIRDER – OWNER, 5-SEP-2026

STACK TOR -25 WHEEL BOTTOM / 0 RAIL / +25 BOX SOFFIT / +75 WHEEL TOP / +325 BOX TOP

VERTICAL IMPACT 10% PENDANT OPERATED – MANUAL TABLE 8.3

CMAA SERVICE CLASS C – MANUAL TABLE 8.1

LONGITUDINAL 10% OF MAX WHEEL LOAD, AT TOP OF RAILS – MANUAL CH.8 SEC 2.4.4

RUNWAY BEAM BUILT-UP, DOUBLE SIDE FILLET WELD (≤ 15 MT) – THAL 125–23 SPEC

SCOPE IS SAID BY THE LABEL, NOT BY THE LINETYPE – REF: CRANE-IN-PEB-SECTION

HOOK HEIGHT FFL-TO-HOOK SETS THE EAVE HEIGHT – MANUAL, EAVE HEIGHT GUIDELINE

GIRDER DEPTH $(500 + \text{SPAN}/30.5) \times (\text{CAP}/10)^{0.20}$ – 1000 AT 15,240 SPAN, 1200 AT 21,335