


Station-independent LSTM-TL architecture

Input window (one station)

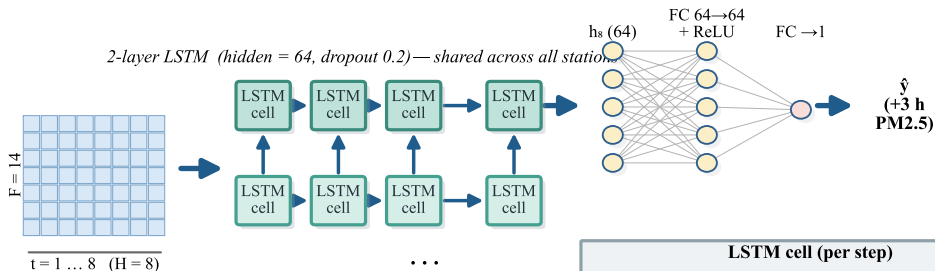

LSTM cell (per step)

$$\begin{aligned} i, f, o &= \sigma(W \cdot [h_{t-1}, x_t] + b) & g &= \tanh(W_g \cdot [h_{t-1}, x_t] + b_g) \\ c_t &= f \cdot c_{t-1} + i \cdot g & h_t &= o \cdot \tanh(c_t) \end{aligned}$$

~50 k parameters, independent of N (applied per station)

Transfer: pre-train on source city $\rightarrow$ fine-tune on target d % $\rightarrow$ evaluate on target test