

LTE power switch rev A (#88)
TI TPS22918DBVR load switch gates the LTE-M unit VCC (Grove pin3).
Grove pin1/pin2 (UART) pass straight through J1 -> J2.
LTE_EN: HIGH = ON. R1 pulls it LOW when the GPIO is Hi-Z (deep sleep, reset).


J1 IN (from Shield UART Grove port)

pin1 yellow=SIG1, pin2 white=SIG2, pin3 red=3V3, pin4 black=GND







C1: VIN bypass (datasheet: 1uF or more).
X5R 50V, place close to U1




J2 OUT (to LTE-M unit, Grove UART)

pin1/pin2 pass-through from J1, pin3 = switched VLTE





R1: ON-pin pull-down.
Required (ON must not float)

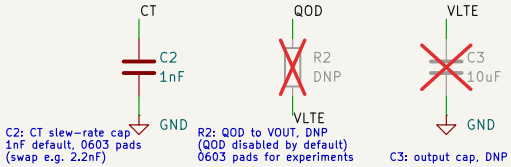


C2: CT slew-rate cap
1nF default, 0603 pads
(swap e.g. 2.2nF)

R2: QOD to VOUT, DNP
(QOD disabled by default)
0603 pads for experiments

C3: output cap, DNP

J3 CTRL (from Shield D0 = GPIO1)

pin1 = LTE_EN. pin2/pin3 left open on purpose (do not feed 5V)



Test points (not assembled): V3V3_IN / VLTE / LTE_EN / GND





Grove IN / OUT / CTRL load-switch board (TPS22918DBVR)
Issue #88

Sheet: /
File: lte-power-switch.kicad_sch

Title: LTE power switch

Size: A4	Date: 2026-10-05	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1