



# Light Touch Switch


## ASSEMBLY MANUAL

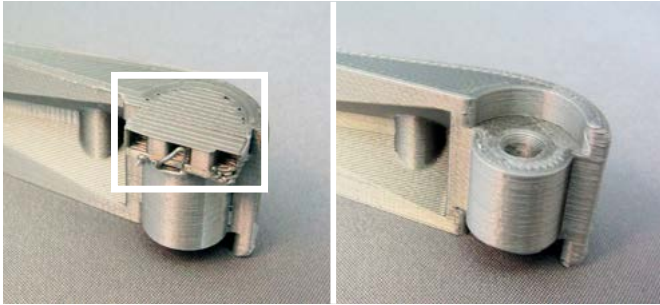


**01.** Remove all the plastic support material and any residual plastic bits.

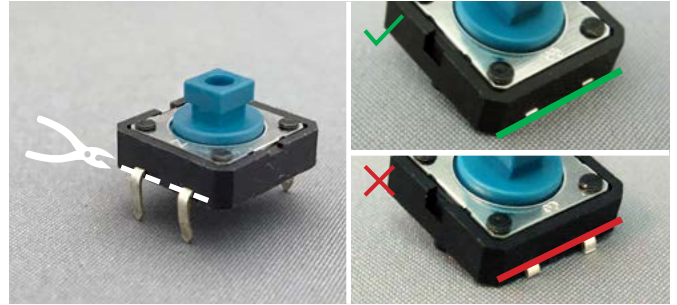

**02.** Cut off the two leads on one side flush.

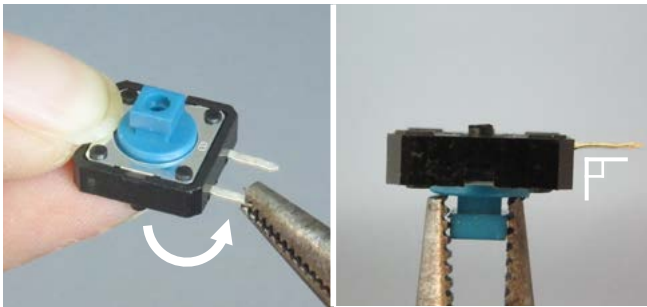


**03.**

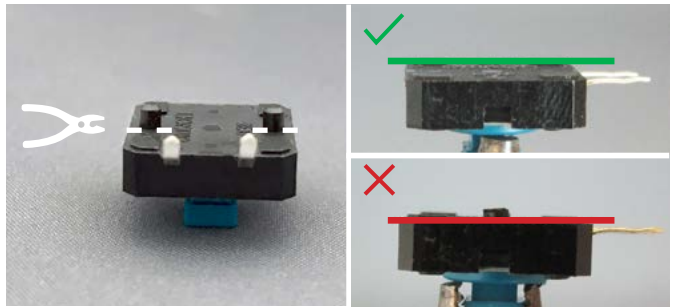


**04.** Cut off the two plastic mounting lugs completely flush.




**05.**

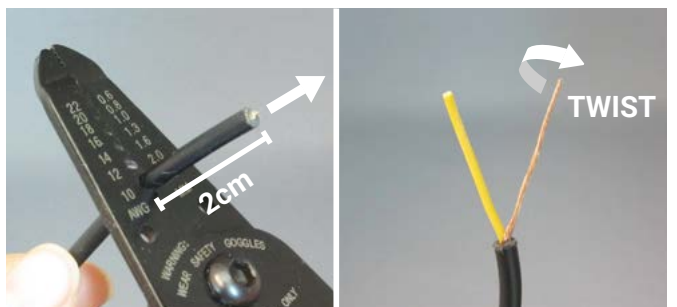

**06.** Use the wire stripper.

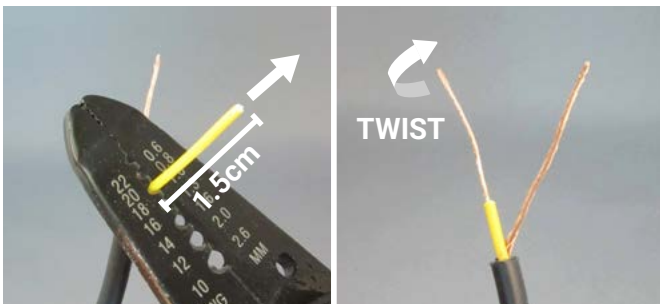


**07.**

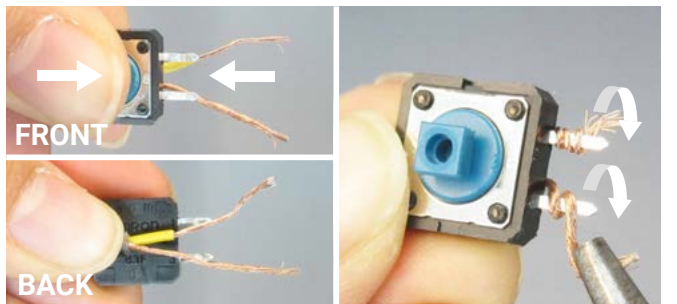


**08.** Hold the wire behind the switch and wrap the wire around the switch leads with a plier.

# Light Touch Switch


## ASSEMBLY MANUAL

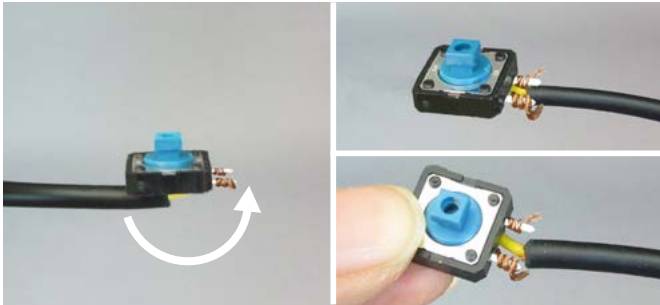


**09.** Hold the switch in place and bend the wire to in between the two switch leads.

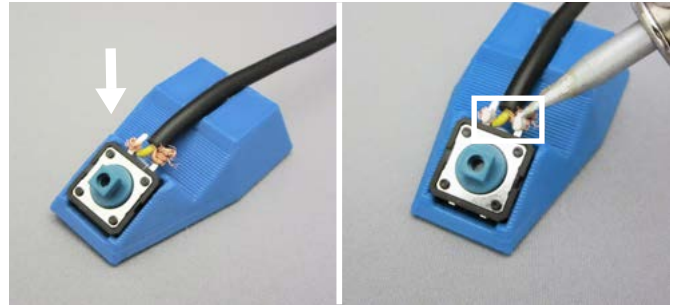

**10.** Solder the two leads indicated in the white rectangle.

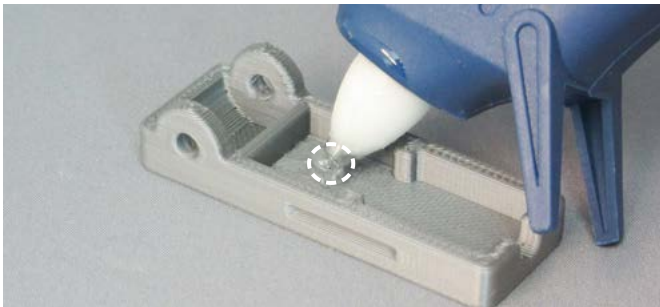


**11.** Add a **small drop** of hot glue. Do not add too much.

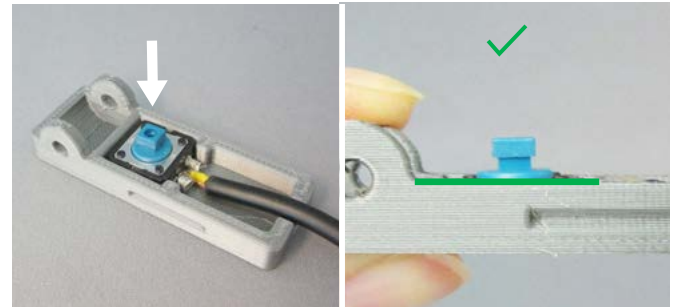

**12.** Make sure the switch sitting flat and level.



**13.** Fill the indicated white rectangle with hot glue to seal in the cable. Do not overfill.

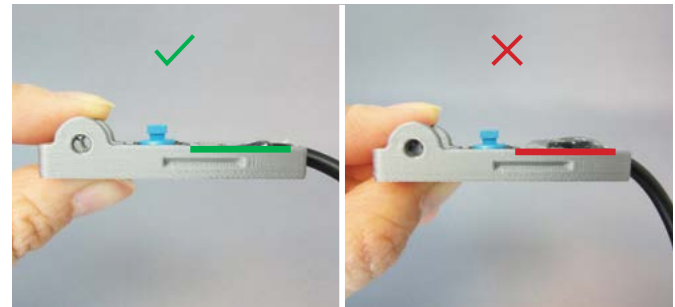

**14.** The two pins are different sizes. Test each pin to find the best fit and insert it all the way in.



**15.** Cut the pin, ensuring it's flush with the switch case.