


OOMWOO front ToF board (rev 2, 2026-10-27). One design, fitted twice: left and right, each aimed 30 deg off centre. The main board holds the I2C (2.2k), INT, LPn (47k) and I2C_RST (47k) resistors, so this board carries none of them. Refs 83xx: unique on the OOMWOO panel.

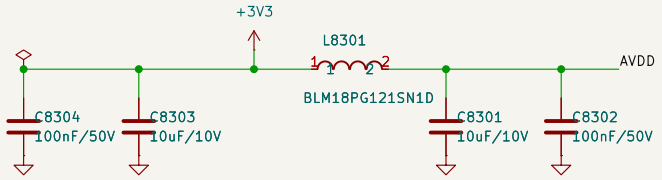

IOVDD: C8303, C8304 AVDD: C8301, C8302
Place each pair at its pins.



J8301 pin 1 to main-board pin 1:
use a same-direction (pin 1 – pin 1)
SH 7-pin cable

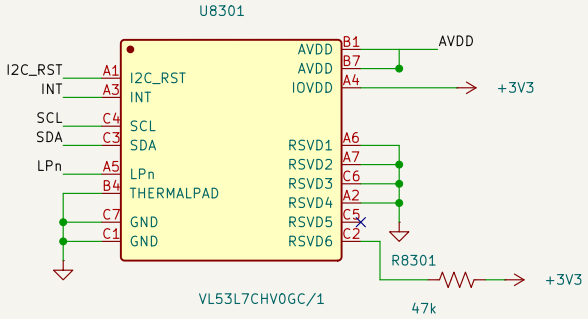

No mounting holes: the board slides into a holder by its long edges.
Keep about 1 mm along both long edges free of parts and copper.

OOMWOO front sensors

Sheet: /
File: Front Sensor.kicad_sch

Title: Front ToF sensor board (fit 2x)

Size: USLetter	Date: 2026-10-27	**Rev: 2**
KiCad E.D.A. 10.0.4		Id: 1/1