


OOMWOO side sensor board (rev 2, 2026-10-27), right side of the robot. U8401 and U8402 both look out of the board face (top-looking parts). The main board holds the I2C pull-ups (2.2k); this board has the XSHUT and GPIO1 pull-ups. Firmware: the I/Os run at 3.3 V = AVDD, so set the VL53L0X API to 2V8 I/O mode. Refs 84xx: unique on the OOMWOO panel.

Pull-ups: R8401 XSHUT, R8402 GPIO1 (open drain)






C8401, C8402: at U8401 pins 1/2 (AVDDVCSEL)



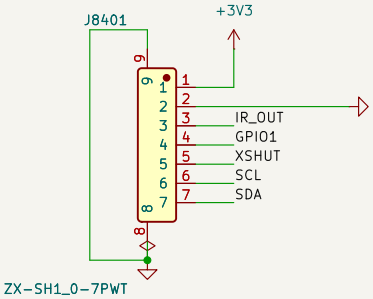


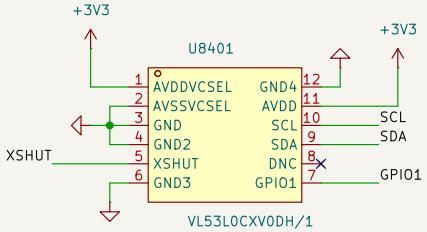

J8401 pin 1 to main-board pin 1:
use a same-direction (pin 1 – pin 1)
SH 7-pin cable

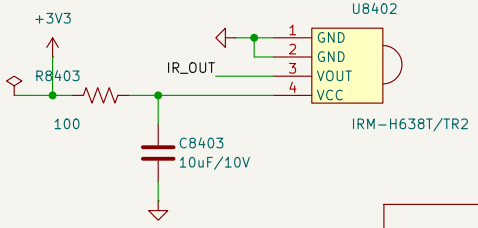


Mounting: 2x M2 (pads to GND)




**OOMWOO side sensor**

Sheet: /
File: Side Sensor.kicad_sch

***Title: Side sensor board (right side)***

| | | |
|---|---|---|
| Size: USLetter | Date: 2026-10-27 | **Rev: 2** |
| KiCad E.D.A. 10.0.4 | | Id: 1/1 |