
OOMWOO side sensor board (rev 2, 2026-10-27), right side of the robot. U3001 and U3002 both look out
of the board face (top-looking parts). The main board holds the I2C pull-ups (2.2k) and
the GPIO1 (INT) pull-up; the MCU (PE3) drives XSHUT, no pull-up. Firmware: the I/Os run at 3.3 V = AVDD, so set the VL53L0X API to 2V8 I/O mode.
Refs in the 3000s: each board has its own range.

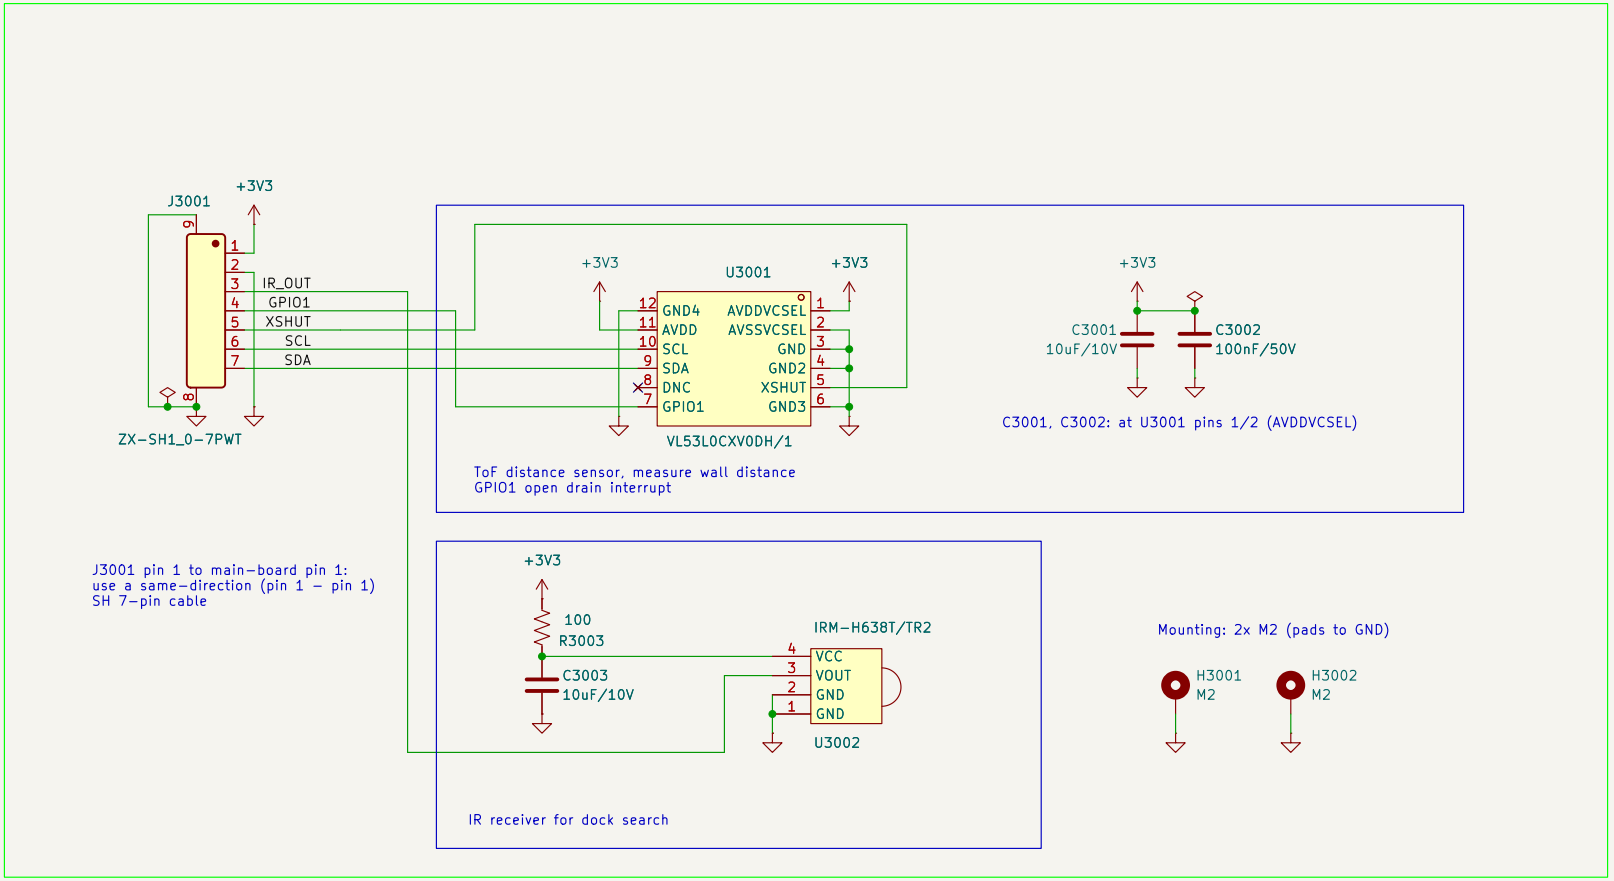

OOMWOO side sensor	
Sheet: /	
File: Side Sensor.kicad_sch	
Title: Side sensor board (right side)	
Size: USLetter	Date: 2026-10-27
KiCad E.D.A. 10.0.4	Id: 1/1

Rev: 2