
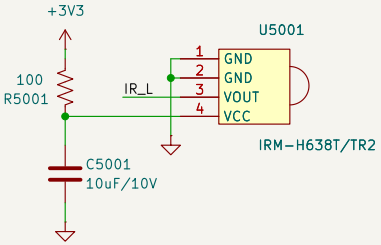
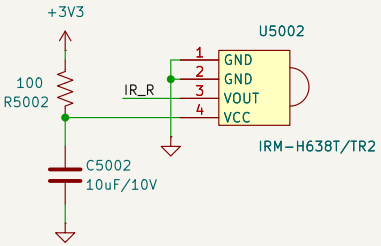
OOMWOO rear docking IR board (rev 1, 2026-10-28). Two top-looking 38 kHz receivers (the same part as the side board and the dock's U1202) look out of the board face, which faces backward. Put them ~10 mm apart with a baffle between them: both see the dock = it is straight behind, one = steer that way. The outputs have internal pull-ups.
Refs in the 5000s: each board has its own range.





J5001 to the main board REAR-IR1, pin 1 to pin 1:
1 3.3 V, 2 IR_L, 3 IR_R, 4 GND




U5001 = left, U5002 = right, seen from behind the robot (looking at the board face).

Mounting: 2x M2 (pads to GND)




| | | |
|---|---|---|
| **OOMWOO rear docking IR** | | |
| Sheet: / | | |
| File: Rear IR.kicad_sch | | |
| ***Title: Rear docking IR board*** | | |
| Size: USLetter | Date: 2026-10-28 | **Rev: 1** |
| KiCad E.D.A. 10.0.4 | | Id: 1/1 |