
OOMWOO side sensor board (rev 2, 2026-10-27), right side of the robot. U3001 and U3002 both look out of the board face (top-looking parts). The main board holds the I2C pull-ups (2.2k); this board has the XSHUT and GPIO1 pull-ups. Firmware: the I/Os run at 3.3 V = AVDD, so set the VL53L0X API to 2V8 I/O mode. Refs in the 3000s: each board has its own range.

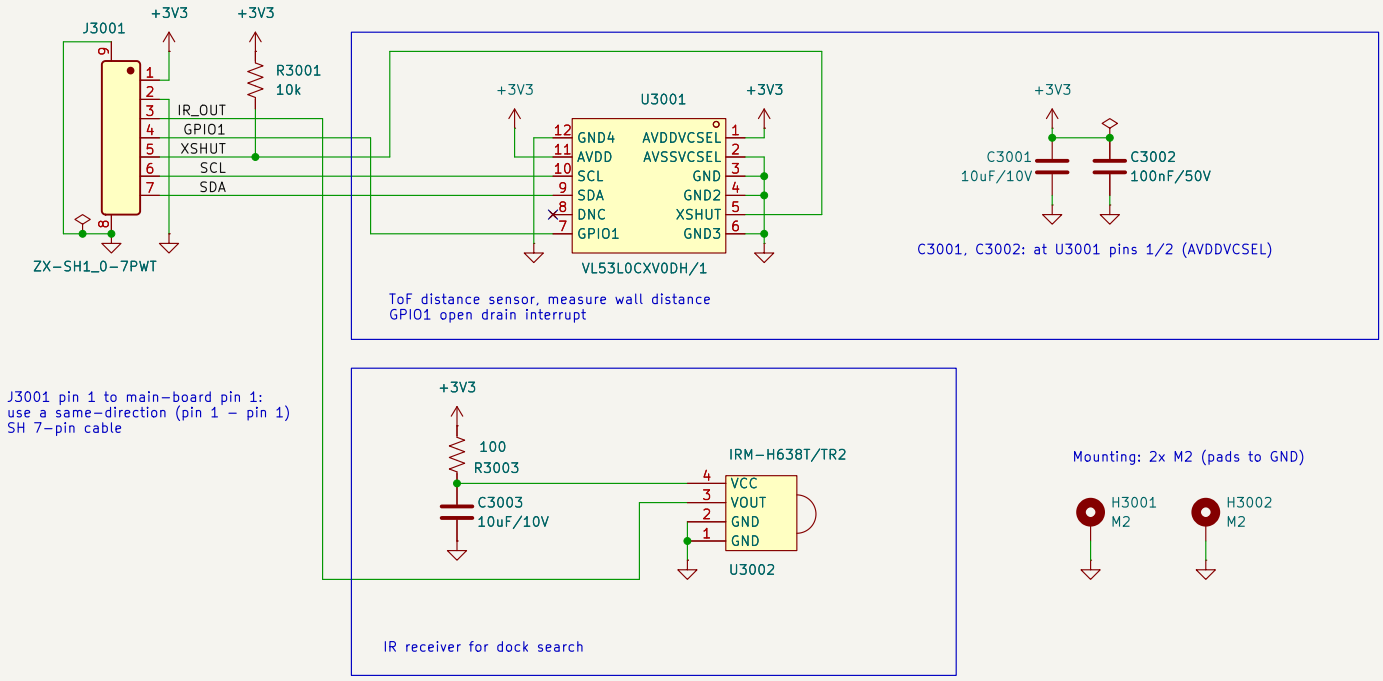

OOMWOO side sensor		
Sheet: /		
File: Side Sensor.kicad_sch		
Title: Side sensor board (right side)		
Size: USLetter	Date: 2026-10-27	**Rev: 2**
KiCad E.D.A. 10.0.4		Id: 1/1