
OOMWOO side sensor board (rev 2, 2026-10-27), right side of the robot. U3001 and U3002 both look out
of the board face (top-looking parts). The main board holds the I2C pull-ups (2.2k) and
the GPIO1 (INT) pull-up; the MCU (PE3) drives XSHUT, no pull-up. Firmware: the I/Os run at 3.3 V = AVDD, so set the VL53L0X API to 2V8 I/O mode.
Refs in the 3000s: each board has its own range.

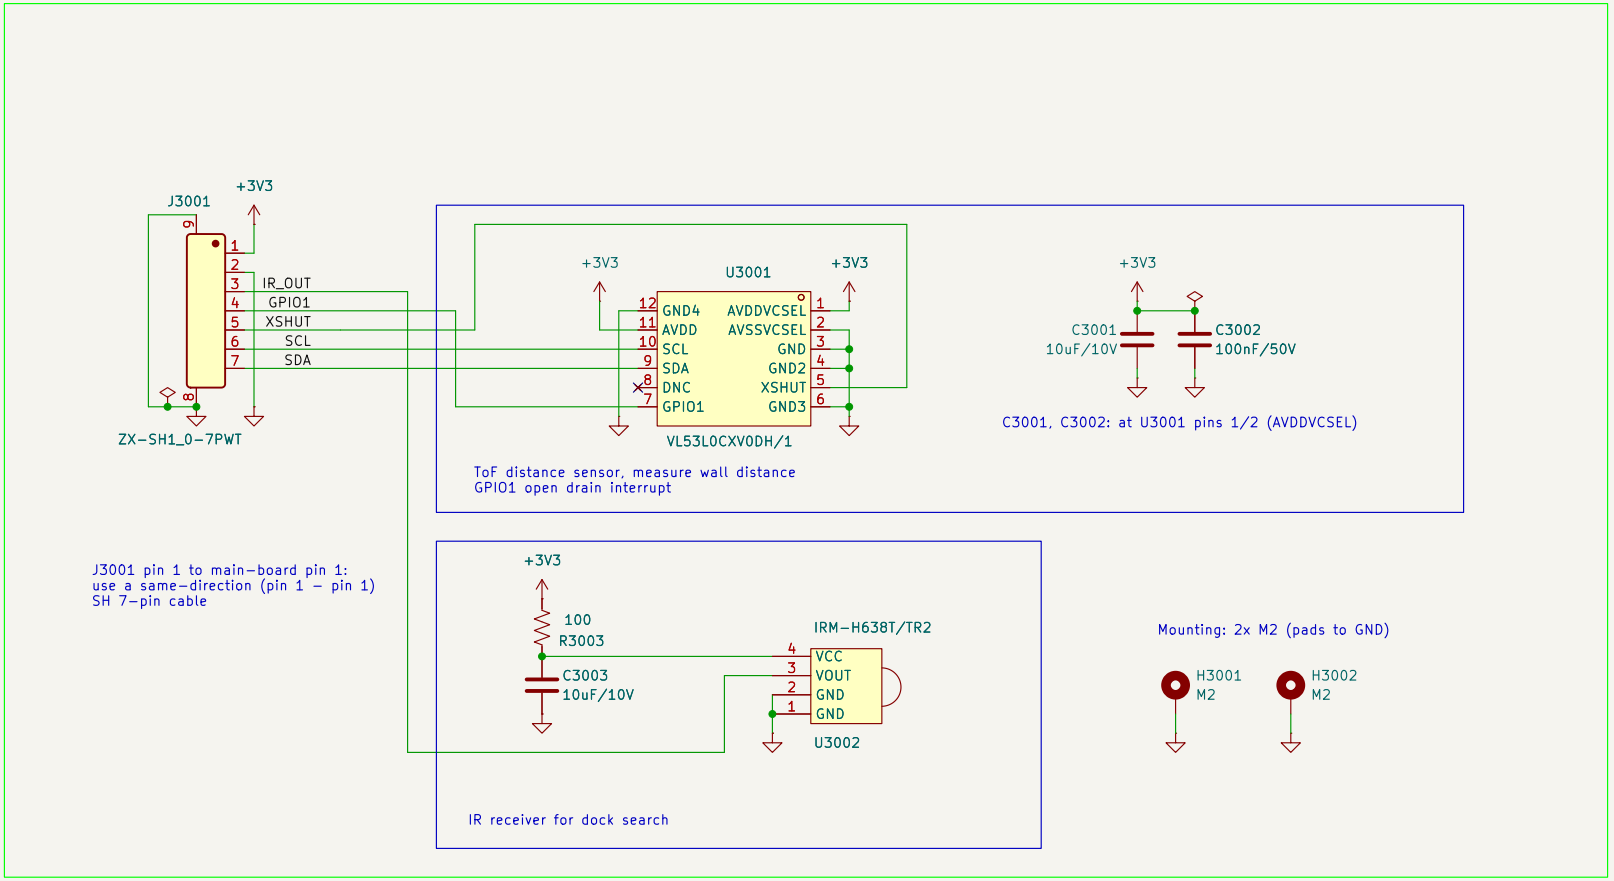


| | |
|---|---|
| **OOMWOO side sensor** | |
| Sheet: / | |
| File: Side Sensor.kicad_sch | |
| ***Title: Side sensor board (right side)*** | |
| Size: USLetter | Date: 2026-10-27 |
| KiCad E.D.A. 10.0.4 | Id: 1/1 |

**Rev: 2**