


OOMWOO side sensor board (rev 2, 2026-10-27), right side of the robot. U3001 and U3002 both look out of the board face (top-looking parts). The main board holds the I2C pull-ups (2.2k); this board has the XSHUT and GPIO1 pull-ups. Firmware: the I/Os run at 3.3 V = AVDD, so set the VL53L0X API to 2V8 I/O mode. Refs in the 3000s: each board has its own range.

Pull-ups: R3001 XSHUT, R3002 GPIO1 (open drain)





C3001, C3002: at U3001 pins 1/2 (AVDDVCSEL)



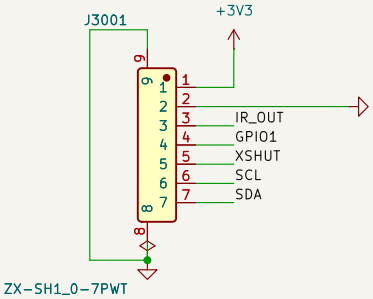


J3001 pin 1 to main-board pin 1:
use a same-direction (pin 1 – pin 1)
SH 7-pin cable

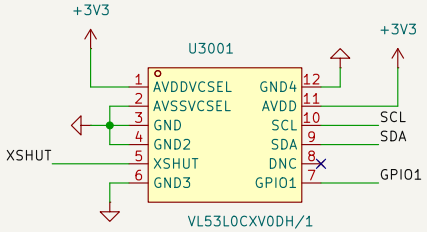

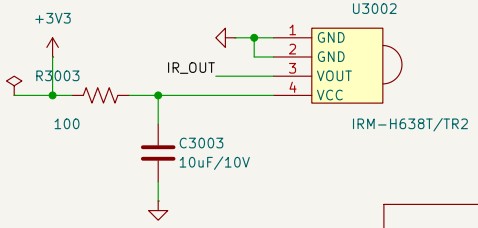

Mounting: 2x M2 (pads to GND)



OOMWOO side sensor

Sheet: /
File: Side Sensor.kicad_sch

Title: Side sensor board (right side)

Size: USLetter	Date: 2026-10-27	**Rev: 2**
KiCad E.D.A. 10.0.4		Id: 1/1