Exp .No : 10 Date :06.09.24

IMPLEMENT THE MAX TEMPERATURE MAPREDUCE PROGRAM TO IDENTIFY THE YEAR WISE MAXIMUM TEMPERATURE FROM SENSOR

AIM:

To implement the max temperature Mapreduce program to identify the year wise maximum temperature from sensor.

PROCEDURE:

Step 1: Create Data File:

Create a file named "sample_weather.txt" and populate it with text data that you wish to analyse.

```
0.001 999.9 0000000
                                                                                             0.001.999 9.000000
690190 13910 20060201 2 50.59 33.0 24 1006.3 24 943.9 24
690190 13910 20060201 3 51.67 33.0 24 1006.3 24 943.9 24
                                                      943.9 24 15.0 24 10.7 24 22.0 28.9
943.9 24 15.0 24 10.7 24 22.0 28.9
                                                                                             n not goo a nonnon
                                                                                             0.001.999.9.000000
690190 13910 20060201 4 65.67
690190 13910 20060201 5 55.37
                                                      943.9 24 15.0 24 10.7 24
                                                                                 22.0 28.9
                                   33.0 24 1006.3 24
                                                                                             0.001 999.9 000000
                                   33.0 24 1006.3 24
                                                      943.9 24 15.0 24 10.7 24
                                                                                 22.0
                                                                                       28.9
                                                                                             0.001999.9 000000
690190 13910 20060201 6 49.26 33.0 24 1006.3 24
                                                      943.9 24 15.0 24 10.7 24
                                                                                 22.0 28.9
                                                                                             0.001 999.9 000000
690190 13910 20060201 7 55.44
                                   33.0 24 1006.3 24
                                                      943.9 24 15.0 24 10.7 24
                                                                                             0.001 999.9 000000
                                                                                 22.0
690190 13910 20060201 8 64.05 33.0 24 1006.3 24
                                                      943.9 24 15.0 24 10.7 24 22.0
                                                                                             0.001 999.9 000000
                                                                                       28.9
690190 13910 20060201 9 68.77
690190 13910 20060201 10 48.93
                                   33.0 24 1006.3 24
                                                      943.9 24 15.0 24 10.7 24 22.0 28.9 0.001 999.9 000000
                                   33.0 24 1006.3 24 943.9 24 15.0 24 10.7 24 22.0 28.9
                                                                                             0.001 999.9 000000
690190 13910 20060201 11 65.37
690190 13910 20060201 12 69.45
                                                       943.9 24 15.0 24 10.7 24 22.0 28.9
                                    33.0 24 1006.3 24
                                                                                              0.001999.9 000000
                                                                         10.7 24 22.0
                                    33.0 24 1006.3 24
                                                       943.9.24
                                                                 15.0 24
                                                                                        28.9
                                                                                              0.001.999.9.000000
                                                                         10.7 24 22.0 28.9
10.7 24 22.0 28.9
690190 13910 20060201_13 52.91
690190 13910 20060201_14 53.69
                                    33.0 24 1006.3 24
                                                       943 9 24
                                                                 15.0 24
                                                                                              0.001.999.9.000000
                                    33.0 24 1006.3 24 943.9 24
                                                                 15.0.24
                                                                                              0.001 999 9 000000
690190 13910 20060201_15 53.30
                                    33.0 24 1006.3 24
                                                                          10.7 24 22.0 28.9
                                                       943.9 24
                                                                 15.0 24
                                                                                              0.001 999 9 0000000
690190 13910 20060201 16 66.17
                                    33.0 24 1006.3 24 943.9 24 15.0 24 10.7 24 22.0
                                                                                        28.9
                                                                                              0.001 999 9. 0000000
                                    33.0 24 1006.3 24 943.9 24 15.0 24 10.7 24 22.0 28.9
690190 13910 20060201 17 53.83
                                                                                              0.001 999.9 000000
690190 13910 20060201 18 50.54
                                    33.0 24 1006.3 24 943.9 24 15.0 24 10.7 24 22.0
                                                                                        28.9
                                                                                              0.001 999.9 000000
690190 13910 20060201 19 50.27
                                    33.0 24 1006.3 24 943.9 24 15.0 24 10.7 24 22.0 28.9
                                                                                              0.001999.9 000000
```

Step 2: Mapper Logic - mapper.py:

Create a file named "mapper.py" to implement the logic for the mapper. The mapper will read input data from STDIN, split lines into words, and output each word with its count.

mapper.py:

```
#!/usr/bin/python3
import sys
def map1():
  for line in sys.stdin:
     tokens = line.strip().split()
     if len(tokens) < 13:
       continue
     station = tokens[0]
     if "STN" in station:
       continue
     date hour = tokens[2]
     temp = tokens[3]
     dew = tokens[4]
     wind = tokens[12]
     if temp == "9999.9" or dew == "9999.9" or wind == "999.9":
       continue
```

```
hour = int(date_hour.split("_")[-1])
    date = date_hour[:date_hour.rfind("_")-2]
    if 4 < hour <= 10:
        section = "section1"
    elif 10 < hour <= 16:
        section = "section2"
    elif 16 < hour <= 22:
        section = "section3"
    else:
        section = "section4"
        key_out = f"{station}_{date}_{section}"
        value_out = f"{temp} {daw} {wind}"
        print(f"{key_out}\t{value_out}")

if __name__ == "_main_":
    map1()</pre>
```

Step 3: Reducer Logic - reducer.py:

Create a file named "reducer.py" to implement the logic for the reducer. The reducer will aggregate the occurrences of each word and generate the final output.

reducer.py:

```
#!/usr/bin/python3
import sys
def reduce1():
  current_key = None
  sum temp, sum dew, sum wind = 0, 0, 0
  count = 0
  for line in sys.stdin:
    key, value = line.strip().split("\t")
    temp, dew, wind = map(float, value.split())
    if current_key is None:
       current_key = key
    if key == current_key:
       sum_temp += temp
       sum dew += dew
       sum wind += wind
       count += 1
    else:
       avg_temp = sum_temp / count
       avg_dew = sum_dew / count
       avg_wind = sum_wind / count
       print(f"{current_key}\t{avg_temp} {avg_dew} {avg_wind}")
       current key = key
       sum_temp, sum_dew, sum_wind = temp, dew, wind
       count = 1
  if current_key is not None:
    avg_temp = sum_temp / count
    avg_dew = sum_dew / count
    avg_wind = sum_wind / count
    print(f"{current_key}\t{avg_temp} {avg_dew} {avg_wind}")
```

```
if __name__ == "_main_":
    reduce1()
```

Step 4: Prepare Hadoop Environment:

Start the Hadoop daemons and create a directory in HDFS to store your data. Run the following commands to store the data in the WeatherData Directory.

```
start-all.cmd
cd C:/Hadoop/sbin
hdfs dfs -mkdir /WeatherData
hdfs dfs -put C:/Users/user/Documents/DataAnalytics2/input.txt /WeatherData
hadoop jar C:\hadoop\share\hadoop\tools\lib\hadoop-streaming-3.3.6.jar ^
-input /user/input/sample_weather.txt ^
-output /user/output ^
-mapper "python C:/ Users/user/Documents/DataAnalytics2/mapper.py" ^
-reducer "python C:/ Users/user/Documents/DataAnalytics2/reducer.py"
```

Step 5: Check Output:

Check the output of the Word Count program in the specified HDFS output directory.

hdfs dfs -cat /WeatherData/output/part-00000

OUTPUT:

```
Administrator: Command Prompt


Microsoft Windows [Version 10.0.19045.4780]
(c) Microsoft Corporation. All rights reserved.

C:\WINDOWS\system32>start-all.cmd
This script is Deprecated. Instead use start-dfs.cmd and start-yarn.cmd
starting yarn daemons

C:\WINDOWS\system32>jps
11104 Jps
12868 DataNode
11288 ResourceManager
12456 NodeManager
12456 NodeManager
5596 NameNode

C:\WINDOWS\system32>hdfs dfs -mkdir /WeatherData

C:\WINDOWS\system32>hdfs dfs -put C:/Users/user/Documents/DataAnalytics2/input.txt /WeatherData
```

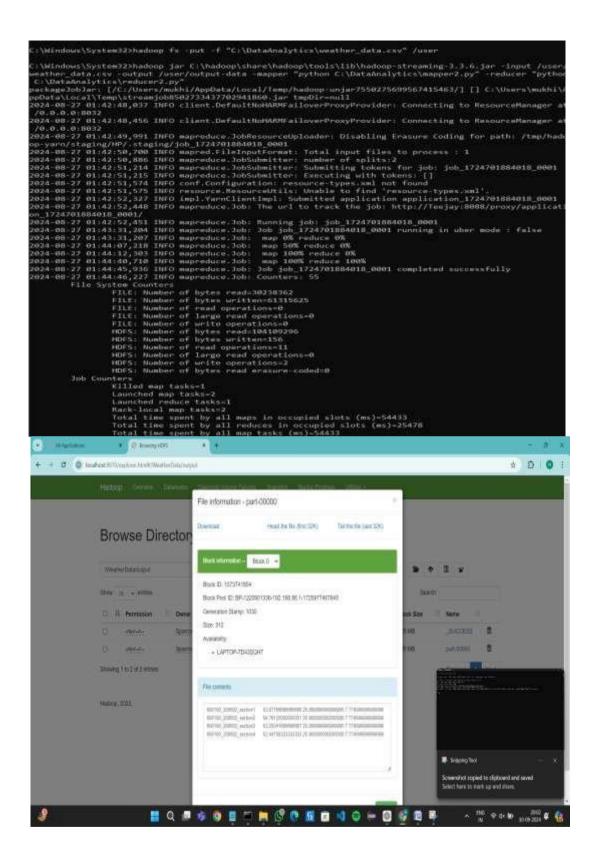

RESULT:

Thus, the Mapreduce program to identify the year wise maximum temperature from sensor has been executed successfully.