






Reverse polarity protection




## +5V\_AN POWER SUPPLY

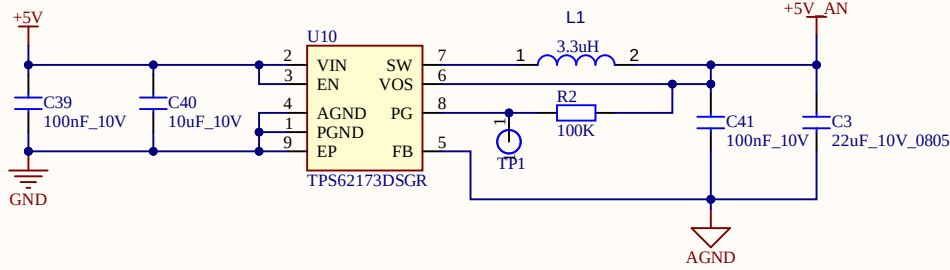



## +3.3V POWER SUPPLY

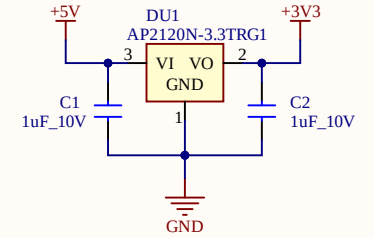

I2C-A




I2C-B

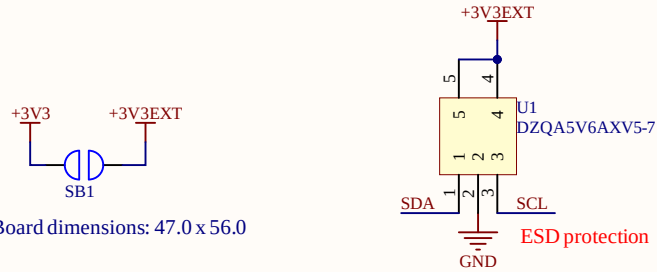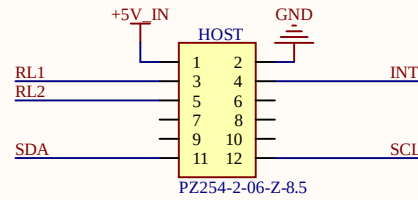

ESD protection

Board dimensions: 47.0 x 56.0

## I2C

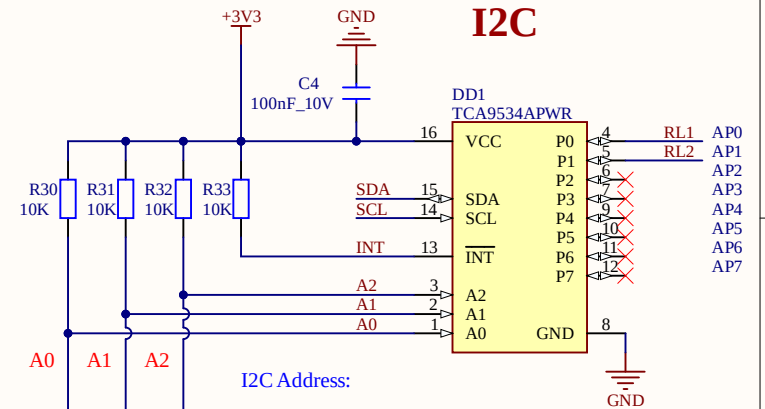

I2C Address:


0 1 1 1 A2 A1 A0 x - for TCA9534A

0 1 0 0 A2 A1 A0 x - for TCA9534


I2C Address Selector

ON - CLOSED - 0, OFF - OPENED - 1


TCA9534APWR  
TCA9534PWR  
PCA9534APWR  
PCA9534PWR  
PCA9534PW




KF2EDGR-3.5-4P



KF2EDGR-3.5-4P





KF2EDGR-3.5-4P



KF2EDGR-3.5-4P

## RELAY OUTPUTS

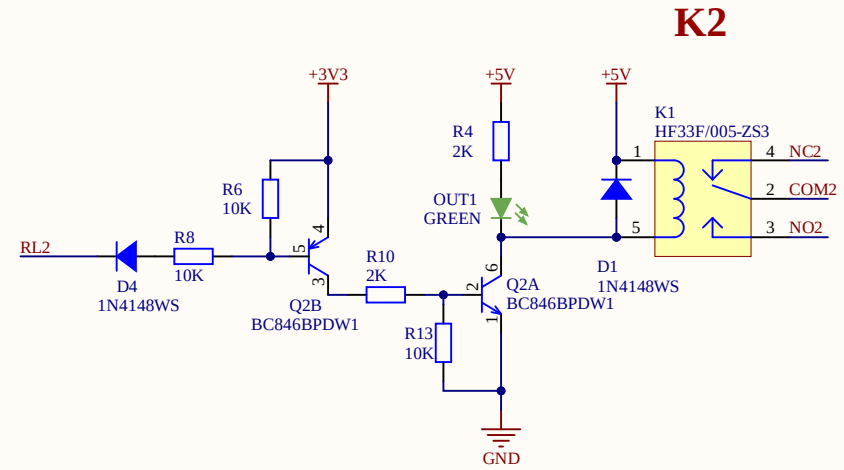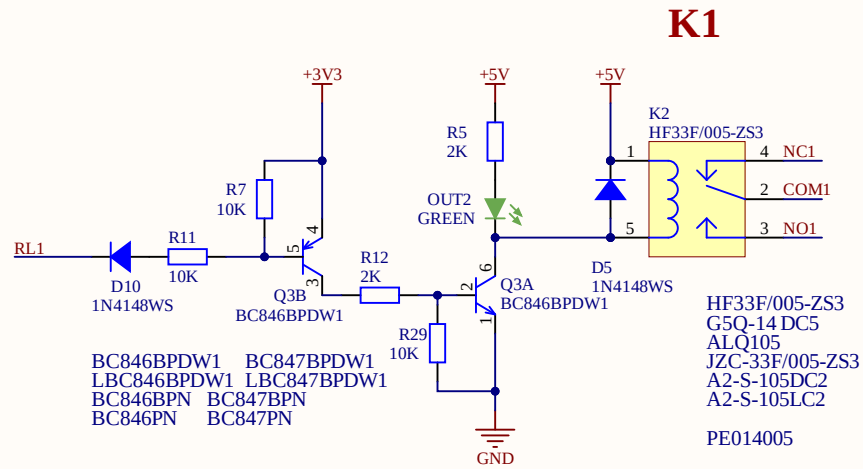

# DIFFERENTIAL AMPLIFIERS

