




+3.3V POWER SUPPLY

Reverse polarity protection



AP2120N-3.3TRG1
XC6206-3.3V
ME6206A33XG
AP7333-3.3SRG
MCP1700T-3302E/TT
LN6206P332MR-G
ME6206A33M3G



Max. current consumption (+3V3) =

$$4 * (3.3 / 4.7 + (3.3 - 1) / 1) + 4 * ((3.3 - 1.3) / 470 + (3.3 - 1) / 1) + (3.3 - 1) / 1 \sim 41 \text{ mA}$$

1) BIPOLAR INPUT


Input (DINx): Vi = 0...2V (Log.0) - optocoupler is closed. Output (INx): Vo = 3.0...3.3V (log.1)

Vi = 2...4.2V - undefined range

Input (DINx): Vi = 4.2...36V (Log.1) - optocoupler is opened. Output (INx): Vo = 0...0.3V (log.0)

Input (DINx): Imax = 3.5mA

I2C

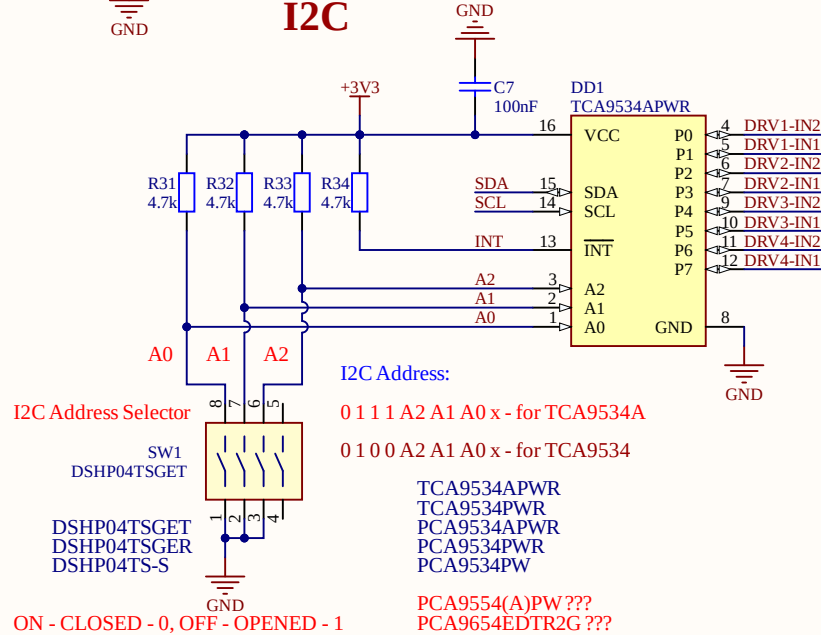


I2C Address:

0 1 1 1 A2 A1 A0 x - for TCA9534A


0 1 0 0 A2 A1 A0 x - for TCA9534

TCA9534APWR
TCA9534PWR
PCA9534APWR
PCA9534PWR
PCA9534PW


PCA9554(A)PW ???
PCA9654EDTR2G ???



I2C-A






I2C-B

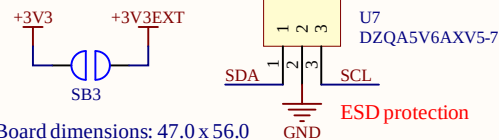

ESD protection


CONNECTORS

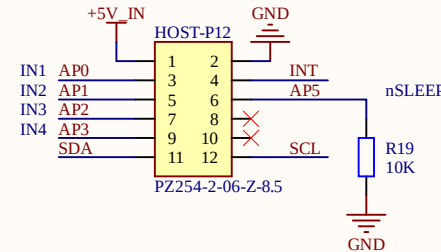

Board dimensions: 47.0 x 56.0



ISOLATED INPUTS

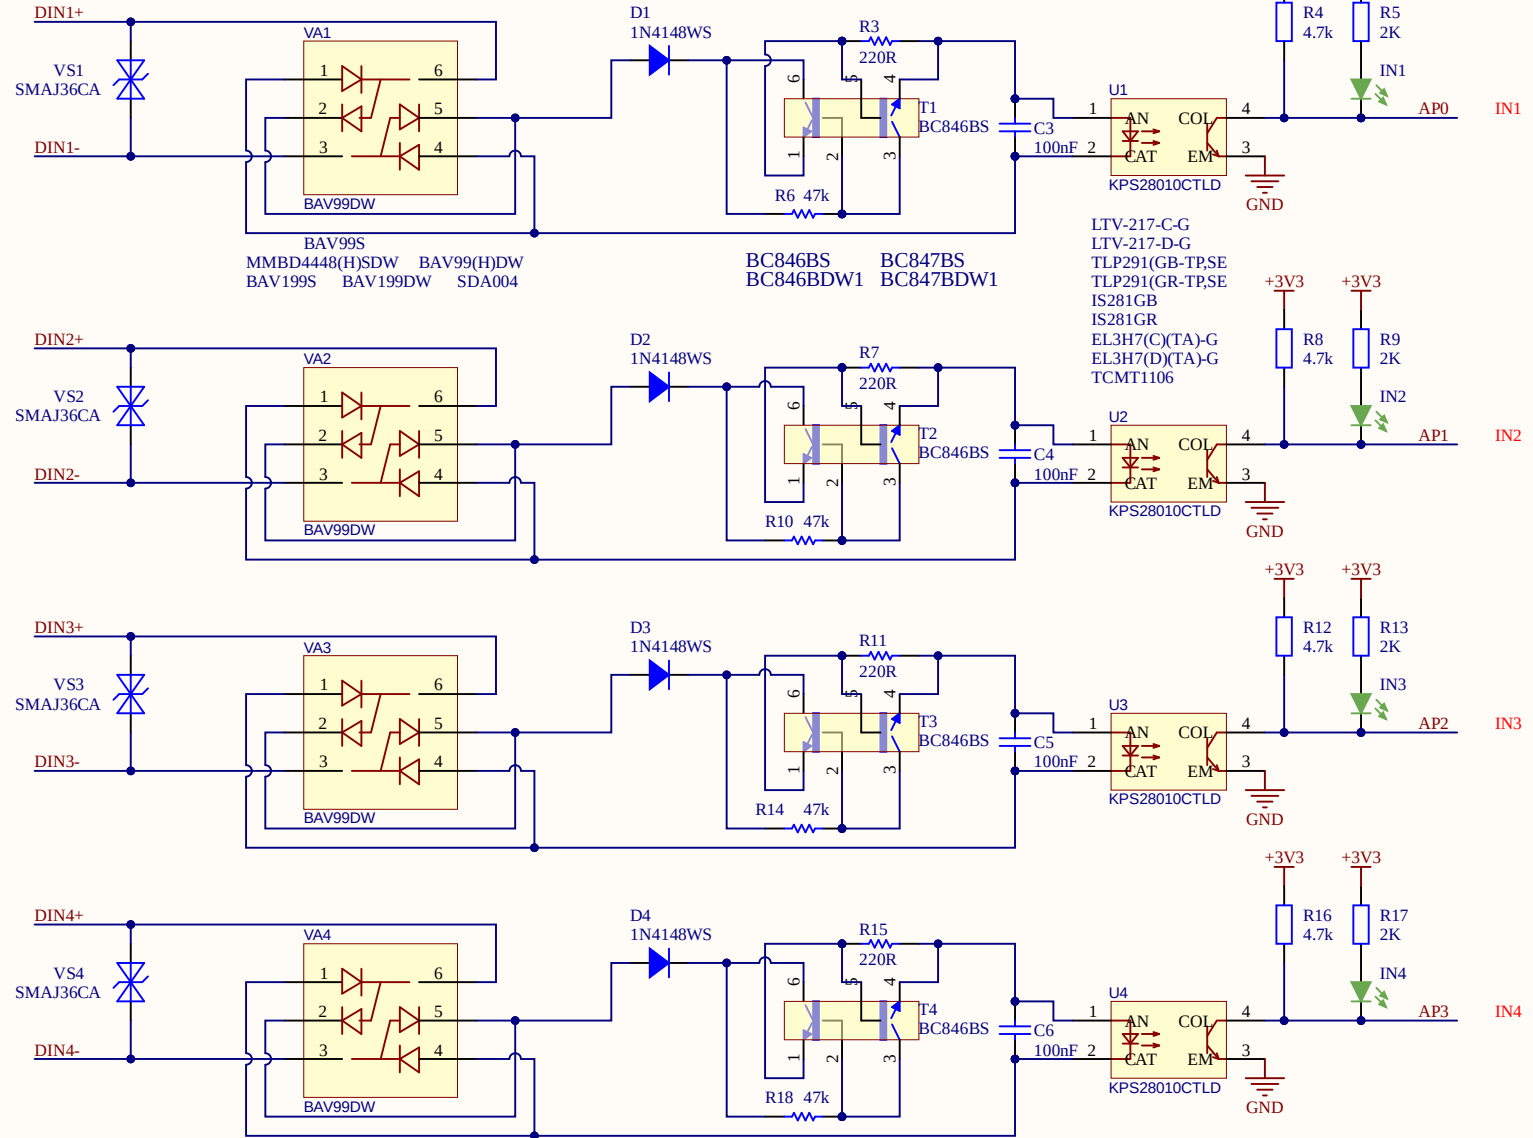

RELAY OUTPUTS

