




+3.3V POWER SUPPLY


Reverse polarity protection



AP2120N-3.3TRG1
XC6206-3.3V
ME6206A33XG
AP7333-3.3SRG
MCP1700T-3302E/TT
LN6206P332MR-G
ME6206A33M3G



I2C

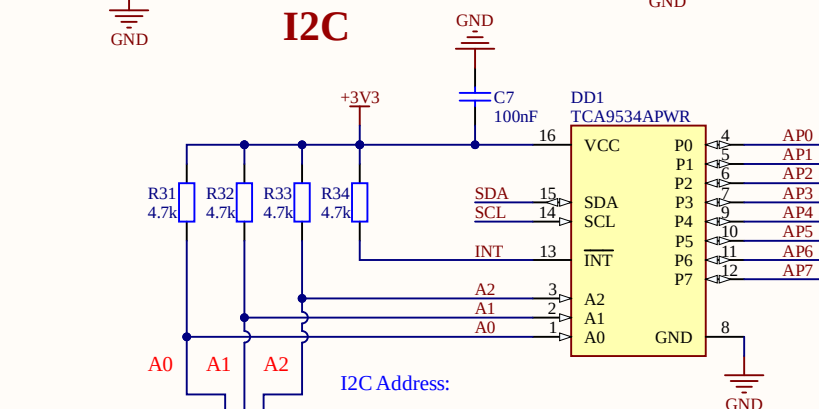

I2C Address Selector

I2C Address:


0 1 1 1 A2 A1 A0 x - for TCA9534A

0 1 0 0 A2 A1 A0 x - for TCA9534


TCA9534APWR
TCA9534PWR
PCA9534APWR
PCA9534PWR

PCA9554(A)PW ???
PCA9654EDTR2G ???



ON - CLOSED - 0, OFF - OPENED - 1



I2C-A



I2C-B



ESD protection

Alternative connectors for HOST-P are the same but 12 pins

Octal Isolated IO: 4 DI + 2 Relay Output + 2 ISOLATED DARLINGTON OUT

Max. current consumption (+3V3) =

#NAME?

1) BIPOLAR INPUT



Input (DINx): Vi = 0...2V (Log.0) - optocoupler is closed. Output (INx): Vo = 3.0...3.3V (log.1)

Vi = 2...4.2V - undefined range





Input (DINx): Vi = 4.2...36V (Log.1) - optocoupler is opened. Output (INx): Vo = 0...0.3V (log.0)

Input (DINx): Imax = 3.5mA

CONNECTORS

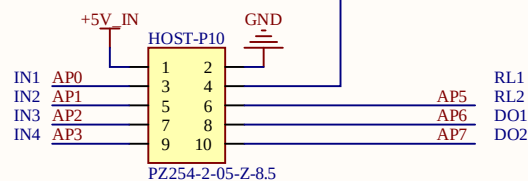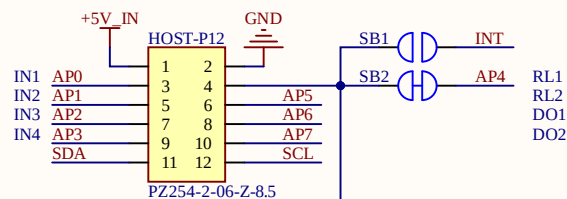


PZ254-2-05-Z-8.5
X6521WV-2x05H-C60D30
PZ254V-12-10P
PZ2.54-2*5




Board dimensions: 47.0 x 56.0



ISOLATED INPUTS

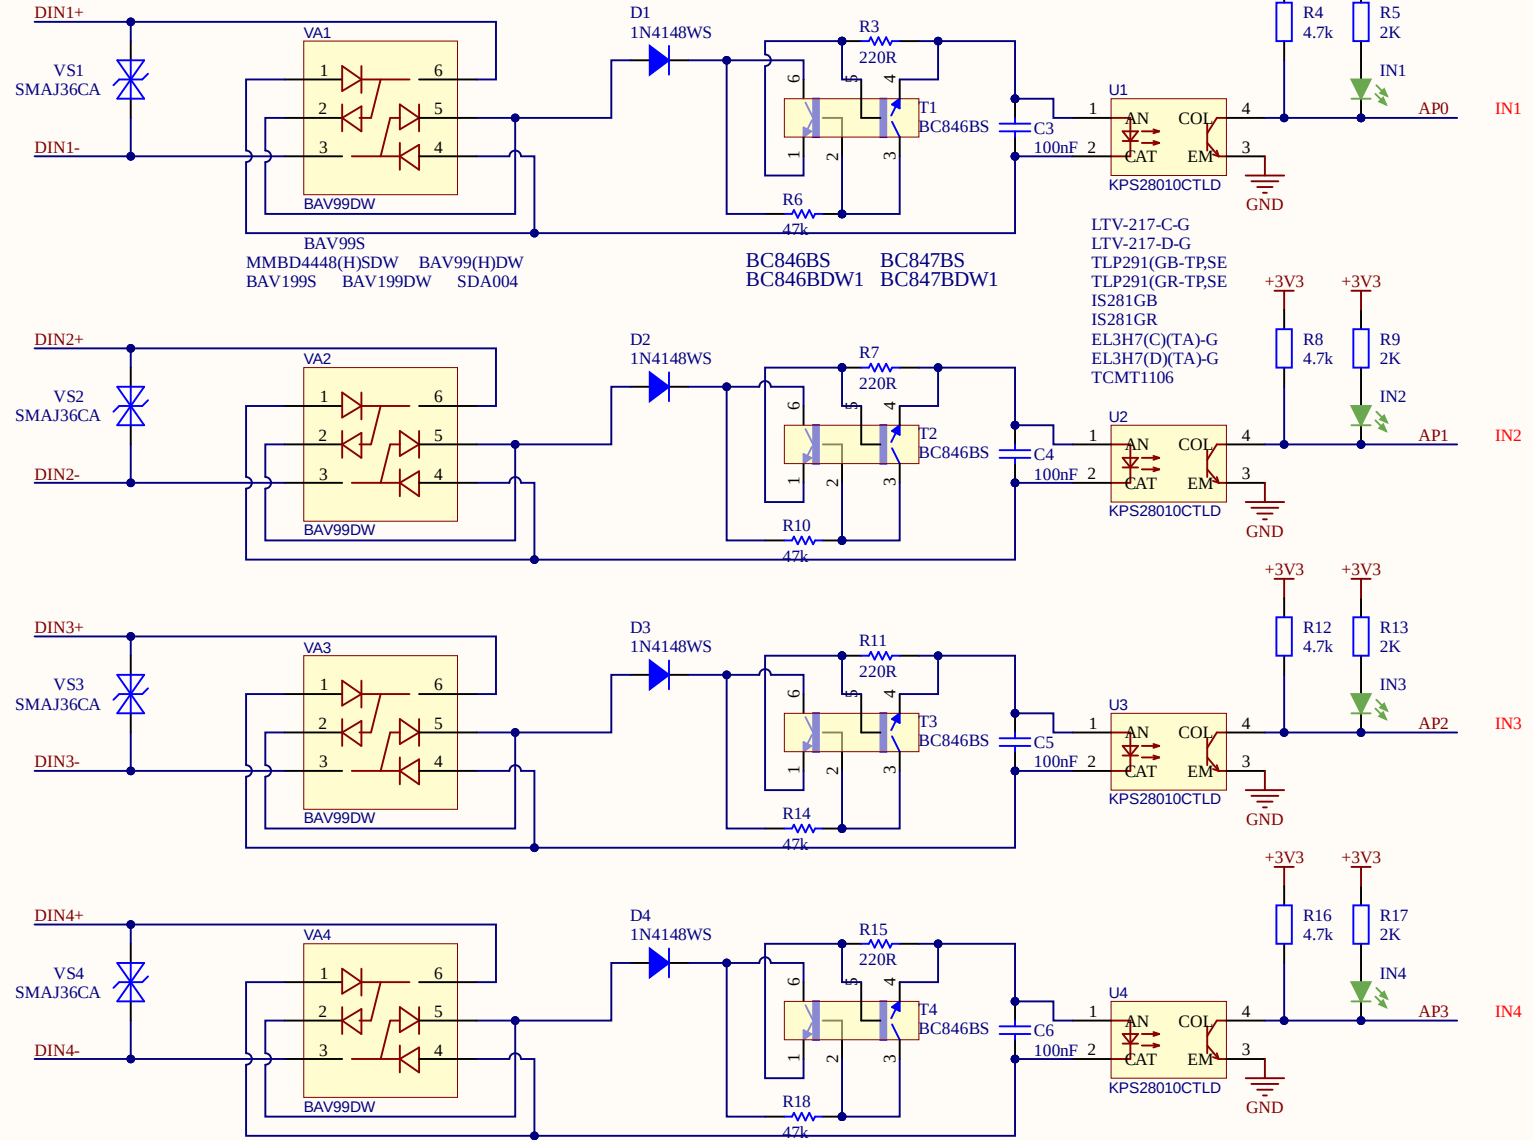

RELAY OUTPUTS

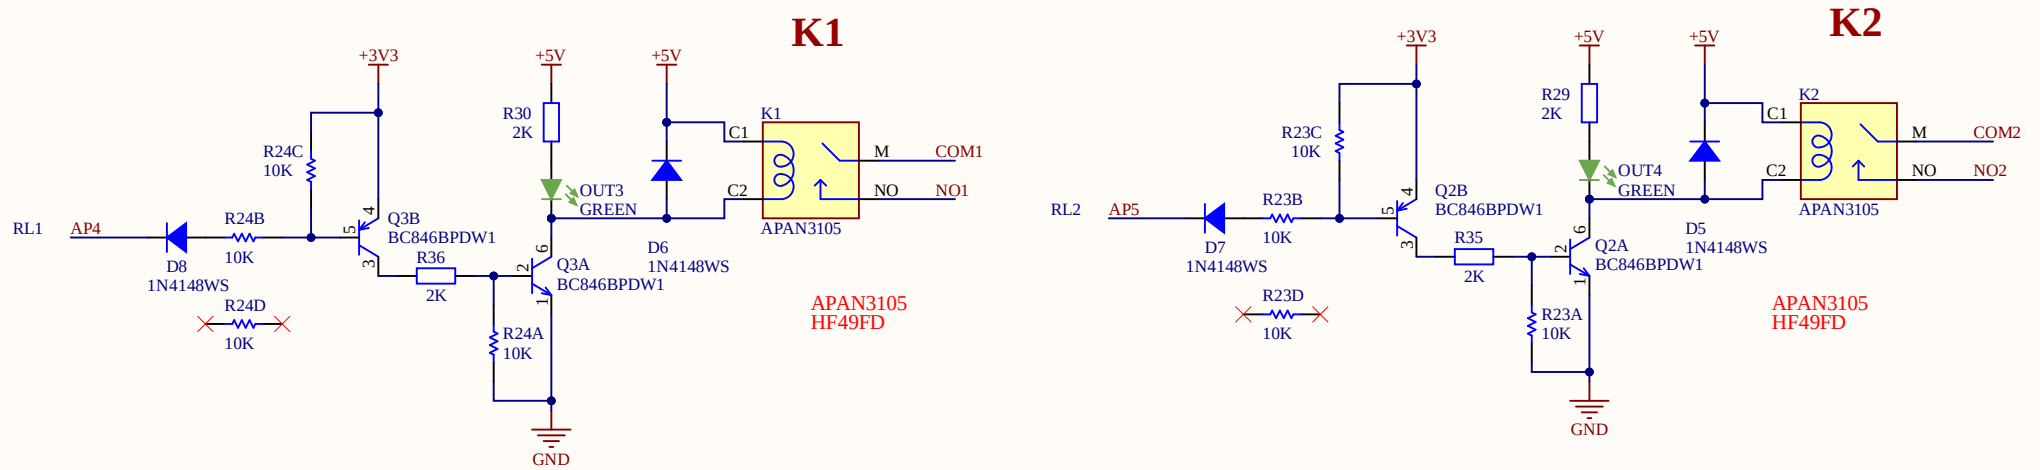

ISOLATED OUTPUTS (DARLINGTON)

