




+3.3V POWER SUPPLY


Reverse polarity protection



AP2120N-3.3TRG1
XC6206-3.3V
ME6206A33XG
AP7333-3.3SRG
MCP1700T-3302E/TT
LN6206P332MR-G
ME6206A33M3G




I2C

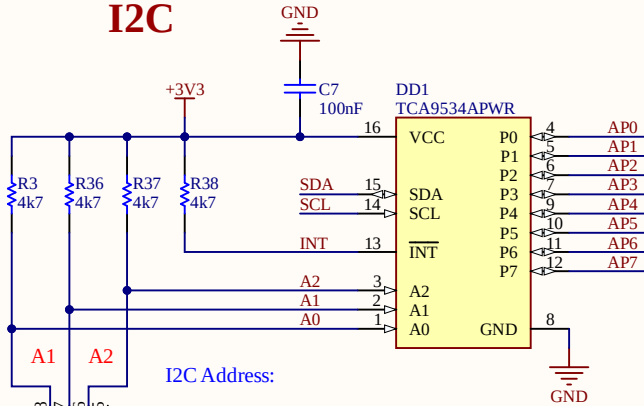

I2C Address:

I2C Address Selector

0 1 1 1 A2 A1 A0 x - for TCA9534A
0 1 0 0 A2 A1 A0 x - for TCA9534





ON - CLOSED - 0, OFF - OPENED - 1

TCA9534APWR
TCA9534PWR
PCA9534APWR
PCA9534PWR
PCA9534PW

PCA9554(A)PW???

PCA9654EDTR2G???


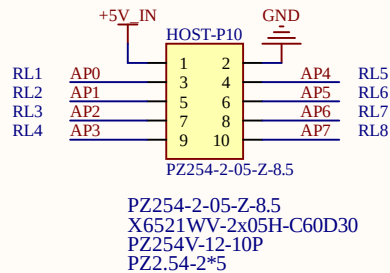
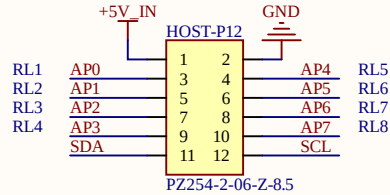


Alternative connectors for HOST-P are the same but 12 pins




CONNECTORS

Attention!


1. I2C (DD1, C7, R3, R36...R38, SW1, U9, I2C-A, I2C-B) - optional
2. Mount HOST-P12 or HOST-P10 or PWR





B2B-EH-A(LF)(SN)_2.54
B2B-EH-A(LF)(SN) - pin length - 3.3 mm
B2B-EH(LF)(SN) - pin length - 4 mm



I2C-A



I2C-B



ESD protection

Board dimensions: 47.0 x 56.0

MOSFETs

MOSFET	V _{ds} , V	I _d , A	R _{DSon} , mΩ
DOS9N03	30	9	20
NCE3009S	30	9	9
UTM6016G-SO8-R	60	8	12
NCE6008AS	60	8	20
DOS9N10	100	9	20
FDS3672	100	8	20



