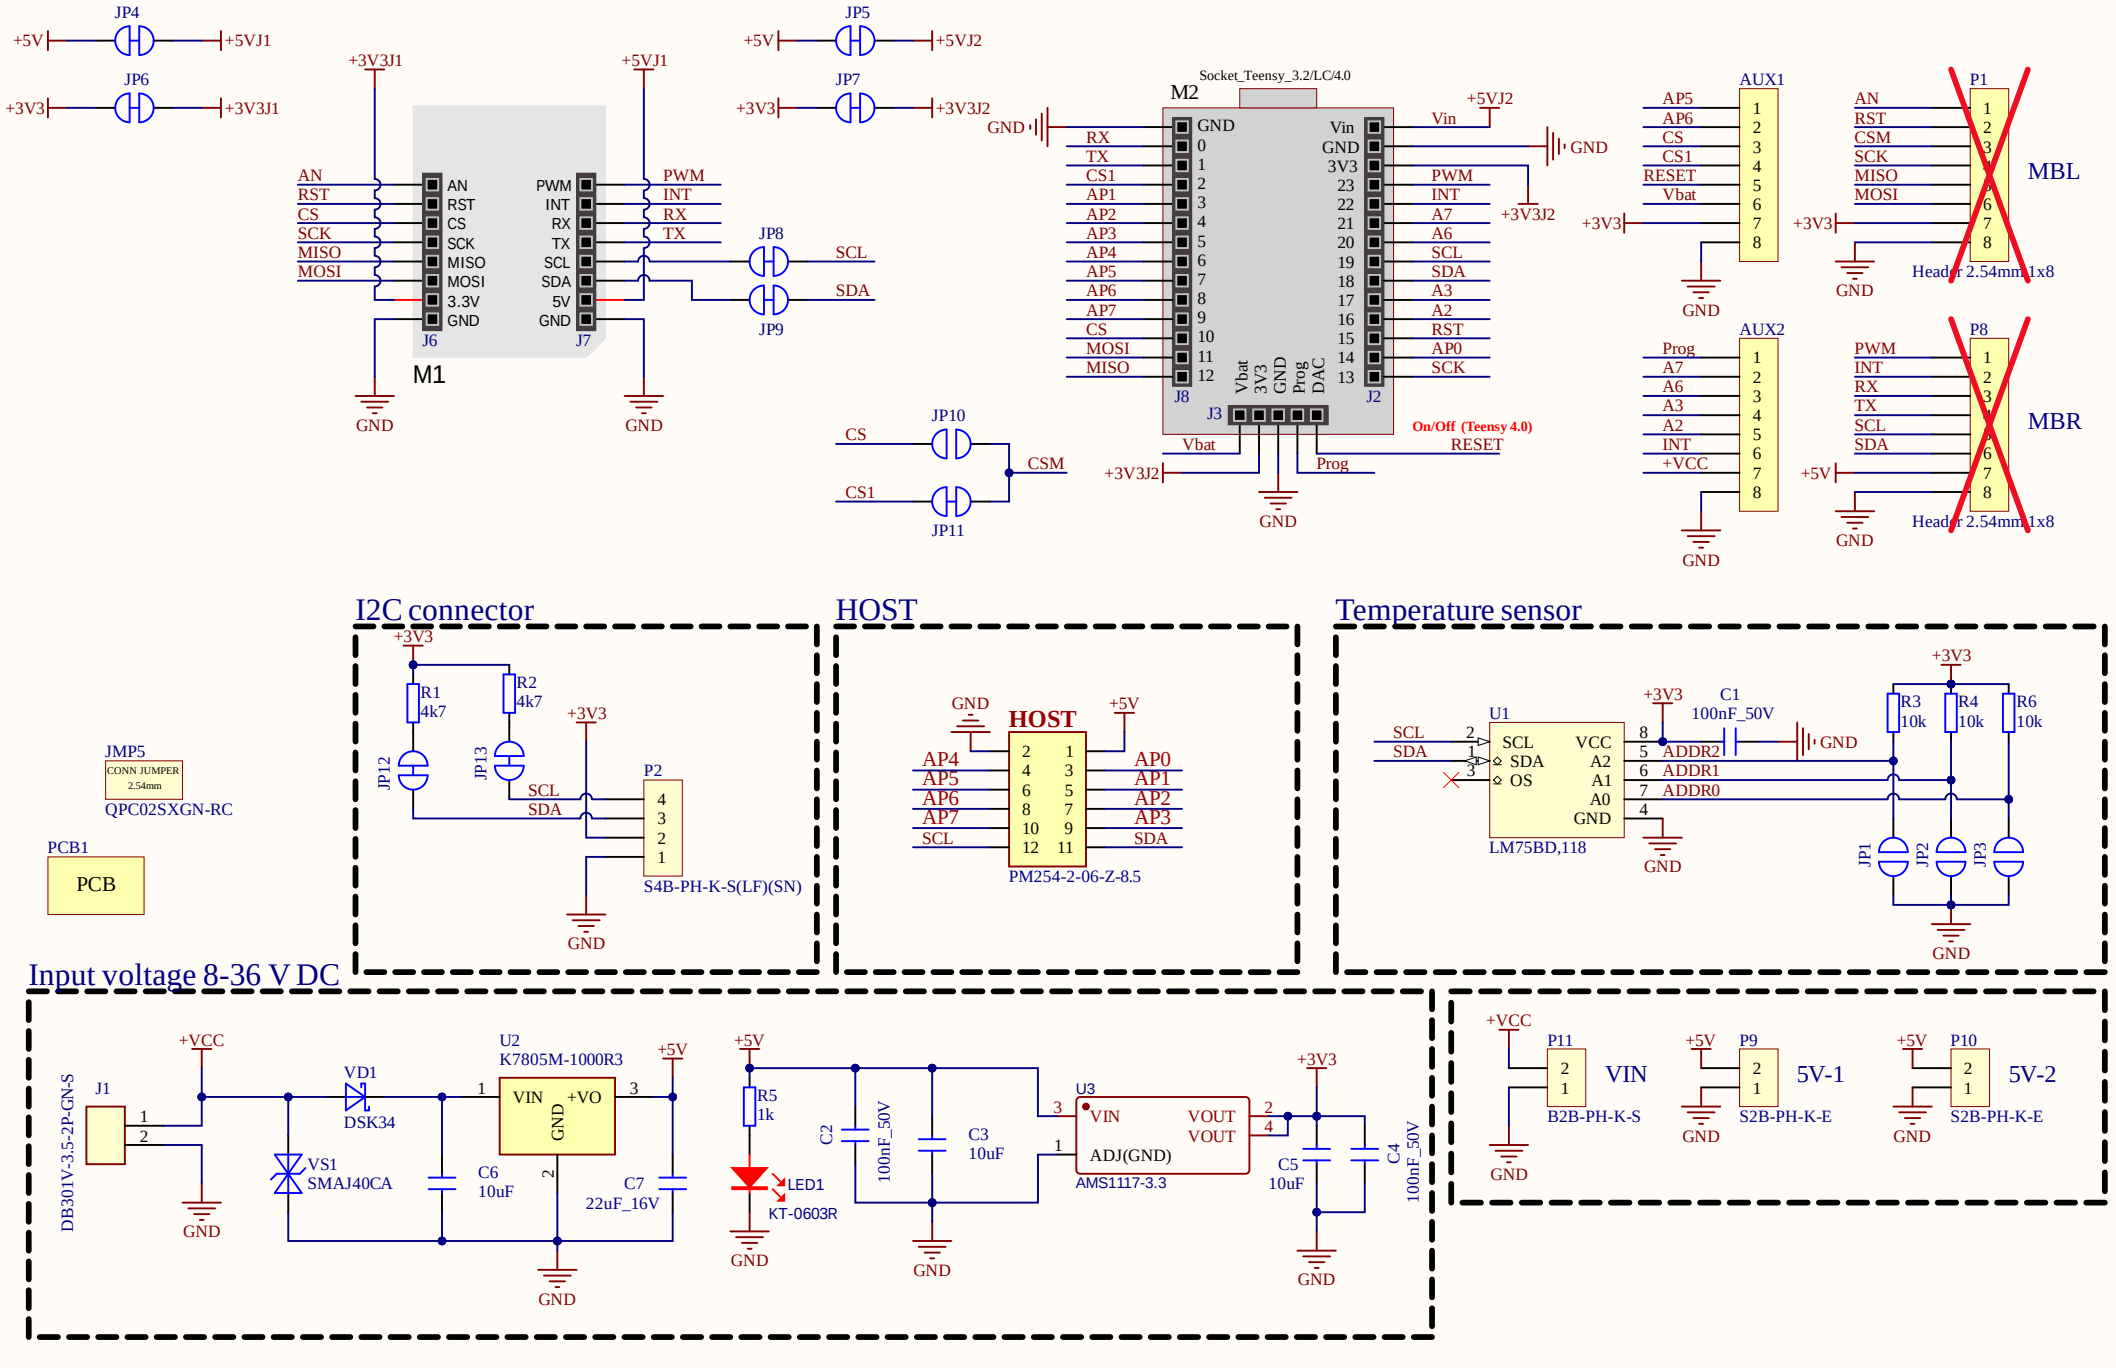

JP4
+5V
+5VJ1
JP6
+3V3
+3V3J1
+3V3J1
+5VJ1
AN
RST
CS
SCK
MISO
MOSI
PWM
INT
RX
TX
SCL
SDA
JP8
JP9
J6
J7
M1
GND
JP5
+5V
+5VJ2
JP7
+3V3
+3V3J2
Socket_Teensy_3.2/LC/4.0
M2
GND
Vin
3V3
Vbat
Prog
DAC
J8
J3
J2
+5VJ2
+3V3J2
On/Off (Teensy 4.0)
RESET
AUX1
AUX2
P1
P8
MBL
MBR
Header 2.54mm 1x8
JP10
JP11
CS
CS1
CSM
JMP5
CONN JUMPER 2.54mm
QPC02SXGN-RC
PCB1
PCB
I2C connector
R1 4k7
R2 4k7
JP12
JP13
P2
S4B-PH-K-S(LF)(SN)
HOST
PM254-2-06-Z-8.5
Temperature sensor
U1
LM75BD,118
C1 100nF_50V
R3 10k
R4 10k
R6 10k
JP1
JP2
JP3
ADDR2
ADDR1
ADDR0
Input voltage 8-36 V DC
J1
DB301V-3.5-2P-GN-S
VD1
DSK34
VS1
SMAJ40CA
U2
K7805M-1000R3
VIN
+VO
GND
C6 10uF
C7 22uF_16V
R5 1k
LED1
KT-0603R
C2 100nF_50V
C3 10uF
U3
ADJ(GND)
VOUT
AMS1117-3.3
C5 10uF
C4 100nF_50V
P11
VIN
B2B-PH-K-S
P9
5V-1
S2B-PH-K-E
P10
5V-2