
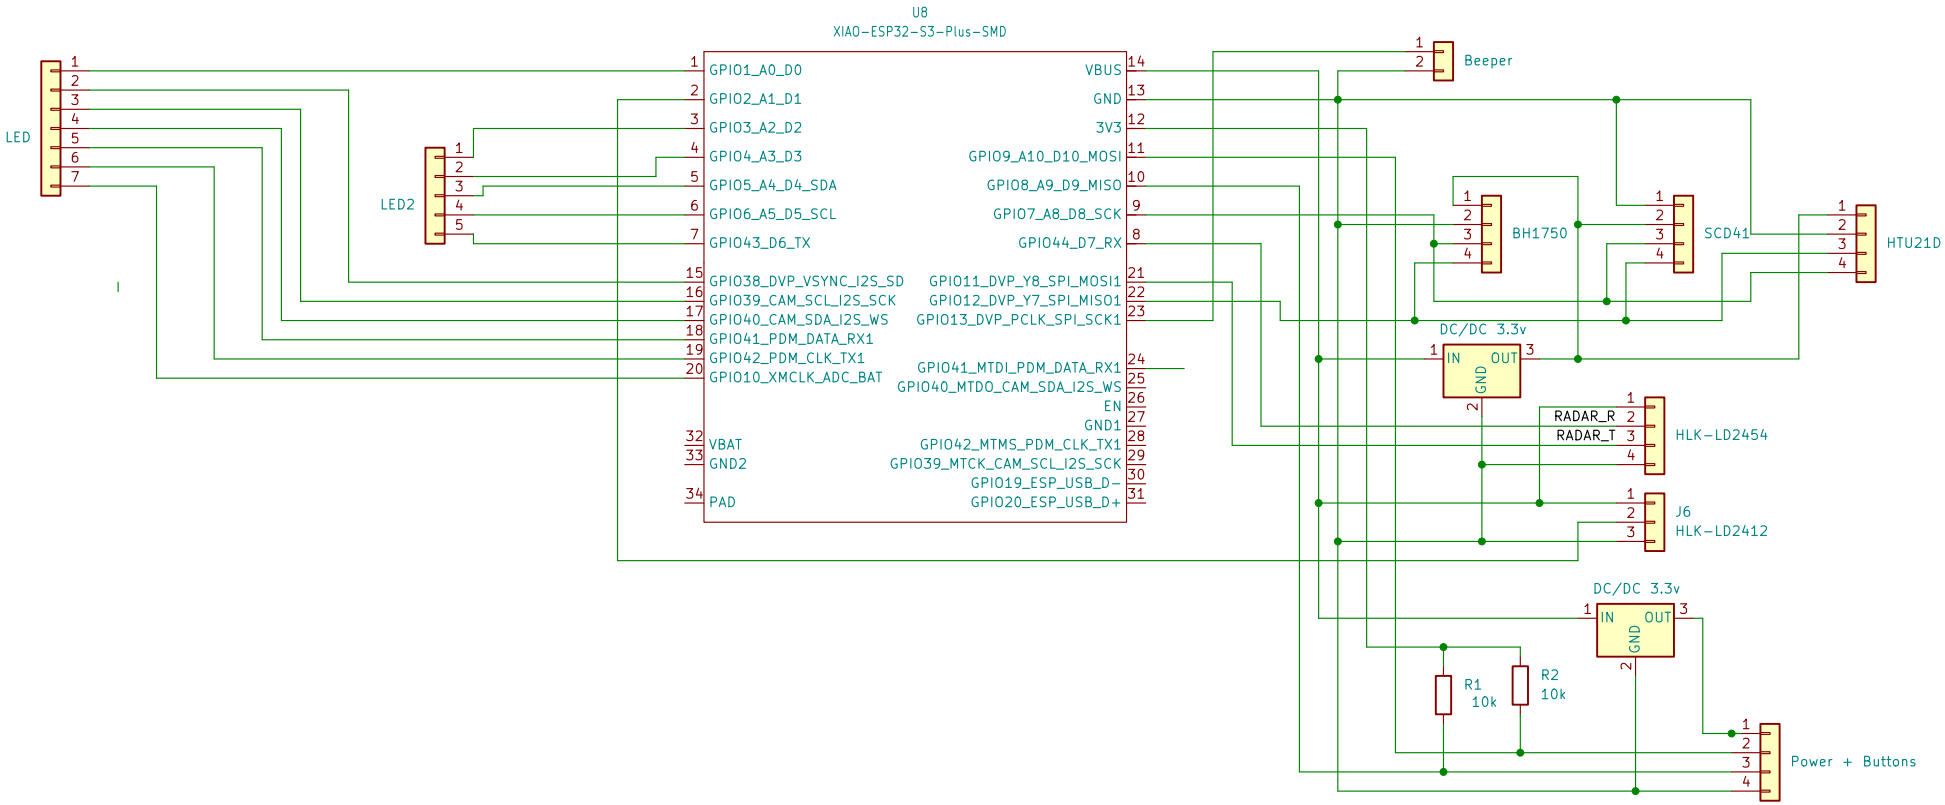


Radar header (HLK-LD2454) to radar J1 [1 5V, 2 G, 3 T, 4 R] - the cable is NOT 1:1:
header 1 VBUS -> J1-1 5V (LD2454 manual: DC 5 V, >200 mA)
header 4 GND -> J1-2 G
header 3 RADAR_T -> J1-3 T (radar TX -> GPIO11 / Serial1 RX)
header 2 RADAR_R -> J1-4 R (radar RX <- D7 / GPIO44 / Serial1 TX, needed to enable multi-target mode)

Sheet: /
File: LedMatrixSensorNode.kicad_sch

Title:

Size: A4 | Date: | **Rev:**
KiCad E.D.A. 10.0.1 | Id: 1/2

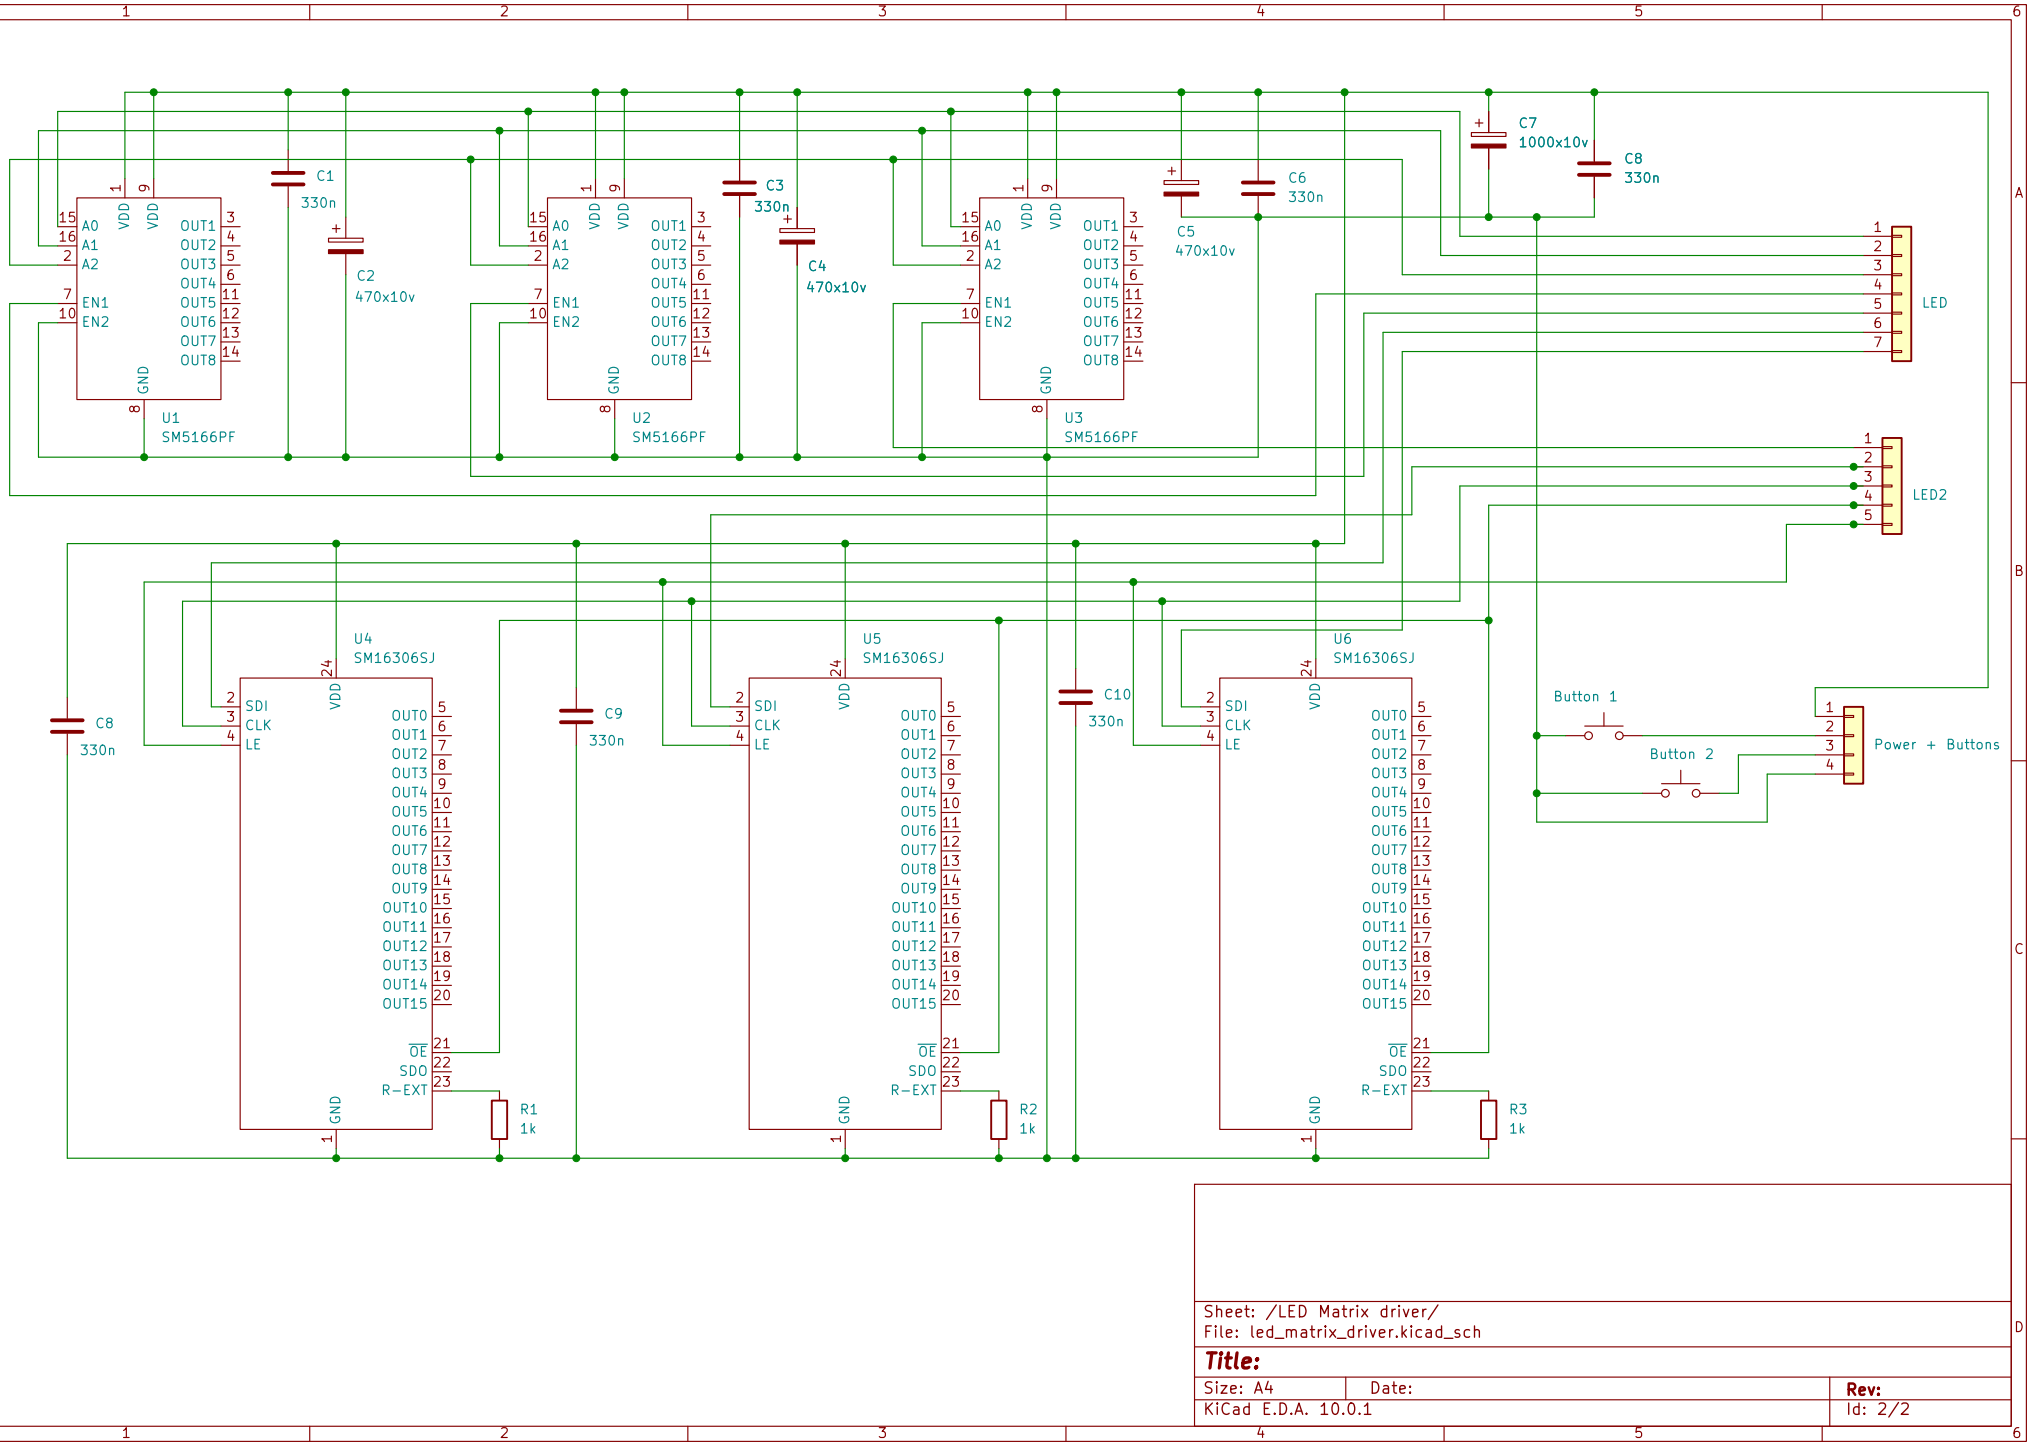

Sheet: /LED Matrix driver/
File: led_matrix_driver.kicad_sch

Title:

Size: A4 | Date: | **Rev:**
KiCad E.D.A. 10.0.1 | Id: 2/2