

screen protector

Screen saver is a specialized program in order to protect the display configuration designed to prevent serial operation screen because no

The display screen displaying the same time, resulting in shortened life of the monitor aging. In addition, although the screen saver does not

It is specifically designed to save power, but a significant reduction in the brightness of the screen, there is a certain power saving effect. Serial achieve screensaver screen

Care in three ways: Engineering Properties window configuration, project configuration, instruction assistant.

1, directly through the Project Properties window configurations:

Automatic backlight → Yes;

Standby time → Custom, engineering configuration time range 0-65535s ;

Activate Brightness → Custom, engineering configuration time range 0-255 , 0 On behalf of the darkest, 255 On behalf of the brightest;

Standby brightness → Custom, engineering configuration time range 0-255 , 0 On behalf of the darkest, 255 On behalf of the brightest;

Standby screen → Custom (Engineering screen any screen), FIG. 1 Fig.

自动调节背光	是
待机时间	3
激活亮度	200
待机亮度	0
背光通知	否
待机画面	Screen0

Figure 1 Configuration Project Properties window

2, by means - engineering configuration, automatically adjust the backlight → √ , And subsequent operations 1 Consistent.

工程配置

设备配置

设备类型: DC10600B070 波特率: 9600

蜂鸣器响声: 按下触摸控件时 屏幕旋转: 0°

滑动切换画面: 关闭 启动画面: Screen0

☒ 启用用户图层 ☒ 锁定配置 ☒ 启用触摸屏 ☐ 启用CRC16校验

☒ 自动调节背光 - 超过待机时间没有点击触摸屏, 则由激活状态进入待机状态。

待机时间(秒): 3 激活亮度: 255

待机亮度: 0 待机画面: Screen0

☐ 启用背光通知

上传设置

触摸坐标通知: 关闭 画面切换通知: 关闭

按钮事件通知: 仅弹起时

提示: 若要修改当前连接设备的配置参数, 请使用指令助手。

确定

3, screen saver function achieved through instruction assistant

Instruction assistant → Device Configuration,

Backlight adjustment → Custom, engineering configuration time range 0-255 , 0 On behalf of the brightest, 255 On behalf of the darkest

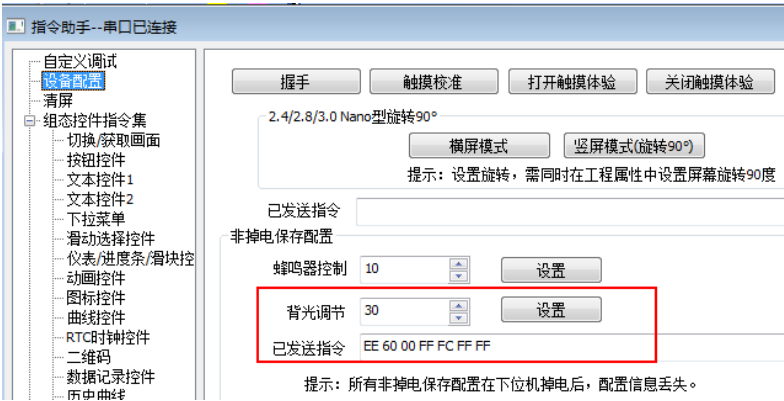


Figure 3 Instruction Assistant