indiana™
floors & more...

THERMOLOCK®
New Generation Construction Materials

THE FUTURE OF
GREEN BUILDING SOLUTION

BROUGHT TO YOU BY INDIANA INTERNATIONAL CORPORATION FLOORING PVT.LTD

indiana™
floors & more...

THERMOLOCK®
New Generation Construction Materials

BUILD BETER.
CHOOSE THERMOLOCK

SUBSTITUTE FOR CONVENTIONAL PLASTERING

indiana™ floors & more...

THERMOLOCK®
New Generation Construction Materials

WHAT IS THERMOLOCK

THERMOLOCK is the world's first and only insulated Building material combining fire, water, thermal and acoustic insulation in one single product.

THERMOLOCK insulation products can be seamlessly integrated into any commercial or residential project.

THERMOLOCK permits the diffusion of water vapour that may condense in the wall structure. Does not allow moisture penetration, thus preventing the growth of mold and mildew.

THERMOLOCK is Easy in handling and installation. Less fatigue on labour force. Up to 2 times more production per day compared to regular plaster products. Great savings on scaffolding.

ENVIRONMENTAL POLICY

THERMOLOCK believes that the first and most important condition to be a successful business is environmental sustainability.

THERMOLOCK manufactures in accordance with the improvement of the economy, environment and the quality of life of the society.

THERMOLOCK incorporates environmental awareness and sensitivity into every area of company processes. It tries to impose this understanding on its customers and suppliers with the importance it attaches to national and international environmental policies.

indiana™ floors & more...

THERMOLOCK®
New Generation Construction Materials

WHY THERMOLOCK

QUALITY

THERMOLOCK is a leading company in the thermal insulation industry. It serves its customers with its professionally produced products. The quality process is the biggest factor in the further strengthening and expansion of thermolock activities. We produce qualified products with our knowledge and expert staff support.

THERMOLOCK, Most important policy is to turn customer expectations into satisfaction and develop our products and services in accordance with national and international quality standards and values. Operating mechanism and quality control processes ensures our perfect production of products.

THERMOLOCK ADVANTAGES

THERMOLOCK, The need of plaster and other extra coatings are NOT required. Before and after applying.

THERMOLOCK is quick and easy to repair and recoat.

THERMOLOCK does not create thermal bridges because of its unique binding compound features.

THERMOLOCK has no need to drill or make any holes, therefore increases the resistance of the structure.

THERMOLOCK Creates and forms a fire barrier.

THERMOLOCK Provides sound insulation.

THERMOLOCK Prevents condensation, humidity, mold, moisture.

THERMOLOCK does not contain any carcinogenic products.

THERMOLOCK VS OTHER INSULATION

THERMOLOCK	CONVENTIONAL STUCCO	EIFS	
✓			TRUE ONE COAT APPLICATION
✓			SINGLE DAY APPLICATION
✓			LOW LABOUR COST
✓			FASTER SCAFFOLDING TURNAROUND
✓			LESS FATUGUE ON LABOUR FORCE
✓		✓	THERMAL INSULATION
✓			CONTINUOUS INSULATION
✓		✓	ULTRA-LIGHT WEIGHT
✓			UV REFLECTIVE
✓			A1 CLASS FIRE RESISTANT
✓			WATER RESISTANT & HYDROPHOBIC

THERMOLOCK VS OTHER INSULATION

THERMOLOCK	CONVENTIONAL STUCCO	EIFS	
✓	✓		PERMEABLE
✓			MOLD AND MILDEW RESISTANT
✓			CORRISION RESISTANT
✓			HIGH CRACK RESISTANT
✓			IDEAL FOR RETORATION
✓			LESS FREIGHT EXPENSES
✓	✓		V.O.C FREE
✓			GRTEEN BUILDING MATERIAL
✓			ACCOUSTIC INSULATION

THERMOLOCK PRODUCT FEATURES

ANTIBACTERIAL

THERMOLOCK products are antibacterial. There are no bacteria or insects contain within itself.

DIFFUSION

THERMOLOCK products are not exterminating structure's diffusion feature. Thereby, moisture and bacteria growth is prevented.

THERMOLOCK PRODUCT FEATURES

NON DEFORMABLE

THERMOLOCK products are resistant in difficult conditions. They are not deformed with beats.

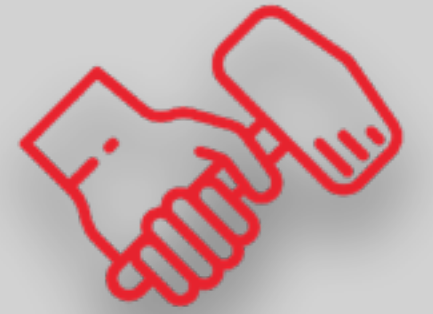

PROVIDE INSULATION

THERMOLOCK products provide heat, water, sound and fire insulation for every occasion.

THERMOLOCK PRODUCT FEATURES

FIREPROOF MATERIALS

THERMOLOCK has class A1 fireproof material. It provides complete protection by creating a fire barrier for your buildings.

NON CANCEROGENIC

THERMOLOCK is a natural product. There are no harmful substances added in this product which can affect our health. Our product does not contain carcinogenic substances.

THERMOLOCK PRODUCT FEATURES

LONG LASTING

THERMOLOCK products are long lasting and it has an exposure period equivalent to the building lifetime.

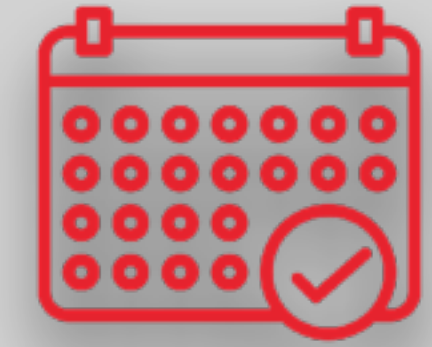

FIX THE SURFACES

THERMOLOCK can be easily applied to the parts that require thick application to restore levelling disorders.

THERMOLOCK PRODUCT FEATURES

EASY APPLICABLE

THERMOLOCK products are very easy to apply. You can easily apply on coercive isolated locations such as edge of the glass and prevent energy loss.

REPAIRABLE

THERMOLOCK products are not affected by external influences, but it can easily be repaired if the building is exposed to deformations or earthquakes.

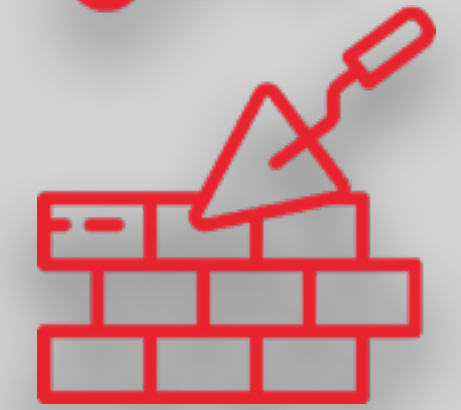

THERMOLOCK PRODUCT FEATURES

ECO-FRIENDLY

THERMOLOCK products are eco-friendly and environmental. It does not release toxic gases harmful to the environment and does not pollute the environment while production process.

ECONOMIC

THERMOLOCK products offer you an economical solution with meeting the demands at a time. Because it doesn't require extra workmanship in pre and post-implementation.

THERMOLOCK PRODUCT FEATURES

THERMOLOCK®
New Generation Construction Materials

Packing Type	20 kg. Kraft Pouch
Appearance	White Granular Powder
Dry Density	333+-%10(kg/m,)
Thermal Conductivity	0.060 (W/mk) T1
Acoustic Insulation	25 Db
Compressive Strength	1.638 (N/mm2) CSII
Bond Strength	0,319 (N/mm2)
Water Absorption	0,312 (kg/m'min 0.5) W1
Fire Endurance	(1000C°)A1
Make-ready time for painting	48 Hours
Shelf Life	16 Months
Heat Range	+5C° +35C°
Application Method	Machine or Steel Trowel
Consumption	1 cm/m2 appr 5 kg.

By means of advanced technology and inorganic natural aggregates used in exterior coating, it is a multipurpose single component isolation coating produced as white coloured and A1 class non inflammable having the feature of high diffusion (breathability) which provides an isolation over heat, sound and fire.

THERMOLOCK GENERAL CHARACTERISTICS

THERMOLOCK provides SOUND INSULATION

Special structures of Thermo stucco products provide sound insulation. They provide comfortable mediums for places where silence is a significant concept such as. in houses, hotels and hospitals, etc.

THERMOLOCK has a BREATHING FEATURES

Its natural and inorganic structure has a high-level vapour permeability and it maintains insulation through preventing condensation. Since it does not hold moisture in the structure.

it offers an absolute solution for SWEAT, RUST, and CORROSION.

THERMOLOCK GENERAL CHARACTERISTICS

THERMOLOCK provides WATER INSULATION

It is not required to use an additional product for positive-direction.
water insulation due to the special water-pushing (hydro-phobic effect) structure and capillary water absorption coefficient of thermolock products.

THERMOLOCK provides FIRE INSULATION

Increases the resistance of constructional components against heat and flames for about 1 hour to 4 hours.

THERMOLOCK functions as a fire barrier and protects buildings and structures.

THERMOLOCK has an A1 non-combustibility and non-flammability feature in compliance to fire regulations. It can resist up to 1000 •C (+) (1830 (+) °F) fire and heat; no poisonous gases or fumes are emitted, thus providing life security

THERMOLOCK INSULATION IS COST EFFECTIVE

65 percent of the energy used in homes in India are used for air-conditioning.

Cost of thermal insulation for buildings is almost 3-5% of construction costs. “If the thermal insulation will be made properly, people can make saving up to 50% for both cost of natural gas and electricity.

Nowadays the importance of the energy usages has been increasing. “Thermal insulation does not only prevent energy losses, but it can also provide decreasing of environmental pollution.

Thermal insulation can decrease the usages of air-condition and natural gas.

THERMOLOCK Product Test Reports

Cedbik

U.S. GREEN BUILDING COUNCIL LEED USGBC

Thermolock

THERMOLOCK COMMODITIES USA INC

Insulation is the protection of our living areas, and is provided on four main fundamentals: heat (thermal), water, sound and fire. Rather than using individual insulation products for each feature, Thermolock Insulation Stucco combines these four main fundamentals in a SINGLE PRODUCT. After years of R&D, the combination of these aggregates gave outstanding results. Various testing of a standard home resulted in ENERGY SAVING with Thermolock Stucco, compared to applied standard insulation material used today. Additionally, we did not want to modify the "traditional" systems of application, and developed it in such that made it MORE user friendly compared to other standard insulation applications, and REDUCED the COST for developers and construction firms in terms of labor, and time. Thermolock Products are natural insulators acquired by blending various natural aggregates with technology, and believe it or not it is MORE LONGER LASTING than any other standard insulation available.

SGS-EMERY LABORATORIES

Project No.: 4131-1
Lab No.: 1-0000

June 17, 2015

CLIENT: MEGA COMMODITIES
20721 CENTREPOINTE PARKWAY, UNIT 1
SANTA CLARITA, CA 91350

Subject: 12" x 12" x 2" thick THERMOLOCK Sample
Specification: Source engineering or weight provisions compared with client the specification.
Source: Submitted to Laboratory by Client.

REPORT OF TEST

The six 4" x 4" x 2" thick sample was fitted with a 6" diameter x 12" high plastic cylinder water finished surface using silicone adhesive and sealing. The exposed indoor surface was exposed over a 2" x 2" x 2" thick block. After curing for 24 hours, the assembly was filled with potable water to a depth of 0.01" and observed for leakages water penetration for 7 days at laboratory ambient condition.

Sample No.	OBSERVATIONS
1	No dampness or formation of water on opposite the surface for 7 days.
2	n/a
3	n/a

Respectfully Submitted,
SGS-EMERY LABORATORIES

D. Jacob Gulstein
Registered Civil Engineer
Registration Expires

Materials Tested Comply With Specifications
Materials Tested Did Not Comply With Specifications
No Established Criteria For Acceptable Limits.
For Information Only

Page 1 of 1

indiana floors & more...™

THERMOLOCK Product Test Reports

THERMOLOCK®
New Generation Construction Materials

QAI LABORATORIES

CLIENT: Nuco Commodities LLC
25535 Ruether Avenue
Santa Clarita, CA 91350
Attn: Nuco

Test Report No: RJ2798-P	Date: September 24, 2013

SUBJECT: Thermal Properties Test on Insulation Material

SAMPLE ID: THERMOLOCK

SAMPLING DETAILS: The samples were submitted to the laboratory directly by the client. No special sampling conditions or sample preparation were observed by QAI.

DATE OF RECEIPT: The sample was received at QAI Laboratories on September 23, 2013.

TESTING PERIOD: September 24, 2013.

AUTHORIZATION: Signed QAI Quote Number [illegible] dated September 20, 2013.

TEST REQUESTED: Thermal Properties Testing per ASTM C 518-10, *Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus.*

TEST RESULTS: Detailed test results are provided on page 2 of this report.

Prepared By

David Ryan
Laboratory Technician-Physical Testing

Signed for and on behalf of
QAI Laboratories Inc.

Larry Berner
Project Leader-Physical Testing

Page 1 of 2

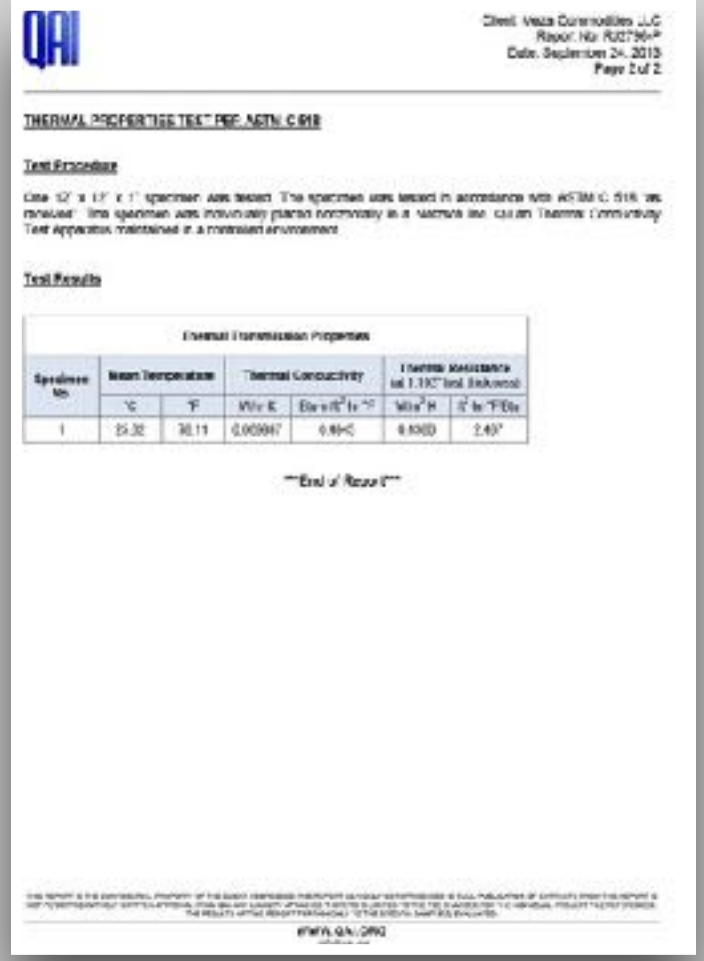

QAI

Steel Veza Commodities LLC
Report No: RJ2798-P
Date: September 24, 2013
Page 2 of 2

THERMAL PROPERTIES TEST PER ASTM C 518

Test Procedure

One 12" x 12" x 1" specimen was tested. The specimen was tested in accordance with ASTM C 518. As received, the specimen was individually placed horizontally in a vacuum jar, called Thermal Conductivity Test Apparatus, maintained in a controlled environment.

Test Results

Thermal Transmission Properties

Specimen No	Mean Temperature		Thermal Conductivity		Thermal Resistance at 1.13" Test Thickness	
	°C	°F	W/m·K	Btu·in/ft²·h·°F	W/m²·K	ft²·h·°F/Btu
1	23.32	74.11	0.00987	0.0685	8.10(D)	2.40*

End of Report

www.qai.org

indiana™ floors & more...

THERMOLOCK®
New Generation Construction Materials

WHERE TO USE THERMOLOCK

THERMOLOCK is applied directly to any wall surface (brown coat, finishing coat, brick, aerated concrete, pumice concrete, concrete surfaces, and briquette) including the load-bearing systems on the exterior coating of buildings. Extra adherence products are not required. It is possible to get varying decorative surfaces.

THERMOLOCK is used in the coating and alteration of the buildings already finished and used as well as in raw constructions. In these kinds of applications, it is recommended to apply the product on condition that the materials such as dye and mineral coating which consist of a film layer are cleaned at the rate of 70% from the surfaces.

indiana™ floors & more...

THERMOLOCK®
New Generation Construction Materials

THE PREPARATION OF THE THERMOLOCK COATING

One bag of KF-S 011 THERMOLOCK coating is poured into a clean container. Approximately 15 lt. of water is added and mixed with a low speed mixer for 6-7 minutes.

How to apply

The surface that THERMOLOCK would be applied is cleaned from dust, dirt and similar factors. After finishing the scale of desired main braces and angle beads, the first stage is completed by filling the main braces and angle beads with a machine or a trowel. Approximately 4 hours later the KF-S 011 Thermolock is ready for the polishing procedure.

At the second stage, KF-S 011 THERMOLOCK is applied as a 0.5 cm layer on the jigged surface with the help of a trowel. By using suitable tools for the chosen decorative surfaces (steel trowel, other kinds of trowel, roll, sponge etc.)

The application of KF-S 011 THERMOLOCK is ended. Other applications such as jamb and precast concrete can be done 48 hours after the usage of KF-S 011 THERMOLOCK coating.

indiana™ floors & more...

THERMOLOCK®
New Generation Construction Materials

THERMOLOCK TEXTURES

THERMOLOCK TOOLS

MASON'S TROWEL AND HAWK

SPONGE FLOAT
(FOR VARIO USOR PRE FERRDE TEXTURES)

COARSE SPONGE FLOAT

(FOR VARIOUS OR PRE FERRDE TEXTURES)

HAMMER SPATULA BRUSH,
SQUARE TROWEL

CORAL OR PAINT RO LLER
(FOR VARIOUS OR PREFERRED TEXTURES)

HAND HELD OR MORTAR MIXERS

indiana™ floors & more...

THERMOLOCK PROJECTS

THERMOLOCK®
New Generation Construction Materials

THESE PROJECTS ARE DONE IN TURKEY

indiana™ floors & more...

THERMOLOCK®
New Generation Construction Materials

THERMOLOCK PROJECTS

THESE PROJECTS ARE DONE IN TURKEY

indiana™
floors & more...

THERMOLOCK®
New Generation Construction Materials

THERMOLOCK PROJECTS

THERMOLOCK PROJECTS

THESE PROJECTS ARE DONE IN TURKEY

Sustainability is one of the fundamental principles of **Indiana**. we strongly believe that the first and foremost requirement to be a successful business is environmental sustainability. **Indiana** has focused on Long-serving company can monitor global trends and project. these onto products and customer-oriented demands while holding its own expertise.

THANK YOU

sales@thermolockindia.com

9008678541/ 8861089111