

Laser coding machine at your fingertips

The simple all-in-one design ensures smooth integration into your production line, intuitive user interface and built-in wizards significantly reduce operator training and allow you to get up to speed.

Quality products at reasonable prices

To provide high quality at a reasonable price, so that laser technology is universal.

Precision design, flexible use

Superior German craftsmanship and excellent component design ensure reliable high quality systems that can handle a wide range of application scenarios.



Radium UV 5W specification/laser inkjet printer

Provide high quality, reliable laser system, by many countries/regions customer trust.



Suzhou Cheef Technology CO.,LTD

UV 5W specification/laser inkjet printer

Endless possibilities, technological advantages

Intelligent management of your marking process, from the workshop to the automated Th production line allows you to easily complete multiple tasks, repeat checks, history files and other data sources can be imported from external data or scan the code gun.



Communication software

Data communication through serial port or network port and a single - and two-machine coding software.



Visual elimination

Comes with visual elimination communication protocol, users can choose this function, seamless integration.



Remote control

It can be connected to the upper computer through Ethernet to realize remote operation



Protection class

The whole controller can achieve IP55 protection level and the surface can achieve IP65 protection level.
Waterable shower





◆The main technical parameters of UV 5W :

Project	Product parameter list	UV-5W
Complete machine characteristics	Material of the machine	Sandblasted oxidized all-aluminum structure
	Laser	Sealed UV laser hair Th device service life of more than 20-30 thousand hours
	Laser wavelength	355nm
	Actual output power	≥5.5W
	Marking speed	≤12000mm/s
	Master control	10.2 "touch controller
	Cooling system	Water cooling (come with chiller)
Inkjet parameter	Focusing lens	Focal length 210mm
	Minimum line width	0.01mm
	Repeated positioning accuracy	0.001mm
	Marking range	110mm x 110mm (Optional)
	Positioning mode	Red light focuses, blue light indicates
	Number of lines of characters to type	Any line in the marking range
	Th Production line speed	0~130m/min (depending on the material)
Software introduction	multilingual	English, French, Spanish, German, Chinese, Russian, Arabic, etc
	Administrative authority	Multi-user management permission
	Operating system	Linux system
	Inkjet mode	Static, analog, encoder three coding modes
	Reserved signal	Print start, print status, print finished, fault alarm
	Data protection	Provides power failure data protection function
	Miss detection	Due to the material reflection caused by the wrong trigger, provide overspeed alarm function
	de-crossover	Automatically removes intersections to avoid crossing points
	Coding software	Single - and dual-machine coding can be realized



Support type	Font	Chinese and English, numerals, traditional characters and other standard character library
	File format	BMP/DXF/HPGL/JPEG/PLT
	Bar code	CODE39、CODE128、CODE126、QR、Real knowledge code (optional)
Maintenance parameter	Power supply	220V/50HZ
	Power consumption	800W
	Net machine weight	Laser part: 13kg flight support part: 30kg
	Overall dimension	670mmX160mmX190mm
Environment	Requirement	External temperature 0℃-45℃; Humidity ≤95; Non-condensing; vibration-free

%

◆ Implementation of quality standards

Serial number	Name
GB 7247-87	Radiation safety of laser products, equipment classification needs and user guide
GB10320-88	Electrical safety of laser equipment and facilities
ISO9000-3	International software standard
GB/T12123-89	Sales packaging program
IEC 536	Classification of anti-shock protection for electrical and electronic equipment



◆ Major configuration list:

NO.	Subsystem name	Brand	Model	Quantity	Place of origin
1.	Laser	Shenzhen gainlaser Laser Technology Co., Ltd	355-3C/5E/10S/15S	1	Shenzhen, China
2.	Galvanometer	Shenzhen Zbt Technology Co.,LTD	ZB2D10C355	1	Shenzhen, China
3.	Field lens	Shenzhen JGZ Optical Technology Co.,Ltd.	JGZL1-355-160-110	1	Shenzhen, China
4.	Power supply	Taiwan Mean Well	S350-24W	1	Taiwan, China
5.	Software control system	Shenyang Baichuang Science and Technology Ltd.	10.2-inch external control panel	1	Shenyang, China
6.	Photoelectric switch	Zhejiang Xinshe Electric Technology Co., Ltd.	FZ2-22N	1	Zhejiang, China
7.	synchronizer	Changchun Yifang Optical Instrument Co., LTD	38S6-2500	1	Changchun, China
8.	Double red focus	Shenzhen Zbt Technology Co.,LTD	ZB2D10C355	1	Shenzhen, China
9.	Filter	Taiwan YUNSANDA	CW2B-10A	1	Taiwan, China
10.	Two-dimensional support	Self-made by the company	SY02415-1500	1	China
11.	water-cooling machine	S&A Chiller	CWUL-05	1	Guangzhou, China


◆ Random accessories and related information:

NO.	Name	Quantity	Remarks
1	Laser machine equipment	1	Random parts
2	Control system	1	Random parts
3	Photoelectric check switch	1	Random parts
4	Synchronizer	1	Random parts
5	Flight support	1	Random parts
6	Debugging toolbox	1	Random parts
7	Mechanical and circuit drawings	One of each	Random parts
8	Specification, warranty, certificate of qualification	One of each	Random parts
9	water-cooling machine	1	Random parts




◆ boundary dimension:


Controller size:

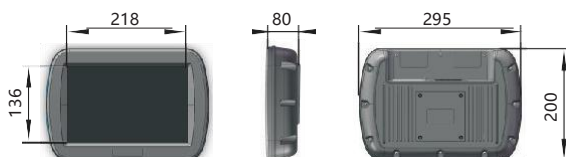

Laser head size:

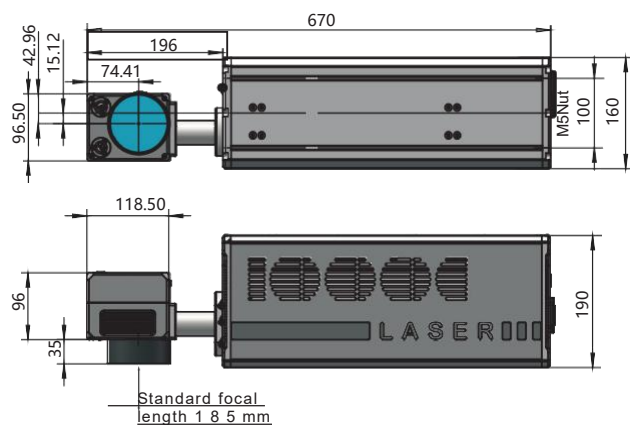

Support size:

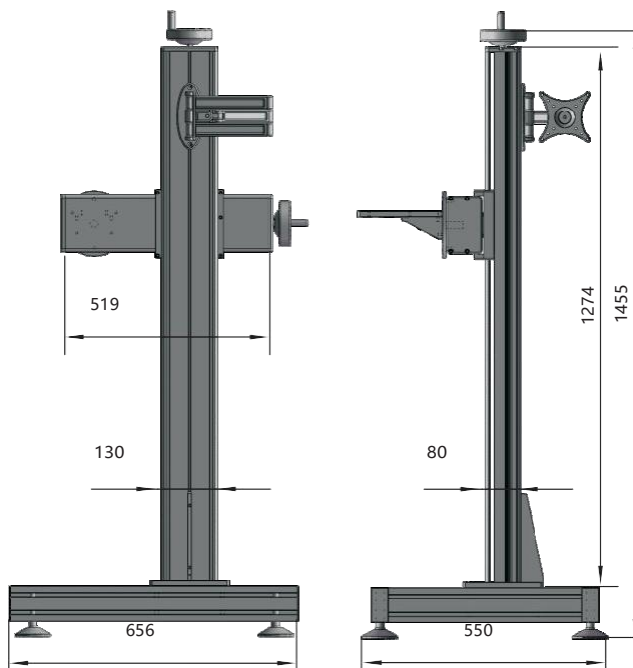


Take peace of mind as the standard

Concise - The large size "What you see is what You Get" color touch screen provides intuitive ICONS and shortcuts to ensure user-friendly operation. Such safety features are quick and easy to use, and are available through standard USB port facilitates information loading and Ethernet access.

Can cooperate with your development needs, can easily update your marking machine power without changing the whole system. High flexibility, laser program can process a variety of workpiece (brittle, soft, hard, surface removal)

- 5W: Multi-purpose, high-performance solution for high-speed Th production lines.

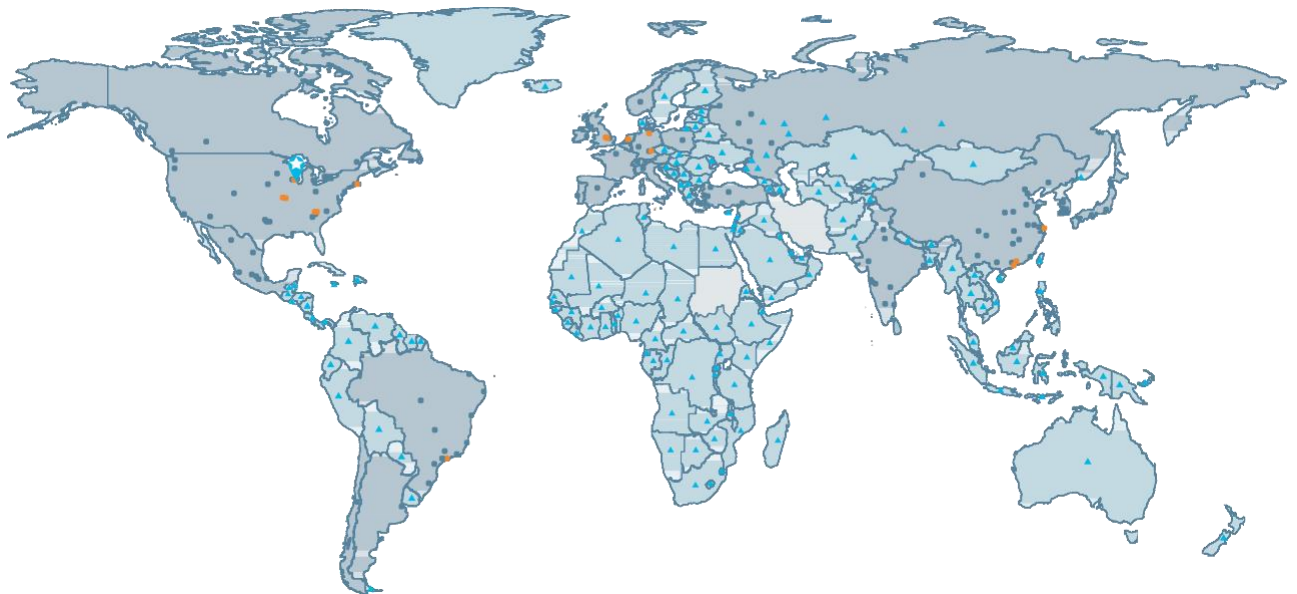

Company:

Address:

TEL:

Email:

Website :

Contact :

The company reserves all rights, continuous optimization of the design scheme is the same policy. We reserve the right to change the specifications without prior notice.

File number SY20210634
br-5008-sb-fw-23
Pending patent
application

No laser radiation is visible

Protect eyes and skin from
radiation

Direct or scattered radiation

Maximum power: 100 watts

Class-II laser products
(IEC 60825-1:2014)