

Laser coding machines are within reach

The simple one-piece design ensures smooth integration into your production line, intuitive user interface and built-in wizards significantly reduce operator training and allow you to get up to speed.

High quality products, Reasonable price

To provide high quality at a reasonable price, so that laser technology is universal.

Precision design, flexible use

Excellent German craftsmanship and excellent component design ensure reliable high quality systems that can handle a wide range of application scenarios.



CO2 30W Specification/Laser inkjet printer

Provide high quality, reliable laser system, by many countries/regions customers trust.



Suzhou Cheef Technology CO.,LTD

CO2 30W Specification/Laser inkjet printer


Endless possibilities, technological advantages

Intelligent management of your marking process, from the workshop to the automated Th production line allows you to easily complete multiple tasks, repeat checks, history files and other data sources can be imported from external data or scan the code gun.



Communication software

Data communication through serial port or network port and a single-node two-node coding software.



Elimination of vision

Comes with visual elimination communication protocol, users can choose this function, seamless integration.



Remote control

It can be connected to the upper computer through Ethernet to realize remote operation



Level of protection

The whole controller can reach IP55 protection level and the surface can reach IP65 protection level. Water available shower





◆CO2 30W Main technical parameters :

Project	Product parameter table	CO2-30W
Complete machine characteristics	Material of the machine	Sandblasted oxidized all-aluminum structure
	Laser	Sealed metal RF CO2 laser Th generator
	Wavelength of laser	10.6um is standard and 10.2 or 9.3um is available
	Actual output power	≥38W
	Speed of marking	≤12000mm/s
	Master	10.2 inch touch controller
	Cooling down system	30W air-cooled
Inkjet code parameter	Focus the lens	Focal length 145mm
	Minimum line width	0.03mm
	Repeated positioning accuracy	0.01mm
	Range of marking	110mm×110mm(Optional)
	Mode of positioning	Red light focusing
	Number of lines of characters to type	Any line in the marking range
	Th Production line speed	0~130m/min (It depends on the material)
Software Introduction	Multiple languages	English, French, Spanish, German, Chinese, Russian, Arabic, etc
	Management Rights	Multiple user management rights
	Operating system	Linux System
	Jet coding mode	Static, analog, encoder three coding modes
	Reserved signal	Start printing, print status, print finished, fault alarm
	Data Protection	Provides power failure data protection function
	Leakage detection	Due to the material reflection caused by the wrong trigger, provide overspeed alarm function
	Go to the intersection	Automatic removal of intersections to avoid cross-emphasis
	Code issuing software	Can realize single - dual - machine code
Supported Types	Typeface	Chinese and English, numerals, traditional characters and other standard characters
	File Format	BMP/DXF/HPGL/JPEG/PLT
	Barcode	CODE39、CODE128、CODE126、QR、Real Knowledge Code(optional)
Rectifier	Power supply	220V/50HZ



parameters	Power consumption	800W
	Net weight of machine	30W Laser machine section: 15kg Flight support section: 30kg
	Overall dimensions	30W handpiece: 666X160X165mm
Environment	Requirements	External temperature 0℃—45℃; humidity≤95% ; Non-condensing; No vibration

◆Implementation of quality standards

The serial number	Name
GB 7247-87	Radiation safety of laser products, equipment classification needs and user guide
GB10320-88	Electrical safety of laser equipment and facilities
ISO9000-3	International software standards
GB/T12123-89	Sales packing procedure
IEC 536	Classification of shock protection for electrical and electronic equipment



◆ Main Configuration List:

No.	Subsystem name	Brand	Model	Quantity	Place of origin
1.	Laser	Shenyang Baichuang Science and Technology Ltd.	CO2-30	1	Shenyang , China
2.	Galvanometer	Shenzhen Zbtk Technology Co.,LTD	ZB2D10C10600	1	Shenzhen , China
3.	Field lens	Shenzhen JGZ Optical Technology Co.,Ltd.	JGZL1-10.6-150-110-8	1	Shenzhen , China
4.	Beam expander	Shenzhen JGZ Optical Technology Co.,Ltd.	JG-BEX-10.6-4C	1	Nanjing, China
5.	Power supply	Taiwan Mean Well	S600-48W	1	Taiwan, China
6.	Software control system	Shenyang Baichuang Science and Technology Ltd.	10.2-inch external control screen	1	Shenyang , China
7.	Optoelectronic switch	Zhejiang Xinshe Electric Technology Co., Ltd.	FZ2-22N	1	Zhejiang, China
8.	Synchronizer	Changchun Yifang Optical Instrument Co., LTD	38S6-2500	1	Changchun, China
9.	Double red focus	Shenzhen Zbtk Technology Co.,LTD	ZB2D10C10600	1	Shenzhen , China
10.	Filter	Taiwan YUNSANDA	CW2B-10A	1	Taiwan, China
11.	Two dimensional bracket	Self-made by the company	SY02415-1500	1	China


◆ Random accessories and related information:

No.	Name	Quantity	Remark
1	Laser machine equipment	1	accessories included
2	Control system	1	accessories included
3	Photoelectric check switch	1	accessories included
4	Synchronizer	1	accessories included
5	Flight support bracket	1	accessories included
6	Debugging toolkit	1	accessories included
7	Mechanical and circuit drawings	One of each	accessories included
8	Specification, warranty, certificate of qualification	One of each	accessories included




Boundary dimension:


Controller Size :

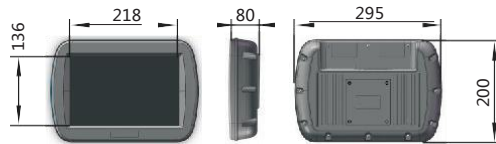

30W Laser head size:

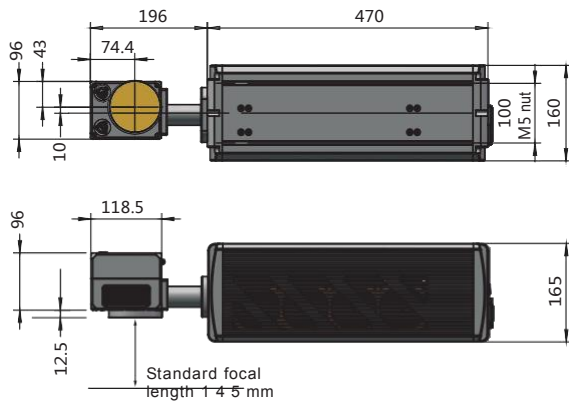

Size of bracket:

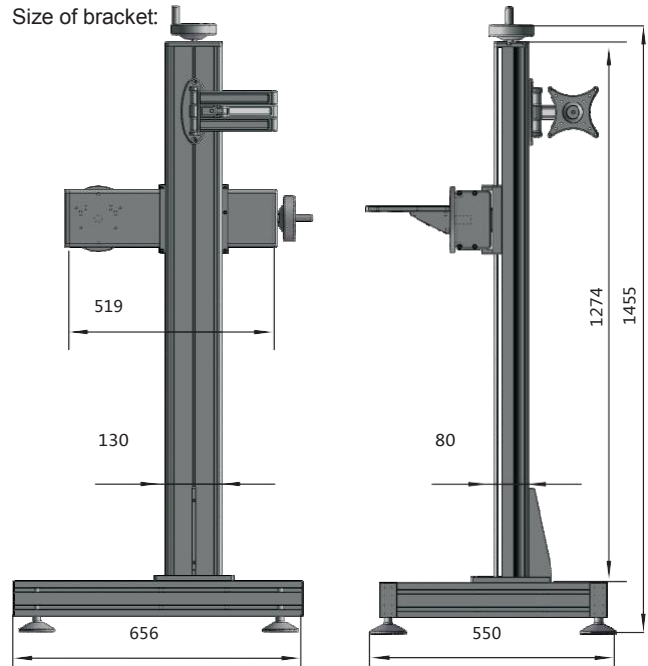

Take reassurance as the standard

Concise - The large size "What you see is what you Get" color touch screen provides intuitive ICONS and shortcuts to ensure user-friendly operation. The security functions are quick and easy to use, and the information loading and Ethernet access can be easily completed through the standard USB port.

Can match your development needs, can easily update your marking machine power without changing the whole system. High flexibility, laser program can process a variety of workpiece (brittle, soft, hard, surface removal)

- 30W: Economic program, with the conventional Th production line supporting.



Company:

Address:

TEL:

Email:

Website :

Contact:

The company reserves all rights, continuous optimization of the design scheme is the unchanged policy. We reserve the right to change the specifications without prior notice.

File No.SY20210634
br-5008-sb-fw-23
patent pending

No laser radiation is visible

Avoid exposure of eyes and
skin to direct or scattered
radiation

Maximum power: 100 W
Class 4 laser products
(IEC 80402-6:2021)