

1 Site Plan
A1 1" = 20'-0"

Window Max U Value reduced as per 3.1.1.1.(3)(b)
 Drain Water Heat Recovery Exempt as per OBC, 3.1.1.12 (2) (b)

General Notes:

DO NOT SCALE DRAWINGS

CONTRACTOR / OWNER TO VERIFY ALL DRAWINGS PRIOR BIDDING AND COMMENCEMENT OF WORK AND DURING CONSTRUCTION, NOTIFY DESIGNER IN WRITING OF ANY DISCREPANCY

DESIGN AND CONSTRUCTION SHALL MEET OR EXCEED THE MINIMUM PRESCRIPTIVE STANDARDS OF THE ONTARIO BUILDING CODE (O.B.C.) CURRENT EDITION AND ANY LOCAL CODES.

THE ONTARIO BUILDING CODE (O.B.C.) A MINIMUM STANDARD FOR CONSTRUCTION, DRAWINGS MAY CONTAIN INSTRUCTIONS THAT PROVIDES A PRODUCT SUPERIOR TO THE O.B.C. STANDARDS. AT THE KNOWLEDGEABLE DISCRETION OF GENERAL CONTRACTOR / OR HOME OWNER THESE STANDARDS MAY CHANGED TO BUT NOT BELOW THE LEVEL PRESCRIBED BY THE O.B.C.

NON STRUCTURAL CHANGES AND NON LIFE SAFETY ISSUE CHANGES MAY BE
CHANGED AT THE KNOWLEDGEABLE DISCRETION OF GENERAL CONTRACTOR / OR
HOME OWNER

STRUCTURAL OR LIVE SAFETY ISSUES CHANGES SHALL BE DONE WITH THE FULL KNOWLEDGE AND CONSENT OF THE DESIGNER AND SHALL NOT PROCEED UNTIL WRITTEN CONSENT IS PROVIDED.

ALL ENGINEERED ITEMS TO BE DESIGNED AND REVIEWED BY STRUCTURAL
COORDINATOR PRIOR TO SUBMITTAL OF BUILDING PERMIT OR PRIOR TO START OF
CONSTRUCTION AS PER REQUEST OF LOCAL BUILDING DEPARTMENT

FOR ALL ENGINEERED STRUCTURAL PRODUCTS PROVIDE STAMPED SHOP DRAWING
BY A PROFESSIONAL ENGINEER OF ONTARIO FOR REVIEW BY DESIGNER PRIOR TO
START OF MANUFACTURING AND CONSTRUCTION.

PRE-ENGINEERED STRUCTURAL PRODUCTS ARE TO BE INSTALLED ACCORDING TO MANUFACTURER'S SPECIFICATIONS.

IT IS RECOMMENDED THAT A SOILS INVESTIGATION BY A QUALIFIED AND LICENSED SOILS ENGINEER MUST BE PROVIDED AT THE BUILDING LOCATION PRIOR TO CONSTRUCTION. IN ADDITION TO OTHER PERTINENT INFORMATION, EACH REPORT SHALL INCLUDE THE FOLLOWING:

A) ALLOWABLE SOIL BEARING CAPACITY AND RECOMMENDATIONS FOR IMPROVEMENT IF REQUIRED.

B) WATER DRAINAGE AND HYDROSTATIC PRESSURE ANALYSIS INCLUDING RECOMMENDATIONS FOR RELIEF OF ANY ADVERSE CONDITIONS.

IF THERE IS A CONFLICT BETWEEN THE SOILS INVESTIGATION AND INFORMATION ON THE CONSTRUCTION DOCUMENTS, THE MOST STRINGENT AND CONSERVATIVE CONDITION SHALL GOVERN.

THE DESIGNER HAS SPECIFIED A FOOTING THAT IS LARGER THAN WHAT MAY BE REQUIRED AS AT THE TIME OF DESIGN THE SOIL CONDITIONS ARE NOT KNOWN AT THIS PARTICULAR SITE.

FOOTINGS MAY BE REDUCED OR INCREASED WHEN SOIL CONDITIONS ARE UNCOVERED DURING EXCAVATION, AT THE DIRECTION/CONSULTATION BY ONE OF THE FOLLOWING:

A) PRESCRIPTIVE STANDARDS OF THE ONTARIO BUILDING CODE
B) A DESIGNER AUTHORIZED TO SIGN
C) LOCAL BUILDING DEPARTMENT INSPECTOR
D) PROFESSIONAL ENGINEER OF ONTARIO

IF CHANGES ARE MADE INNOVATIVE BY DESIGN SHALL BE NOTIFIED IN WRITING.

MECHANICAL TO VERIFY ALL APPLIANCE LOCATIONS

ALL LIGHTING AND ELECTRICAL TO COMPLY WITH O.B.C. 9.3.

SMOKE DETECTORS ARE REQUIRED ON EACH FLOOR LEVEL AND TO BE INTERCONNECTED WITH STROBE

SMOKE DETECTORS ARE REQUIRED ON EACH FLOOR LEVEL AND TO BE INTERCONNECTED.

ALL BEAMS TO HAVE MIN. 3-1/2" END BEARING AND MASONRY LINTELS TO HAVE MIN. 5-1/8" END BEARING BEAM AND POINTS LOADS TO BE SUPPORTED FULL WIDTH TO FOUNDATION.

HEADROOM UNDER DUCTS AND BEAMS MIN. 6'-5".

RANGE HOODS TO BE VENTED TO EXTERIOR WITH NON COMBUSTIBLE DUCTS.

STAIR STANDARD DIMENSIONS:

RUN MIN. 8'-1/4"
RUN DESIGN 10'
TREAD MIN. 9'-1/4"
NOSING 1"
TREAD DESIGN 11" (INTERIOR STAIRS INCLUDING NOSING)
TREAD DESIGN 12" (EXTERIOR STAIRS)
UNIFORM RISE AND RUN IN ANY ONE FLIGHT OF STAIRS
HEADROOM MIN. 6'-9"
GUARD HEIGHT AT LANDING 36"
GUARDS NON AND MAX. SPACING OF 4"
HANDRAILS INSTALLED BETWEEN 31" AND 38"

3 Basement Floor Plan


Footing Schedule		
Type Mark	Size	Description
EX01	20" x 6"	Strip Footing
PD01	36" x 36" x 16"	Pad Footing

First Floor Plan

Building Areas	
Name	Area
First Floor Living	2144 SF
Garage	545 SF
Front Porch	132 SF
Back Porch	115 SF

[illegible]

Drawing List	
Sheet No.	Sheet Name
A1	Plan Plans
A2	Elevations & Details



Project North	Actual North
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

Project Information

34 FOSTER LEAMINGTON ONTARIO

Drawing Title

Plan Plans

Project No.	1
Date.	2017-02-05
Drawing No.	

A1

THIS HOME IS DESIGNED TO
TABLE 3.1.1.2.A (IP) COMPLIANCE PACKAGE A1

2032	sgt	WALL GROSS AREA
361	sgt	WINDOW AREA
10		% Window area of Exterior Wall
R 60		CEILING WITH ATTIC SPACE
R 31		CEILING WITHOUT ATTIC SPACE
R 31		EXPOSED FLOOR
R 22		WALLS ABOVE GRADE
R 20 ci		BASMENT WALLS
RSI 1.76 (R10)		EDGE OF SLAB +/- 600mm BELOW GRADE
RSI 1.76 (R10)		HEATED SLAB
0.23 (or lower)		WINDOWS AND GLASS DOORS MAX U VALUE
0.44		SKYLIGHTS MAX U VALUE
96% (or higher)		SPACE HEATING EQUIPMENT
75% (or higher)		HRV MIN EFFICIENCY
0.0 (or higher)		DOMESTIC HOT WATER HEATER MIN EF

Window Max U Value reduced as per 3.1.1.1.(6)(b)
Drain Water Heat Recovery Exempt as per OBC, 3.1.1.12 (2) (b)

Min. Lintel Sizes as per O.B.C. Pine No. 1 or No. 2 Grade Non-Structural Sheathing								
Roof and Ceiling Only			Roof and Ceiling # 1 Story			Roof and Ceiling # 2 Story		
Max Opening Size	Max Opening Size	Lintel Size	Max Opening Size	Max Opening Size	Lintel Size	Max Opening Size	Max Opening Size	Lintel Size
Exterior Wall	Exterior Wall	2 - 2"x4"	Exterior Wall	Exterior Wall	2 - 2"x4"	Exterior Wall	Exterior Wall	2 - 2"x4"
5'-4"	4'-4"	2 - 2"x6"	4'-5"	3'-3"	2 - 2"x6"	4'-1"	2'-10"	2 - 2"x6"
6'-7"	5'-4"	2 - 2"x8"	5'-5"	3'-10"	2 - 2"x8"	5'-0"	3'-5"	2 - 2"x8"
8'-1"	6'-7"	2 - 2"x10"	6'-7"	4'-9"	2 - 2"x10"	6'-1"	4'-1"	2 - 2"x10"
9'-4"	7'-6"	2 - 2"x12"	7'-8"	5'-5"	2 - 2"x12"	6'-10"	4'-9"	2 - 2"x12"

Note: To Be Used For Lintels Opening Under Max Supported Joist of Rafter Length of 16'-0"

Note: To Be Used For Lintels Openings Under Max Supported Joist or Rafter Length of 16'-0"

X2
Sheet Number

Main Floor Plan & Details

Sheet Name:

phone : 519-972-3805

phone: 019-972-0003
email: Innovative.by.Design@gmail.com

Project Number

Date:

2017-02-05

Project Info.


Project Info.

34 FOSTER LEAMINGTON ONTARIO

[illegible]

Drawings Not Bearing An Embossed Stamp
With The Company Name Of 'Innovative By
Design' And BCIN Information For The
Following Address Only Should Not Be
Accepted For Permit.

34 FOSTER LEAMINGTON ONTARIO

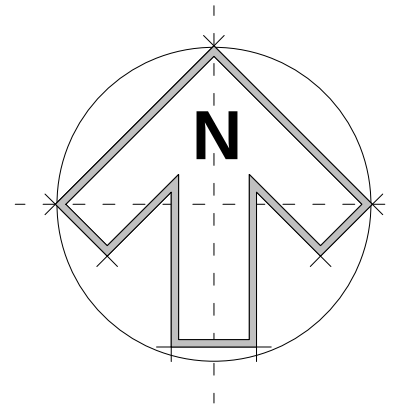

SEAL

Project North

O.B.C.NERGY REQUIREMENTS	
THIS HOME IS DESIGNED TO TABLE 3.1.1.2.A (IP) COMPLIANCE PACKAGE A1	
2032 sqft	WALL GROSS AREA
361 sqft	WINDOW AREA
15	% Window area of Exterior Wall
R 60	CEILING WITH ATTIC SPACE
R 31	CEILING WITHOUT ATTIC SPACE
R 31	EXPOSED FLOOR
R 22	WALLS ABOVE GRADE
R 20 ci	BASEMENT WALLS
RS1 1/6 (R10)	EDGE OF SLAB = 600mm BELOW GRADE
RS1 1/6 (R10)	HEATED SLAB
0.25 (or lower)	WINDOWS AND GLASS DOORS MAX U VALUE
0.44	SKYLIGHTS MAX U VALUE
75% (or higher)	SPACE HEATING EQUIPMENT
75% (or higher)	HRV MIN EFFICIENCY
0.6 (or higher)	DOMESTIC HOT WATER HEATER MIN EF

Window Max U Value reduced as per 3.1.1.1.(5)(b)
Drain Water Heat Recovery Exempt as per OBC, 3.1.1.12 (2) (b)

Min. Lintel Sizes as per O.B.C. Pine No. 1 or No. 2 Grade Non-Structural Sheathing								
Roof and Ceiling Only			Roof and Ceiling # 1 Story			Roof and Ceiling # 2 Story		
Max Opening Size	Max Opening Size	Lintel Size	Max Opening Size	Max Opening Size	Lintel Size	Max Opening Size	Max Opening Size	Lintel Size
Superior nail	Superior nail	2-2"x4"	Superior nail	Superior nail	2-2"x4"	Superior nail	Superior nail	2-2"x4"
5-4"	4-4"	2-2"x6"	4-5"	3-3"	2-2"x6"	4-1"	2-10"	2-2"x6"
6-7"	5-4"	2-2"x8"	5-5"	3-10"	2-2"x8"	5-0"	3-5"	2-2"x8"
8-1"	6-7"	2-2"x10"	6-7"	4-4"	2-2"x10"	6-1"	4-1"	2-2"x10"
9-4"	7-6"	2-2"x12"	7-8"	5-5"	2-2"x12"	6-10"	4-4"	2-2"x12"

Note: To be used For Lintels Openings Under Max Supported Joist of Rafter Length of 16'-0"

[illegible]

Drawings Not Bearing An Embossed Stamp
With The Company Name Of 'Innovative By
Design' And BCIN Information For The
Following Address Only Should Not Be
Accepted For Permit.



SEAL

Project North

O.B.C.ENERGY REQUIREMENTS	
THIS HOME IS DESIGNED TO	
TABLE 3.1.1.2.A (1F) COMPLIANCE PACKAGE A1	
2092 sqft	WALL GROSS AREA
561 sqft	WINDOW AREA
16	% Window area of Exterior Wall
R 60	CEILING WITH ATTIC SPACE
R 31	CEILING WITHOUT ATTIC SPACE
R 31	EXPOSED FLOOR
R 22	WALLS ABOVE GRADE
R 20 ci	BASEMENT WALLS
R3: 1/8" (R10)	EDGE OF SLAB $\pm$ 600mm BELOW GRADE
R3: 1/8" (R10)	HEATED SLAB
0.25 (or lower)	WINDOWS AND GLASS DOORS MAX U VALUE
0.44	SKYLIGHTS MAX U VALUE
96% (or higher)	SPACE HEATING EQUIPMENT
75%	HRV/ MVN EFFICIENCY
0.8 (or higher)	DOMESTIC HOT WATER HEATER MIN EF

Window Max U Value reduced as per 3.1.1.1.(b)/(b)
 Drain Water Heat Recovery Exempt as per OBC, 3.1.1.12 (2) (b)

Exterior Finishes	
Tag	Description
(Mat. 01)	Fiberglass Shingles
(Mat. 02)	Brick
(Mat. 03)	Stone
(Mat. 04)	Stucco
(Mat. 05)	Siding
(Mat. 06)	Aluminum Trim
(Mat. 07)	Exposed Concrete
(Mat. 08)	Concrete Steps
(Mat. 09)	Column Finish T.B.D.
(Mat. 10)	StoneSill

Drawings Not Bearing An Embossed Stamp
With The Company Name of 'Innovative By
Design' And BCIN Information For The
Following Address Only Should Not Be
Accepted For Permit.

34 FOSTER LEAMINGTON ONTARIO

[illegible]

X5 Elevations

phone : 519-972-3805

Project Number

Data

Project Info.

Project Info.

Project Info.

SEAL

Project North

GENERAL NOTES:

PROVIDE PREFINISHED EAVES TROUGH AND DOWN SPOUT AS
REQUIRED FOR PROPER DRAINAGE.

PROVIDE STEEL ANGLE LINTEL AS PER O.B.C. WHERE REQUIRED TO SUPPORT BRICK ABOVE WALL OPENINGS.

STATED WINDOW SIZES ARE TO BE USED AS A DESIGN GUIDE FOR WINDOW SELECTION. PROVIDE FINAL R.O. SIZES FOR FRAMING PURPOSES

WINDOWS AND GLASS DOORS: