Quotation

SQAP005760-2

Job Name: Hall Constr. - 1000 Morris Ave

Quote Date: 08/06/2026

Manufacturer's Estimated Lead Time: 12-13 Weeks

Account Manager: Michael Meyers

Dealer

The Kuiken Brothers Company
145 Lake Ave
Midland Park, NJ 07432

Customer

Pricing Mode: Dealer Sales Price

Line	Label	Qty	UOM	Description	Unit	Extended
1	B	1	EA	MODIFIED 29 13/16 inch X 80 inch, 1 3/4, VG3000, Beaded V-Groove, Swing, Single, TruStile Interior No Added Formaldehyde MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge V-Groove Type = Beaded V-Groove *****Door Machining Details***** Machine Prep = TruStile Standard Configuration Machine Prep = Hinges Hinges = TruStile Installed Hinges = Standard Ball Bearing Hinges Hinges = Brand: Throw Away Hinges = Qty: 3 - Size: 4" x 4" - Corners: Square Hinges = Locations: Hinge 1: 7", Hinge 2: 36-1/2", Hinge 3: 66" Hinges = Thickness: 0.130" - Backset: 1/4" Hinges = Finish: TA-Throw Away Hinges = Qty:3 - Hinge (11527) *****Pre-Hanging Details***** Jamb Fire Rating = Non-Rated Jamb Opening Type = Interior Jamb Profile = Flat Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed) Jamb Prefinish = Primed Jamb Edge = 1/8" Radius Front Corner with Beveled Edge Jamb Thickness = 3/4 Jamb Width = 4 9/16" Jamb Stop Profile = Ogee Jamb Stop Application = Applied Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed) Jamb Stop Width = 1 1/2" Jamb Stop Thickness = 3/8" Jamb Stop = Qty: 3 - Ogee (12520) Jamb Leg Length Extension = 7/8" *****Jamb Machining Details***** Jamb Leg Prep = Hinge Prep: Standard Hinge	$1,027.66	$1,027.66

Line	Label	Qty	UOM	Description	Unit	Extended
2	B 201	1	EA	29 13/16 inch X 80 inch, 1 3/4, TS3000, Standard V-Groove, Swing, Single, TruStile Interior No Added Formaldehyde MDF Door, SS-Square Stick Sticking, C-Flat Panel (11/16"), Prehung, Bevel Lock Side, LH, Prime, Wedge Panel Substitution = Louvers In Bottom Row V-Groove Type = Standard V-Groove Louver Type = Vented Louvers Blind Side of Louvers Direction = Outside Louver Material = MDF Louvers	$1,280.53	$1,280.53

*****Door Machining Details*****
Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: Throw Away
Hinges = Qty: 3 - Size: 4" x 4" - Corners: Square
Hinges = Locations: Hinge 1: 7", Hinge 2: 36-1/2", Hinge 3: 66"
Hinges = Thickness: 0.130" - Backset: 1/4"
Hinges = Finish: TA-Throw Away
Hinges = Qty:3 - Hinge (11527)

*****Pre-Hanging Details*****
Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Prefinish = Primed
Jamb Edge = 1/8" Radius Front Corner with Beveled Edge
Jamb Thickness = 3/4
Jamb Width = 4 9/16"
Jamb Stop Profile = Ogee
Jamb Stop Application = Applied
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Stop = Qty: 3 - Ogee (12520)
Jamb Leg Length Extension = 7/8"

*****Jamb Machining Details*****
Jamb Leg Prep = Hinge Prep: Standard Hinge

Line	Label	Qty	UOM	Description	Unit	Extended
3	P2 107	1	EA	MODIFIED, 35 13/16 inch X 80 inch, 1 3/4, TS4140, Swing, Single, TruStile Interior MDF Door, LP-Low Profile Moulding, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge	$1,187.17	$1,187.17

*****Door Machining Details*****
Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: Throw Away
Hinges = Qty: 3 - Size: 4" x 4" - Corners: Square
Hinges = Locations: Hinge 1: 7", Hinge 2: 36-1/2", Hinge 3: 66"
Hinges = Thickness: 0.130" - Backset: 1/4"
Hinges = Finish: TA-Throw Away
Hinges = Qty:3 - Hinge (11527)

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 44" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4" Radius Edge Prep - 3-1/2" Edge Bore Depth

*****Pre-Hanging Details*****
Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Prefinish = Primed
Jamb Edge = 1/8" Radius Front Corner with Beveled Edge
Jamb Thickness = 3/4
Jamb Width = 4 9/16"
Jamb Stop Profile = Ogee
Jamb Stop Application = Applied
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Stop = Qty: 3 - Ogee (12520)
Jamb Leg Length Extension = 7/8"

*****Jamb Machining Details*****
Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
4	P2 108	1	EA	MODIFIED, 29 13/16 inch X 80 inch, 1 3/4, TS4140, Swing, Single, TruStile Interior MDF Door, LP-Low Profile Moulding, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge	$1,159.24	$1,159.24

*****Door Machining Details*****
Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: Throw Away
Hinges = Qty: 3 - Size: 4" x 4" - Corners: Square
Hinges = Locations: Hinge 1: 7", Hinge 2: 36-1/2", Hinge 3: 66"
Hinges = Thickness: 0.130" - Backset: 1/4"
Hinges = Finish: TA-Throw Away
Hinges = Qty:3 - Hinge (11527)

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 44" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep - 3-1/2" Edge Bore Depth

*****Pre-Hanging Details*****
Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Prefinish = Primed
Jamb Edge = 1/8" Radius Front Corner with Beveled Edge
Jamb Thickness = 3/4
Jamb Width = 4 9/16"
Jamb Stop Profile = Ogee
Jamb Stop Application = Applied
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Stop = Qty: 3 - Ogee (12520)
Jamb Leg Length Extension = 7/8"

*****Jamb Machining Details*****
Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
5	P3 103A	1		MODIFIED,TS4000 Door Style, ES101 Configuration	$5,515.28	$5,515.28

This system does not require an overhang for warranty coverage as detailed in the Resilient Entry System warranty available on trustile.com

DOOR
Unit Style = TS4000
Dimensions = 35 13/16" x 80"
Thickness = 1-3/4"
Leaf Count = Single
Handing = LH
Beveling = Bevel Lock Side
Material = Resilient Engineered Wood
Door Construction = TruStile Resilient Entry
Sticking = LP-Low Profile Moulding
Panel = C
Prefinish = Premium Prime
Drip Trim = Metal (Pemko 3452)
Drip Trim Finish = Dark Bronze
Drip Trim Parts = Qty: 1 - Drip Cap, Dark Bronze Aluminum w/Black Insert- 42" - Pemko 3452DPK (15036)

*****Door Machining Details*****
Machine Prep = TruStile Modified Configuration
Machine Prep = Hinges, Three Point Lock

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: Throw Away
Hinges = Qty: 3 - Size: 4-1/2" x 4-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 6-3/4", Hinge 2: 36-1/4", Hinge 3: 65-3/4"
Hinges = Thickness: 0.134" - Backset: 1/4"
Hinges = Finish: TA-Throw Away
Hinges = Qty:3 - Hinge (11528)

Multipoint Lock = TruStile Installed
Multipoint Lock = Modified Multipoint Lock
Multipoint Lock = Brand: GU, Series: Secury Automatic, Model: 6-35565-01-R-8B , Template: 6-35565-01-R-8B , Template Revision:

1/1/2014
Multipoint Lock = Handle Location - ToD: 44", BoD: 36"
Multipoint Lock = Qty: 1 - Secury Automatic 60mm x 1590mm Multipoint Lock, 6-8 hgt (15078), Qty: 1 - Secury Construction Handle (15199)

Frame Details
Frame Assembly = Prehung
Head/Sill Construction = Individually Boxed
Frame Type = Single Rabbet
Wall Depth = 4 9/16"
Material = Solid Accoya
Prefinish = Premium Prime
Edge Profile = Square
Weatherstrip Color = Black
Weatherstrip Parts = Cut to length (14984)
Sill Type = Hydrosill
Sill Finish = Bronze Anodized Aluminum
Sill Depth = 4 9/16"
Sill Parts = Qty: 1 - Hydro Sill, 5000 Bronze-36 1/4 LG (16130), Qty: 2 - Hydrosill Weep Gate (15647)

*****Frame Machining Details*****
Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Multipoint Lock Strike: TruStile Installed - See Template
Jamb Leg Prep = Multipoint Lock Strike Parts: Qty: 4 - Secury Automatic Plastic Cup with Edge for jamb rout (15085), Qty: 1 - Secury Automatic 1 3/4" Door keeper set dark bronze PC (15090)

Line	Label	Qty	UOM	Description	Unit	Extended
6	P3 104A	1		MODIFIED,TS4000 Door Style, ES101 Configuration	$5,395.59	$5,395.59

This system does not require an overhang for warranty coverage as detailed in the Resilient Entry System warranty available on trustile.com

DOOR
Unit Style = TS4000
Dimensions = 33 13/16" x 80"
Thickness = 1-3/4"
Leaf Count = Single
Handing = LH
Beveling = Bevel Lock Side
Material = Resilient Engineered Wood
Door Construction = TruStile Resilient Entry
Sticking = LP-Low Profile Moulding
Panel = C
Prefinish = Premium Prime
Drip Trim = Metal (Pemko 3452)
Drip Trim Finish = Dark Bronze
Drip Trim Parts = Qty: 1 - Drip Cap, Dark Bronze Aluminum w/Black Insert- 42" - Pemko 3452DPK (15036)

*****Door Machining Details*****
Machine Prep = TruStile Modified Configuration
Machine Prep = Hinges, Three Point Lock

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: Throw Away
Hinges = Qty: 3 - Size: 4-1/2" x 4-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 6-3/4", Hinge 2: 36-1/4", Hinge 3: 65-3/4"
Hinges = Thickness: 0.134" - Backset: 1/4"
Hinges = Finish: TA-Throw Away
Hinges = Qty:3 - Hinge (11528)

Multipoint Lock = TruStile Installed
Multipoint Lock = Modified Multipoint Lock
Multipoint Lock = Brand: GU, Series: Secury Automatic, Model: 6-35565-01-R-8B , Template: 6-35565-01-R-8B , Template Revision: 1/1/2014
Multipoint Lock = Handle Location - ToD: 44", BoD: 36"
Multipoint Lock = Qty: 1 - Secury Automatic 60mm x 1590mm Multipoint Lock, 6-8 hgt (15078), Qty: 1 - Secury Construction Handle (15199)

Frame Details
Frame Assembly = Prehung
Head/Sill Construction = Individually Boxed
Frame Type = Single Rabbet
Wall Depth = 4 9/16"
Material = Solid Accoya

Prefinish = Premium Prime
Edge Profile = Square
Weatherstrip Color = Black
Weatherstrip Parts = Cut to length (14984)
Sill Type = Hydrosill
Sill Finish = Bronze Anodized Aluminum
Sill Depth = 4 9/16"
Sill Parts = Qty: 1 - Hydro Sill, 5000 Bronze-36 1/4 LG (16130), Qty: 2 - Hydrosill Weep Gate (15647)

*****Frame Machining Details*****
Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Multipoint Lock Strike: TruStile Installed - See Template
Jamb Leg Prep = Multipoint Lock Strike Parts: Qty: 4 - Secury Automatic Plastic Cup with Edge for jamb rout (15085), Qty: 1 - Secury Automatic 1 3/4" Door keeper set dark bronze PC (15090)

Line	Label	Qty	UOM	Description	Unit	Extended
7	P3 106A	1		MODIFIED,TS4000 Door Style, ES101 Configuration	$5,335.76	$5,335.76

This system does not require an overhang for warranty coverage as detailed in the Resilient Entry System warranty available on trustile.com

DOOR
Unit Style = TS4000
Dimensions = 32 13/16" x 80"
Thickness = 1-3/4"
Leaf Count = Single
Handing = LH
Beveling = Bevel Lock Side
Material = Resilient Engineered Wood
Door Construction = TruStile Resilient Entry
Sticking = LP-Low Profile Moulding
Panel = C
Prefinish = Premium Prime
Drip Trim = Metal (Pemko 3452)
Drip Trim Finish = Dark Bronze
Drip Trim Parts = Qty: 1 - Drip Cap, Dark Bronze Aluminum w/Black Insert- 42" - Pemko 3452DPK (15036)

*****Door Machining Details*****
Machine Prep = TruStile Modified Configuration
Machine Prep = Hinges, Three Point Lock

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: Throw Away
Hinges = Qty: 3 - Size: 4-1/2" x 4-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 6-3/4", Hinge 2: 36-1/4", Hinge 3: 65-3/4"
Hinges = Thickness: 0.134" - Backset: 1/4"
Hinges = Finish: TA-Throw Away
Hinges = Qty:3 - Hinge (11528)

Multipoint Lock = TruStile Installed
Multipoint Lock = Modified Multipoint Lock
Multipoint Lock = Brand: GU, Series: Secury Automatic, Model: 6-35565-01-R-8B , Template: 6-35565-01-R-8B , Template Revision: 1/1/2014
Multipoint Lock = Handle Location - ToD: 44", BoD: 36"
Multipoint Lock = Qty: 1 - Secury Automatic 60mm x 1590mm Multipoint Lock, 6-8 hgt (15078), Qty: 1 - Secury Construction Handle (15199)

Frame Details
Frame Assembly = Prehung
Head/Sill Construction = Individually Boxed
Frame Type = Single Rabbet
Wall Depth = 4 9/16"
Material = Solid Accoya
Prefinish = Premium Prime
Edge Profile = Square
Weatherstrip Color = Black
Weatherstrip Parts = Cut to length (14984)
Sill Type = Hydrosill
Sill Finish = Bronze Anodized Aluminum
Sill Depth = 4 9/16"
Sill Parts = Qty: 1 - Hydro Sill, 5000 Bronze-36 1/4 LG (16130), Qty: 2 - Hydrosill Weep Gate (15647)

*****Frame Machining Details*****
Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Multipoint Lock Strike: TruStile Installed - See Template
Jamb Leg Prep = Multipoint Lock Strike Parts: Qty: 4 - Secury Automatic Plastic Cup with Edge for jamb rout (15085), Qty: 1 - Secury Automatic 1 3/4" Door keeper set dark bronze PC (15090)


Line	Label	Qty	UOM	Description	Unit	Extended
8	SL 102B	1	EA	MODIFIED, 33 inch X 84 inch, 1 3/4, TS4000, Pocket, Pair, TruStile Interior MDF Door, BM-Bolection Moulding, C-Flat Panel, Prime, Wedge, ***SELECTED STICKING MAY INTERFERE WITH POCKET DOOR APPLICATION***	$1,967.11	$1,967.11

LVL Stiles = Yes
Top Wedge = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
9		1	EA	Manufacturer's Freight for 6 Doors	$131.66	$131.66
Total Units:		**5**			**Total:**	**$23,000.00**

Door Elevation

TruStile Doors, LLC
1111 E. 71st Ave.
Denver, CO. 80229
www.trustile.com

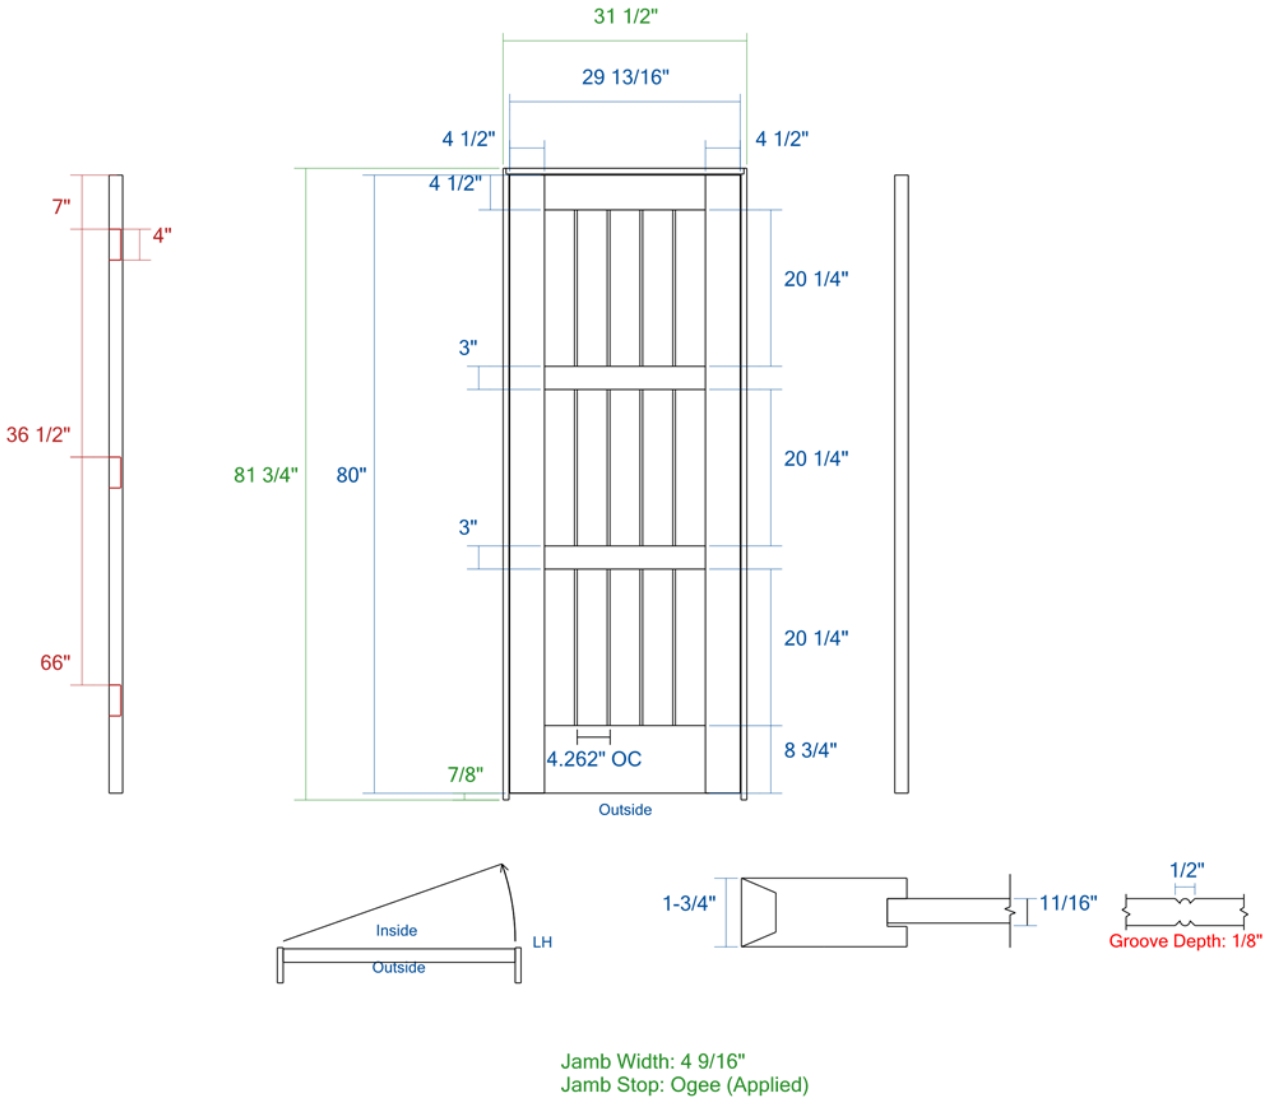


Jamb Width: 4 9/16"
Jamb Stop: Ogee (Applied)

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED VG3000	SS	C	No Added Formaldehyde MDF	N/A	Non-Rated	Interior

Quote #: SQAP005760-2	Line #: 1 - B
The Kuiken Brothers Company	Entered By: Micah Kuiken
Approval (sign here):	Created On: 09/03/2026

Door Elevation

TruStile Doors, LLC
1111 E. 71st Ave.
Denver, CO. 80229
www.trustile.com

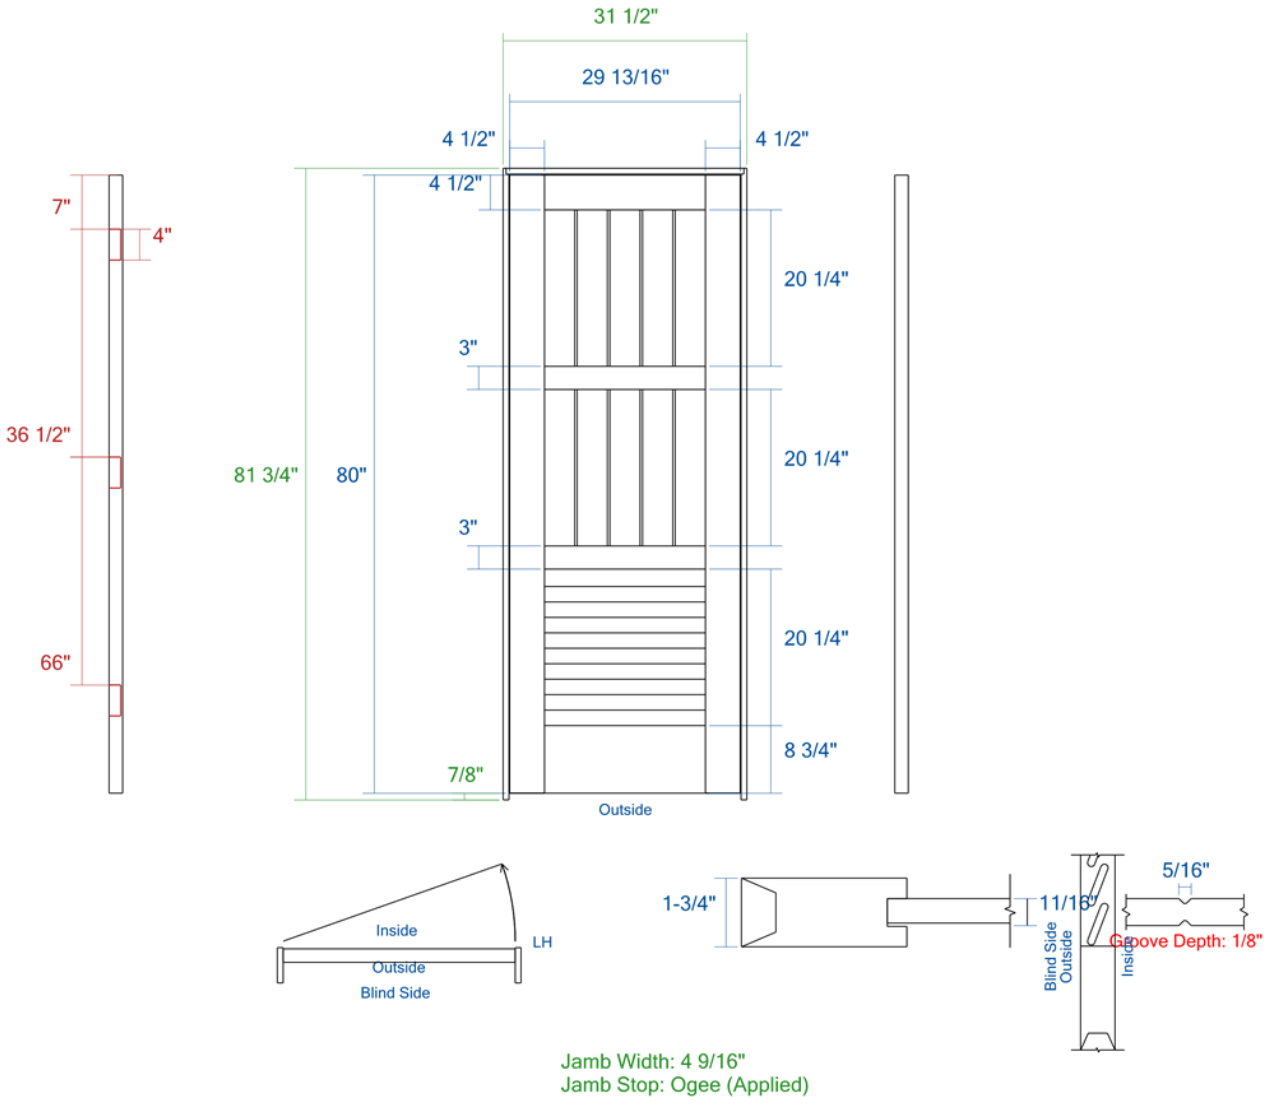


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TS3000	SS	C	No Added Formaldehyde MDF	N/A	Non-Rated	Interior

Quote #: SQAP005760-2	Line #: 2 - B 201
The Kuiken Brothers Company	Entered By: Micah Kuiken
Approval (sign here):	Created On: 09/03/2026

Door Elevation

TruStile Doors, LLC
1111 E. 71st Ave.
Denver, CO. 80229
www.trustile.com

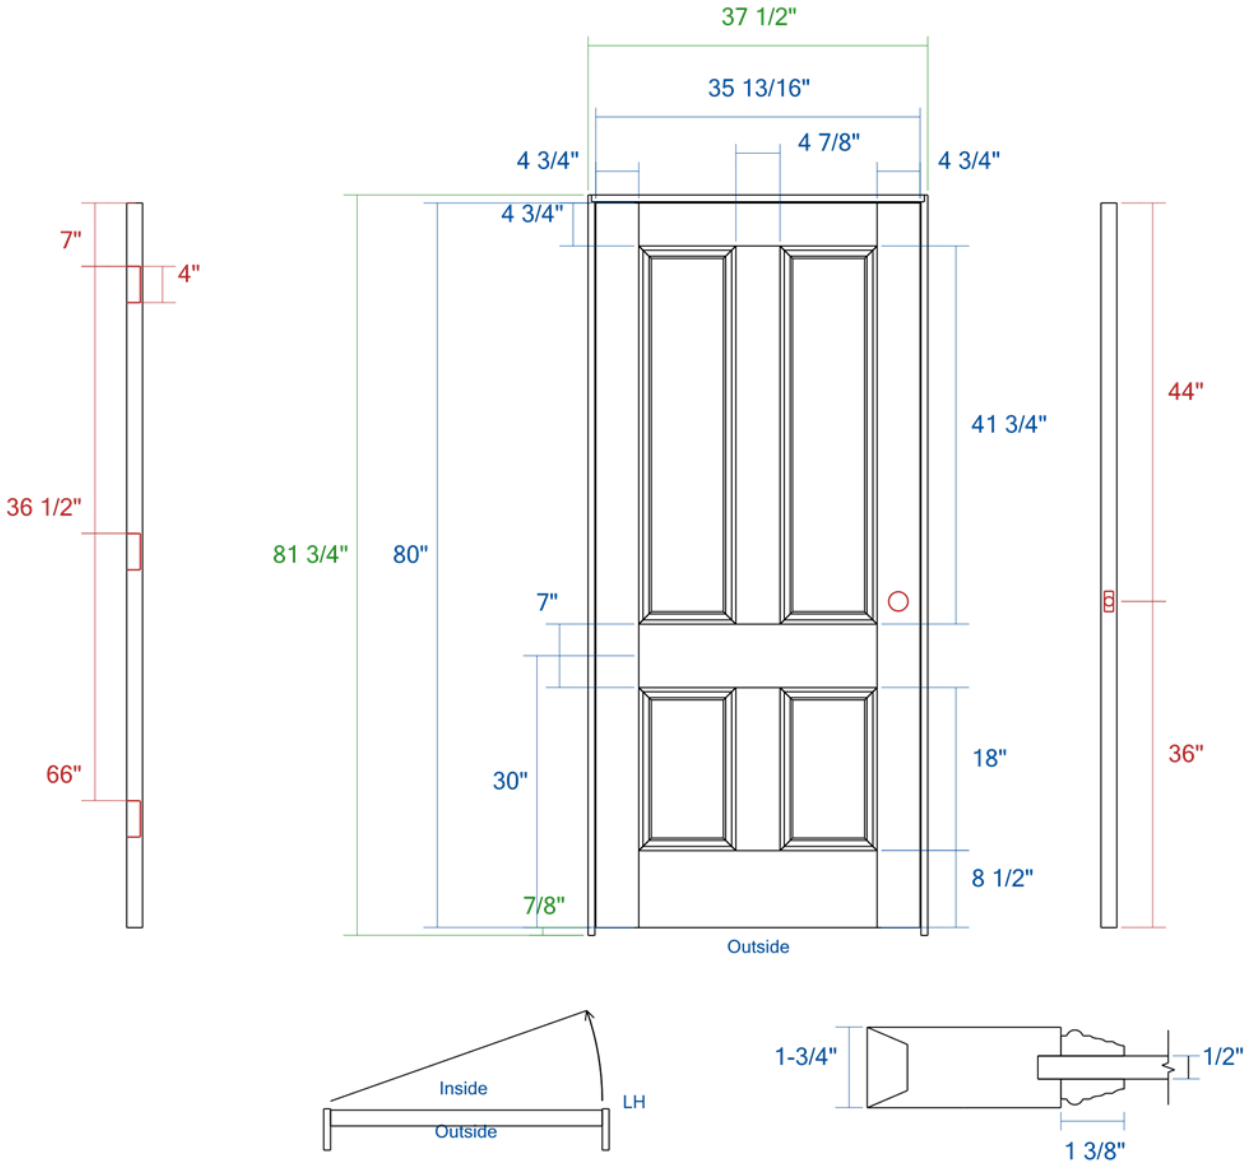


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TS4140	LP	C	MDF	N/A	Non-Rated	Interior

Quote #: SQAP005760-2	Line #: 3 - P2 107
The Kuiken Brothers Company	Entered By: Micah Kuiken
Approval (sign here):	Created On: 09/03/2026

Door Elevation

TruStile Doors, LLC
1111 E. 71st Ave.
Denver, CO. 80229
www.trustile.com

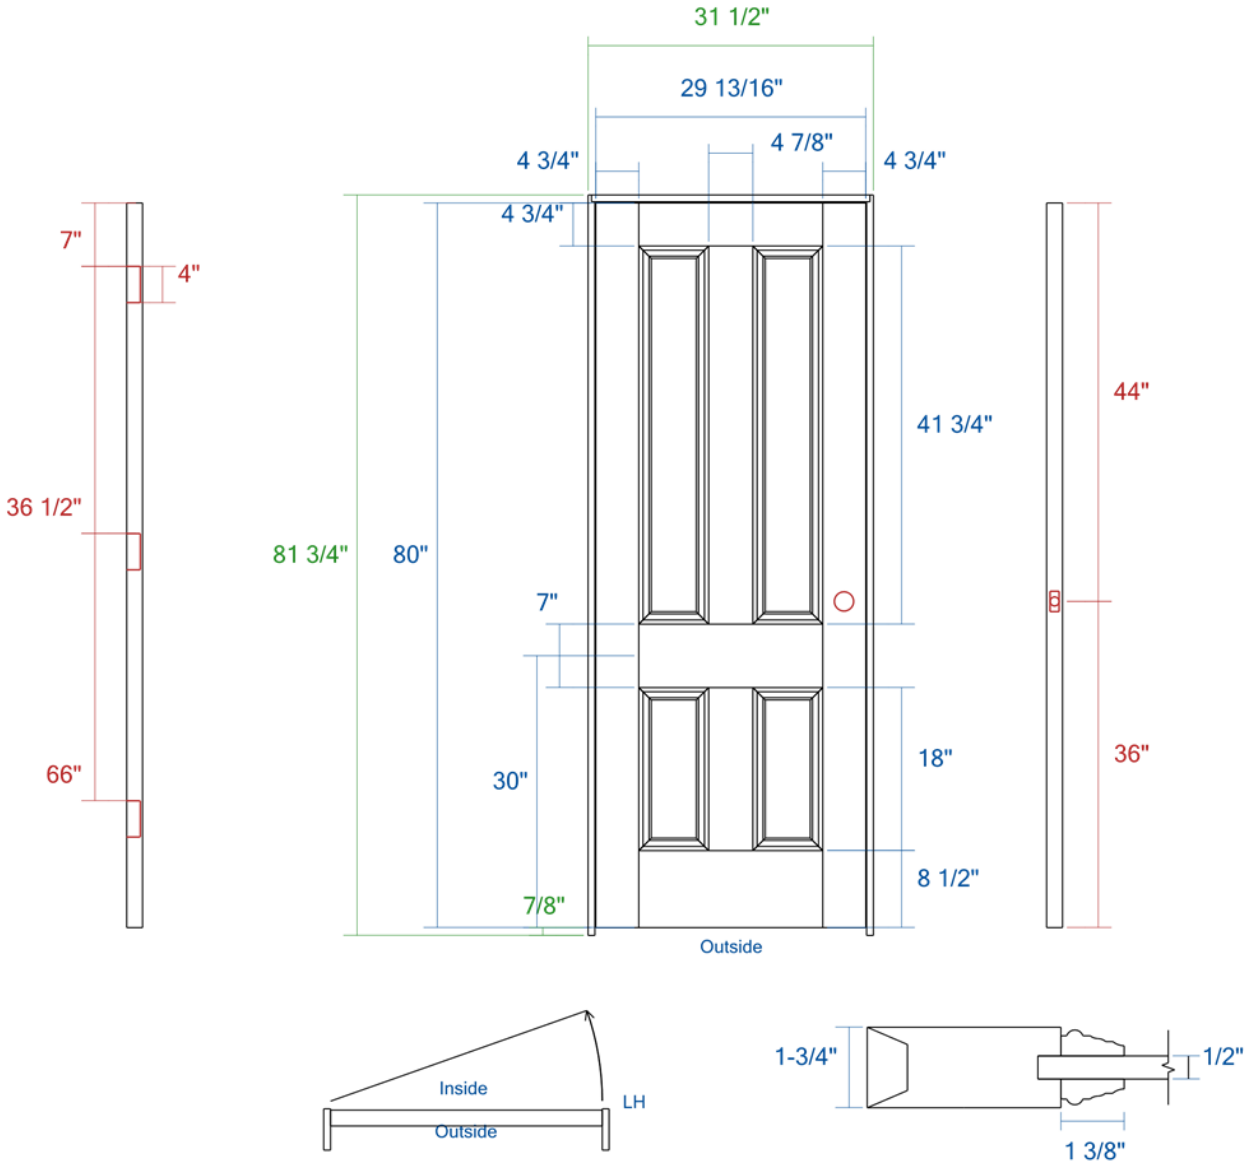


Jamb Width: 4 9/16"
Jamb Stop: Ogee (Applied)

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TS4140	LP	C	MDF	N/A	Non-Rated	Interior

Quote #: SQAP005760-2	Line #: 4 - P2 108
The Kuiken Brothers Company	Entered By: Micah Kuiken
Approval (sign here):	Created On: 09/03/2026

Entry System Elevation

TruStile Doors, LLC
1111 E. 71st Ave.
Denver, CO. 80229
www.trustile.com

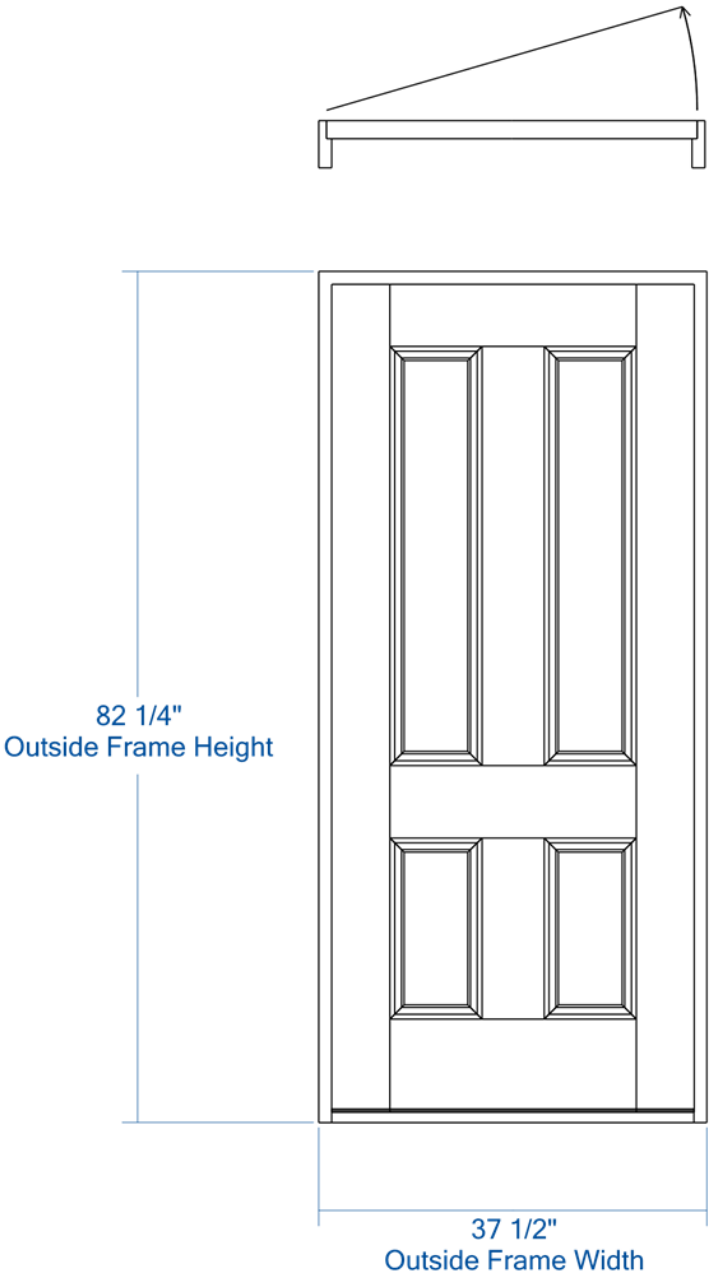


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
ES101			Resilient Engineered Wood	N/A	Non-Rated	Exterior

Quote #: SQAP005760-2	Line #: 5 - P3 103A
The Kuiken Brothers Company	Entered By: Micah Kuiken
Approval (sign here):	Created On: 09/03/2026

Door Detail

TruStile Doors, LLC
1111 E. 71st Ave.
Denver, CO. 80229
www.trustile.com

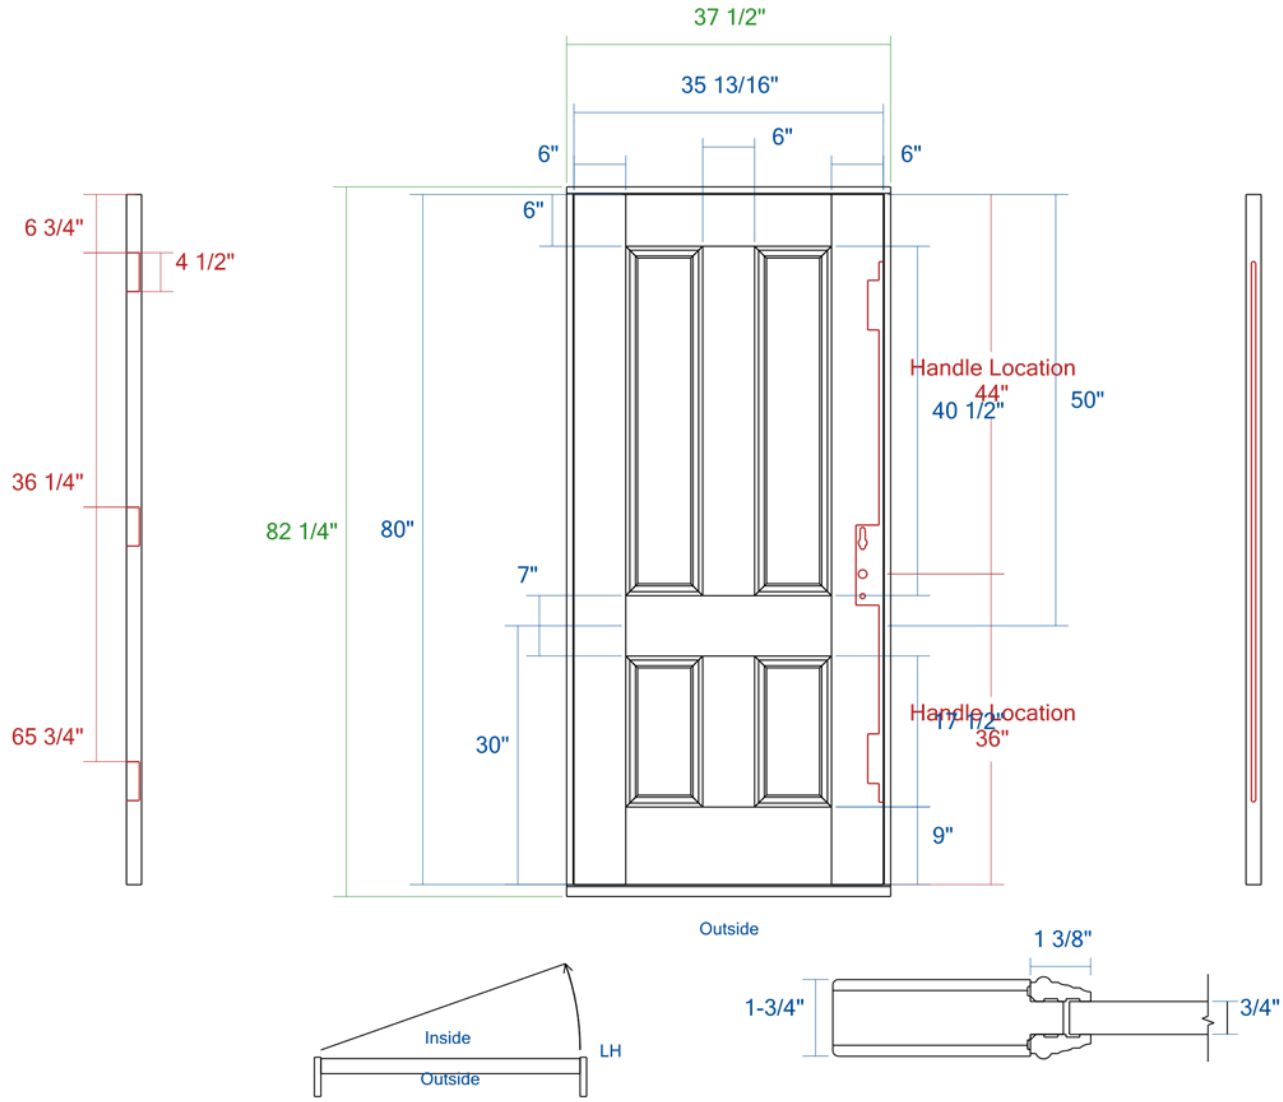


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TS4000	LP	C	Resilient Engineered Wood	N/A	Non-Rated	Exterior

Quote #: SQAP005760-2	Line #: 5 - P3 103A
The Kuiken Brothers Company	Entered By: Micah Kuiken
Approval (sign here):	Created On: 09/03/2026

Entry System Elevation

TruStile Doors, LLC
1111 E. 71st Ave.
Denver, CO. 80229
www.trustile.com

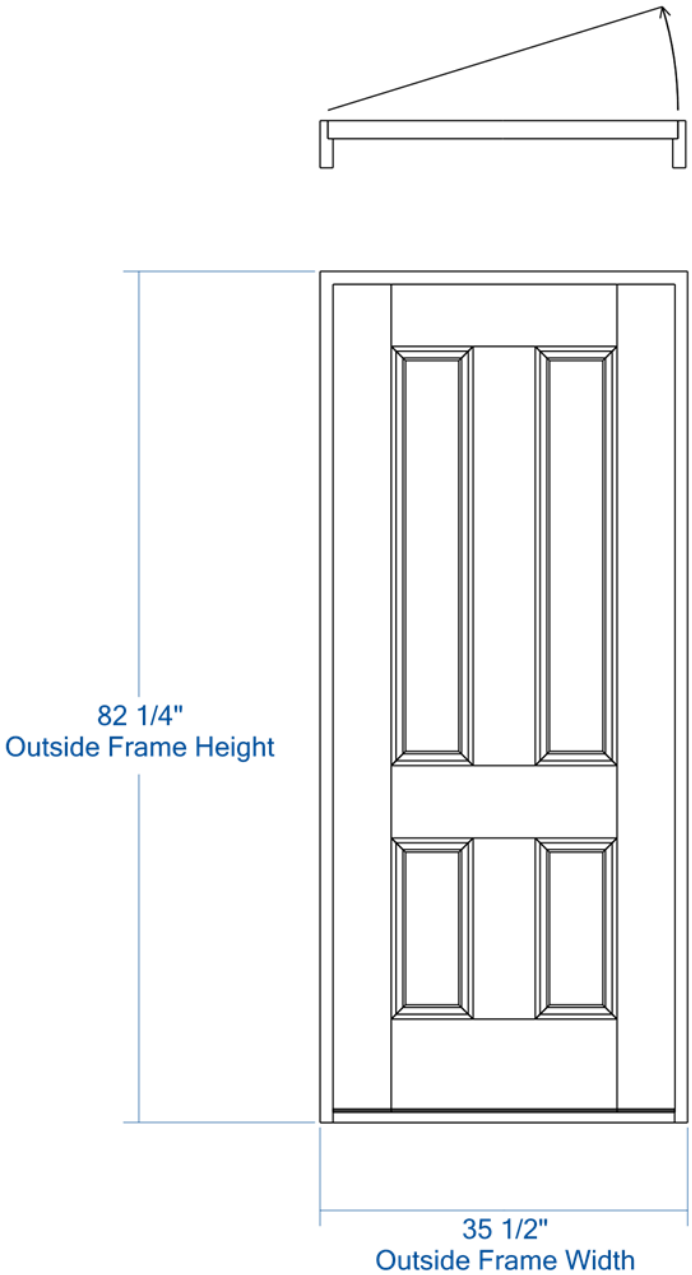

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
ES101			Resilient Engineered Wood	N/A	Non-Rated	Exterior

Quote #: SQAP005760-2	Line #: 6 - P3 104A
The Kuiken Brothers Company	Entered By: Micah Kuiken
Approval (sign here):	Created On: 09/03/2026




Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TS4000	LP	C	Resilient Engineered Wood	N/A	Non-Rated	Exterior

Quote #: SQAP005760-2	Line #: 6 - P3 104A
The Kuiken Brothers Company	Entered By: Micah Kuiken
Approval (sign here):	Created On: 09/03/2026

Entry System Elevation

TruStile Doors, LLC
1111 E. 71st Ave.
Denver, CO. 80229
www.trustile.com

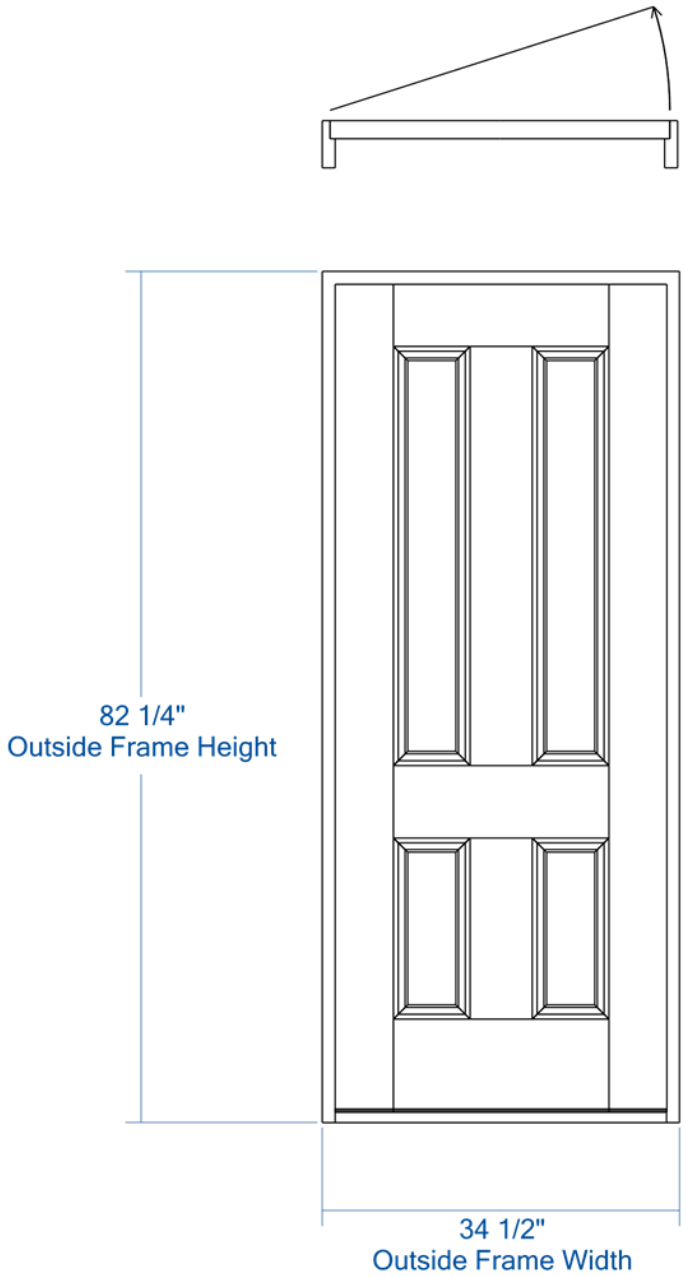

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
ES101			Resilient Engineered Wood	N/A	Non-Rated	Exterior

Quote #: SQAP005760-2	Line #: 7 - P3 106A
The Kuiken Brothers Company	Entered By: Micah Kuiken
Approval (sign here):	Created On: 09/03/2026




Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TS4000	LP	C	Resilient Engineered Wood	N/A	Non-Rated	Exterior

Quote #: SQAP005760-2	Line #: 7 - P3 106A
The Kuiken Brothers Company	Entered By: Micah Kuiken
Approval (sign here):	Created On: 09/03/2026

Door Elevation

TruStile Doors, LLC
1111 E. 71st Ave.
Denver, CO. 80229
www.trustile.com

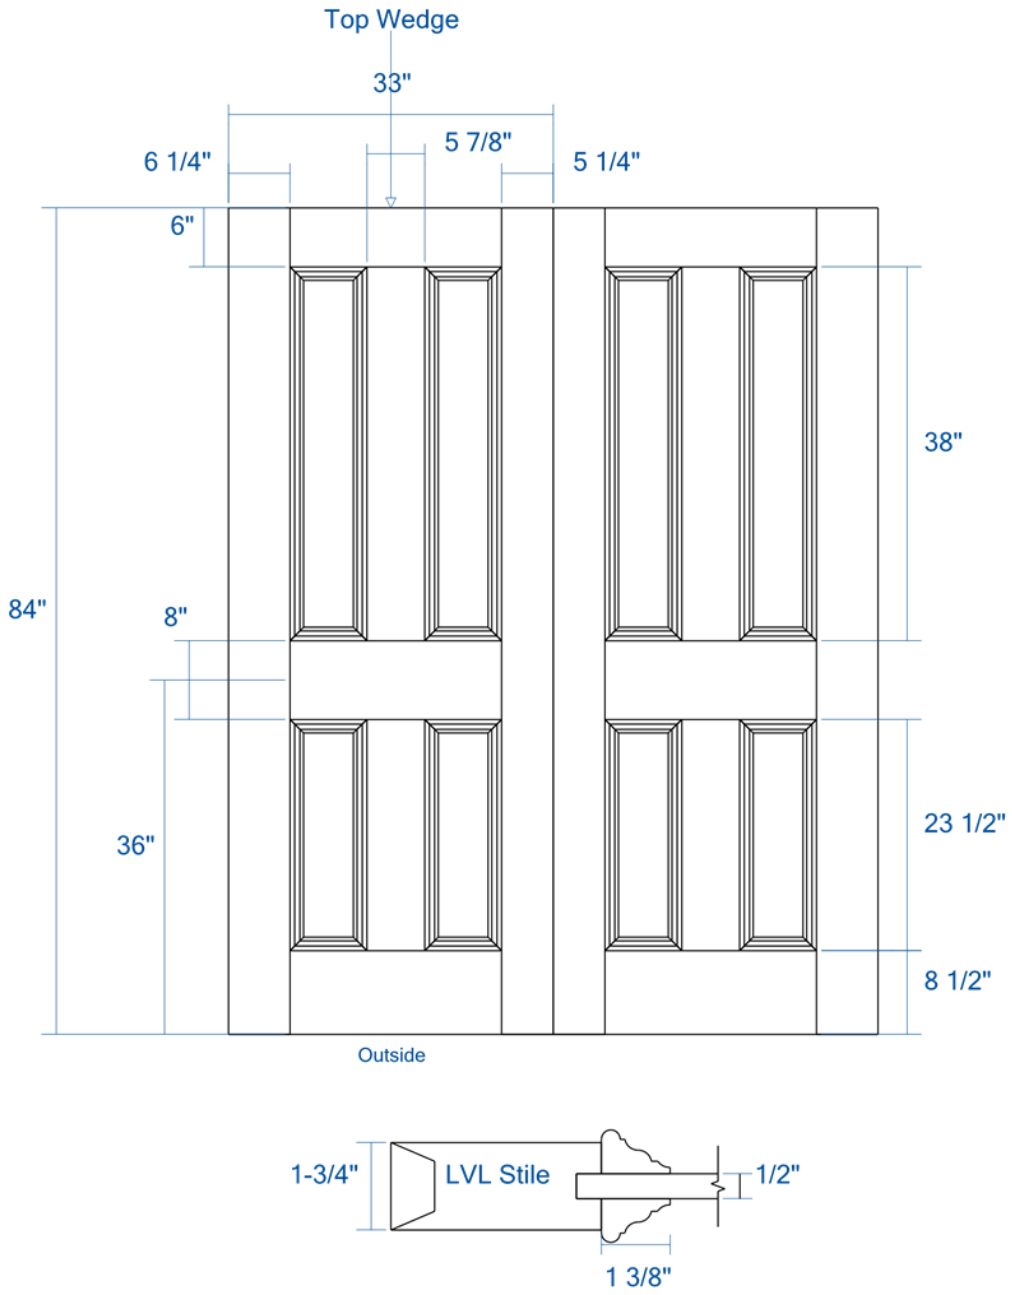

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TS4000	BM	C	MDF	N/A	Non-Rated	Interior

Quote #: SQAP005760-2	Line #: 8 - SL 102B
The Kuiken Brothers Company	Entered By: Micah Kuiken
Approval (sign here):	Created On: 09/03/2026