

assignment 2.ioc - Pinout & Configuration

Pinout & Configuration

Clock Configuration

Project Manager

Software Packs

Pinout

NVIC Mode and Configuration

Configuration

✓ NVIC ✓ Code generation


Priority Group 4 bit... ☐ Sort by Preemption Priority and Sub Priority

Search Show available interrupts

NVIC Interrupt Table	Enabled
Non maskable interrupt	☒
Hard fault interrupt	☒
Memory management fault	☒
Prefetch fault, memory access fault	☒
Undefined instruction or illegal state	☒
System service call via SWI instruction	☒
Debug monitor	☒
Pendable request for system service	☒
Time base: System tick timer	☒
PVD interrupt through EXTI line 16	☐
Flash global interrupt	☐
RCC global interrupt	☐
TIM1 break interrupt	☐
TIM1 update interrupt	☐
TIM1 trigger and commutation interrupts	☐
TIM1 capture compare interrupt	☐
TIM3 global interrupt	☒
I2C1 event interrupt	☐
I2C1 error interrupt	☐

Pinout view

System view

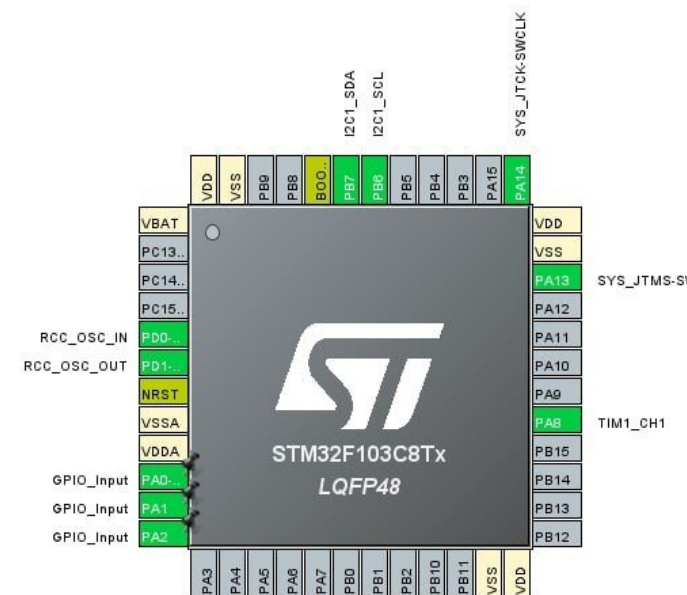

Power & Battery

Your battery is low
You should plug in your

workspace - Device Configuration Tool - STM32CubeIDE

File Edit Navigate Search Project Run Window Help

Project Explorer ×

- IDE assignment 2
 - Includes
 - Core
 - Drivers
 - assignment 2.ioc
 - STM32F103C8TX_FLASH

main.c × STM32F103C8TX_FLASH.Id × assignment 2.ioc ×

assignment 2.ioc - Pinout & Configuration

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Pinout view System view

Categories A->Z

- System Core >
- Analog >
- Timers >
- Connectivity >
- Computing >
- Middleware >

STM32F103C8Tx LQFP48

Pins and Functions:

- Top: VDD, VSS, PB9, PB8, B00, PB7, PB6, PB5, PB4, PB3, PA15, PA14, VDD, VSS
- Right: PA13 (SYS_JTMS-SWDIO), PA12, PA11, PA10, PA9, PA8 (TIM1_CH1), PB15, PB14, PB13, PB12
- Bottom: PA3, PA4, PA5, PA6, PA7, PB0, PB1, PB2, PB10, PB11, VSS, VDD
- Left: VBAT, PC13, PC14, PC15, PDD, NRST, VSSA, VDDA, GPIO_Input (PA0), GPIO_Input (PA1), GPIO_Input (PA2)
- Internal: RCC_OSC_IN, RCC_OSC_OUT, I2C1_SDA, I2C1_SCL, SYS_JTCK-SWCLK

assignment 2.ioc - Clock Configuration


Pinout & Configuration

Clock Configuration

Project Manager

Tools

Resolve Clock Issues

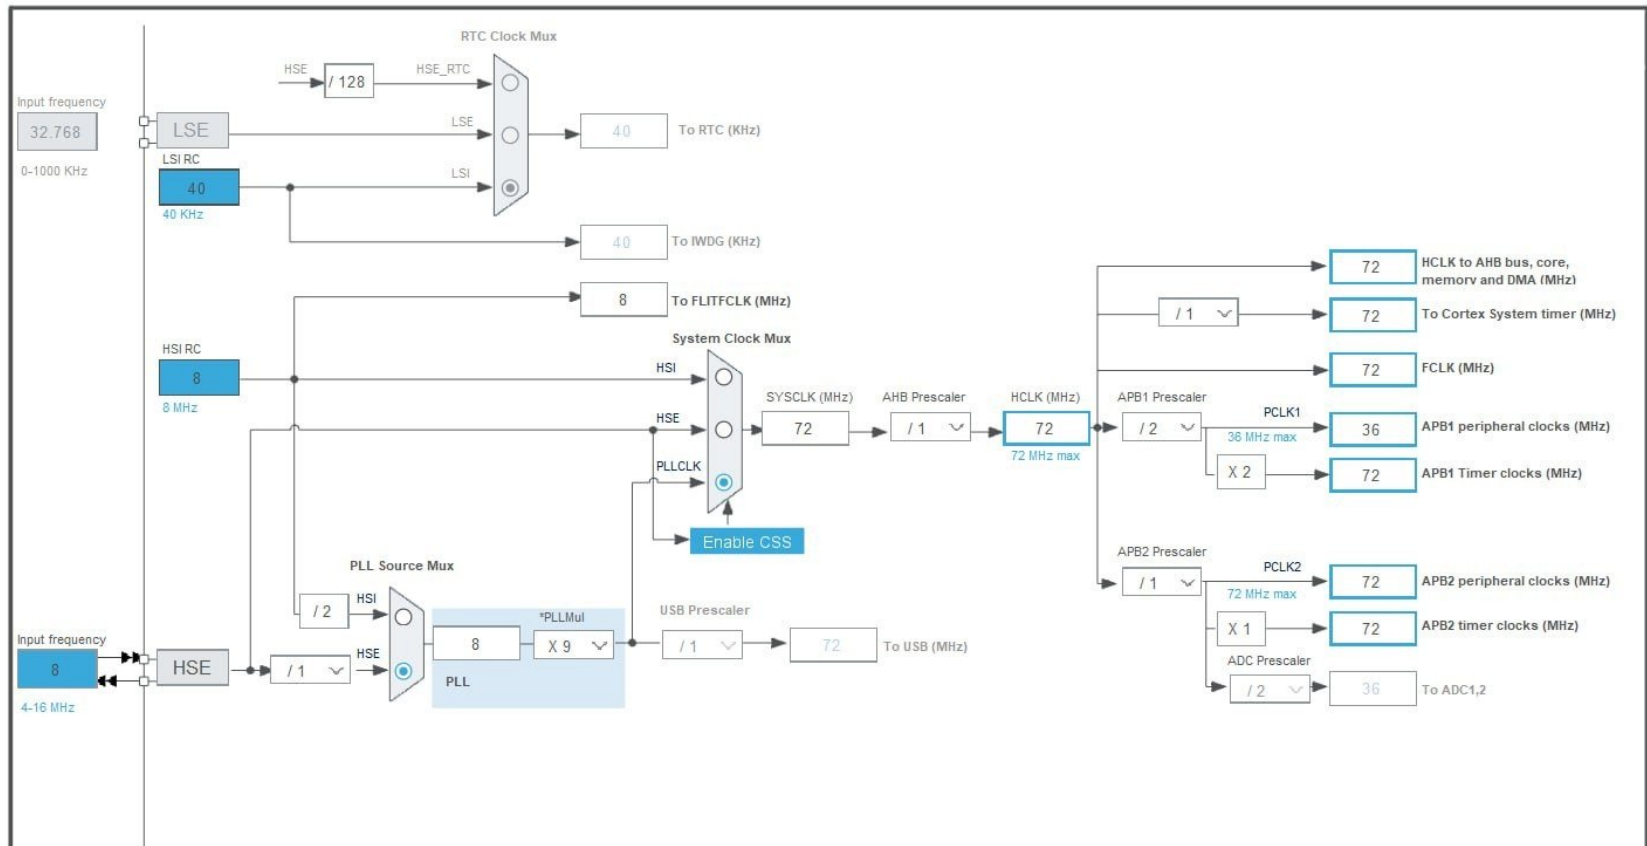

Pinout & Configuration

Clock Configuration

Project Manager

Software PacksPinout

Q

A->Z

Categories

Syste...

DMA

GPIO

IWDG

NVIC

RCC

SYS

WWDG

Analog >

Timers

RTC

TIM1

TIM2

TIM3

TIM4

Conne...

Comp...

TIM3 Mode and Configuration

Mode

Slave ModeDisable

Trigger SourceDisable

☒ Internal Clock

Channel1Disable

Channel2Disable

Channel3Disable

Channel4Disable

Combined ChannelsDisable

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

NVIC Settings

DMA Settings

Parameter Settings

User Constants

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC - 16 bits v.. 7199

Counter ModeUp

Counter Period (AutoRelo.. 4999

Internal Clock Division (C... No Division

auto-reload preloadDisable

Pinout view

System view

VDD

VSS

PB9

PB8

BOOT

PB7

PB6

PB5

PB4

PB3

PA15

PA14

VDD

VSS

PA13

PA12

PA11

PA10

PA9

PA8

PB15

PB14

PB13

PB12

VSS

VDD

PA3

PA4

PA5

PA6

PA7

PB0

PB1

PB2

PB10

PB11

STM32F103C8Tx

LQFP48

RCC_OSC_IN

RCC_OSC_OUT

GPIO_Input

GPIO_Input

GPIO_Input

I2C1_SDA

I2C1_SCL

SYS_JTCK-SWCLK

SYS_JTMS-SWDIO

TIM1_CH1

Windows Taskbar

IDE