
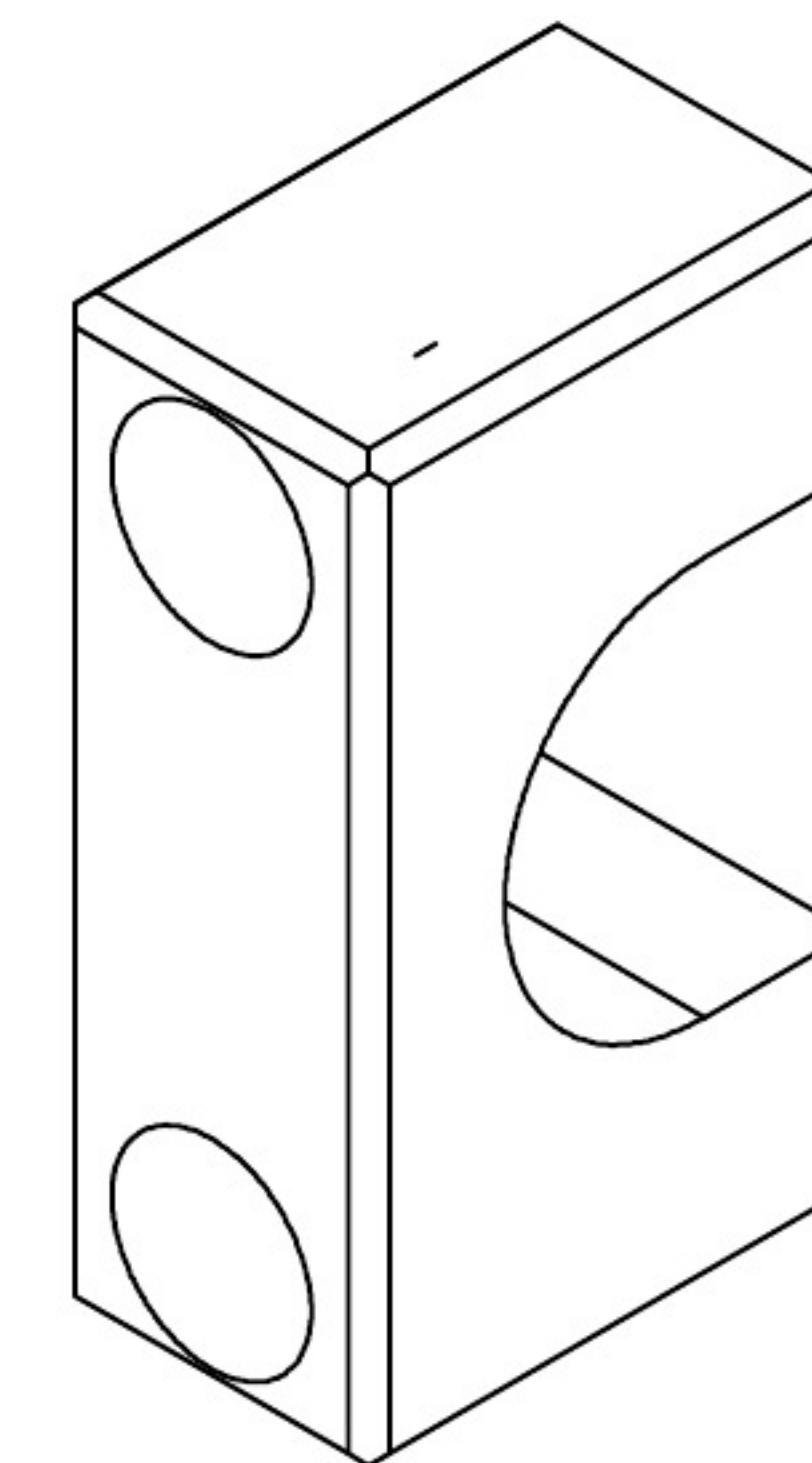
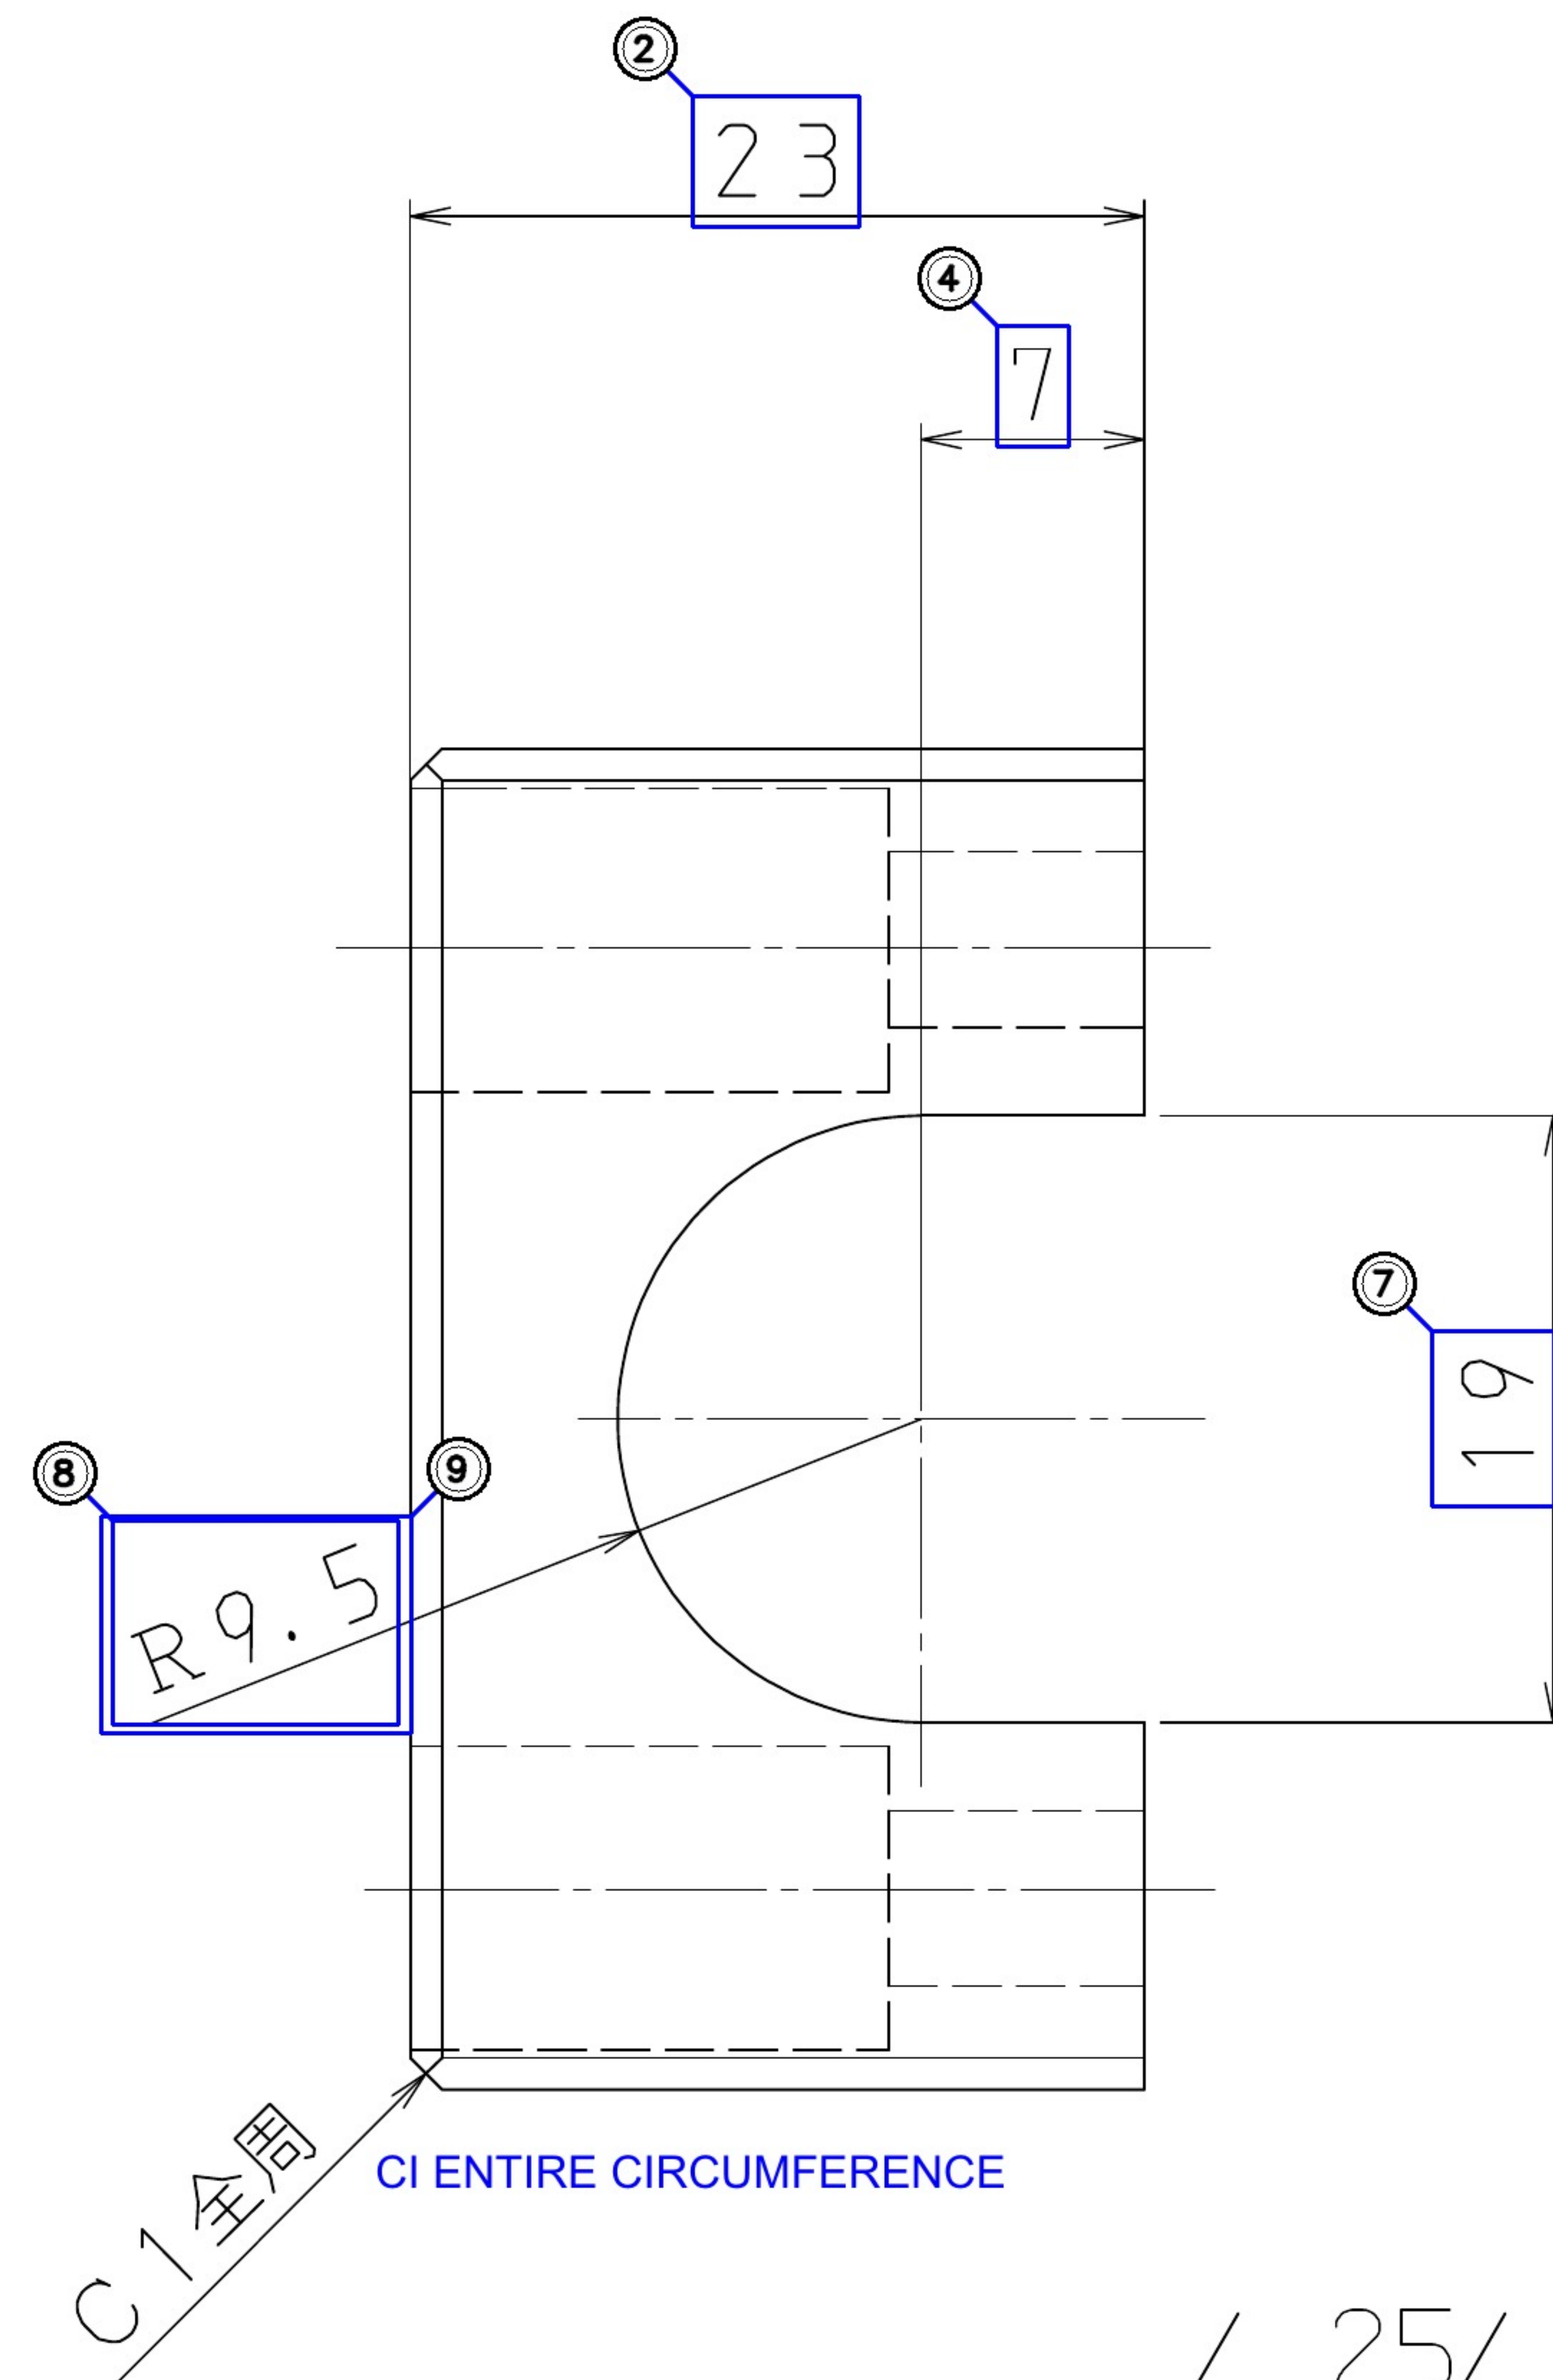


表面粗さ	三角記号と最大高さ粗さ (S)	面表
------	-----------------	----

寸法の区分	精級士	中級士	粗級士	極粗級士	旧表面粗さ S	表面粗さ Ra	記号	寸 法	PROJ.
0.5以上 3以下	0.05	0.1	0.2 0.3	— 0.5	~	✓	(無)	糸面(C0.1)	 (注) 寸法許容差を 記入していない ものは中級を 示す
3を超え 6以下						25/	C	0.3~0.5	
6" 30"	0.1	0.2	0.5	1	 35/  50S  100S	 8/ 12.5/ 25/	C1	C1.0~1.2	
30" 120"	0.15	0.3	0.8	1.5	 12.5S  25S	 32/  6.3/	インロー凸部は すべてC面とリ		
120" 400"	0.2	0.5	1.2	2.5	 6.3S	1.6/			
400" 1000"	0.3	0.8	2	4	 0.8S	0.2/	丸みRの寸法差 ±10%		
1000" 2000"	0.5	1.2	3	6					
2000" 4000"	—	2	4	8					

2	ADD EQUIVALENT MATERIAL	17.06.01	ALB	ALB
1	記載漏れ訂正 1 箇所 ADD MISSING (1 PLACE)	09. 09. 28	篠崎	国沢
番号	製 番 / 内 容 ・ 理 由	年 ・ 月 ・ 日	係	承 認
図 面 来 歴				

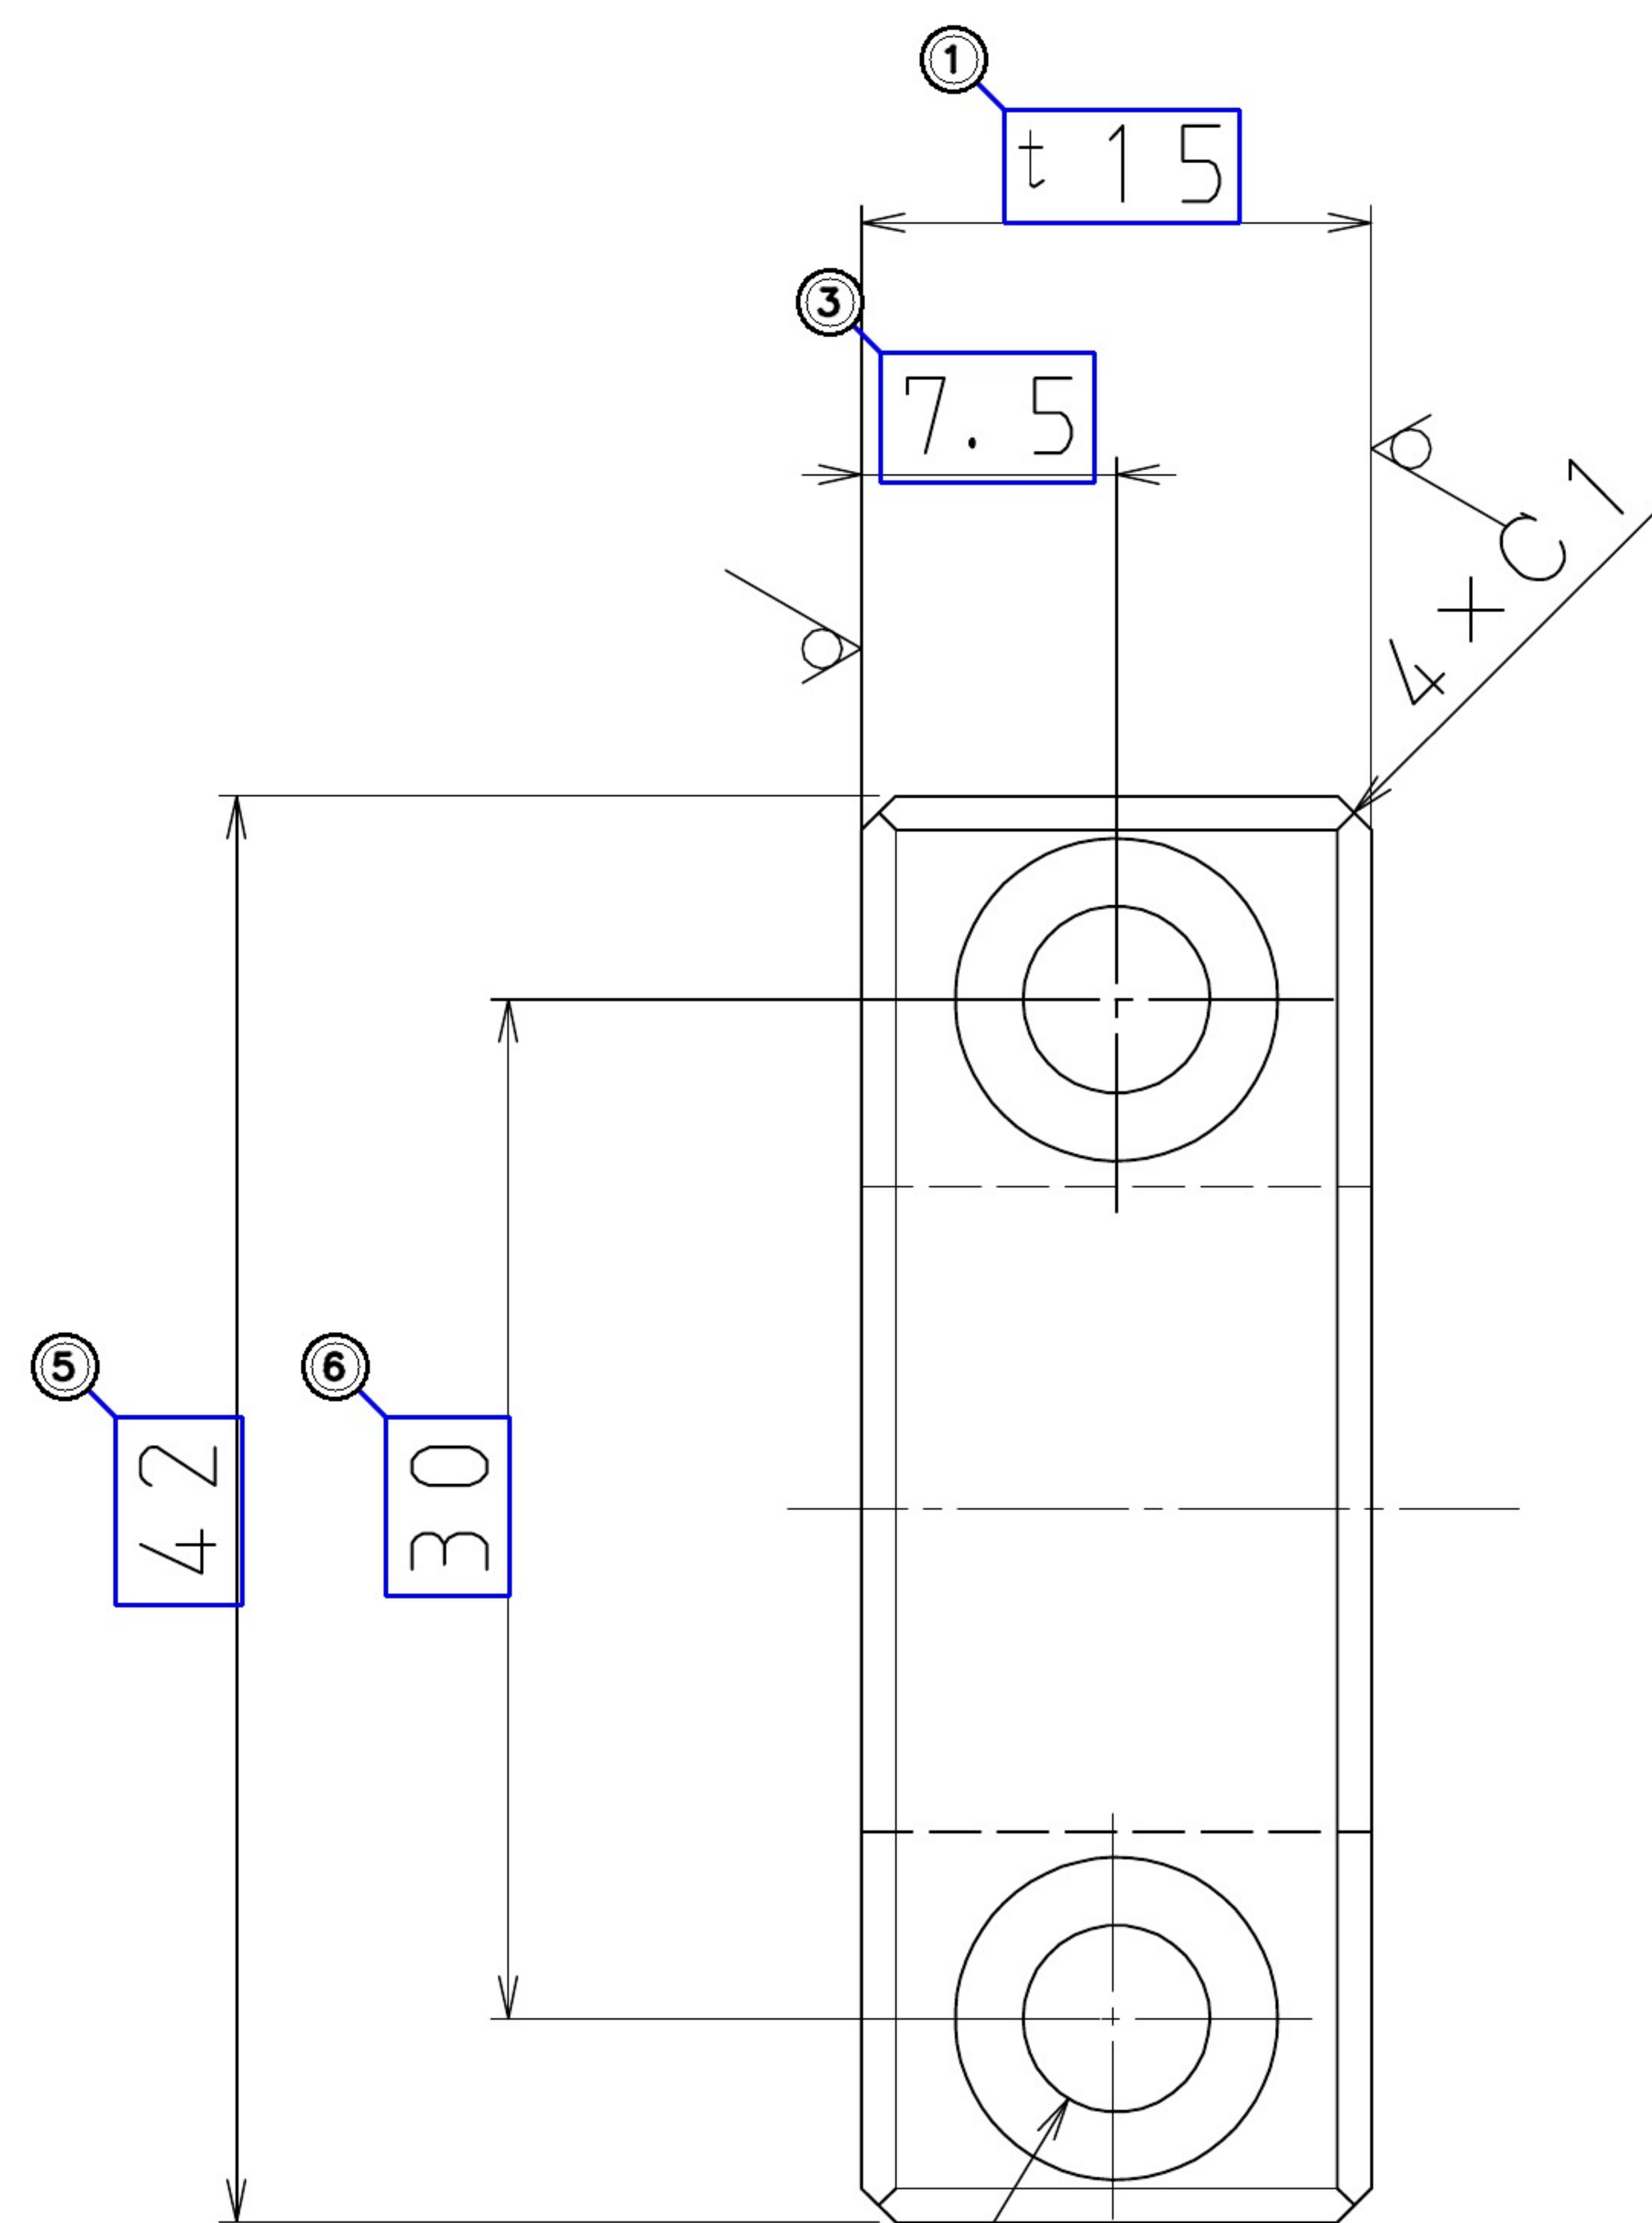

NOTE:

1. UNLESS OTHERWISE INDICATED, THE CHAMFER FOR CORNER IS C0.3 TO C0.5
2. DEGREASE AND CLEANING UPON DELIVERY
3. MATERIAL USE: UL94 (V-0) OR EQUIVALENT

記事

1. 指示なき角部はC0.3~0.4
2. 脱脂洗浄後納品
3. UL-94 (V-0) 相当品

[illegible]