NS--A2

DOC NO	AUTO-GENERATED	REV 00
PART NUMBER	C-3020-175-6400	
BALLOON DRAWING		PAGE 1 OF 1

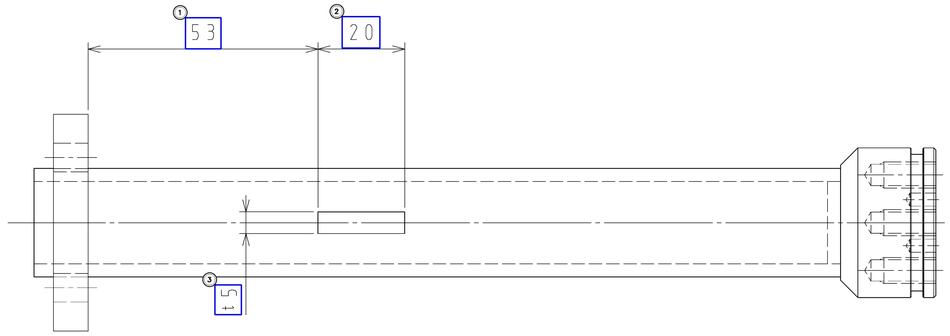

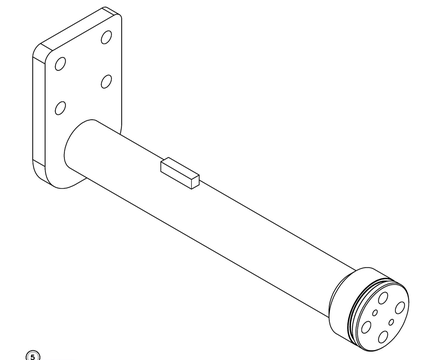

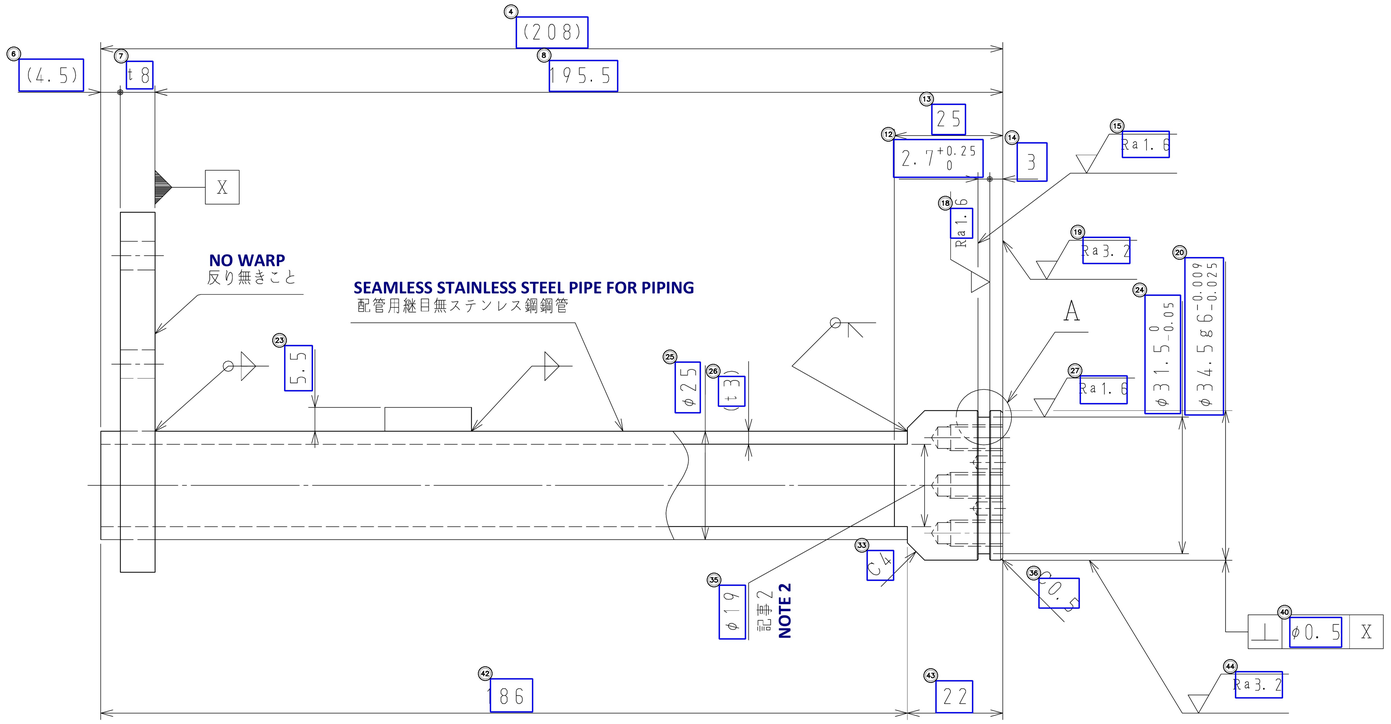

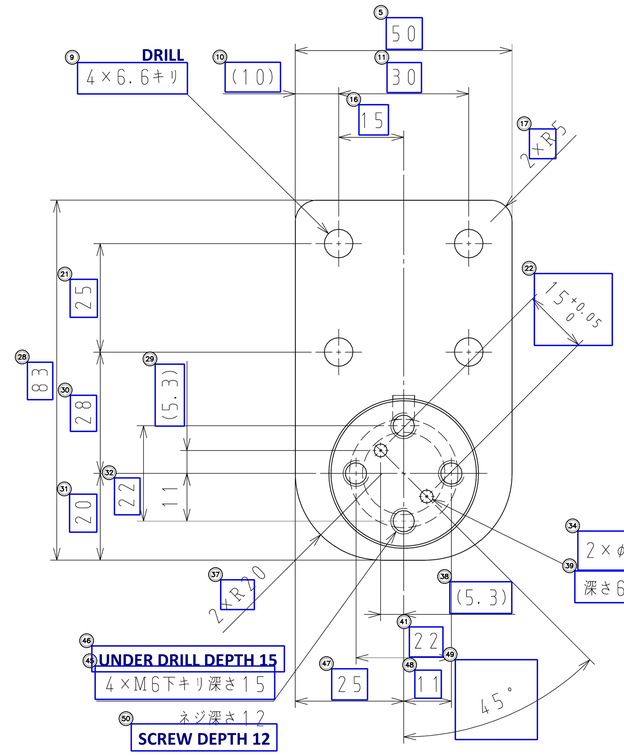



A PORTION DETAILS
A部詳細
S=5:1



NOTE:
1. MACHINE EACH PART BEFORE WELDING
2. MACHINING TOLERANCE MUST BE MINUS TOLERANCE IN ORDER TO TIGHT FIT INTO THE INNER DIAMETER OF THE PIPE WITHOUT RATTLING
3. THREAD CHAMFER FOR EDGE WITH NO INDICATION
4. ACID WASH THE WELDED LOCATION
5. DEGREASE AND CLEANING UPON DELIVERY

記事
1. 各部溶接前加工のこと
2. パイプ内径にガタつき無く入る様適宜マイナス公差で加工のこと
3. 指示無き角部は糸面取りのこと
4. 溶接部酸洗いのこと
5. 脱脂洗浄後納品のこと

EBARA PRECISION GREEN PROCUREMENT SUPPORT 荏原精密グリーン調達対応

常用	予備	常用予備	個/台	部品名	番号	材料	質量 kg	摘要	判別記号
					5				
					4				
					3				
					2				
			1	アトマイザ スタンド	1	SUS304	0.666		

大区分コード	承認 小菅	係員	設計 相澤 17.04.12	図名 BHY アトマイザ スタンド STAND, ATOMIZER
		調査	製図 堀地 17.04.12	尺度 1:1
製番		機名 F-REX300X		図番 W3-C171246401-00 REV.
木型番号 C-3020-175-6400		検 工 事 CAD		株式会社 荏原製作所

寸法の区分	精級±	中級±	粗級±	極粗級±
0.5以上 3以下	0.05	0.1	0.2	—
3を超え 6以下			0.3	0.5
6〃 30〃	0.1	0.2	0.5	1
30〃 120〃	0.15	0.3	0.8	1.5
120〃 400〃	0.2	0.5	1.2	2.5
400〃 1000〃	0.3	0.8	2	4
1000〃 2000〃	0.5	1.2	3	6
2000〃 4000〃	—	2	4	8

記号	寸法
(面)	面取(C0.1)
C	0.3~0.5
C1	C1.0~1.2

インロー凸部はすべてC面とり

丸みRの寸法差 ±10%

PROJ.

(注) 寸法許容差を記入していないものは中級を示す

番号	製番／内容・理由	年・月・日	係	承認
	図面来歴			

表面粗さ 記号	算術平均粗さ (Ra)	算術平均粗さ (S)	最大高さ粗さ (S)	適用
▽A	0.2	800	1600	2010年8月1日～
▽B	0.4	400	800	2003年4月1日～
▽C	0.8	200	400	1970年3月1日～
▽D	1.6	100	200	
▽E	3.2	50	100	
▽F	6.3	25	50	
▽G	12.5	12.5	25	
▽H	25	6.3	12.5	
▽I	50	3.2	6.3	
▽J	100	1.6	3.2	

流用元:W3-C1420863O1-00
変更内容:形状変更

作成理由:アトマイザー取り付け強化の為、新規作成
その他関連資料:無し

PM852C