MDCCINT_EL1, Monitor DCC Interrupt Enable Register

The MDCCINT_EL1 characteristics are:

Purpose

Enables interrupt requests to be signaled based on the DCC status flags.

Configuration

AArch64 System register MDCCINT_EL1 bits [31:0] are architecturally mapped to AArch32 System register DBGDCCINT[31:0].

Attributes

MDCCINT_EL1 is a 64-bit register.

Field descriptions

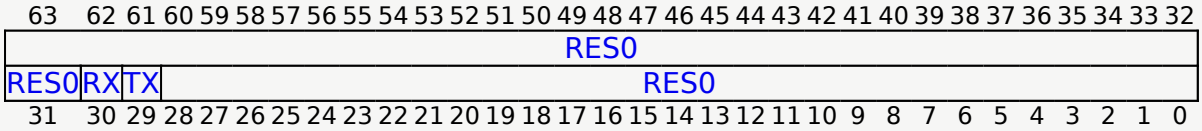

Bits [63:31]

Reserved, res0.

RX, bit [30]

DCC interrupt request enable control for DTRRX. Enables a common **COMMIRQ** interrupt request to be signaled based on the DCC status flags.

RX	Meaning
0b0	No interrupt request generated by DTRRX.
0b1	Interrupt request will be generated on RXfull == 1.

If legacy **COMMRX** and **COMMTX** signals are implemented, then these are not affected by the value of this bit.

The reset behavior of this field is:

- On a Warm reset, this field resets to `0`.

TX, bit [29]

DCC interrupt request enable control for DTRTX. Enables a common **COMMIRQ** interrupt request to be signaled based on the DCC status flags.

TX	Meaning
`0b0`	No interrupt request generated by DTRTX.
`0b1`	Interrupt request will be generated on TXfull == 0.

If legacy **COMMRX** and **COMMTX** signals are implemented, then these are not affected by the value of this bit.

The reset behavior of this field is:

- On a Warm reset, this field resets to `0`.

Bits [28:0]

Reserved, res0.

Accessing MDCCINT_EL1

Accesses to this register use the following encodings in the System register encoding space:

MRS <Xt>, MDCCINT_EL1

op0	op1	CRn	CRm	op2
0b10	0b000	0b0000	0b0010	0b000

```
if PSTATE.EL == EL0 then
    UNDEFINED;
elsif Halted() &&
ConstrainUnpredictableBool(Unpredictable_IGNORETRAPINDEBUG)
then
    X[t, 64] = MDCCINT_EL1;
elsif PSTATE.EL == EL1 then
    if Halted() && HaveEL(EL3) && EDSCR.SDD == '1'
&& boolean IMPLEMENTATION_DEFINED "EL3 trap priority
when SDD == '1'" && MDCR_EL3.TDCC == '1' then
        UNDEFINED;
    elsif Halted() && HaveEL(EL3) && EDSCR.SDD ==
```

```
'1' && boolean IMPLEMENTATION_DEFINED "EL3 trap
priority when SDD == '1'" && MDCR_EL3.TDA == '1' then
        UNDEFINED;
    elsif EL2Enabled() && MDCR_EL2.TDCC == '1' then
        AArch64.SystemAccessTrap(EL2, 0x18);
    elsif EL2Enabled() && MDCR_EL2.<TDE,TDA> != '00'
then
        AArch64.SystemAccessTrap(EL2, 0x18);
    elsif HaveEL(EL3) && MDCR_EL3.TDCC == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    elsif HaveEL(EL3) && MDCR_EL3.TDA == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    else
        X[t, 64] = MDCCINT_EL1;
elsif PSTATE.EL == EL2 then
    if Halted() && HaveEL(EL3) && EDSCR.SDD == '1'
&& boolean IMPLEMENTATION_DEFINED "EL3 trap priority
when SDD == '1'" && MDCR_EL3.TDCC == '1' then
        UNDEFINED;
    elsif Halted() && HaveEL(EL3) && EDSCR.SDD ==
'1' && boolean IMPLEMENTATION_DEFINED "EL3 trap
priority when SDD == '1'" && MDCR_EL3.TDA == '1' then
        UNDEFINED;
    elsif HaveEL(EL3) && MDCR_EL3.TDCC == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    elsif HaveEL(EL3) && MDCR_EL3.TDA == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    else
        X[t, 64] = MDCCINT_EL1;
elsif PSTATE.EL == EL3 then
    X[t, 64] = MDCCINT_EL1;
```

MSR MDCCINT_EL1, <Xt>

op0	op1	CRn	CRm	op2
0b10	0b000	0b0000	0b0010	0b000

```
if PSTATE.EL == EL0 then
    UNDEFINED;
elsif Halted() &&
ConstrainUnpredictableBool(Unpredictable_IGNORETRAPINDEBUG)
```

```
then
    MDCCINT_EL1 = X[t, 64];
elsif PSTATE.EL == EL1 then
    if Halted() && HaveEL(EL3) && EDSCR.SDD == '1'
&& boolean IMPLEMENTATION_DEFINED "EL3 trap priority
when SDD == '1'" && MDCR_EL3.TDCC == '1' then
        UNDEFINED;
    elsif Halted() && HaveEL(EL3) && EDSCR.SDD ==
'1' && boolean IMPLEMENTATION_DEFINED "EL3 trap
priority when SDD == '1'" && MDCR_EL3.TDA == '1' then
        UNDEFINED;
    elsif EL2Enabled() && MDCR_EL2.TDCC == '1' then
        AArch64.SystemAccessTrap(EL2, 0x18);
    elsif EL2Enabled() && MDCR_EL2.<TDE,TDA> != '00'
then
        AArch64.SystemAccessTrap(EL2, 0x18);
    elsif HaveEL(EL3) && MDCR_EL3.TDCC == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    elsif HaveEL(EL3) && MDCR_EL3.TDA == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    else
        MDCCINT_EL1 = X[t, 64];
elsif PSTATE.EL == EL2 then
    if Halted() && HaveEL(EL3) && EDSCR.SDD == '1'
&& boolean IMPLEMENTATION_DEFINED "EL3 trap priority
when SDD == '1'" && MDCR_EL3.TDCC == '1' then
        UNDEFINED;
    elsif Halted() && HaveEL(EL3) && EDSCR.SDD ==
'1' && boolean IMPLEMENTATION_DEFINED "EL3 trap
priority when SDD == '1'" && MDCR_EL3.TDA == '1' then
        UNDEFINED;
    elsif HaveEL(EL3) && MDCR_EL3.TDCC == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    elsif HaveEL(EL3) && MDCR_EL3.TDA == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    else
        MDCCINT_EL1 = X[t, 64];
elsif PSTATE.EL == EL3 then
    MDCCINT_EL1 = X[t, 64];
```