MPAM2_EL2, MPAM2 Register (EL2)

The MPAM2_EL2 characteristics are:

Purpose

Holds information to generate MPAM labels for memory requests when executing at EL2.

Configuration

AArch64 System register MPAM2_EL2 bit [63] is architecturally mapped to AArch64 System register MPAM3_EL3[63] when EL3 is implemented.

AArch64 System register MPAM2_EL2 bit [63] is architecturally mapped to AArch64 System register MPAM1_EL1[63].

This register is present only when FEAT_MPAM is implemented. Otherwise, direct accesses to MPAM2_EL2 are undefined.

This register has no effect if EL2 is not enabled in the current Security state.

Attributes

MPAM2_EL2 is a 64-bit register.

Field descriptions

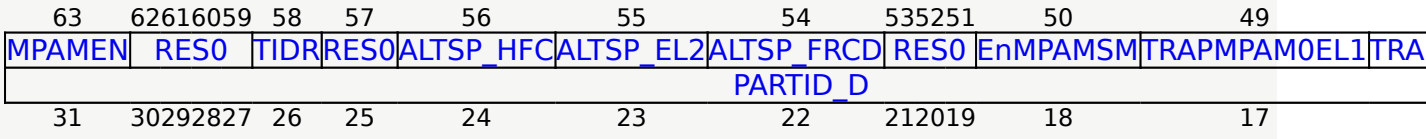

MPAMEN, bit [63]

MPAM Enable. MPAM is enabled when MPAMEN == 1. When disabled, all PARTIDs and PMGs are output as their default value in the corresponding ID space.

MPAMEN	Meaning
0b0	The default PARTID and default PMG are output in MPAM information from all Exception levels.

0b1	MPAM information is output based on the MPAMn_ELx register for ELn according to the MPAM configuration.

If EL3 is not implemented, this field is read/write.

If EL3 is implemented, this field is read-only and reads the current value of the read/write MPAM3_EL3.MPAMEN bit.

The reset behavior of this field is:

- On a Warm reset, this field resets to 0.

Accessing this field has the following behavior:

- When EL3 is not implemented, access to this field is **RW**.
- Otherwise, access to this field is **RO**.

Bits [62:59]

Reserved, res0.

TIDR, bit [58]
When (FEAT_MPAMv0p1 is implemented or FEAT_MPAMv1p1 is implemented) and MPAMIDR_EL1.HAS_TIDR == 1:

TIDR traps accesses to MPAMIDR_EL1 from EL1 to EL2.

TIDR	Meaning
0b0	This control does not cause any instructions to be trapped.
0b1	Trap accesses to MPAMIDR_EL1 from EL1 to EL2.

MPAMHCR_EL2.TRAP_MPAMIDR_EL1 == 1 also traps MPAMIDR_EL1 accesses from EL1 to EL2. If either TIDR or TRAP_MPAMIDR_EL1 are 1, accesses are trapped.

The reset behavior of this field is:

- On a Warm reset, this field resets to an architecturally unknown value.

Otherwise:

Reserved, res0.

Bit [57]

Reserved, res0.

ALTSP_HFC, bit [56]
When FEAT_RME is implemented and MPAMIDR_EL1.HAS_ALTSP == 1:

Hierarchical force of alternative PARTID space controls. When MPAM3_EL3.ALTSP_HEN is 0, ALTSP controls in MPAM2_EL2 have no effect. When MPAM3_EL3.ALTSP_HEN is 1, this bit selects whether the PARTIDs in MPAM1_EL1 and MPAM0_EL1 are in the primary (0) or alternative (1) PARTID space for the security state.

ALTSP_HFC	Meaning
0b0	When MPAM3_EL3.ALTSP_HEN is 1, the PARTID space of MPAM1_EL1.PARTID_I, MPAM1_EL1.PARTID_D, MPAM0_EL and MPAM0_EL1.PARTID_D are in the primary PARTID space Security state.
0b1	When MPAM3_EL3.ALTSP_HEN is 1, the PARTID space of MPAM1_EL1.PARTID_I, MPAM1_EL1.PARTID_D, MPAM0_EL and MPAM0_EL1.PARTID_D are in the alternative PARTID sp Security state.

This control has no effect when MPAM3_EL3.ALTSP_HEN is 0.

For more information, see 'Alternative PARTID spaces and selection' in ArmÂ® Architecture Reference Manual Supplement, Memory System Resource Partitioning and Monitoring (MPAM), for Armv8-A (ARM DDI 0598).

The reset behavior of this field is:

- On a Warm reset, this field resets to an architecturally unknown value.

Otherwise:

Reserved, res0.

ALTSP_EL2, bit [55]
When FEAT_RME is implemented and MPAMIDR_EL1.HAS_ALTSP == 1:

Select alternative PARTID space for PARTIDs in MPAM2_EL2 when MPAM3_EL3.ALTSP_HEN is 1.

ALTSP_EL2	Meaning
0b0	When MPAM3_EL3.ALTSP_HEN is 1, selects the primary PARTID space for MPAM2_EL2.PARTID_I and MPAM2_EL2.PARTID_D.

0b1	When MPAM3_EL3.ALTSP_HEN is 1, selects the alternative PARTID space for MPAM2_EL2.PARTID_I and MPAM2_EL2.PARTID_D.

For more information, see 'Alternative PARTID spaces and selection' in ArmÂ® Architecture Reference Manual Supplement, Memory System Resource Partitioning and Monitoring (MPAM), for Armv8-A (ARM DDI 0598).

The reset behavior of this field is:

- On a Warm reset, this field resets to an architecturally unknown value.

Otherwise:

Reserved, res0.

ALTSP_FRCD, bit [54]
When FEAT_RME is implemented and MPAMIDR_EL1.HAS_ALTSP == 1:

Alternative PARTID forced for PARTIDs in this register.

ALTSP_FRCD	Meaning
0b0	The PARTIDs in this register are using the primary PARTID space.
0b1	The PARTIDs in this register are using the alternative PARTID space.

This bit indicates that a higher Exception level has forced the PARTIDs in this register to use the alternative PARTID space defined for the current Security state. In EL2, it is also 1 when MPAM2_EL2.ALTSP_EL2 is 1.

For more information, see 'Alternative PARTID spaces and selection' in ArmÂ® Architecture Reference Manual Supplement, Memory System Resource Partitioning and Monitoring (MPAM), for Armv8-A (ARM DDI 0598).

The reset behavior of this field is:

- On a Warm reset, this field resets to an architecturally unknown value.

Access to this field is **RO**.

Otherwise:

Reserved, res0.

Bits [53:51]

Reserved, res0.

EnMPAMSM, bit [50]
When FEAT_SME is implemented:

Traps execution at EL1 of instructions that directly access the MPAMSM_EL1 register to EL2. The exception is reported using ESR_ELx.EC value `0x18`.

EnMPAMSM	Meaning
`0b0`	This control causes execution of these instructions at EL1 to be trapped.
`0b1`	This control does not cause execution of any instructions to be trapped.

This field has no effect on accesses to MPAMSM_EL1 from EL2 or EL3.

The reset behavior of this field is:

- On a Warm reset, this field resets to an architecturally unknown value.

Otherwise:

Reserved, res0.

TRAPMPAM0EL1, bit [49]

Trap accesses from EL1 to the MPAM0_EL1 register trap to EL2.

TRAPMPAM0EL1	Meaning
`0b0`	Accesses to MPAM0_EL1 from EL1 are not trapped.

0b1	Accesses to MPAM0_EL1 from EL1 are trapped to EL2.

The reset behavior of this field is:

- On a Warm reset:
  - When EL3 is not implemented, this field resets to 1.
  - When EL3 is implemented, this field resets to an architecturally unknown value.

TRAPMPAM1EL1, bit [48]

Trap accesses from EL1 to the MPAM1_EL1 register trap to EL2.

TRAPMPAM1EL1	Meaning
0b0	Accesses to MPAM1_EL1 from EL1 are not trapped.
0b1	Accesses to MPAM1_EL1 from EL1 are trapped to EL2.

The reset behavior of this field is:

- On a Warm reset:
  - When EL3 is not implemented, this field resets to 1.
  - When EL3 is implemented, this field resets to an architecturally unknown value.

PMG_D, bits [47:40]

Performance monitoring group for data accesses.

The reset behavior of this field is:

- On a Warm reset, this field resets to an architecturally unknown value.

PMG_I, bits [39:32]

Performance monitoring group for instruction accesses.

The reset behavior of this field is:

- On a Warm reset, this field resets to an architecturally unknown value.

PARTID_D, bits [31:16]

Partition ID for data accesses, including load and store accesses, made from EL2.

The reset behavior of this field is:

- On a Warm reset, this field resets to an architecturally unknown value.

PARTID_I, bits [15:0]

Partition ID for instruction accesses made from EL2.

The reset behavior of this field is:

- On a Warm reset, this field resets to an architecturally unknown value.

Accessing MPAM2_EL2

None of the fields in this register are permitted to be cached in a TLB.

Accesses to this register use the following encodings in the System register encoding space:

MRS <Xt>, MPAM2_EL2

op0	op1	CRn	CRm	op2
0b11	0b100	0b1010	0b0101	0b000

```
if PSTATE.EL == EL0 then
    UNDEFINED;
elsif PSTATE.EL == EL1 then
    if EL2Enabled() && HCR_EL2.NV == '1' then
        if HaveEL(EL3) && MPAM3_EL3.TRAPLOWER == '1'
then
            if Halted() && EDSCR.SDD == '1' then
                UNDEFINED;
            else
                AArch64.SystemAccessTrap(EL3, 0x18);
        else
            AArch64.SystemAccessTrap(EL2, 0x18);
    else
        UNDEFINED;
elsif PSTATE.EL == EL2 then
    if HaveEL(EL3) && MPAM3_EL3.TRAPLOWER == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
```

```
    else
        X[t, 64] = MPAM2_EL2;
elsif PSTATE.EL == EL3 then
    X[t, 64] = MPAM2_EL2;
```

MSR MPAM2_EL2, <Xt>

op0	op1	CRn	CRm	op2
0b11	0b100	0b1010	0b0101	0b000

```
if PSTATE.EL == EL0 then
    UNDEFINED;
elsif PSTATE.EL == EL1 then
    if EL2Enabled() && HCR_EL2.NV == '1' then
        if HaveEL(EL3) && MPAM3_EL3.TRAPLOWER == '1'
then
            if Halted() && EDSCR.SDD == '1' then
                UNDEFINED;
            else
                AArch64.SystemAccessTrap(EL3, 0x18);
        else
            AArch64.SystemAccessTrap(EL2, 0x18);
    else
        UNDEFINED;
elsif PSTATE.EL == EL2 then
    if HaveEL(EL3) && MPAM3_EL3.TRAPLOWER == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    else
        MPAM2_EL2 = X[t, 64];
elsif PSTATE.EL == EL3 then
    MPAM2_EL2 = X[t, 64];
```

MRS <Xt>, MPAM1_EL1

op0	op1	CRn	CRm	op2
0b11	0b000	0b1010	0b0101	0b000

```
if PSTATE.EL == EL0 then
    UNDEFINED;
elsif PSTATE.EL == EL1 then
    if HaveEL(EL3) && MPAM3_EL3.TRAPLOWER == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
```

```
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    elsif EL2Enabled() && MPAM2_EL2.TRAPMPAM1EL1 ==
'1' then
        AArch64.SystemAccessTrap(EL2, 0x18);
    elsif EL2Enabled() && HCR_EL2.<NV2,NV1,NV> ==
'111' then
        X[t, 64] = NVMem[0x900];
    else
        X[t, 64] = MPAM1_EL1;
elsif PSTATE.EL == EL2 then
    if HaveEL(EL3) && MPAM3_EL3.TRAPLOWER == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    elsif HCR_EL2.E2H == '1' then
        X[t, 64] = MPAM2_EL2;
    else
        X[t, 64] = MPAM1_EL1;
elsif PSTATE.EL == EL3 then
    X[t, 64] = MPAM1_EL1;
```

MSR MPAM1_EL1, <Xt>

op0	op1	CRn	CRm	op2
0b11	0b000	0b1010	0b0101	0b000

```
if PSTATE.EL == EL0 then
    UNDEFINED;
elsif PSTATE.EL == EL1 then
    if HaveEL(EL3) && MPAM3_EL3.TRAPLOWER == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    elsif EL2Enabled() && MPAM2_EL2.TRAPMPAM1EL1 ==
'1' then
        AArch64.SystemAccessTrap(EL2, 0x18);
    elsif EL2Enabled() && HCR_EL2.<NV2,NV1,NV> ==
'111' then
        NVMem[0x900] = X[t, 64];
    else
        MPAM1_EL1 = X[t, 64];
elsif PSTATE.EL == EL2 then
    if HaveEL(EL3) && MPAM3_EL3.TRAPLOWER == '1' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    elsif HCR_EL2.E2H == '1' then
        MPAM2_EL2 = X[t, 64];
    else
```

```
            MPAM1_EL1 = X[t, 64];
    elsif PSTATE.EL == EL3 then
        MPAM1_EL1 = X[t, 64];
```

28/03/2023 16:02; 72747e43966d6b97dcbd230a1b3f0421d1ea3d94

Copyright Â© 2010-2023 Arm Limited or its affiliates. All rights reserved. This document is Non-Confidential.