TFSR_EL2, Tag Fault Status Register (EL2)

The TFSR_EL2 characteristics are:

Purpose

Holds accumulated Tag Check Faults occurring in EL2 that are not taken precisely.

Configuration

This register is present only when FEAT_MTE2 is implemented. Otherwise, direct accesses to TFSR_EL2 are undefined.

Attributes

TFSR_EL2 is a 64-bit register.

Field descriptions

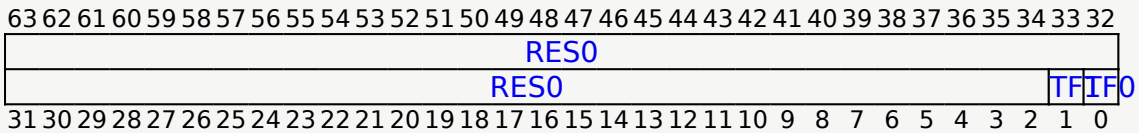

Bits [63:2]

Reserved, res0.

TF1, bit [1]

Tag Check Fault. Asynchronously set to 1 when a Tag Check Fault using a virtual address with bit[55] == `0b1` occurs.

When HCR_EL2.E2H==`0b0`, this field is res0.

The reset behavior of this field is:

- On a Warm reset, this field resets to an architecturally unknown value.

TF0, bit [0]

Tag Check Fault. Asynchronously set to 1 when a Tag Check Fault using a virtual address with bit[55] == `0b0` occurs.

The reset behavior of this field is:

- On a Warm reset, this field resets to an architecturally unknown value.

Accessing TFSR_EL2

When HCR_EL2.E2H is 1, without explicit synchronization, access from EL2 using the mnemonic TFSR_EL2 or TFSR_EL1 are not guaranteed to be ordered with respect to accesses using the other mnemonic.

Accesses to this register use the following encodings in the System register encoding space:

MRS <Xt>, TFSR_EL2

op0	op1	CRn	CRm	op2
0b11	0b100	0b0101	0b0110	0b000

```
if PSTATE.EL == EL0 then
    UNDEFINED;
elsif PSTATE.EL == EL1 then
    if EL2Enabled() && HCR_EL2.<NV2,NV> == '11' then
        if Halted() && HaveEL(EL3) && EDSCR.SDD ==
'1' && boolean IMPLEMENTATION_DEFINED "EL3 trap
priority when SDD == '1'" && SCR_EL3.ATA == '0' then
            UNDEFINED;
        elsif EL2Enabled() && HCR_EL2.ATA == '0' then
            AArch64.SystemAccessTrap(EL2, 0x18);
        elsif HaveEL(EL3) && SCR_EL3.ATA == '0' then
            if Halted() && EDSCR.SDD == '1' then
                UNDEFINED;
            else
                AArch64.SystemAccessTrap(EL3, 0x18);
        else
            X[t, 64] = TFSR_EL1;
    elsif EL2Enabled() && HCR_EL2.NV == '1' then
        AArch64.SystemAccessTrap(EL2, 0x18);
    else
        UNDEFINED;
elsif PSTATE.EL == EL2 then
    if Halted() && HaveEL(EL3) && EDSCR.SDD == '1'
&& boolean IMPLEMENTATION_DEFINED "EL3 trap priority
when SDD == '1'" && SCR_EL3.ATA == '0' then
        UNDEFINED;
    elsif HaveEL(EL3) && SCR_EL3.ATA == '0' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    else
        X[t, 64] = TFSR_EL2;
```

```
elsif PSTATE.EL == EL3 then
    X[t, 64] = TFSR_EL2;
```

MSR TFSR_EL2, <Xt>

op0	op1	CRn	CRm	op2
0b11	0b100	0b0101	0b0110	0b000

```
if PSTATE.EL == EL0 then
    UNDEFINED;
elsif PSTATE.EL == EL1 then
    if EL2Enabled() && HCR_EL2.<NV2,NV> == '11' then
        if Halted() && HaveEL(EL3) && EDSCR.SDD ==
'1' && boolean IMPLEMENTATION_DEFINED "EL3 trap
priority when SDD == '1'" && SCR_EL3.ATA == '0' then
            UNDEFINED;
        elsif EL2Enabled() && HCR_EL2.ATA == '0' then
            AArch64.SystemAccessTrap(EL2, 0x18);
        elsif HaveEL(EL3) && SCR_EL3.ATA == '0' then
            if Halted() && EDSCR.SDD == '1' then
                UNDEFINED;
            else
                AArch64.SystemAccessTrap(EL3, 0x18);
        else
            TFSR_EL1 = X[t, 64];
    elsif EL2Enabled() && HCR_EL2.NV == '1' then
        AArch64.SystemAccessTrap(EL2, 0x18);
    else
        UNDEFINED;
elsif PSTATE.EL == EL2 then
    if Halted() && HaveEL(EL3) && EDSCR.SDD == '1'
&& boolean IMPLEMENTATION_DEFINED "EL3 trap priority
when SDD == '1'" && SCR_EL3.ATA == '0' then
        UNDEFINED;
    elsif HaveEL(EL3) && SCR_EL3.ATA == '0' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    else
        TFSR_EL2 = X[t, 64];
elsif PSTATE.EL == EL3 then
    TFSR_EL2 = X[t, 64];
```

MRS <Xt>, TFSR_EL1

op0	op1	CRn	CRm	op2

0b11	0b000	0b0101	0b0110	0b000

```
if PSTATE.EL == EL0 then
    UNDEFINED;
elsif PSTATE.EL == EL1 then
    if Halted() && HaveEL(EL3) && EDSCR.SDD == '1'
&& boolean IMPLEMENTATION_DEFINED "EL3 trap priority
when SDD == '1'" && SCR_EL3.ATA == '0' then
        UNDEFINED;
    elsif EL2Enabled() && HCR_EL2.<NV2,NV1,NV> ==
'011' then
        AArch64.SystemAccessTrap(EL2, 0x18);
    elsif EL2Enabled() && HCR_EL2.ATA == '0' then
        AArch64.SystemAccessTrap(EL2, 0x18);
    elsif HaveEL(EL3) && SCR_EL3.ATA == '0' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    elsif EL2Enabled() && HCR_EL2.<NV2,NV1,NV> ==
'111' then
        X[t, 64] = NVMem[0x190];
    else
        X[t, 64] = TFSR_EL1;
elsif PSTATE.EL == EL2 then
    if Halted() && HaveEL(EL3) && EDSCR.SDD == '1'
&& boolean IMPLEMENTATION_DEFINED "EL3 trap priority
when SDD == '1'" && SCR_EL3.ATA == '0' then
        UNDEFINED;
    elsif HaveEL(EL3) && SCR_EL3.ATA == '0' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    elsif HCR_EL2.E2H == '1' then
        X[t, 64] = TFSR_EL2;
    else
        X[t, 64] = TFSR_EL1;
elsif PSTATE.EL == EL3 then
    X[t, 64] = TFSR_EL1;
```

MSR TFSR_EL1, <Xt>

op0	op1	CRn	CRm	op2
0b11	0b000	0b0101	0b0110	0b000

```
if PSTATE.EL == EL0 then
    UNDEFINED;
elsif PSTATE.EL == EL1 then
    if Halted() && HaveEL(EL3) && EDSCR.SDD == '1'
&& boolean IMPLEMENTATION_DEFINED "EL3 trap priority
when SDD == '1'" && SCR_EL3.ATA == '0' then
```

```
        UNDEFINED;
    elsif EL2Enabled() && HCR_EL2.<NV2,NV1,NV> ==
'011' then
        AArch64.SystemAccessTrap(EL2, 0x18);
    elsif EL2Enabled() && HCR_EL2.ATA == '0' then
        AArch64.SystemAccessTrap(EL2, 0x18);
    elsif HaveEL(EL3) && SCR_EL3.ATA == '0' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    elsif EL2Enabled() && HCR_EL2.<NV2,NV1,NV> ==
'111' then
        NVMem[0x190] = X[t, 64];
    else
        TFSR_EL1 = X[t, 64];
elsif PSTATE.EL == EL2 then
    if Halted() && HaveEL(EL3) && EDSCR.SDD == '1'
&& boolean IMPLEMENTATION_DEFINED "EL3 trap priority
when SDD == '1'" && SCR_EL3.ATA == '0' then
        UNDEFINED;
    elsif HaveEL(EL3) && SCR_EL3.ATA == '0' then
        if Halted() && EDSCR.SDD == '1' then
            UNDEFINED;
        else
            AArch64.SystemAccessTrap(EL3, 0x18);
    elsif HCR_EL2.E2H == '1' then
        TFSR_EL2 = X[t, 64];
    else
        TFSR_EL1 = X[t, 64];
elsif PSTATE.EL == EL3 then
    TFSR_EL1 = X[t, 64];
```

28/03/2023 16:02; 72747e43966d6b97dcbd230a1b3f0421d1ea3d94