ID_MMFR5_EL1, AArch32 Memory Model Feature Register 5

The ID_MMFR5_EL1 characteristics are:

Purpose

Provides information about the implemented memory model and memory management support in AArch32 state.

For general information about the interpretation of the ID registers, see 'Principles of the ID scheme for fields in ID registers'.

Configuration

AArch64 System register ID_MMFR5_EL1 bits [31:0] are architecturally mapped to AArch32 System register ID_MMFR5[31:0].

Attributes

ID_MMFR5_EL1 is a 64-bit register.

Field descriptions

When AArch32 is supported:

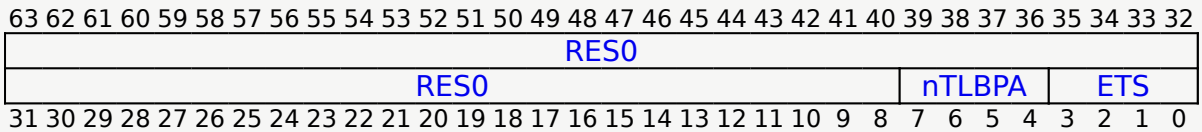

Bits [63:8]

Reserved, res0.

nTLBPA, bits [7:4]

Indicates support for intermediate caching of translation table walks. Defined values are:

nTLBPA	Meaning
0b0000	The intermediate caching of translation table walks might include non-coherent physical translation caches.

0b0001	The intermediate caching of translation table walks does not include non-coherent physical translation caches.

Non-coherent physical translation caches are non-coherent caches of previous valid translation table entries since the last completed relevant TLBI applicable to the PE, where either:

- The caching is indexed by the physical address of the location holding the translation table entry.
- The caching is used for stage 1 translations and is indexed by the intermediate physical address of the location holding the translation table entry.

All other values are reserved.

FEAT_nTLBPA implements the functionality identified by the value 0b0001.

From Armv8.0, the permitted values are 0b0000 and 0b0001.

ETS, bits [3:0]

Indicates support for Enhanced Translation Synchronization. Defined values are:

ETS	Meaning
0b0000	Enhanced Translation Synchronization is not supported.
0b0001	Enhanced Translation Synchronization is supported.

All other values are reserved.

FEAT_ETS implements the functionality identified by the value 0b0001.

From Armv8.0, the permitted values are 0b0000 and 0b0001.

From Armv8.7, the only permitted value is 0b0001.

Otherwise:

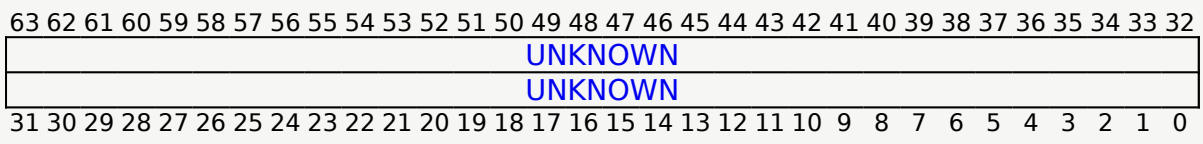

Bits [63:0]

Reserved, unknown.

Accessing ID_MMFR5_EL1

Accesses to this register use the following encodings in the System register encoding space:

MRS <Xt>, ID_MMFR5_EL1

op0	op1	CRn	CRm	op2
0b11	0b000	0b0000	0b0011	0b110

```
if PSTATE.EL == EL0 then
    if IsFeatureImplemented(FEAT_IDST) then
        if EL2Enabled() && HCR_EL2.TGE == '1' then
            AArch64.SystemAccessTrap(EL2, 0x18);
        else
            AArch64.SystemAccessTrap(EL1, 0x18);
    else
        UNDEFINED;
elsif PSTATE.EL == EL1 then
    if EL2Enabled() &&
(IsFeatureImplemented(FEAT_FGT) || !
IsZero(ID_MMFR5_EL1) || boolean
IMPLEMENTATION_DEFINED "ID_MMFR5_EL1 trapped by
HCR_EL2.TID3") && HCR_EL2.TID3 == '1' then
        AArch64.SystemAccessTrap(EL2, 0x18);
    else
        X[t, 64] = ID_MMFR5_EL1;
elsif PSTATE.EL == EL2 then
    X[t, 64] = ID_MMFR5_EL1;
elsif PSTATE.EL == EL3 then
    X[t, 64] = ID_MMFR5_EL1;
```


28/03/2023 16:01; 72747e43966d6b97dcbd230a1b3f0421d1ea3d94

Copyright Â© 2010-2023 Arm Limited or its affiliates. All rights reserved. This document is Non-Confidential.