

Order acknowledgement

To,
Name KLAUS FABER AG
Your Ref PO-004802
Address EUROPAALEE
SAARBRUCKEN 66113

Mobile +496819711422
Email info@faberkabel.de
Account N° at Customer
Customer number 134631

Confirmation No. 4620001963
Version No. 1 - 20.04.26
Date 15.04.2026
Currency EUR

Our Contact
Mobile
Email

Attention: Ship to
WUERZBURGER GMBH ELEKTROANLAGE
Kafkastraße 09 Nürnberg 90471 Germany

Nr.	Material No. & Description	UM	Req Date	Req. Quantity	Confirmed Date	Confirmed Quantity	Unit Price	Dis	Net Value
000010	FCL1A1D0144AGAL001	M	12.06.2026	30.000,0 00	12.06.2026	30.000,00 0	2.446,980 0		73.409,40
	A/I-DQ(ZN)HBH 12Tx12F NOVAB2ca gn								
	STL/FA								
	120843								
	Tol.+ :5,0 % Tol.- :5,0 %								
	Cable is supplied according to MB TDS n° 2538.F0.800 in lengths of 2500 meters +/- 5% - Green Outer Jacket -								
	Printing: 04507 - Single Mode FRNC Metro A/I-DQ(ZN)HBH B2ca-s1a,d1,a1 12x12E9 - Year - Batch Nr. + meter marking								
	TOTAL								
									73.409,40

Destination address:
WUERZBURGER GMBH
ELEKTROANLAGEN
Kafkastraße 5
Betriebsgelaende der VAG
90471 Nürnberg
Germany

Note for delivery date: the above delivery date is the dispatching date. For DAP Nuernberg delivery date please add 5/6 working days transit time

Commercial Terms and Conditions

Customer PO Number and Date: PO-004802 10.04.2026
Delivery Terms: DAP Nürnberg - Germany
Payment terms : S030 BT 30 DAYS INV. DATE END MONTH
Packing : WOODEN DRUMS ON PALLETS - INCLUDED -
Notes and Comments: TOLERANCES +/- 5% LENGTHS AND ORDER




Metallurgica Bresciana s.p.a.

Technical Dept.

TECHNICAL DATA SHEET

Specification n°2538.FO.800

MULTITUBE OPTICAL CABLES
DIELECTRIC ARMOUR
CPR UE 305/11: B2ca, s1a, d1, a1

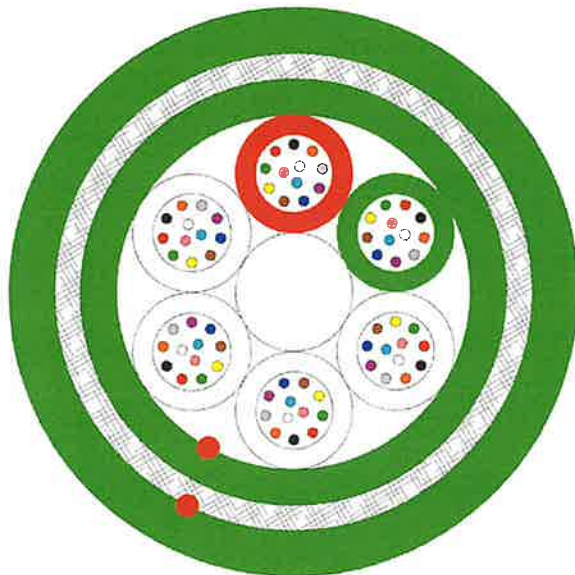

Intended use:

Optical Cable for telecommunication in buildings and other civil engineer works subject to fire reaction requirement

Normative reference:

- EU regulation n° 305/2011
- EN 50575:2014 + A1:2016

Fire reaction Euroclass:

- B2ca, s1a, d1, a1

0	EMISSION	10/09/19				CABLE CODE
7	REVISION	07/10/24	<i>BBB</i>	<i>Maion</i>	<i>fu</i>	
8	REVISION	16/12/24	<i>BBB</i>	<i>Maion</i>	<i>fu</i>	Replace n.
9	REVISION	24/02/26	<i>BBB</i>	<i>Maion</i>	<i>fu</i>	Of
Rev.	Description	Date	Drawn up	Controlled	Seen	Sheet 1 of 3



Metallurgica Bresciana s.p.a.

Technical Dept.

TECHNICAL DATA SHEET

Specification n°2538.FO.800

CONSTRUCTION:

- Fibre:
 - single-mode SM 9/125/250 µm (ITU-T G.652.D)
 - other fibre types available on request* - multi-mode MM 50/125/250 µm (IEC 60793-2-10 A1)
 - Tube:
 - PBT tube, jelly filled, containing up to 24 fibres
 - Fibres/Tubes identification: as per chosen colour code
 - Assembly:
 - tubes with fibres + eventual fillers are stranded together around an FRP (fiberglass reinforced plastic) central strength element. Water blocking elements provided.
 - Inner sheath:
 - LSZH compound type M16 according to CEI 20-11/0-1;V1
 - other colours available on request* colour: - green (RAL 6029)
 - Armour:
 - dielectric, composed by glass yarns
 - Outer sheath:
 - LSZH compound type M16 according to CEI 20-11/0-1;V1
 - other colours available on request* colour: - green (RAL 6029)
 - nominal thickness: 1,50 mm
 - maximum diameter:
 - TOL6D: 15,20 mm
 - TOL8D: 14,70 mm
 - TOL10D: 15,70 mm
 - TOL12D: 16,20 mm
 - Ripcord: optional
- Marking (Ink-Jet):
customisable on request "METALLURGICA BRESCIANA year- OPTICAL CABLE
 TOL...D n°FO n°TUBES(n°FO [FO type])T/MVM – B2ca, s1a, d1, a1"
 + eventual Client customization

0	EMISSION	10/09/19				CABLE CODE
7	REVISION	07/10/24	<i>Robusti</i>	<i>Mauro</i>	<i>Luca</i>	
8	REVISION	16/12/24	<i>Robusti</i>	<i>Mauro</i>	<i>Luca</i>	Replace n.
9	REVISION	24/02/26	<i>Robusti</i>	<i>Mauro</i>	<i>Luca</i>	Of
Rev.	Description	Date	Drawn up	Controlled	Seen	Sheet 2 of 3



Metallurgica Bresciana s.p.a.

Technical Dept.

TECHNICAL DATA SHEET

Specification n°2538.FO.800

POTENTIALITY

ITEM	CEI UNEL Identification	ITEM	CEI UNEL Identification
1	TOL6D 4 1(4 "FO")T/MVM	9	TOL6D 96 4(24 "FO")T/MVM
2	TOL6D 6 1(6 "FO")T/MVM	10	TOL6D 120 5(24 "FO")T/MVM
3	TOL6D 12 1(12 "FO")T/MVM	11	TOL6D 144 6(24 "FO")T/MVM
4	TOL6D 24 2(12 "FO")T/MVM	12	TOL8D 96 8(12 "FO")T/MVM
5	TOL6D 36 3(12 "FO")T/MVM	13	TOL8D 192 8(24 "FO")T/MVM*
6	TOL6D 48 4(12 "FO")T/MVM	14	TOL10D 240 10(24 "FO")T/MVM*
7	TOL6D 60 5(12 "FO")T/MVM	15	TOL12D 288 12(24 "FO")T/MVM*
8	TOL6D 72 6(12 "FO")T/MVM	16	TOL12D 144 12(12 "FO")T/MVM

Note: substitute "FO" with chosen optic fibre; other "tubes/fibres" distributions available on request

* 200µm fibre is MANDATORY

CHARACTERISTICS:

- Approximate weight:

TOL6D	220 Kg/Km
TOL8D	230 Kg/Km
TOL10D	235 Kg/Km
TOL12D	240 Kg/Km
- Minimum bending radius:

IEC 60794-1-21-E11	10 x Ø	(static)
	15 x Ø	(dynamic)
- Operating temperature: IEC 60794-1-22-F1 -30°C +70°C
- Pulling tension: IEC 60794-1-21-E1 2.500 N (max. fibre strain 0,33%)
- Crush resistance: IEC 60794-1-21 E3 2.000 N/10 cm (short term)
- Impact: IEC 60794-1-21 E4 5 J
- Smoke density: IEC 61034-1&2 (CEI 20-37/3-1)
 - Transmittance: ≥ 60 %
- Amount of halogen acid gas during the combustion: IEC 60754-1 (CEI 20-37/2-1)
 - HCl: ≤ 0,5 %
- Degree of acidity of gasses (corrosivity) IEC 60754-2 (CEI 20-37/2-2)
 - pH: ≥ 4,3
 - conductivity: ≤ 10 µS/mm

0	EMISSION	10/09/19				CABLE CODE
7	REVISION	07/10/24	<i>Belucchi</i>	<i>Wasson</i>	<i>low</i>	
8	REVISION	16/12/24	<i>Belucchi</i>	<i>Wasson</i>	<i>low</i>	Replace n.
9	REVISION	24/02/26	<i>Belucchi</i>	<i>Wasson</i>	<i>low</i>	Of
Rev.	Description	Date	Drawn up	Controlled	Seen	Sheet 3 of 3