
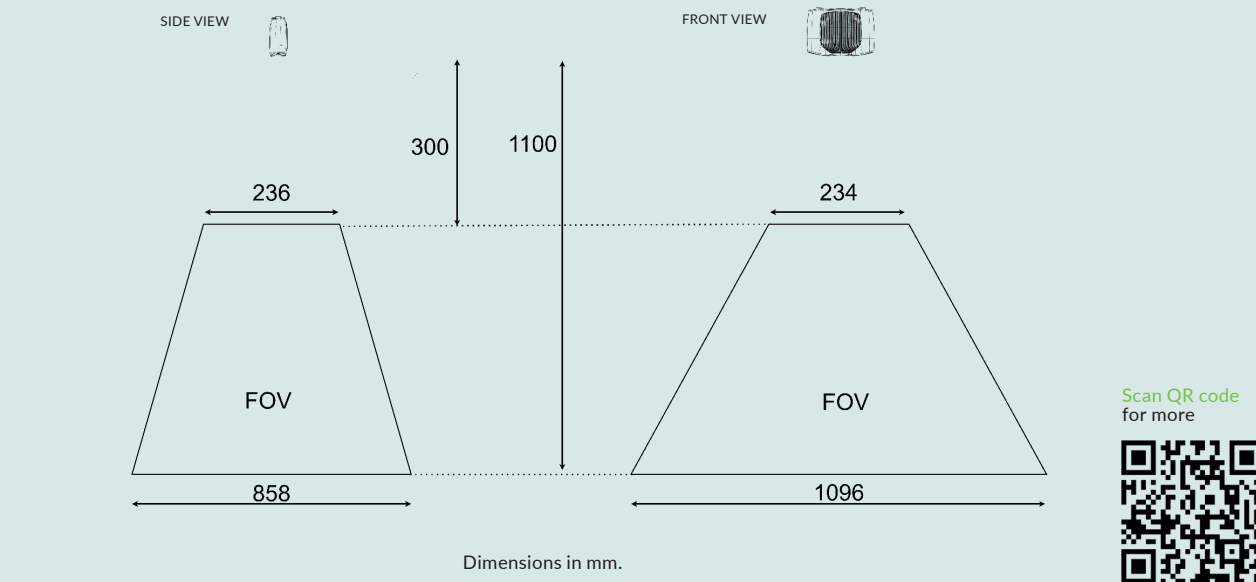


Pickit M-HD2-MR60 facts

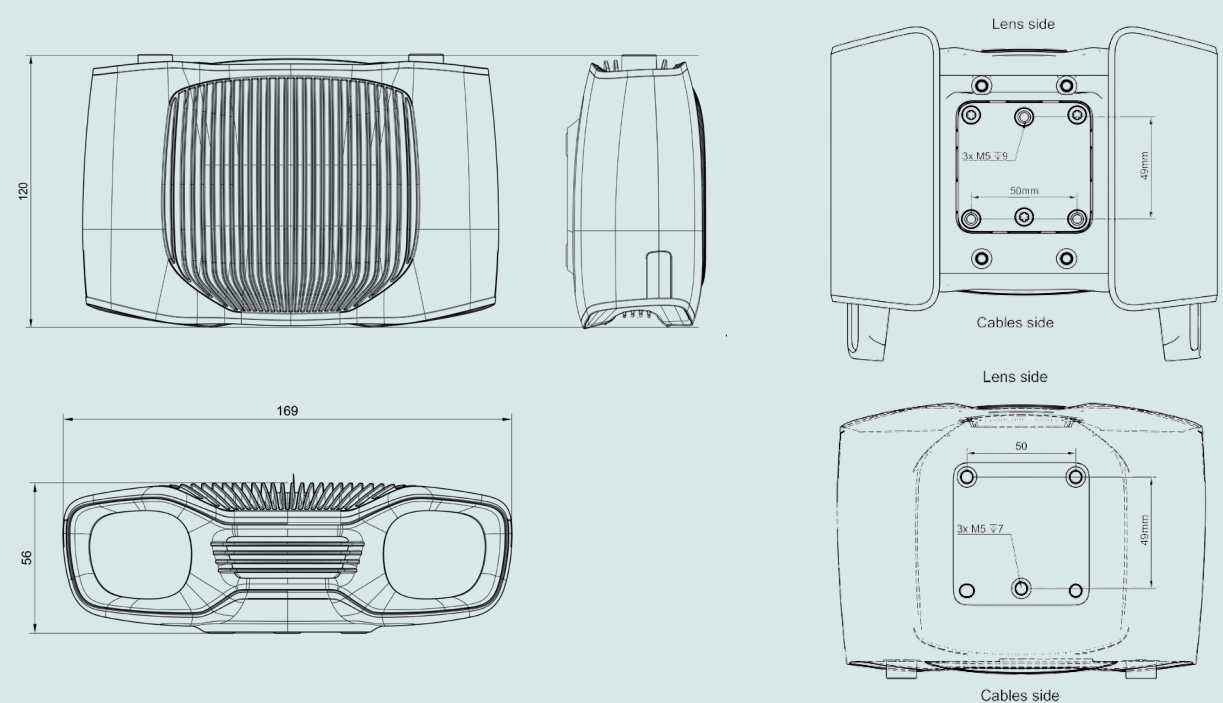

CAMERA TECHNICAL SPECIFICATIONS	
3D measurement method	Structured light
3D image capturing time	From 200 ms
3D camera resolution (pixels)	2448 x 2048 (5.0 MPx)
Estimated picking accuracy (mm)	1.5 (optimal) - 3.0 (full range)
Estimated part location accuracy (mm)	up to 0.5 (optimal)
Working distance	300 - 1100 mm
Field of view	570 x 460 mm @ 600mm
3D camera weight	1000 g
3D camera connection to PC	M12-8 (Ethernet)
PC connection to robot	TCP/IP over Ethernet
Power supply	M12-5 24VDC
Temperature	0°C - 40°C
IP rating	IP65
Humidity level	10-90% non condensing
Vibrations	5G Random, 15G Shock
Conforms to	CE, CB, EN62368, FCC class B

CAMERA CABLE TECHNICAL SPECIFICATIONS	
5 m / 20 m	
- Cable: CAT6A, PUR jacket. 7,0 mm OD, black, Flame / oil resistant (FT2 / 100 °C x 96h) - Minimum bend radius static/dynamic: R 35 mm / 70 mm - Bend chain cycles: R50 0,6 m 10 million - Twist cycles: +-180 deg, 500 mm 10 million - Tensile strength: 100 N - RoHS Compliant	