

On The Passive Measurability of QUIC

Brian Trammell, ETH Zürich

RIPE 75 Plenary Lightning Talk
Dubai — 23 October 2017


QUIC in review

- UDP-encapsulated transport protocol being standardized by the IETF.
 - Rolled out by Google since 2014:
35% of Google traffic, 7% of Internet traffic.
- Designed for deployability, evolvability, low-latency, and security.
- Initial focus on support for HTTP/2, but is a new, general-purpose Layer 4 protocol.


What's up and why should I care?

- TCP continuously radiates information about loss and RTT to passive observers along the path.
 - Loss and RTT measurement useful for intra- and inter-network health monitoring and troubleshooting.
 - Ruru is an excellent illustration of this.
- QUIC (as presently defined) doesn't do this.
 - QUIC traffic on your network is of limited use for passive measurement
 - ***Is this a problem?***


Back to TCP School: Passive RTT Measurement

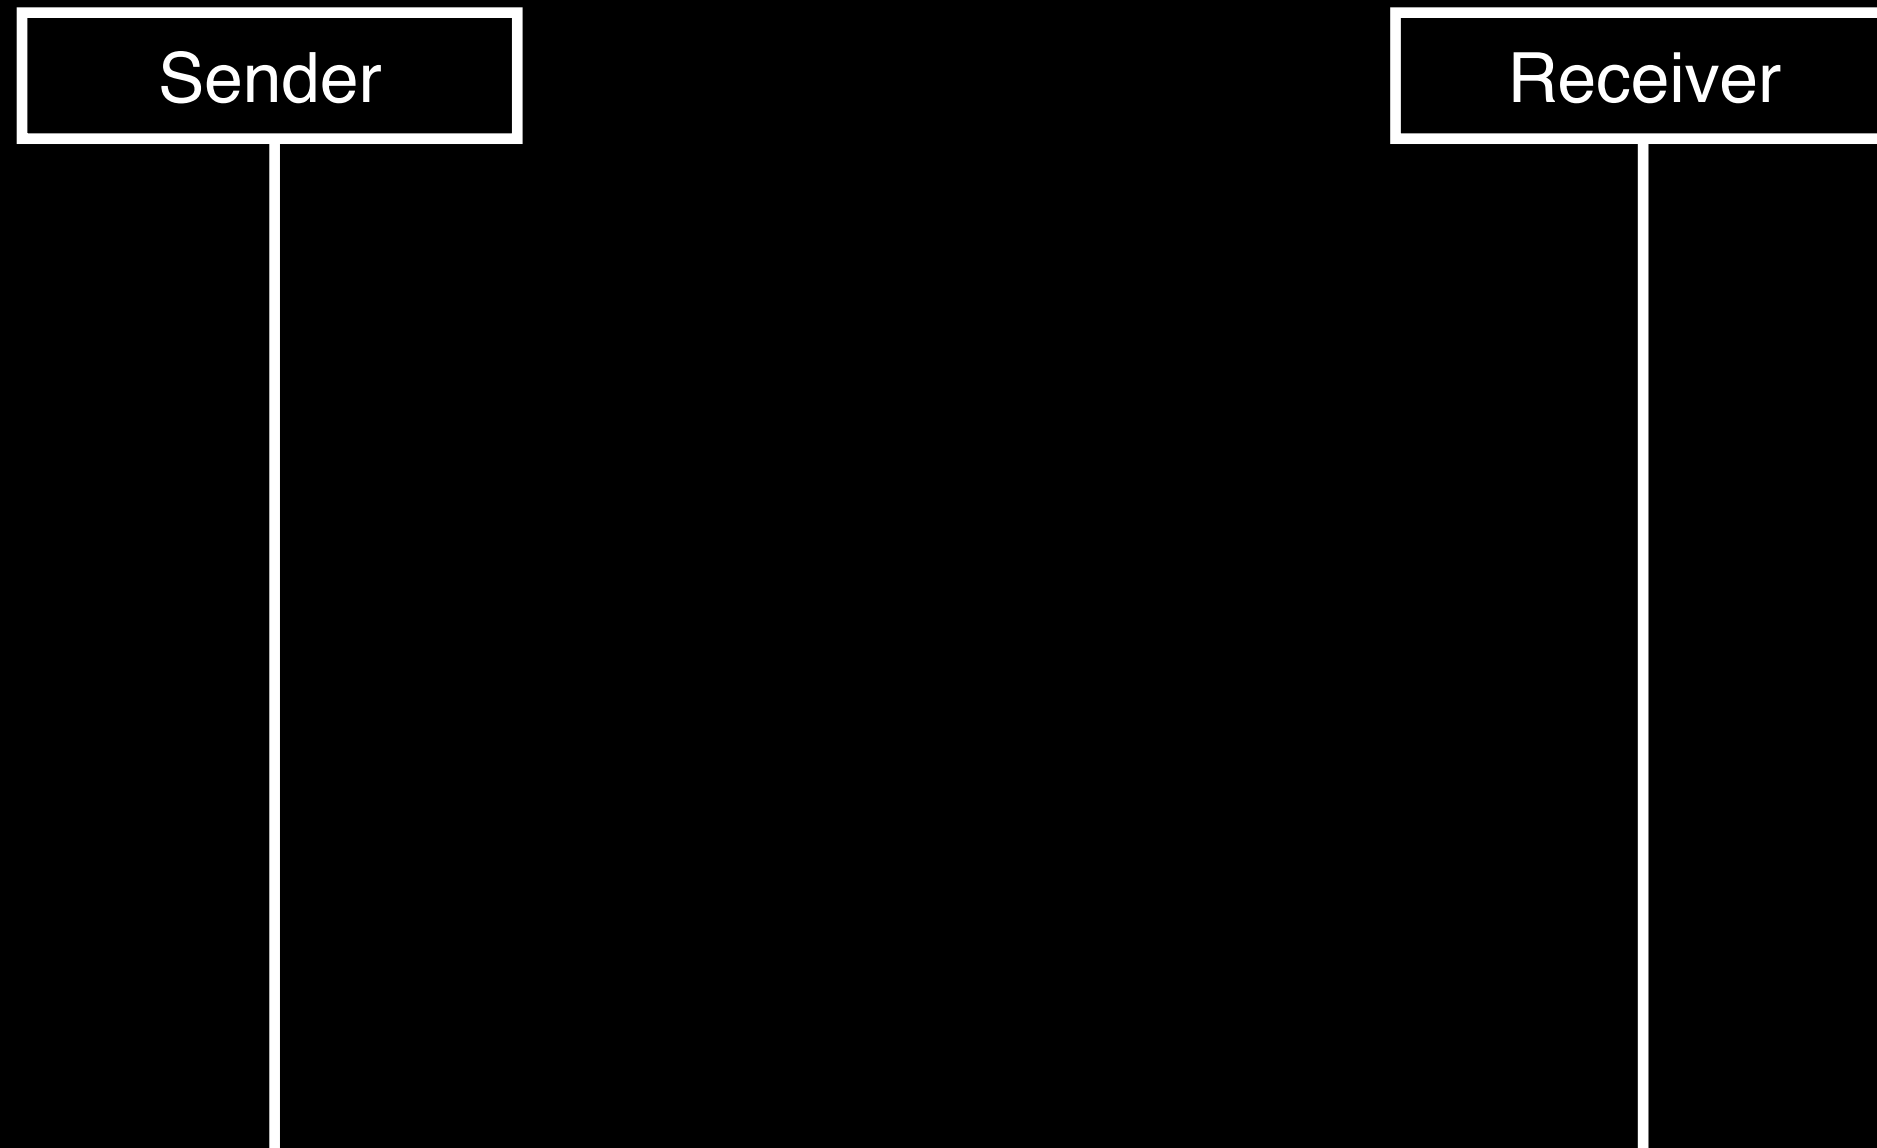


Back to TCP School: Passive RTT Measurement

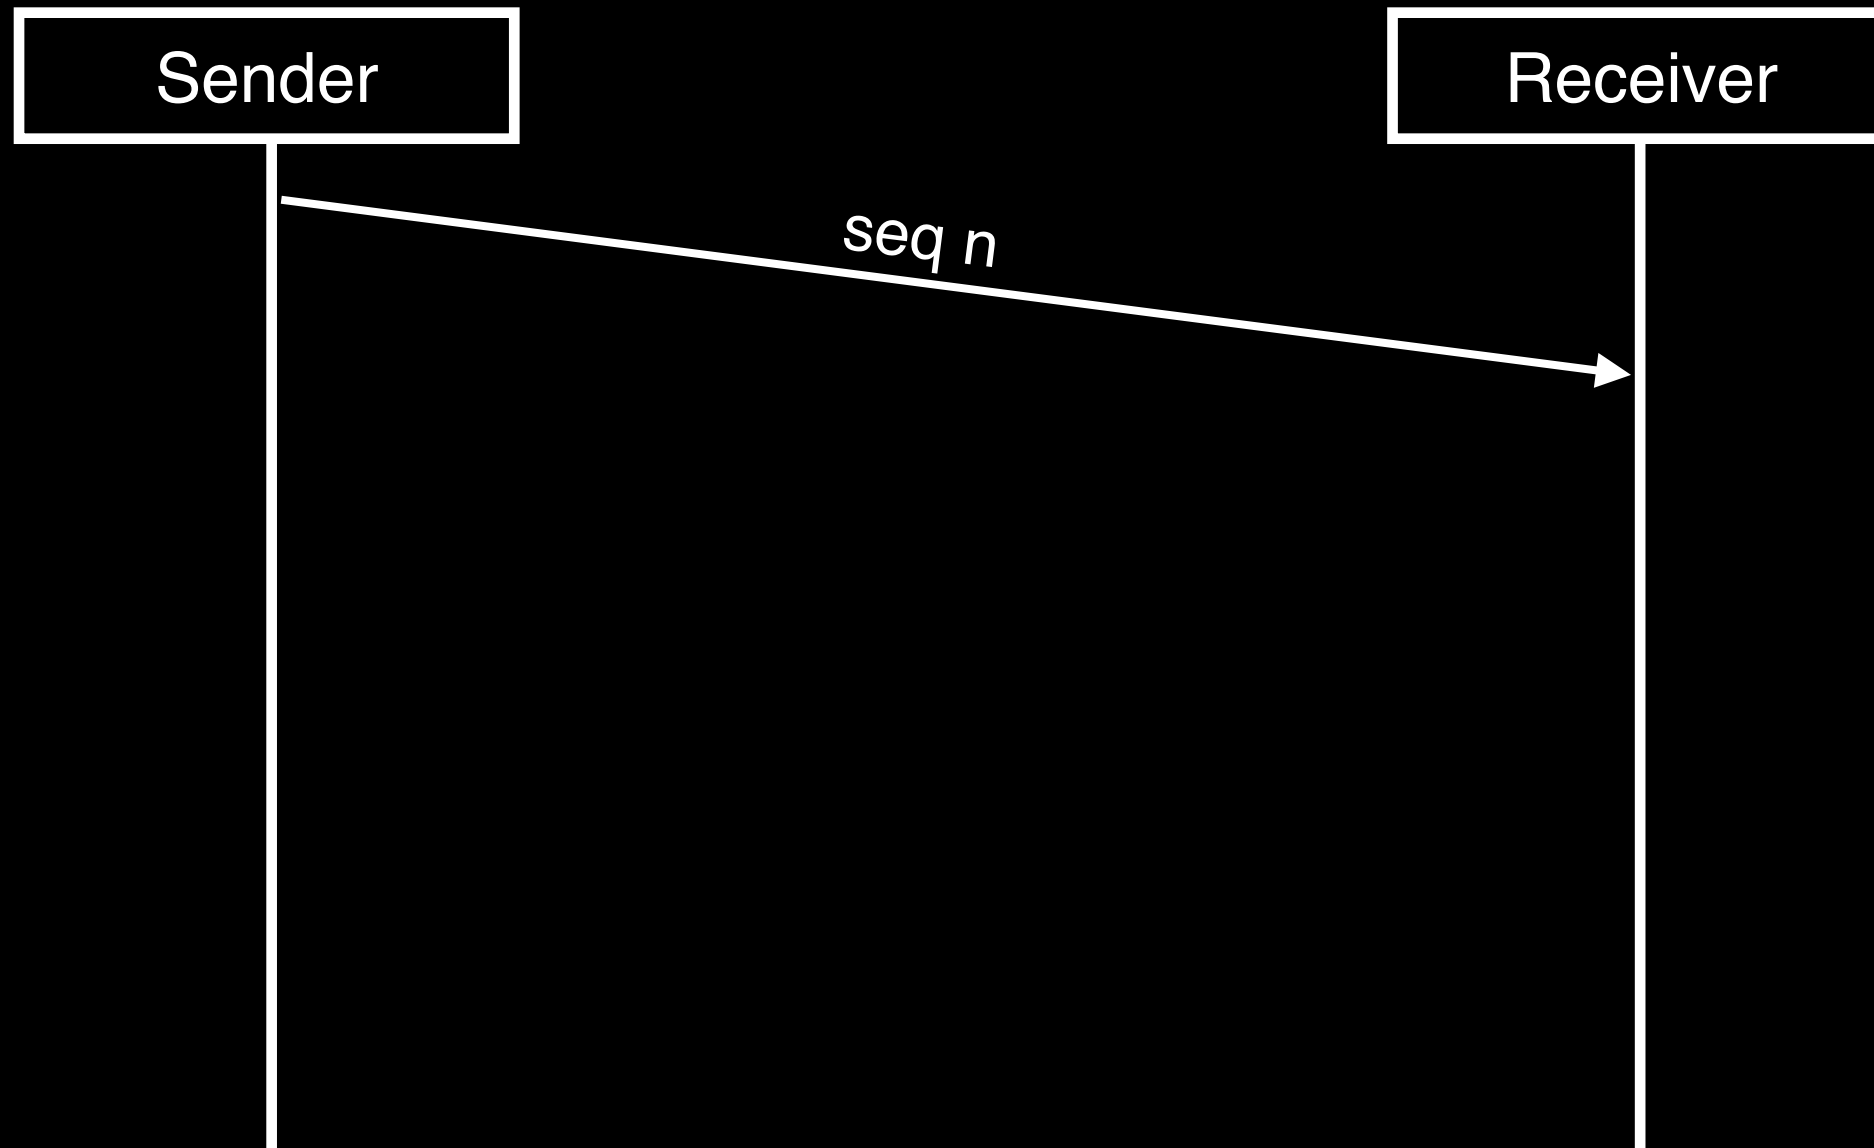


Back to TCP School: Passive RTT Measurement

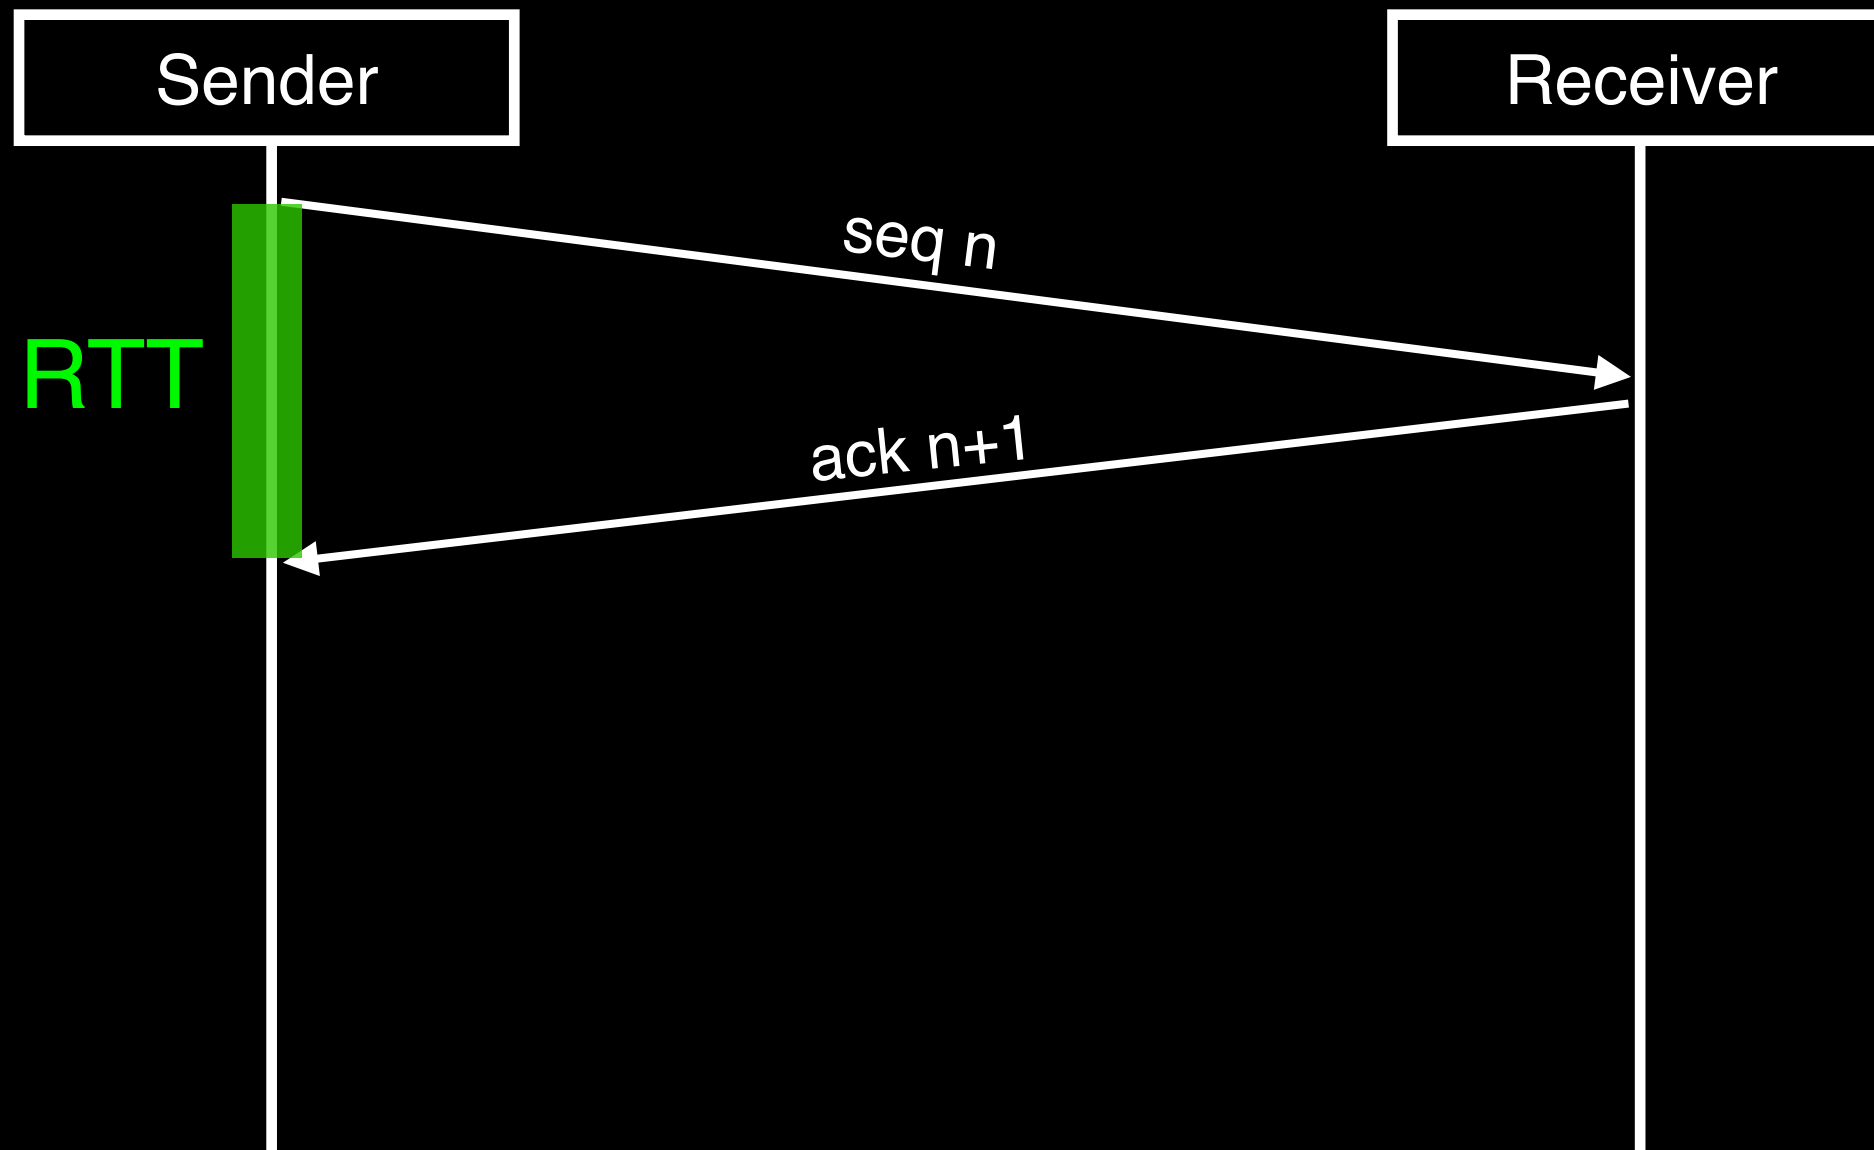


Back to TCP School: Passive RTT Measurement

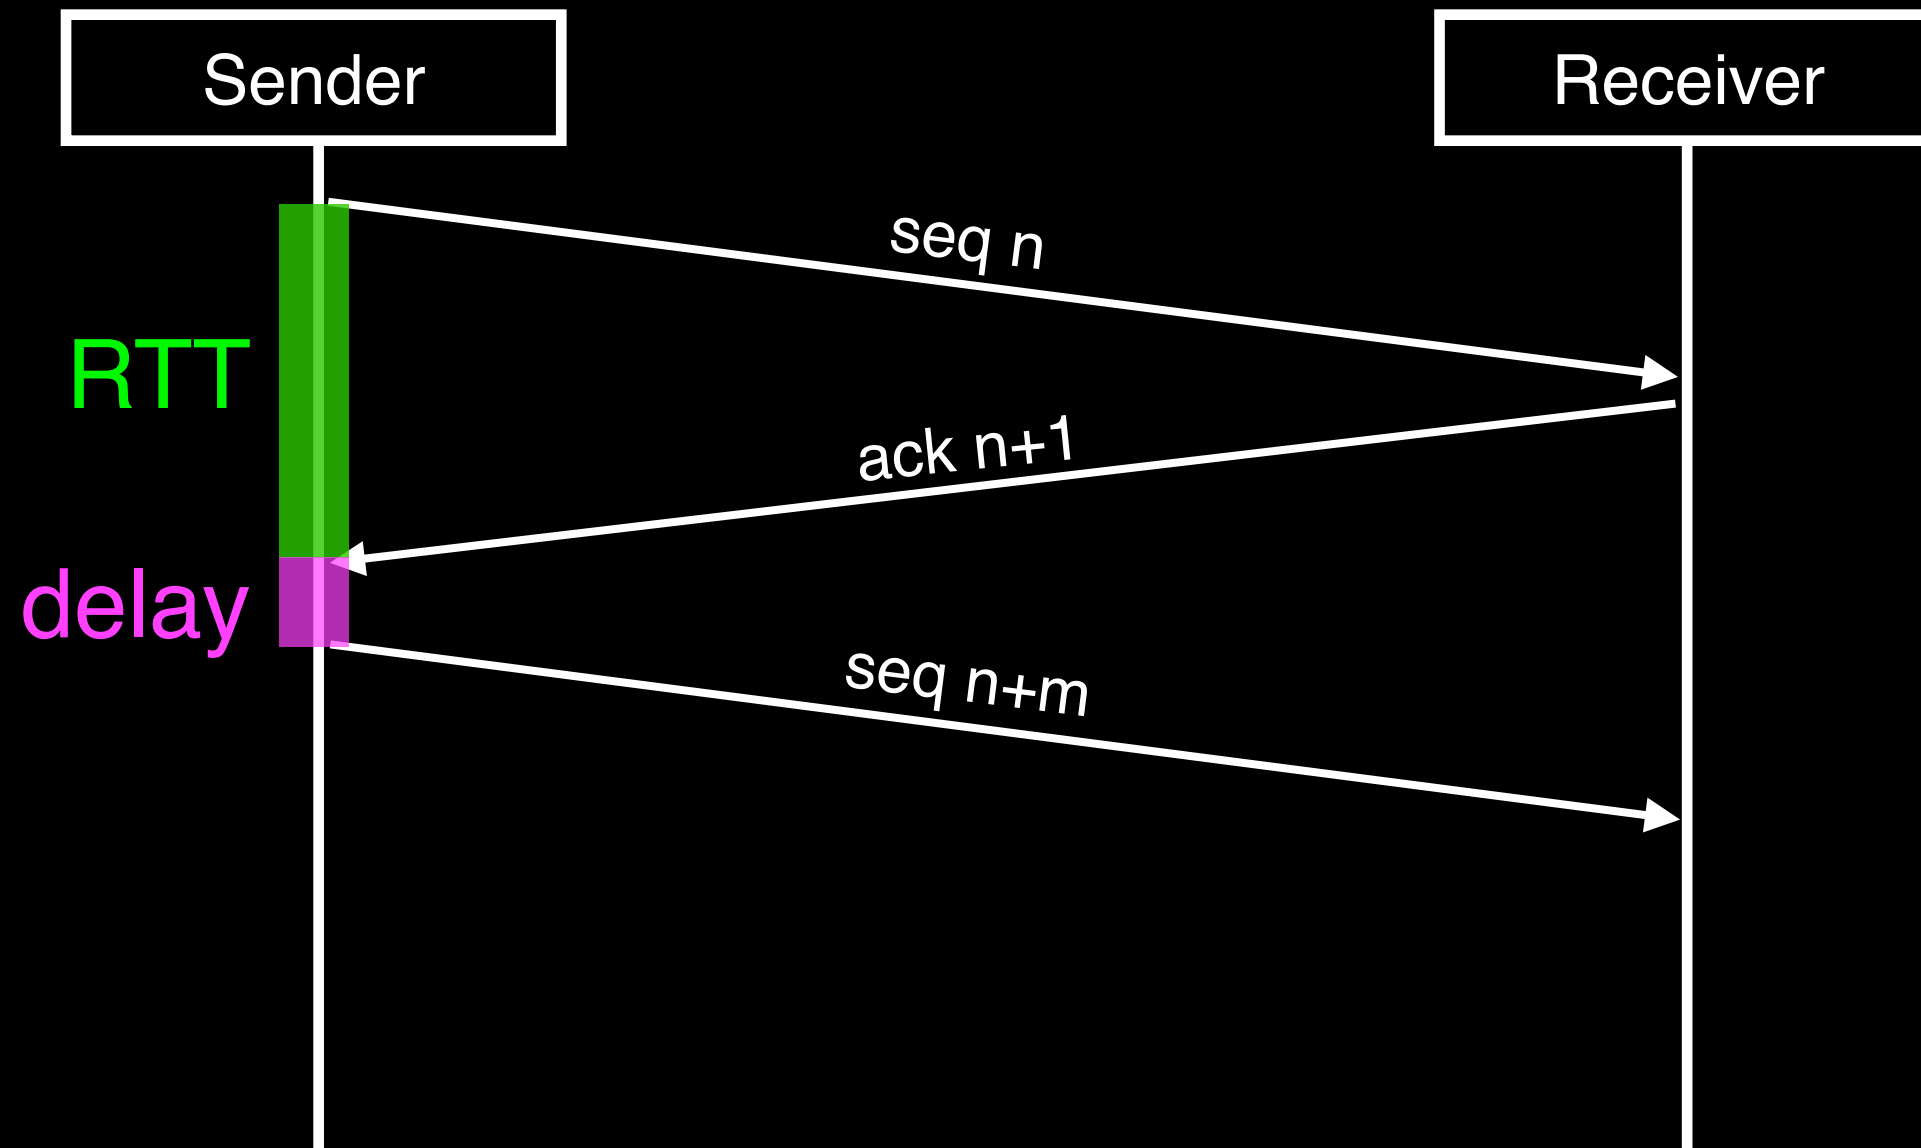


Back to TCP School: Passive RTT Measurement

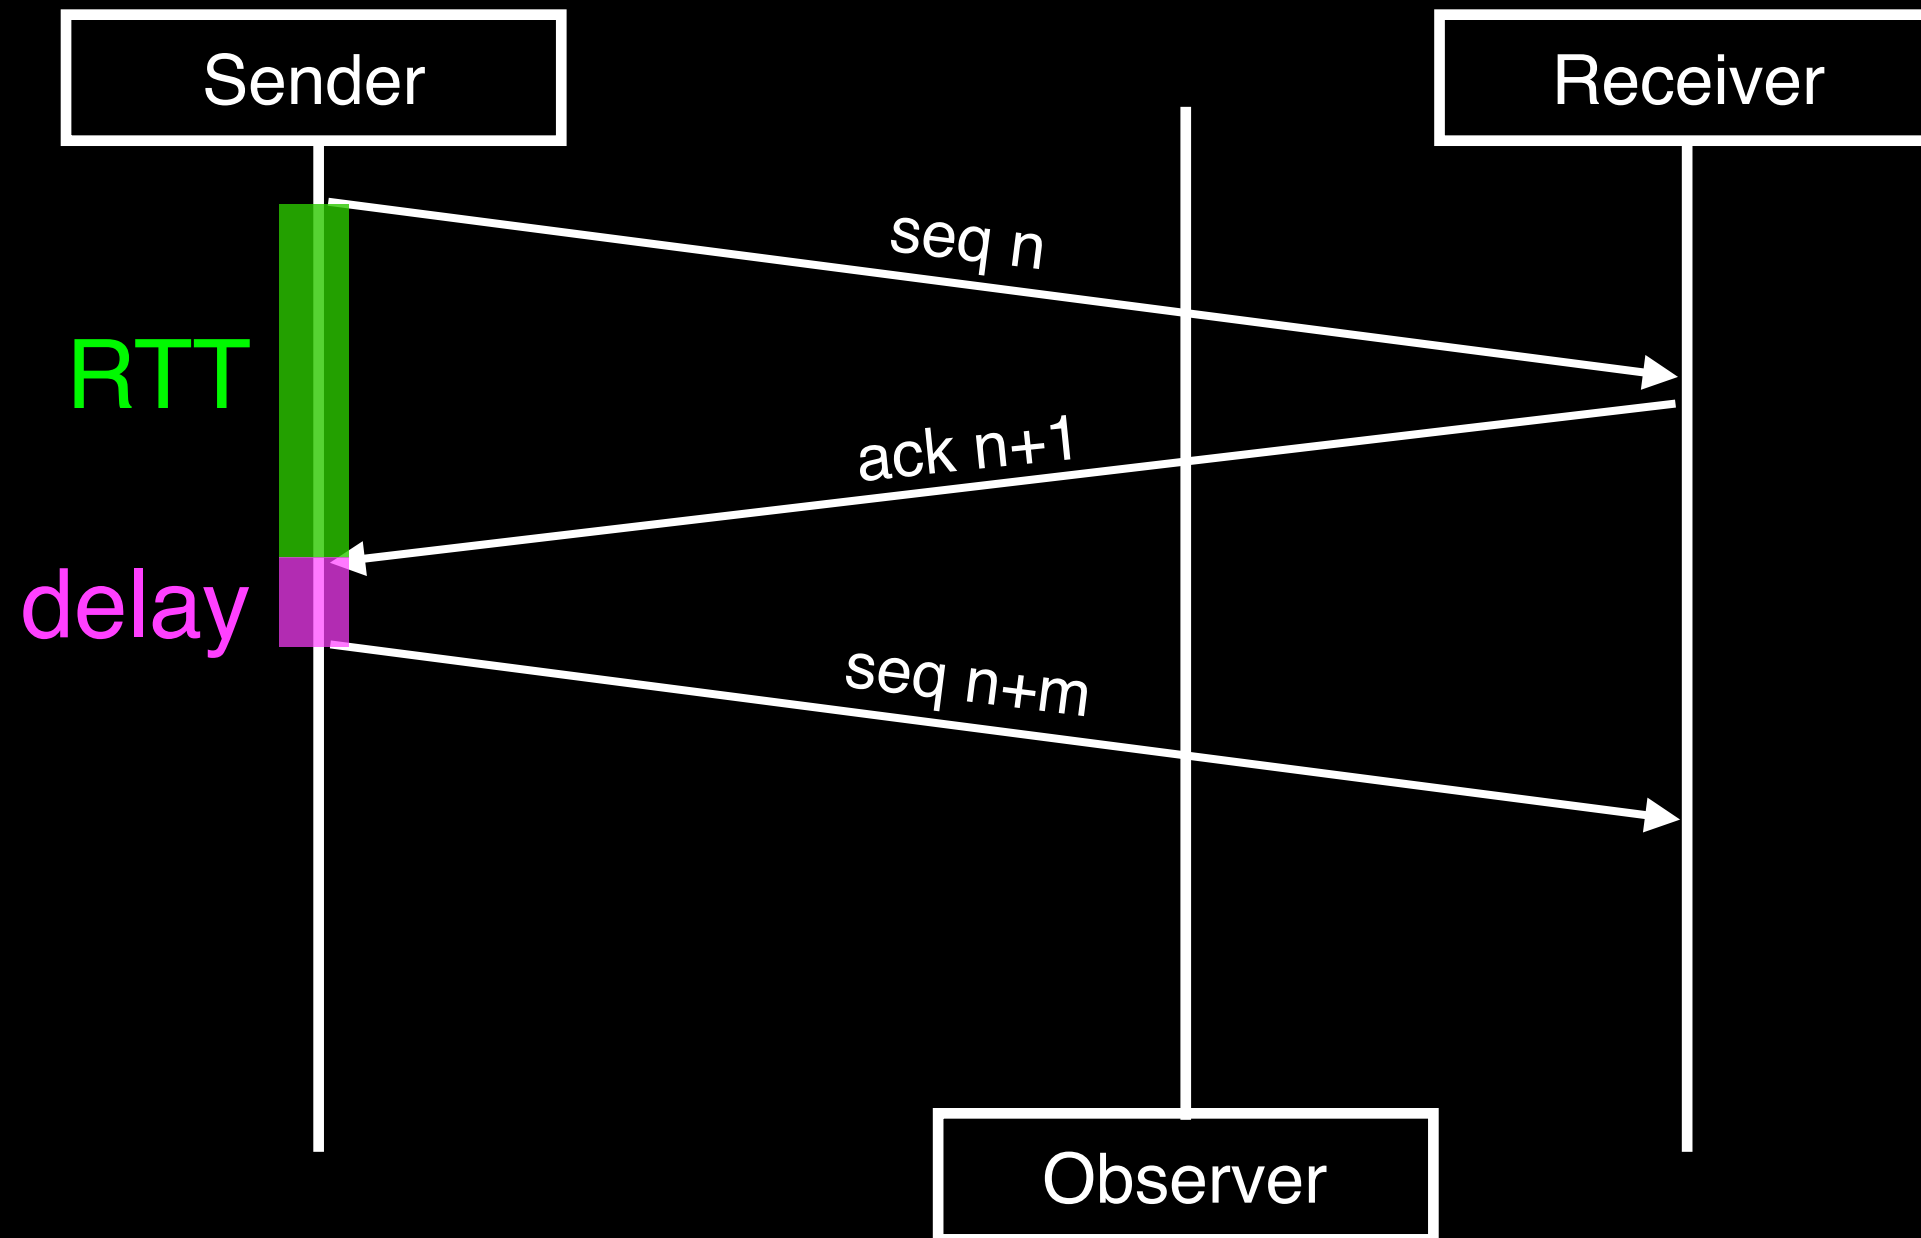


Back to TCP School: Passive RTT Measurement

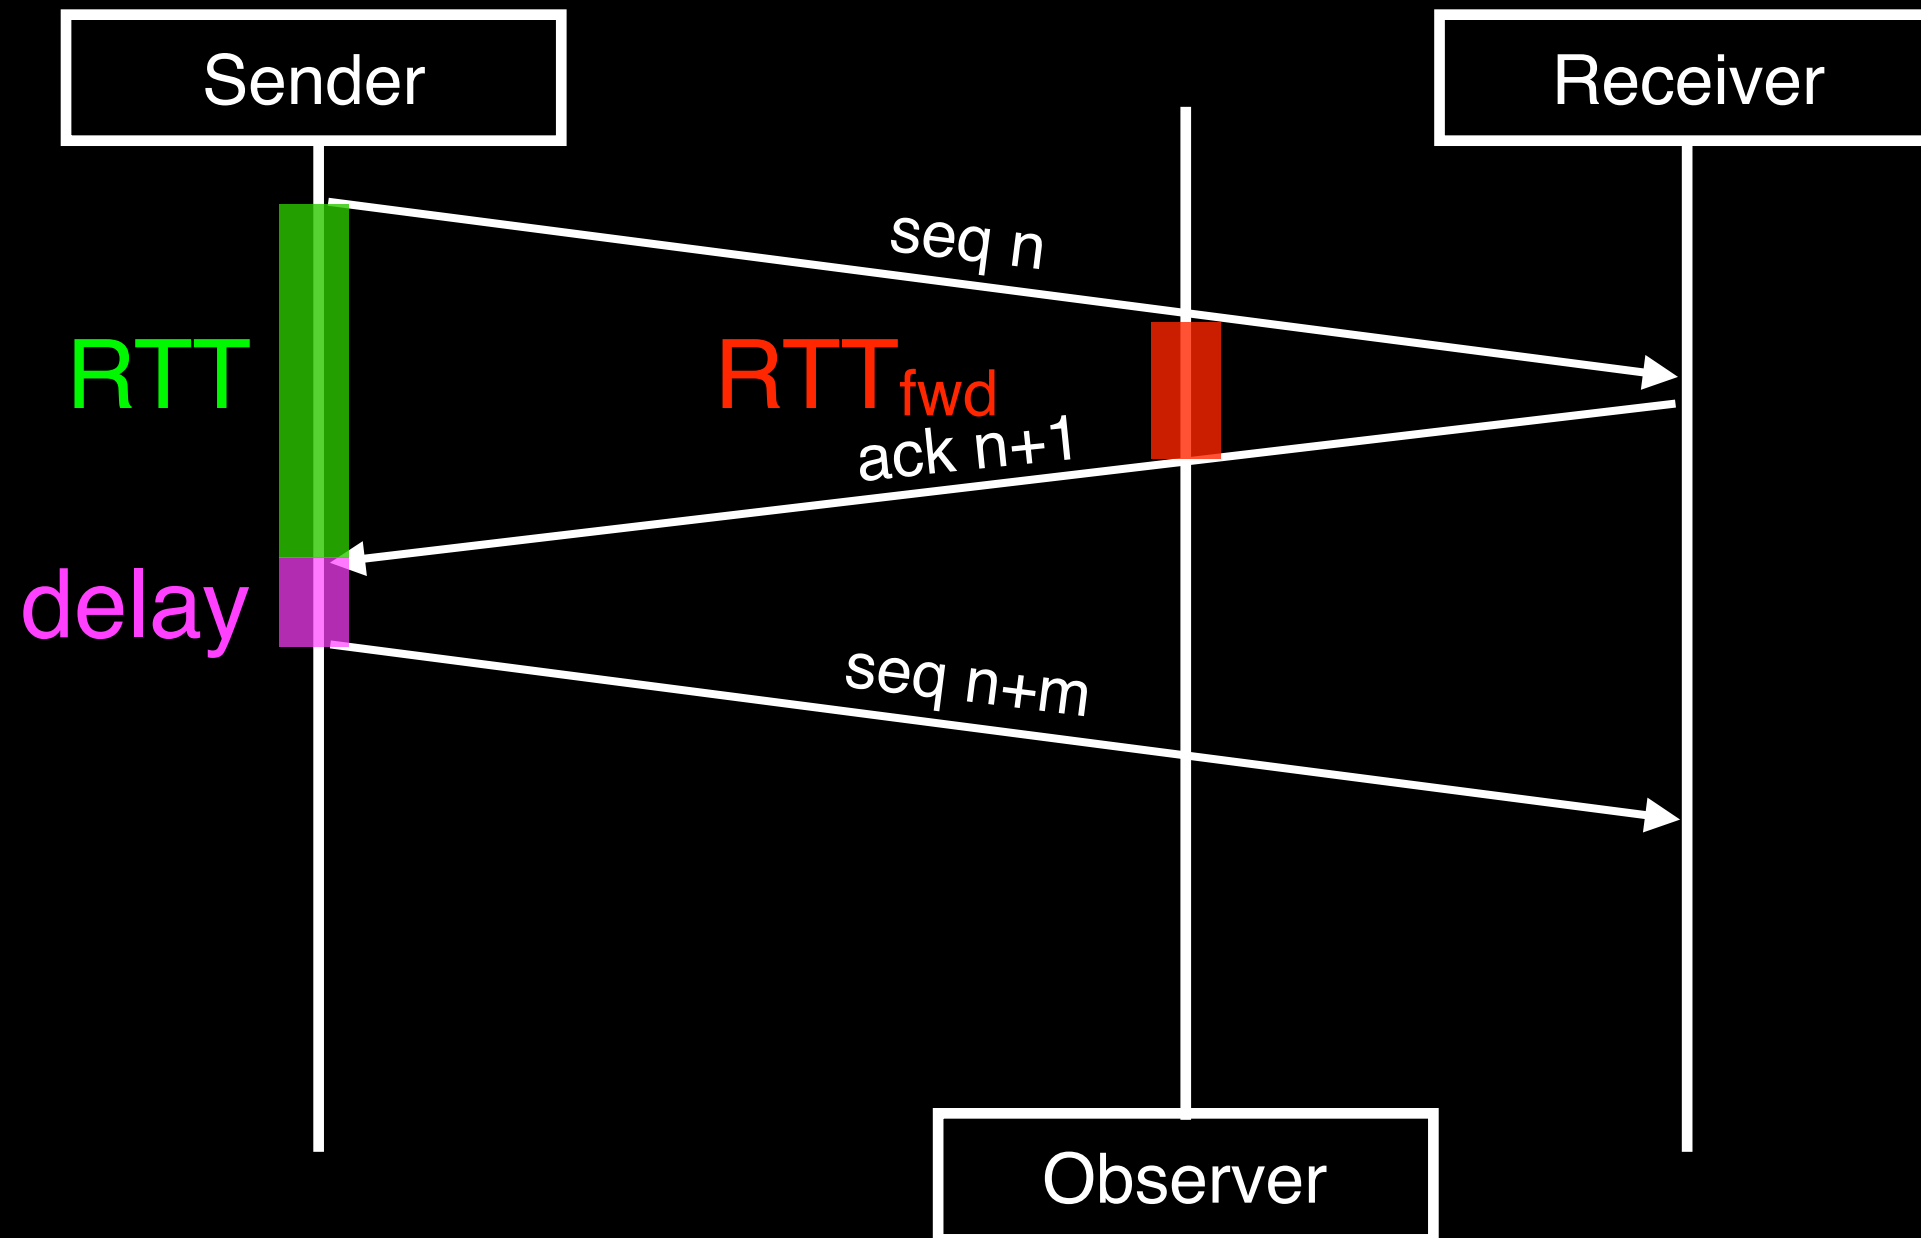


Back to TCP School: Passive RTT Measurement

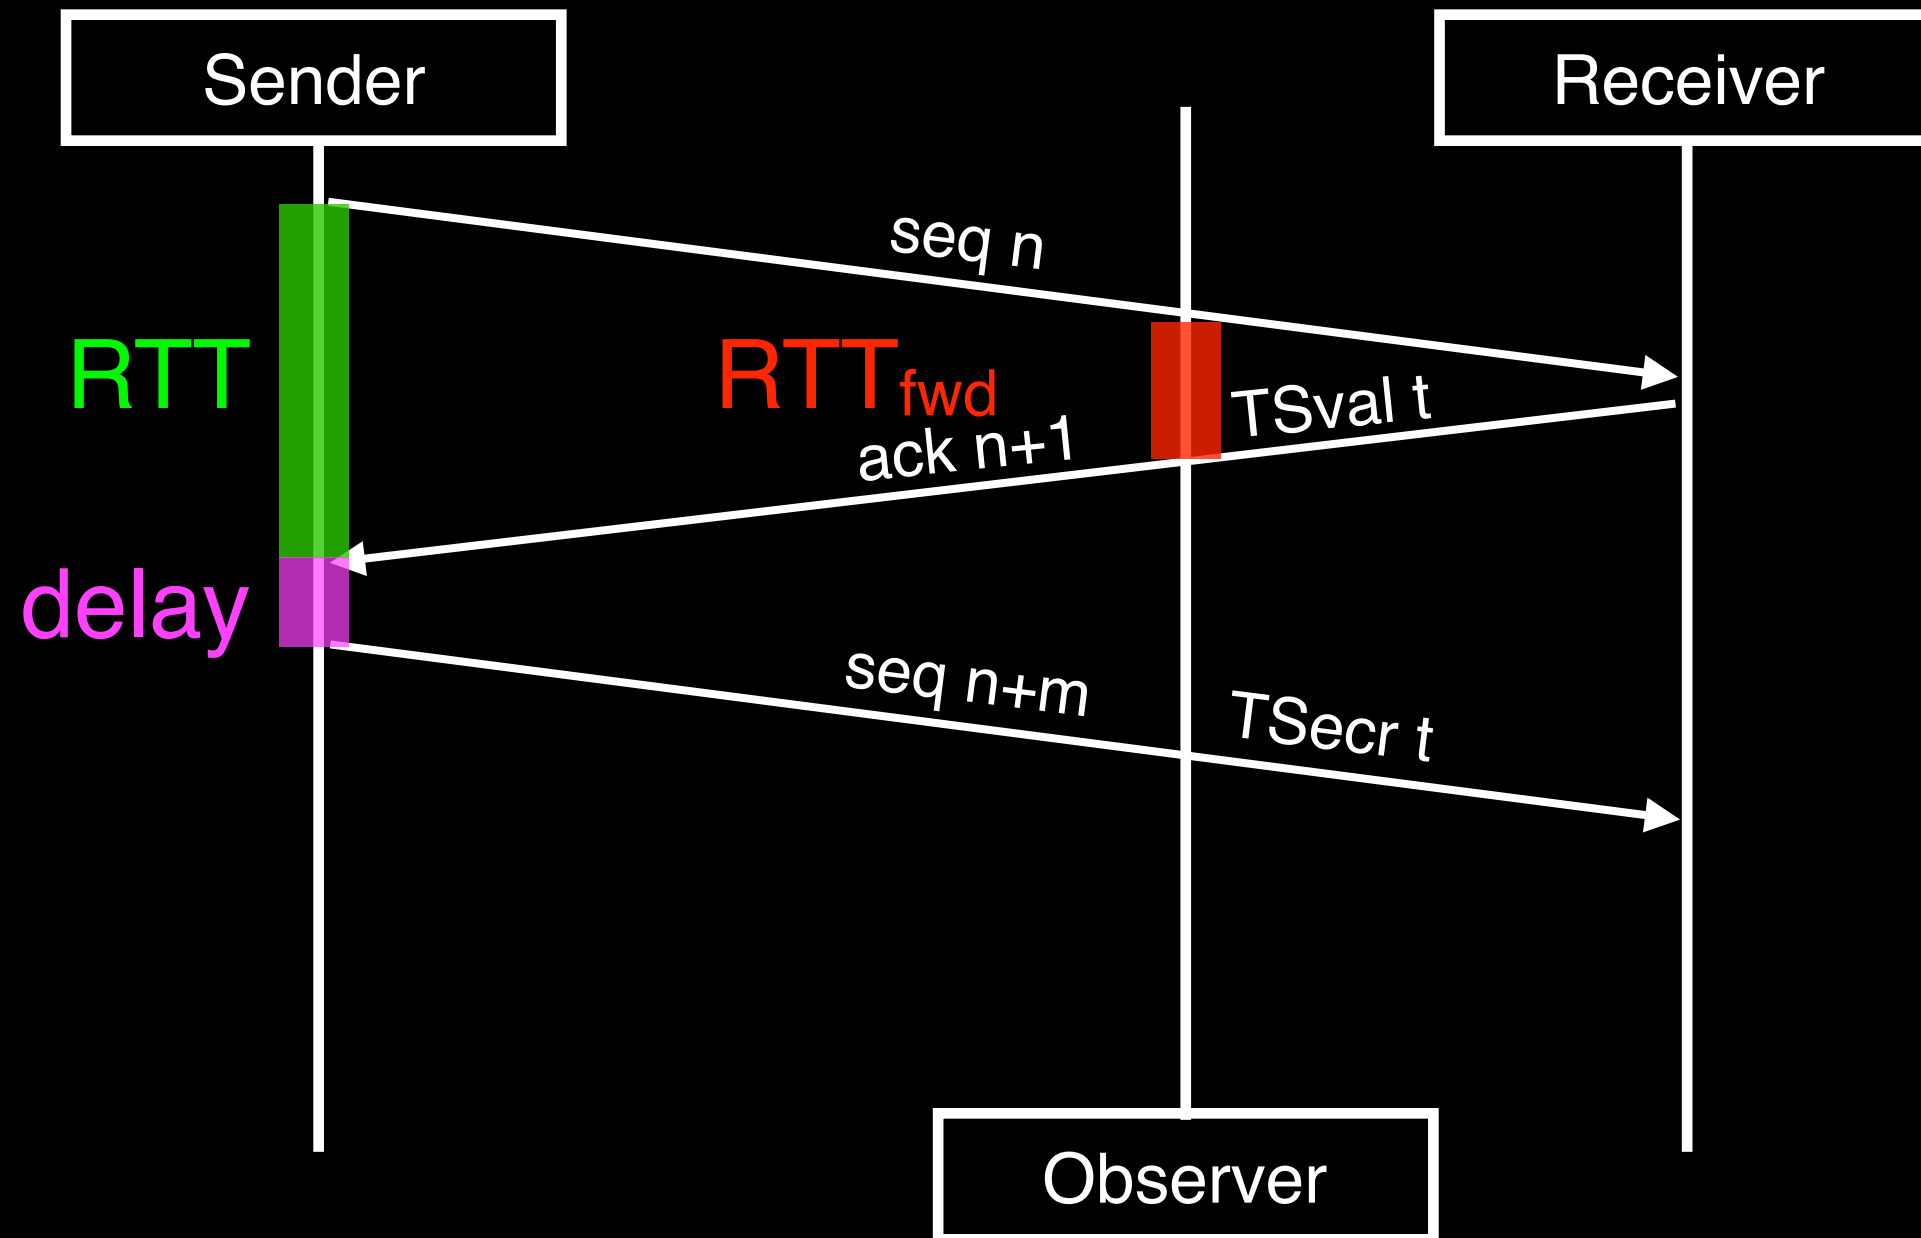


Back to TCP School: Passive RTT Measurement

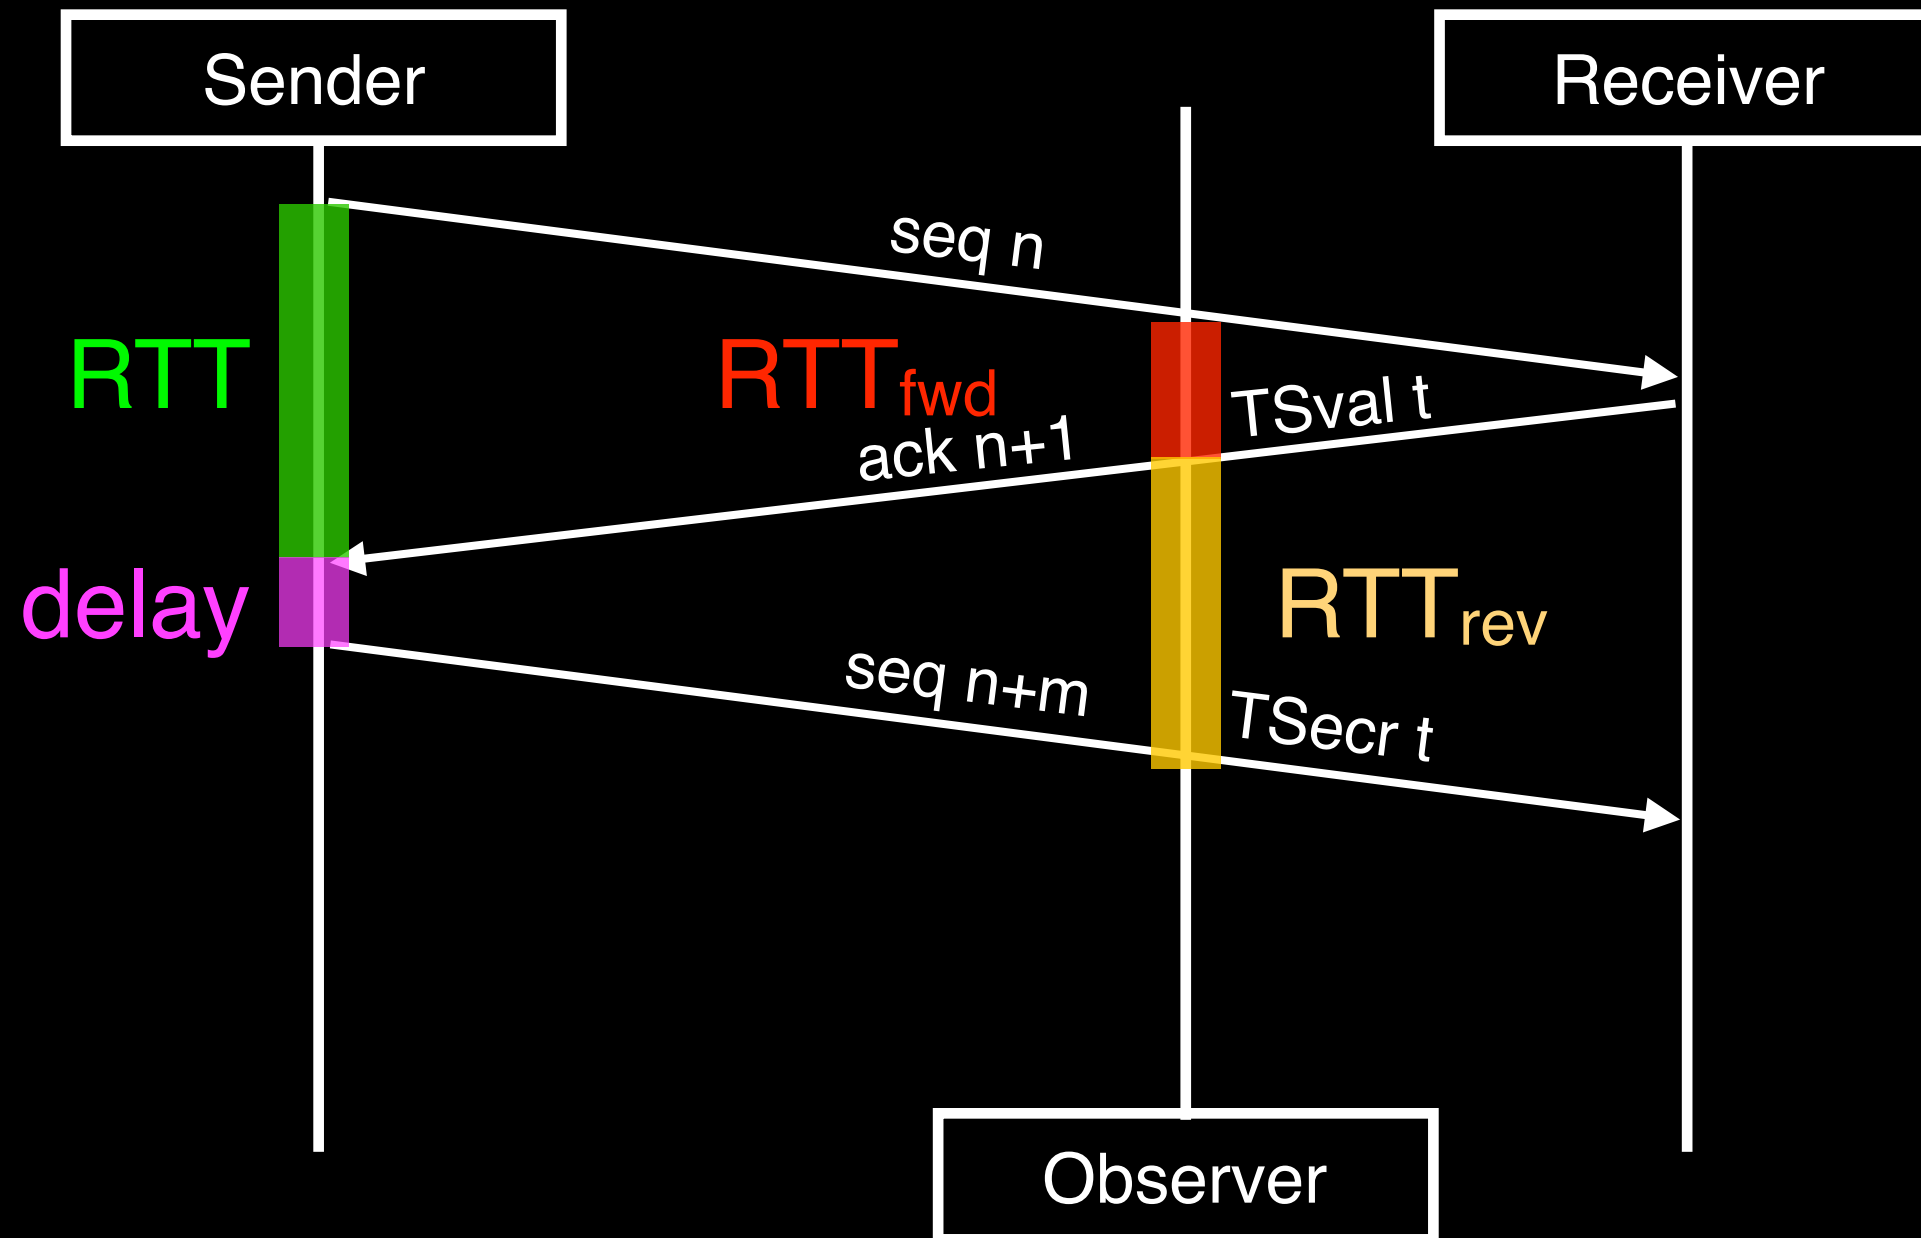


Back to TCP School: Passive RTT Measurement

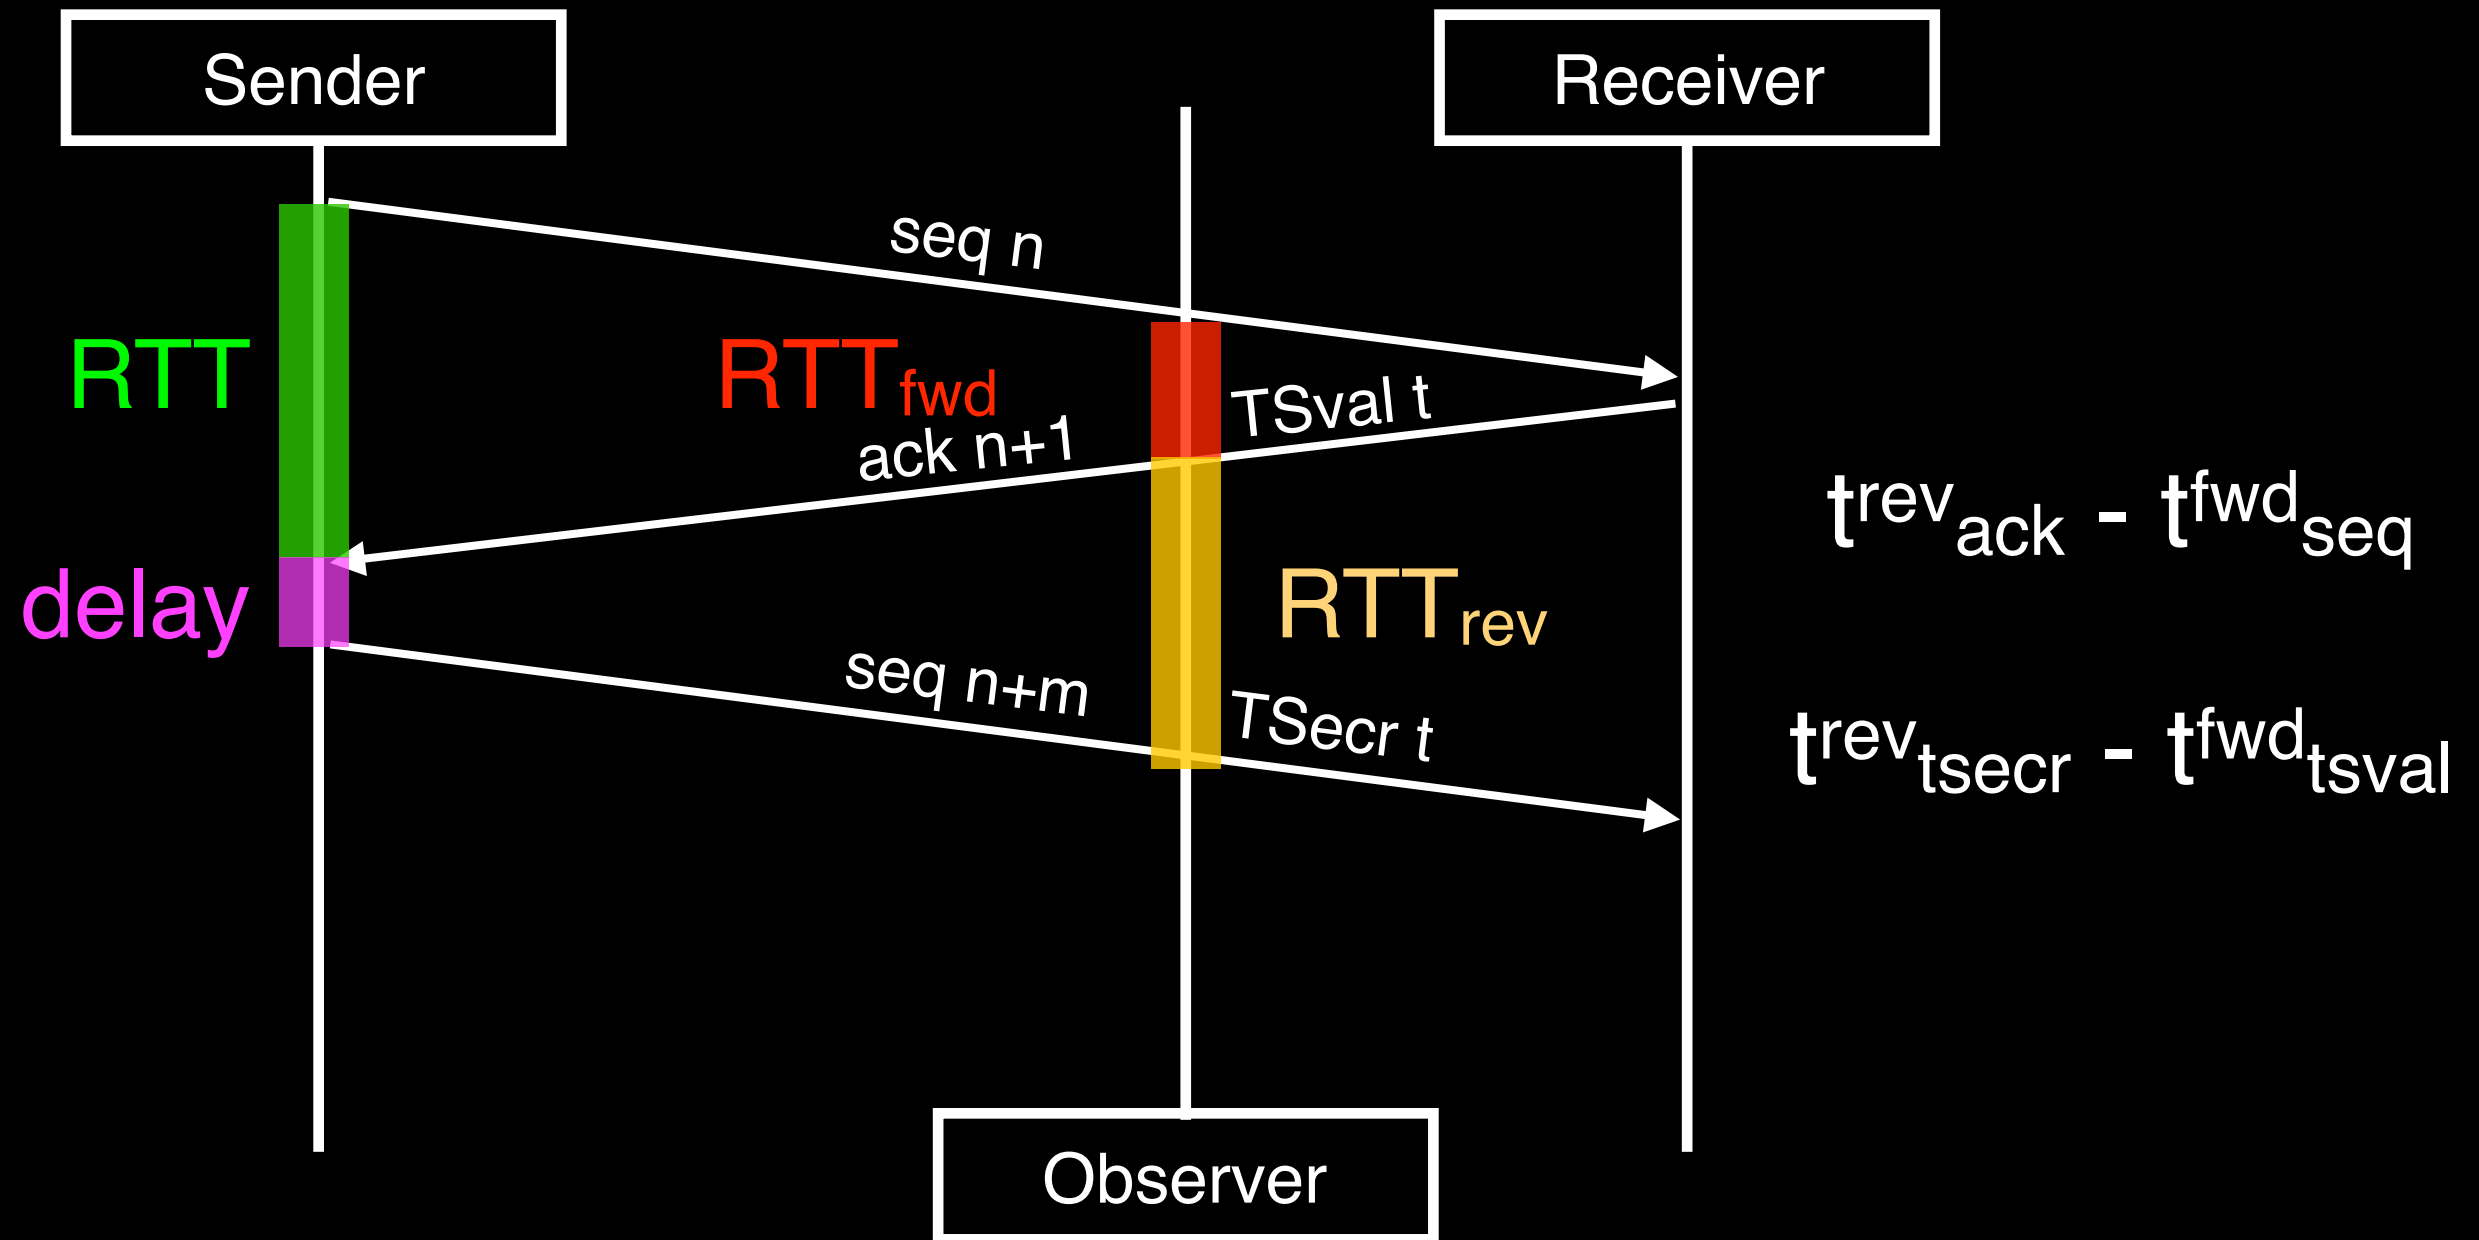


QUIC packet header

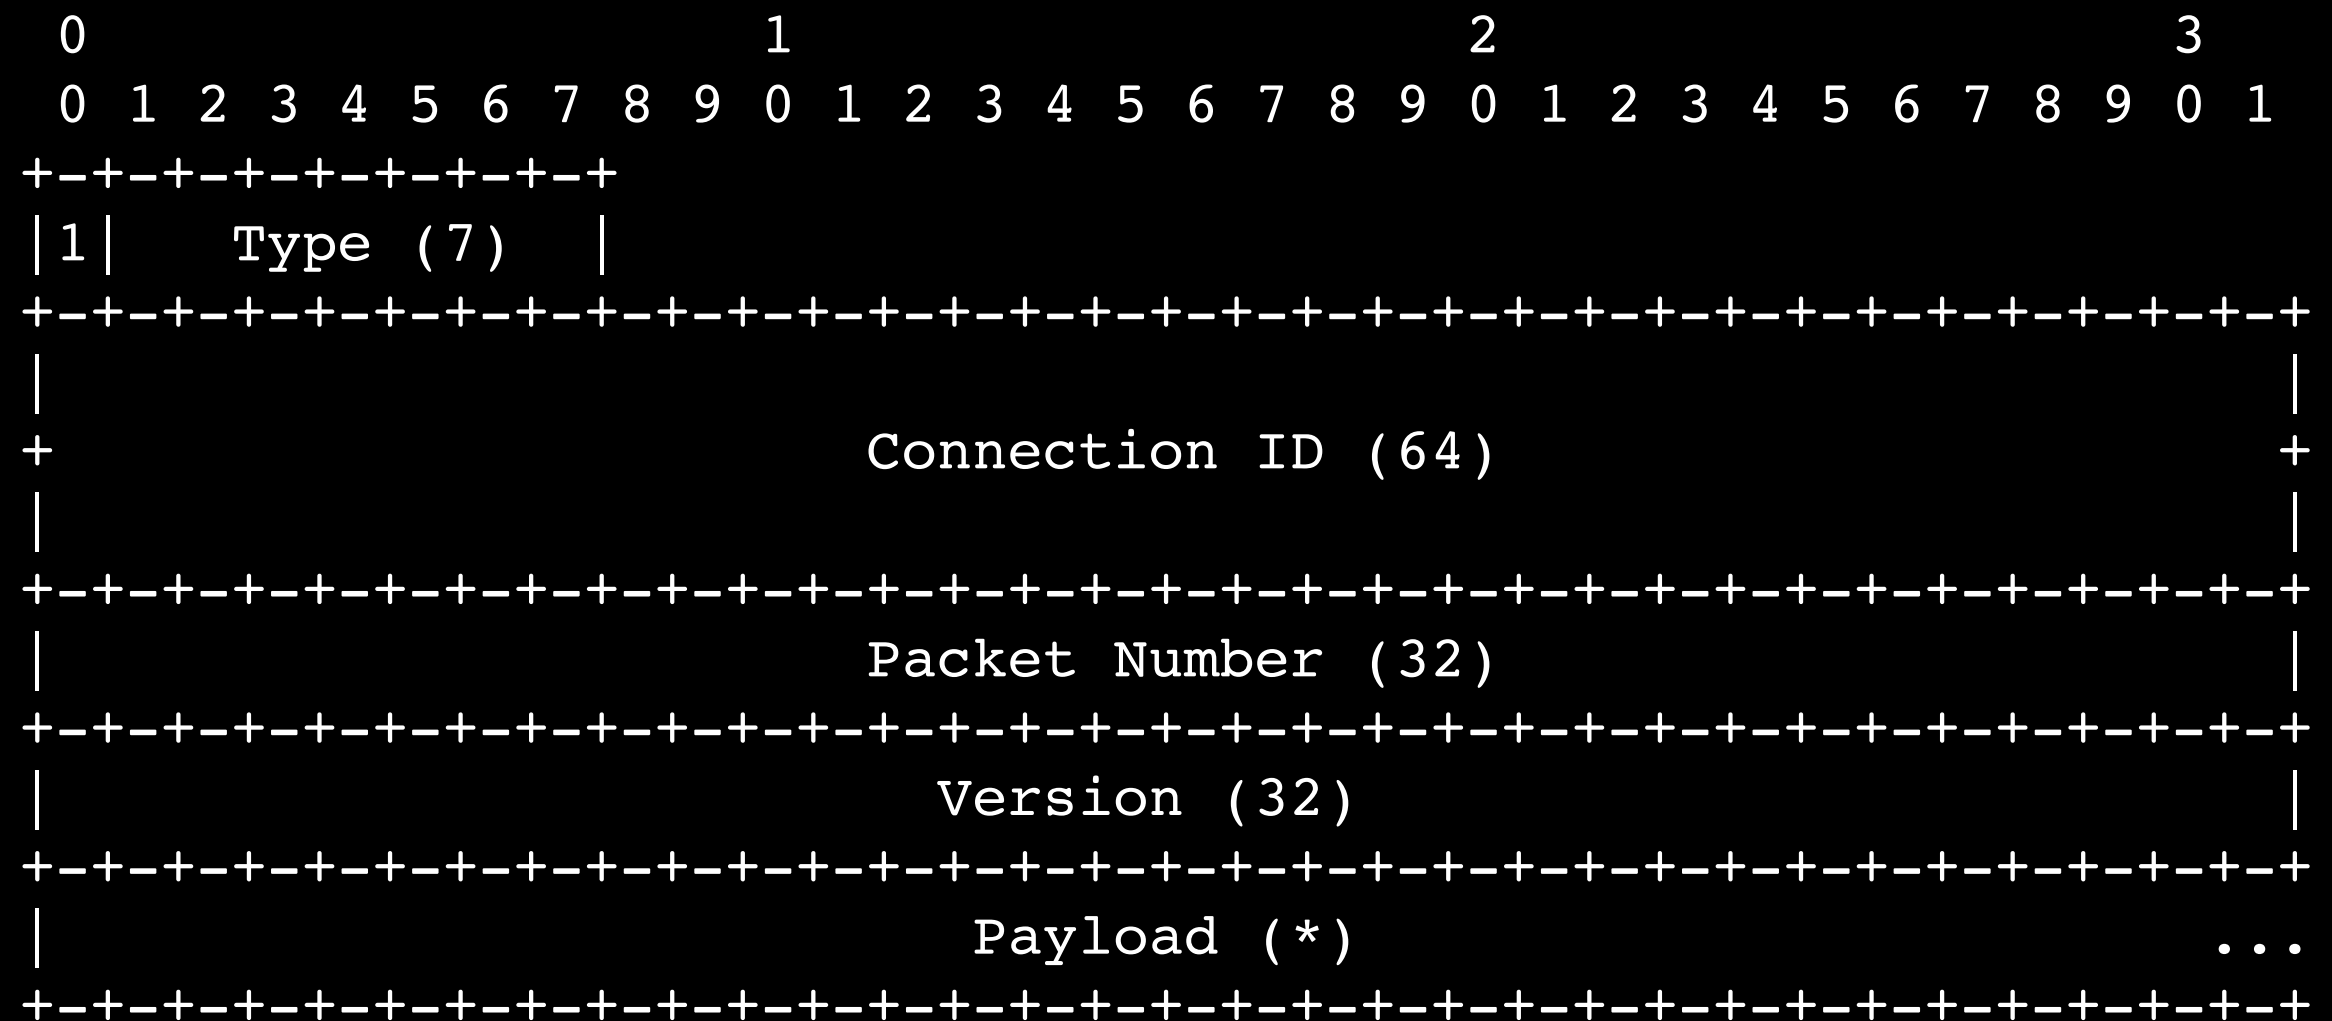


Matching packets with QUIC

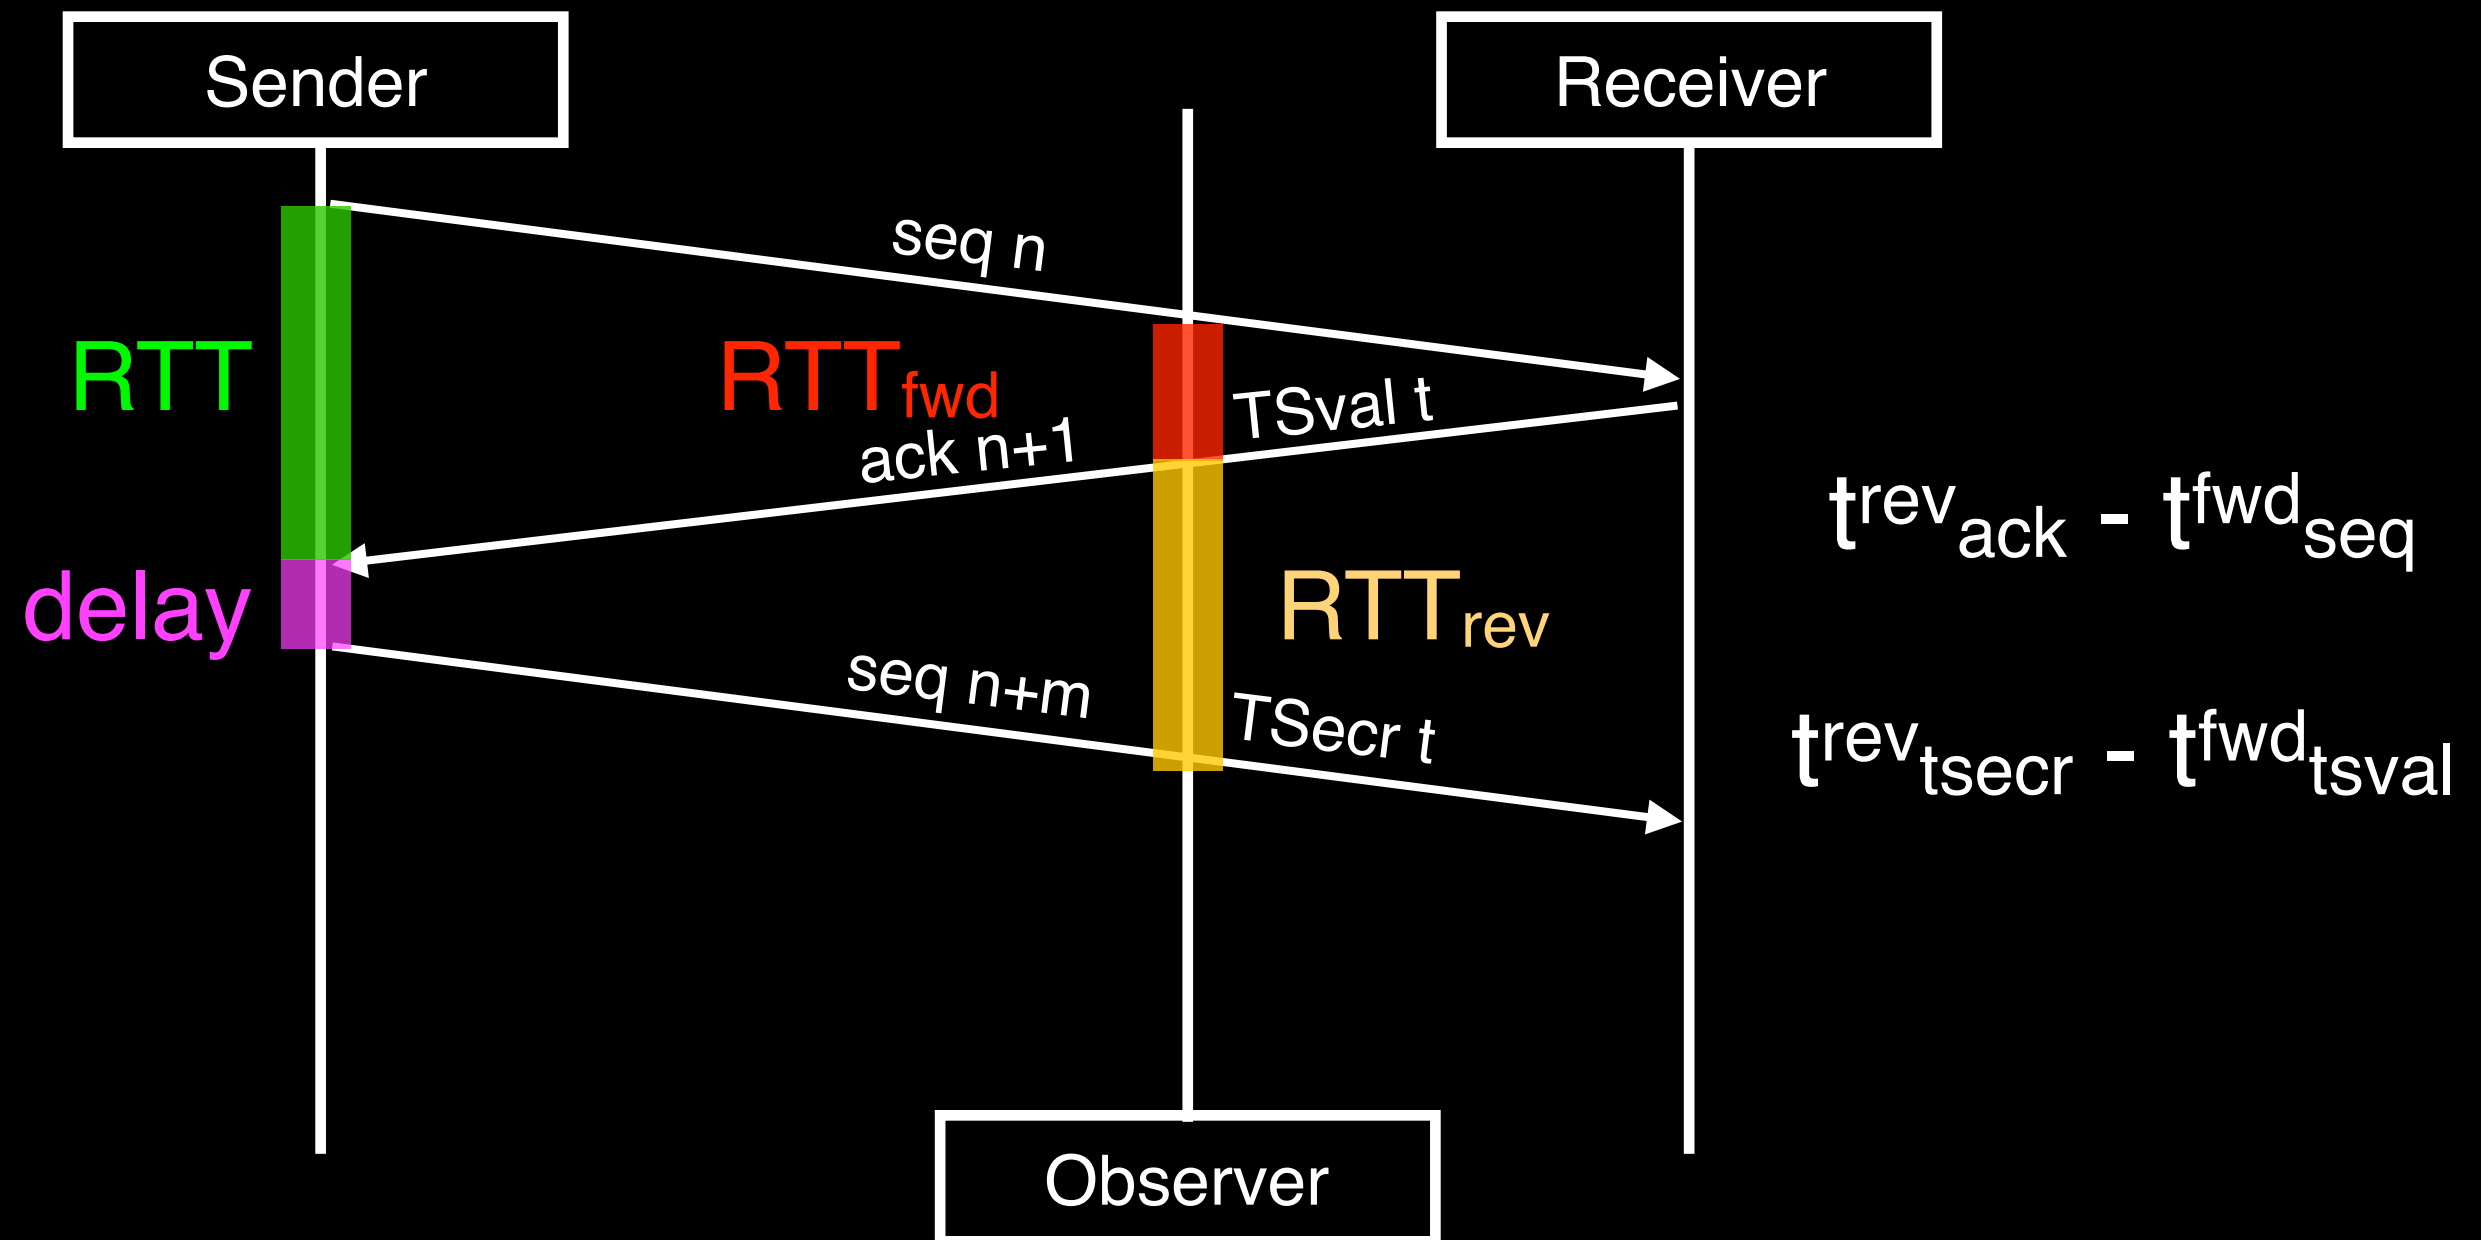

Matching packets with QUIC

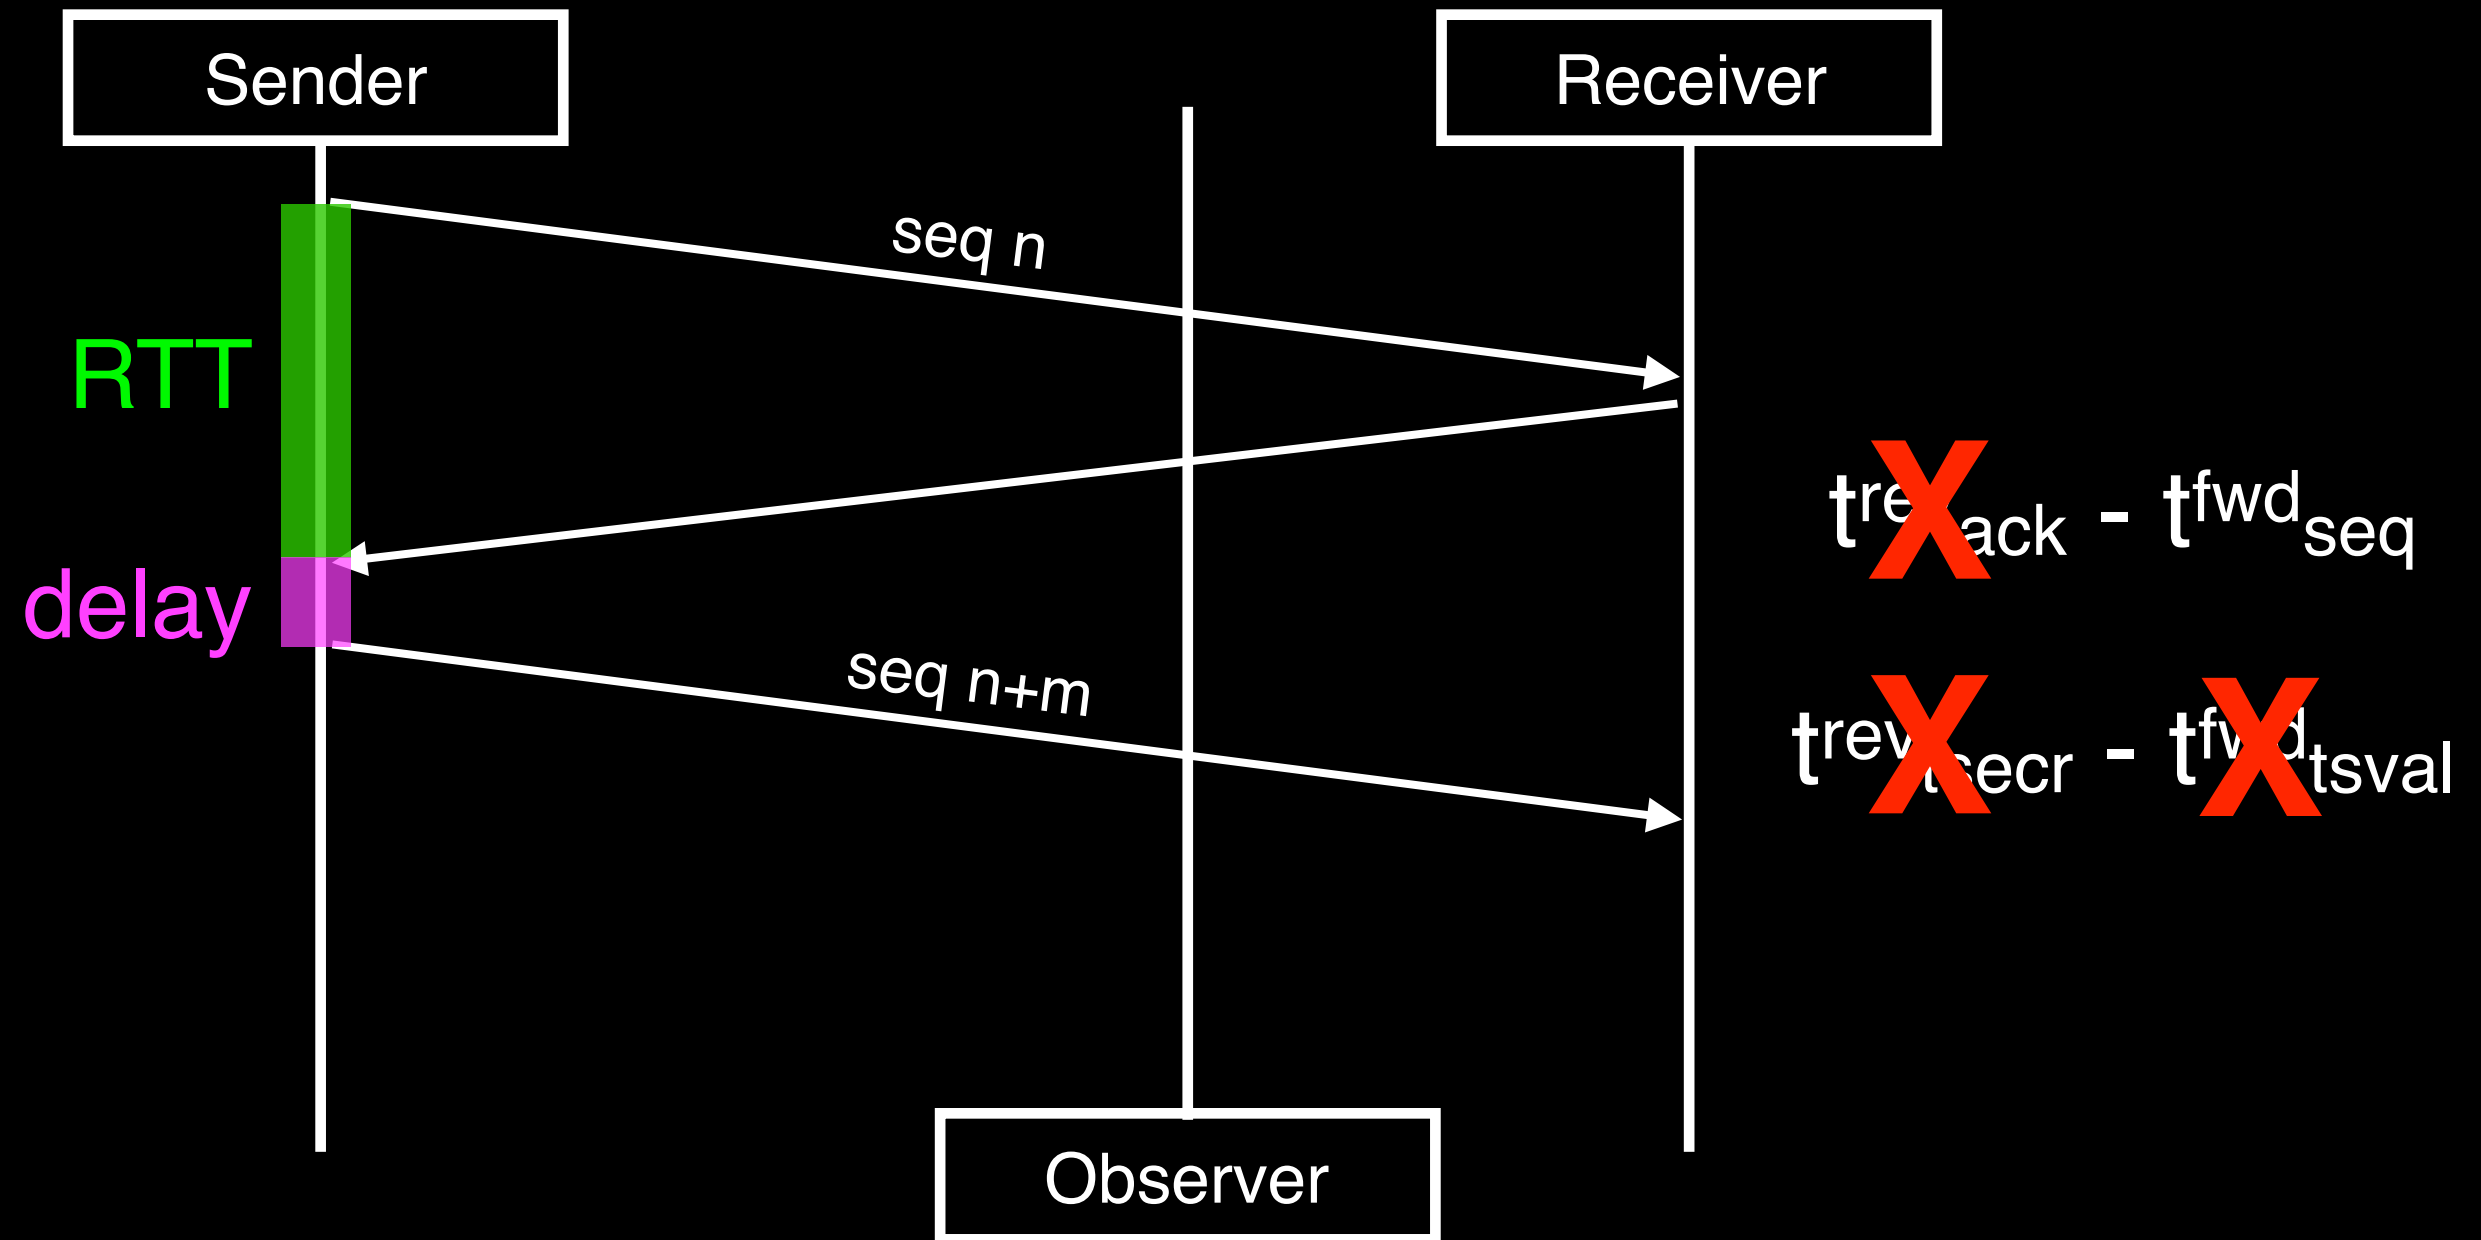


Matching packets with QUIC

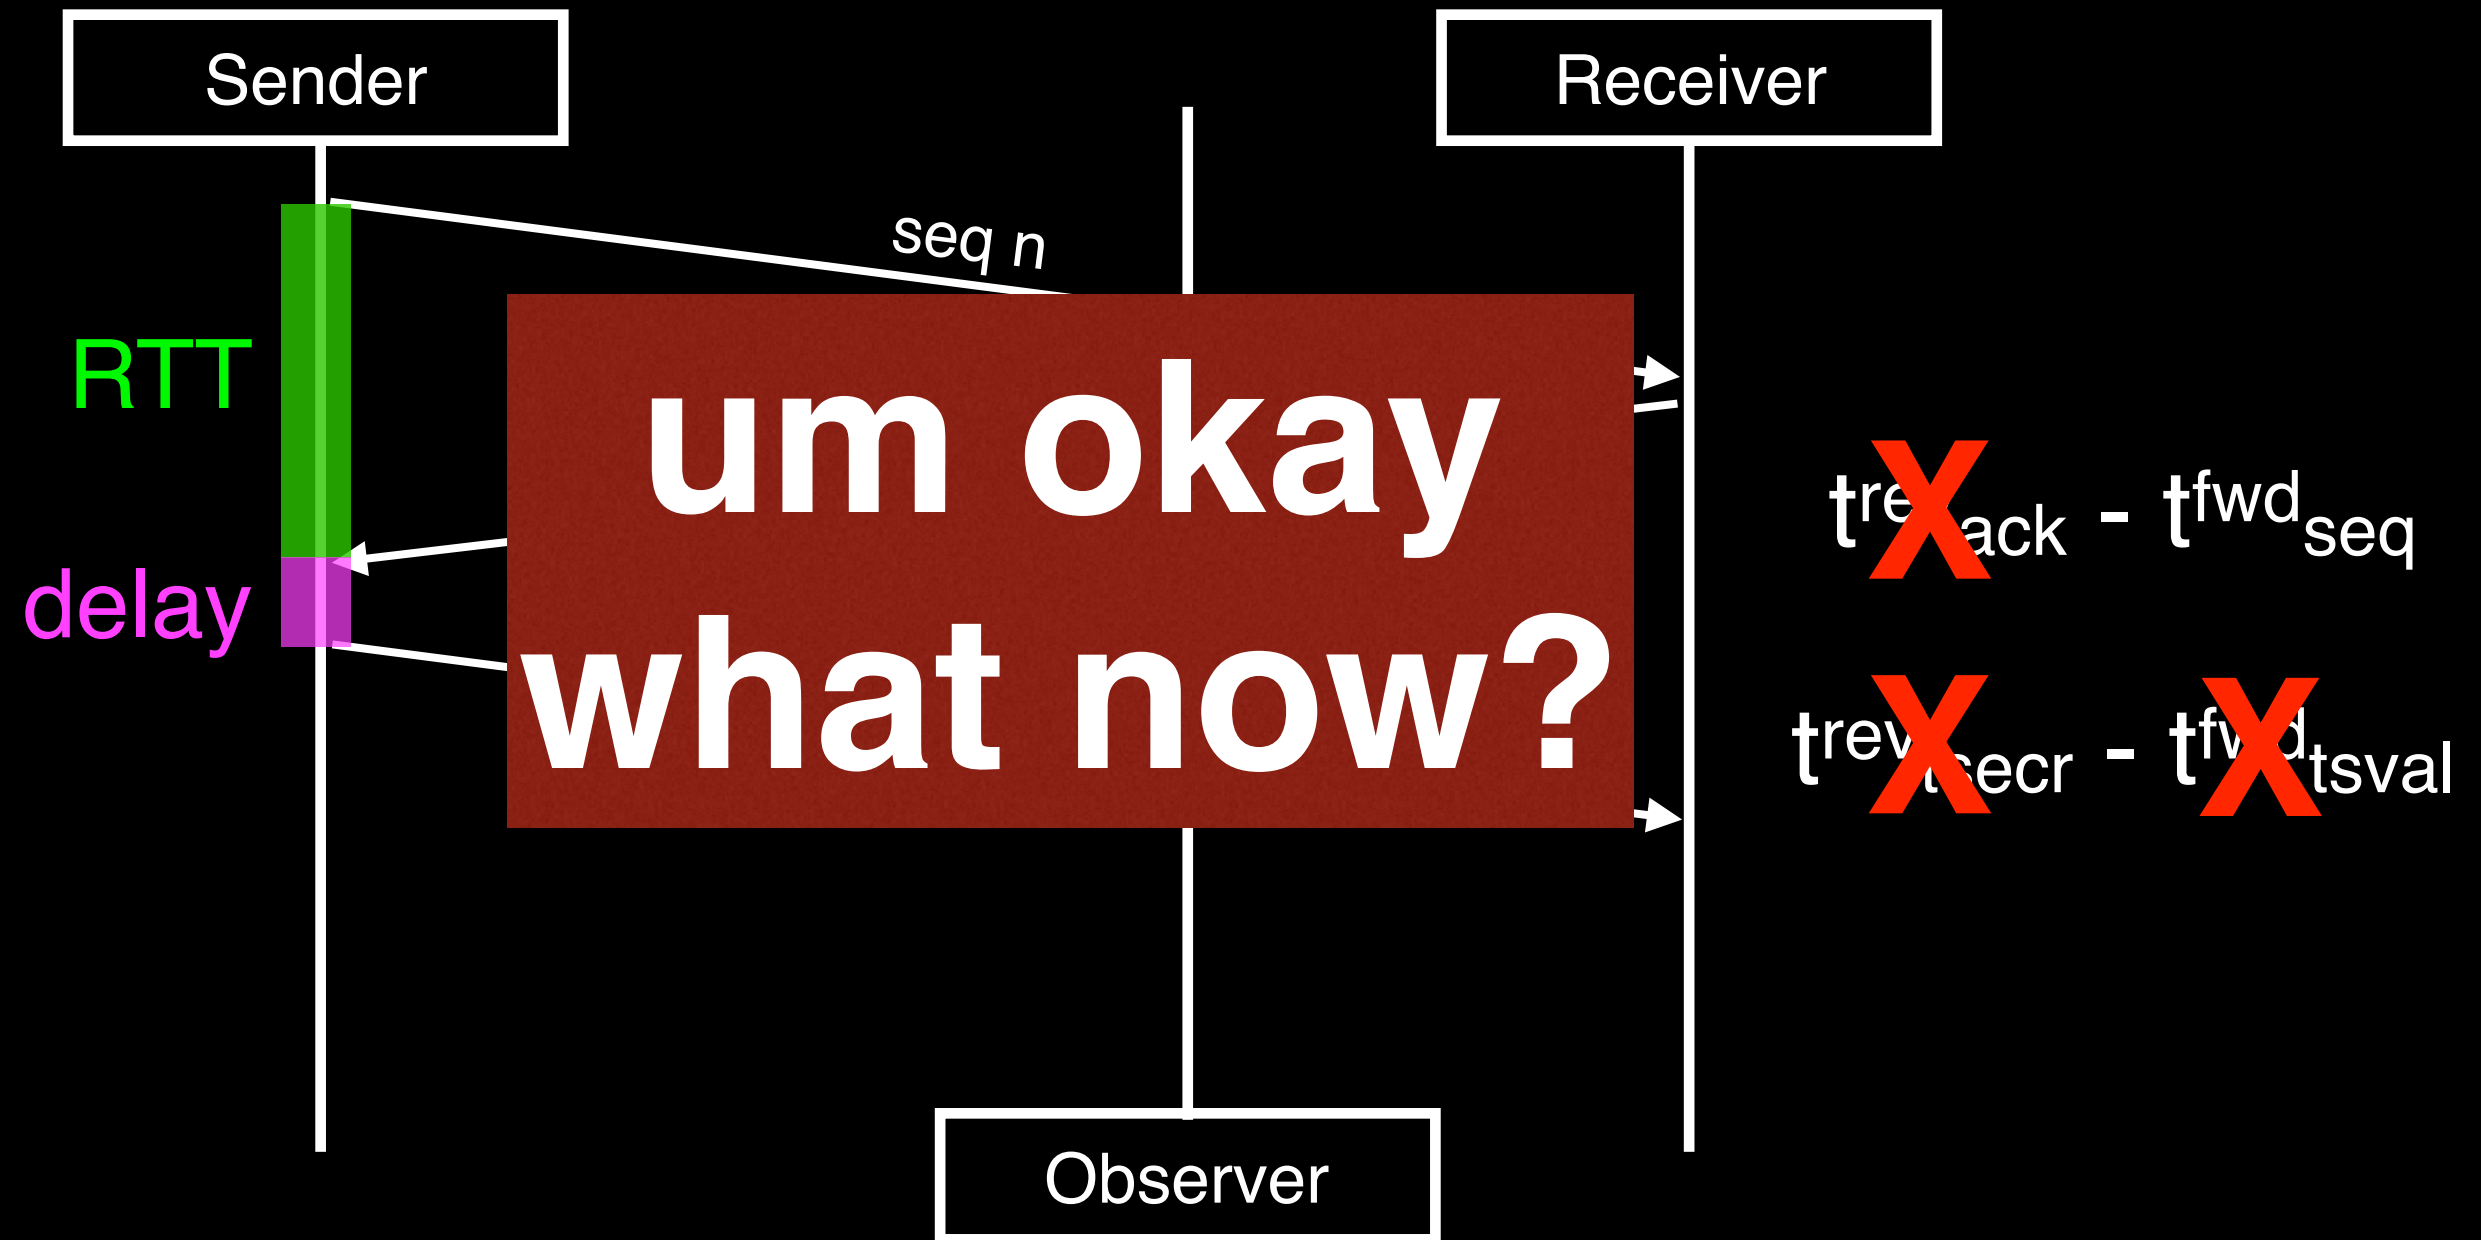


Why encrypt SEQ/ACK/TS?

- A **minimal wire image** is a design goal of QUIC:
 - Defense against “collect it all” is “encrypt it all”
 - Every bit we put on the wire is a bit we won’t be able to change in the future.
 - Every bit we put on the wire is a bit that might be used against us in the future.


QUIC packet header

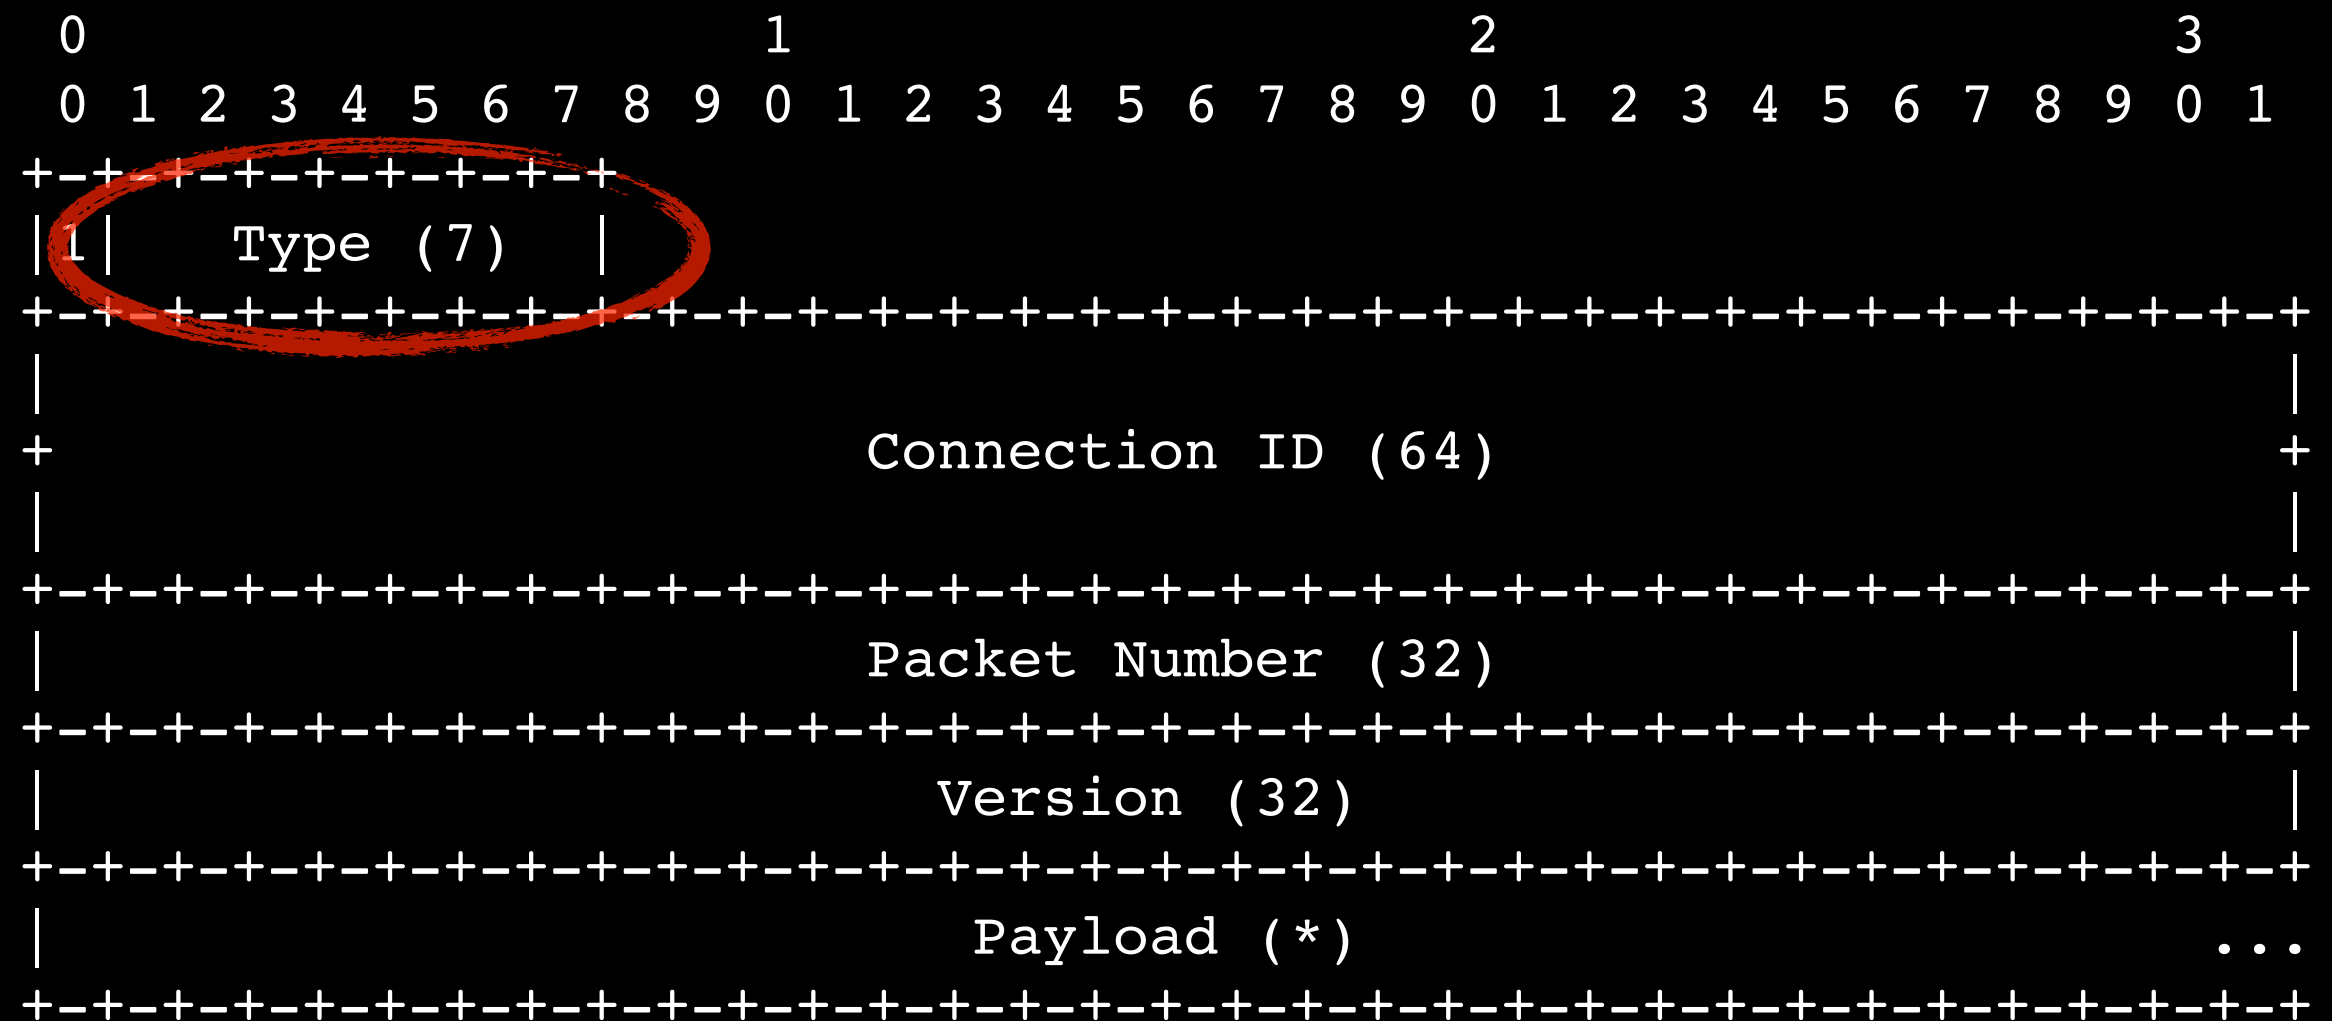


Handshake RTT measurement in QUIC

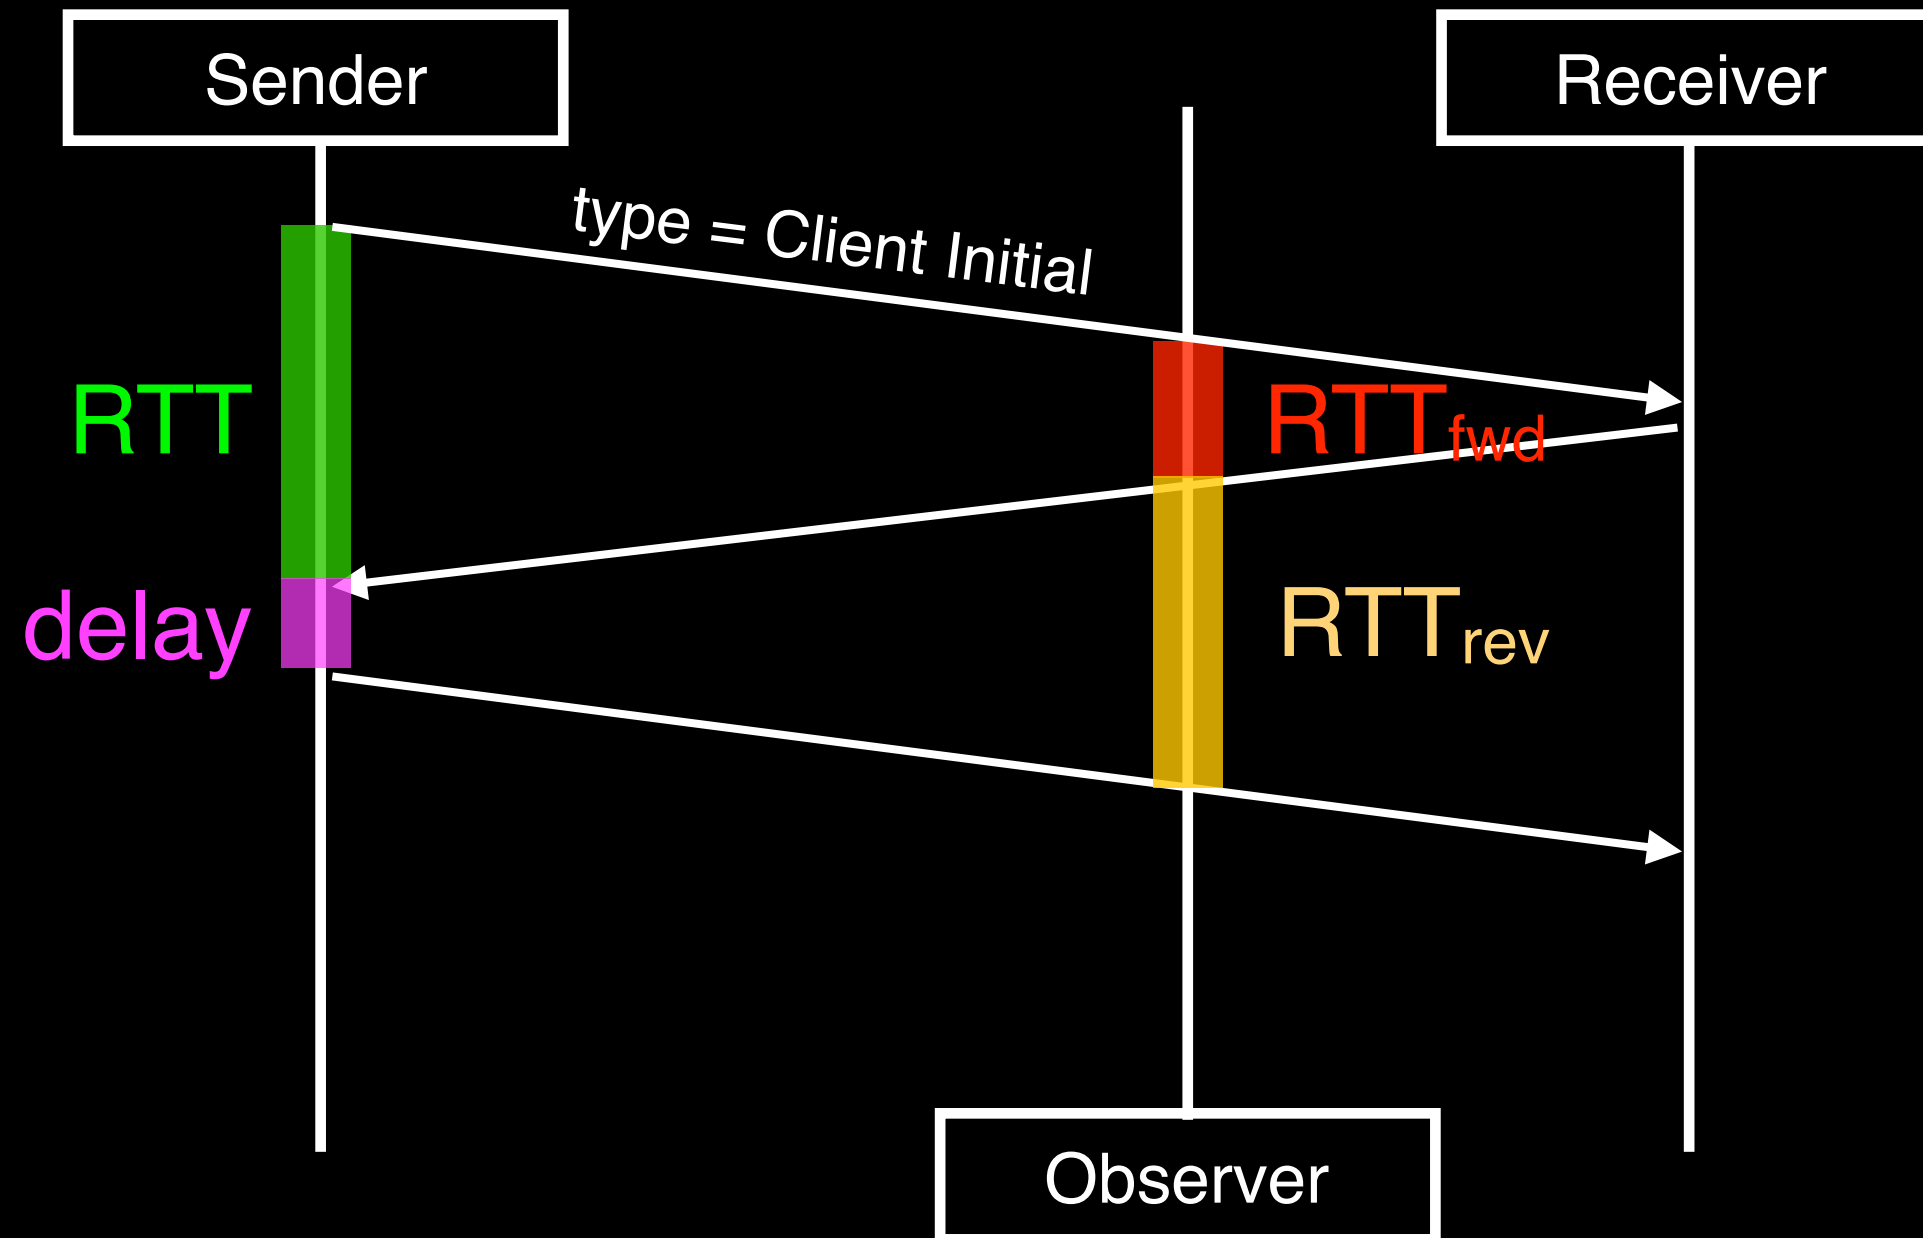


Handshake RTT measurement in QUIC

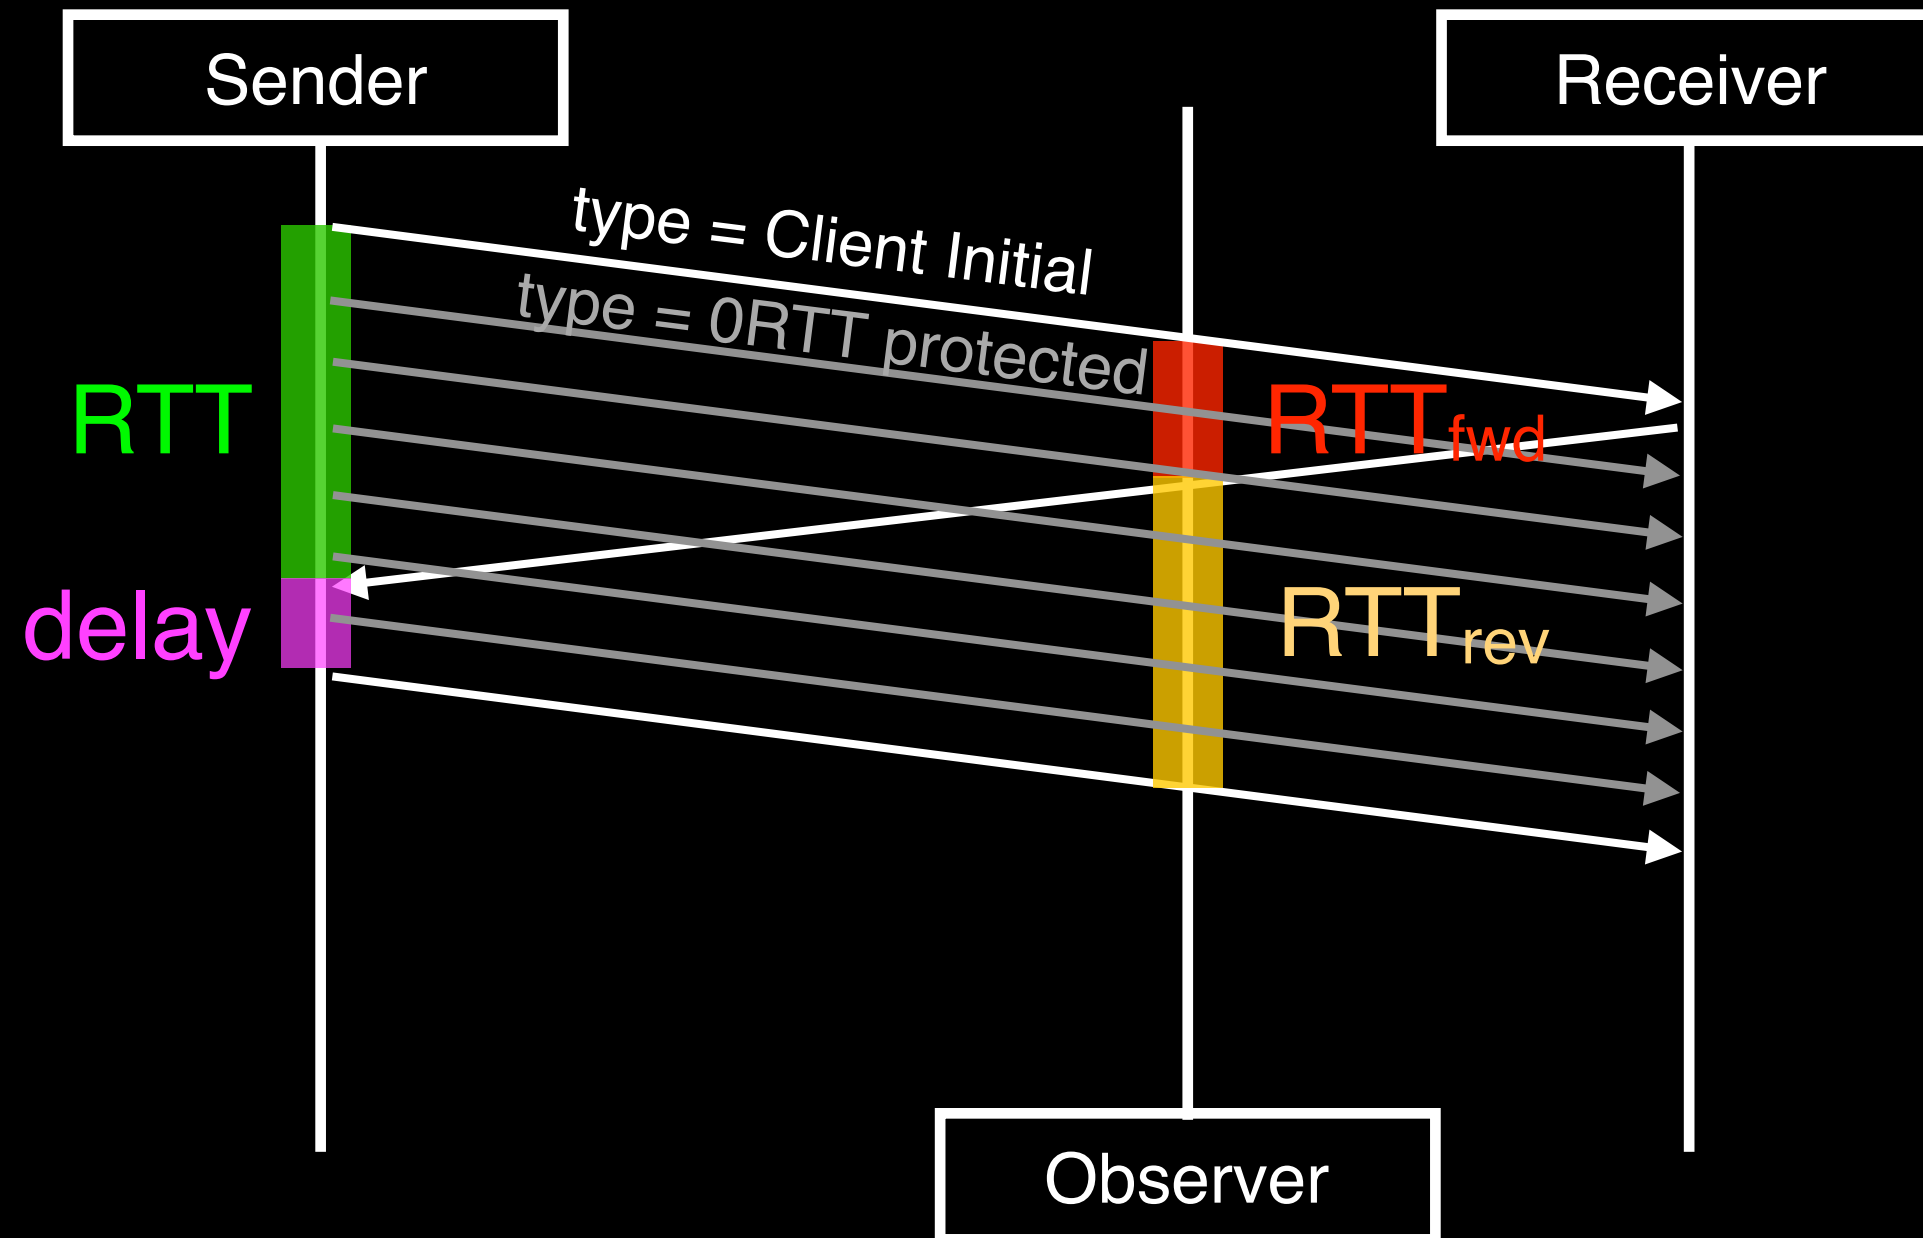

Handshake RTT measurement in QUIC

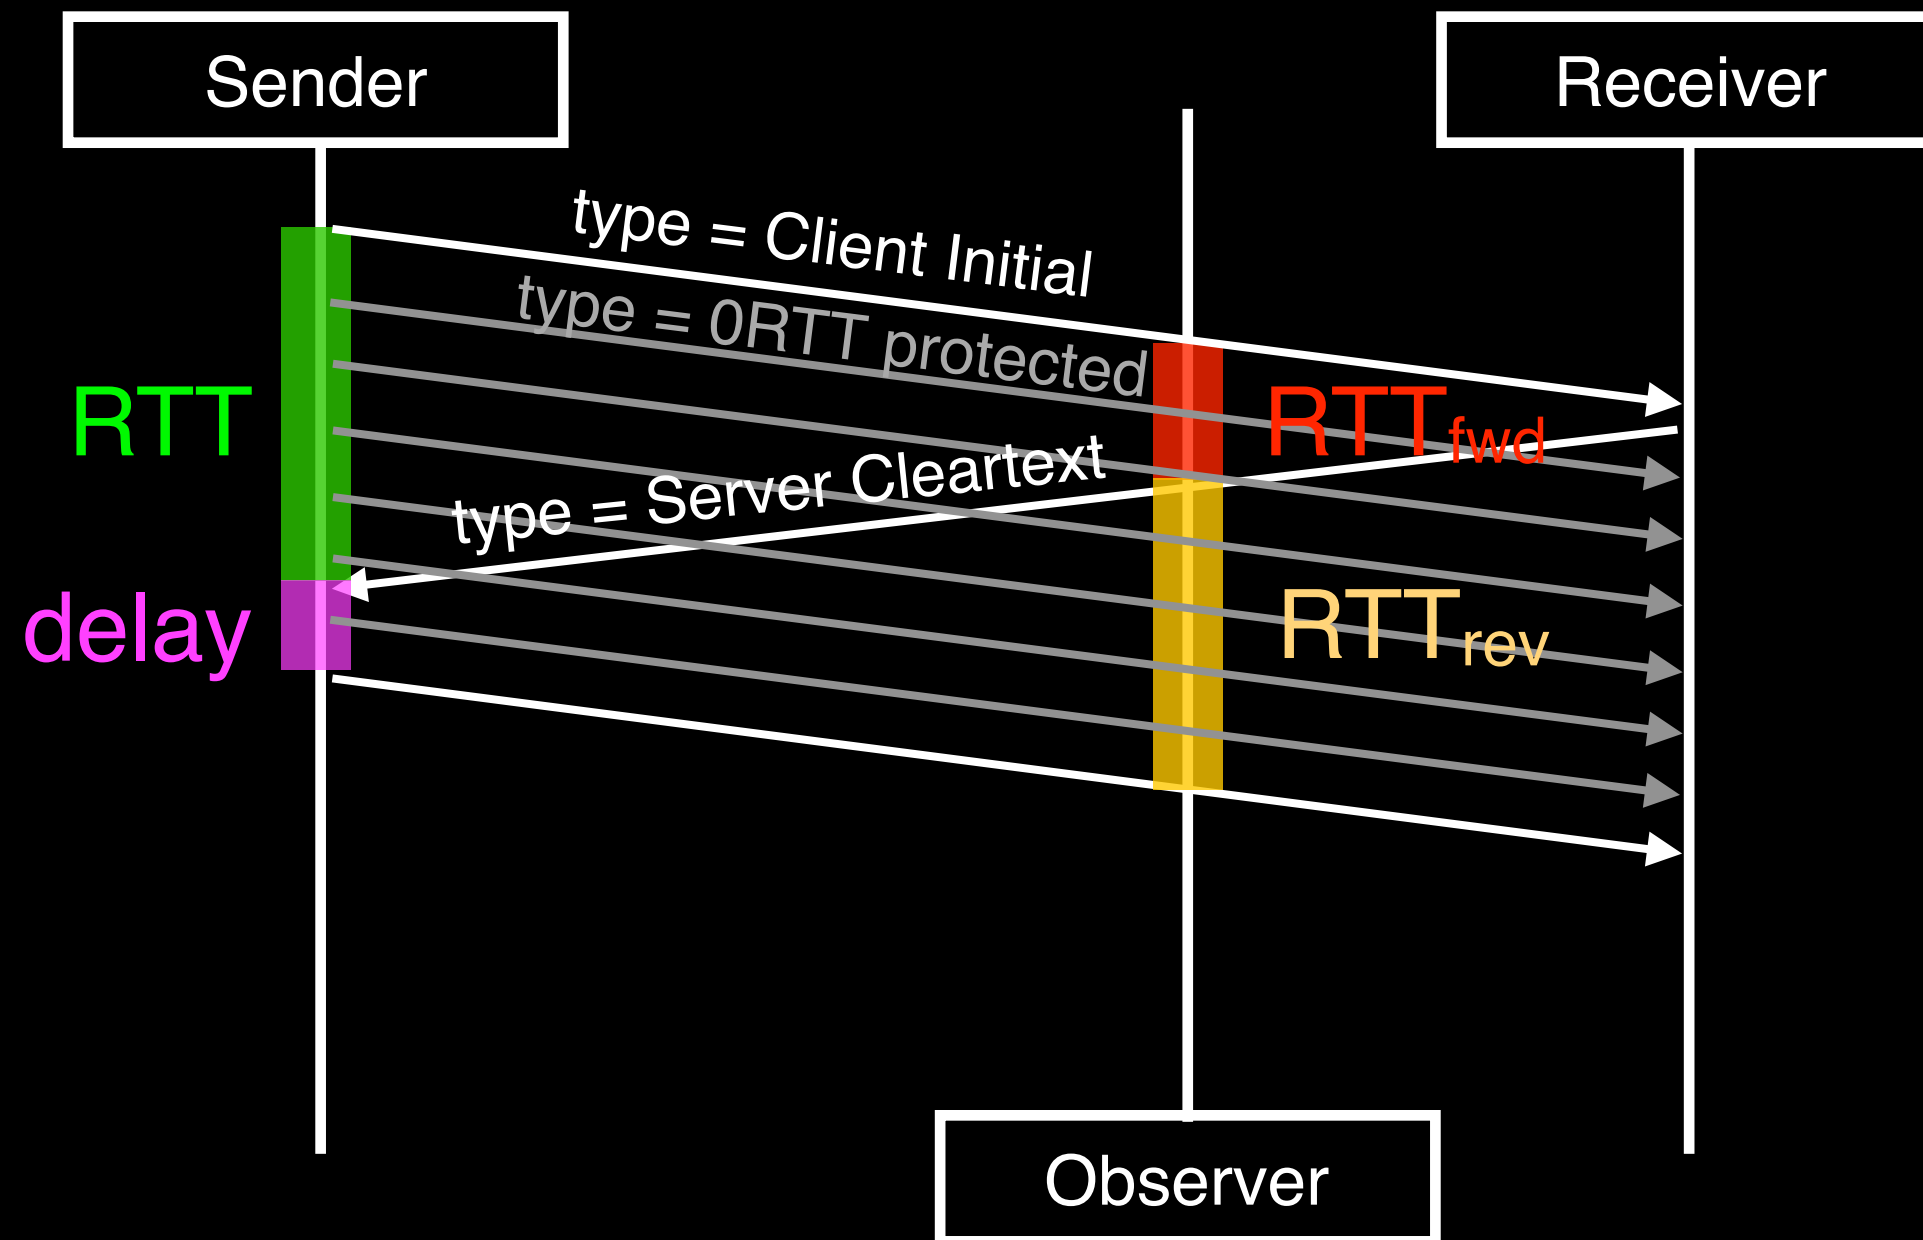


Handshake RTT measurement in QUIC

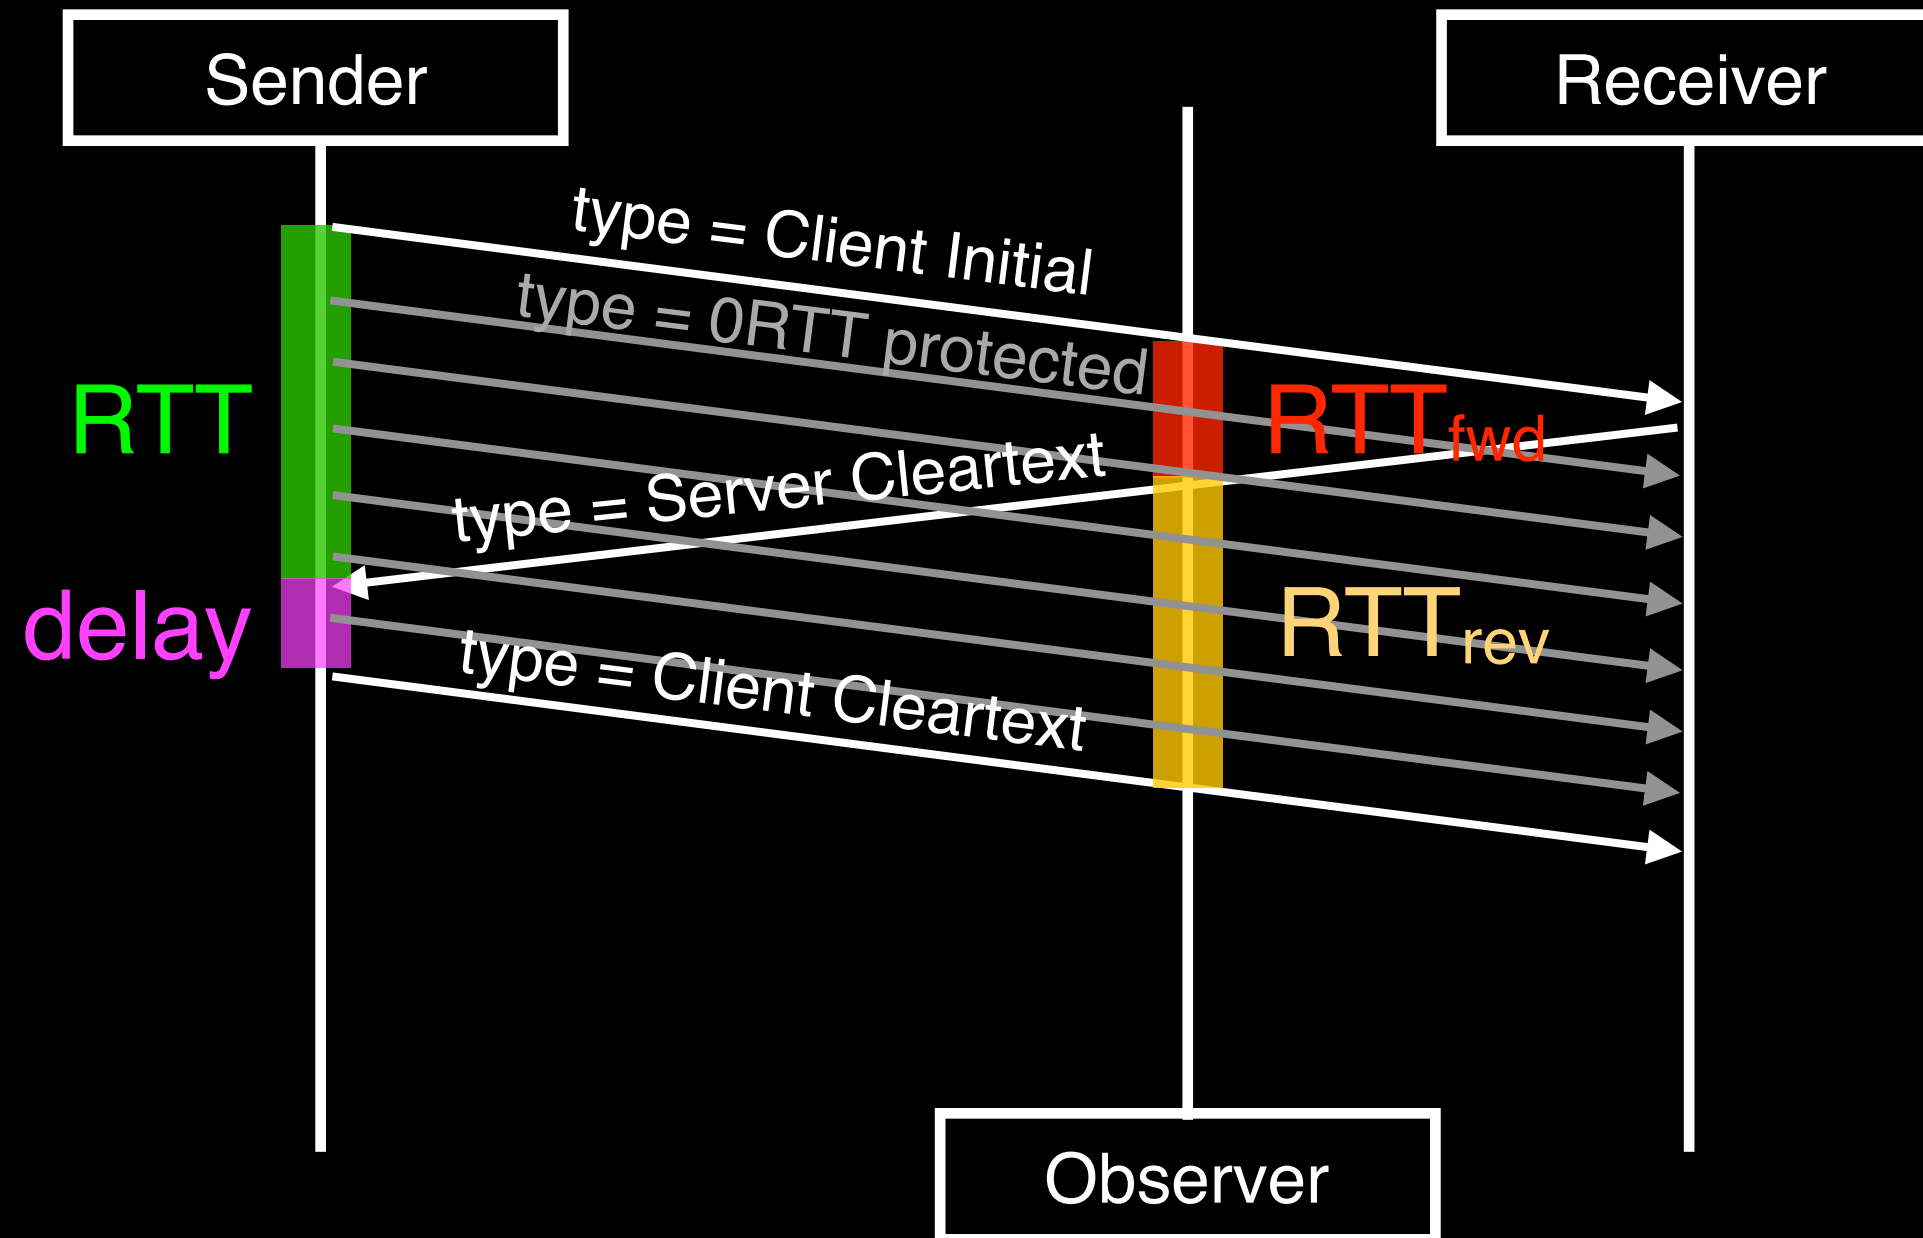

Explicit passive measurability of RTT


- If passive measurability of a protocol is a desirable feature, then it should be explicitly supported by the design of the protocol.
- Is there a way to do this with a minimal impact on the wire image?
 - One sample per flow: ensure handshake is distinguishable in both directions
 - Multiple samples per flow: latency spin bit

The Latency Spin Bit

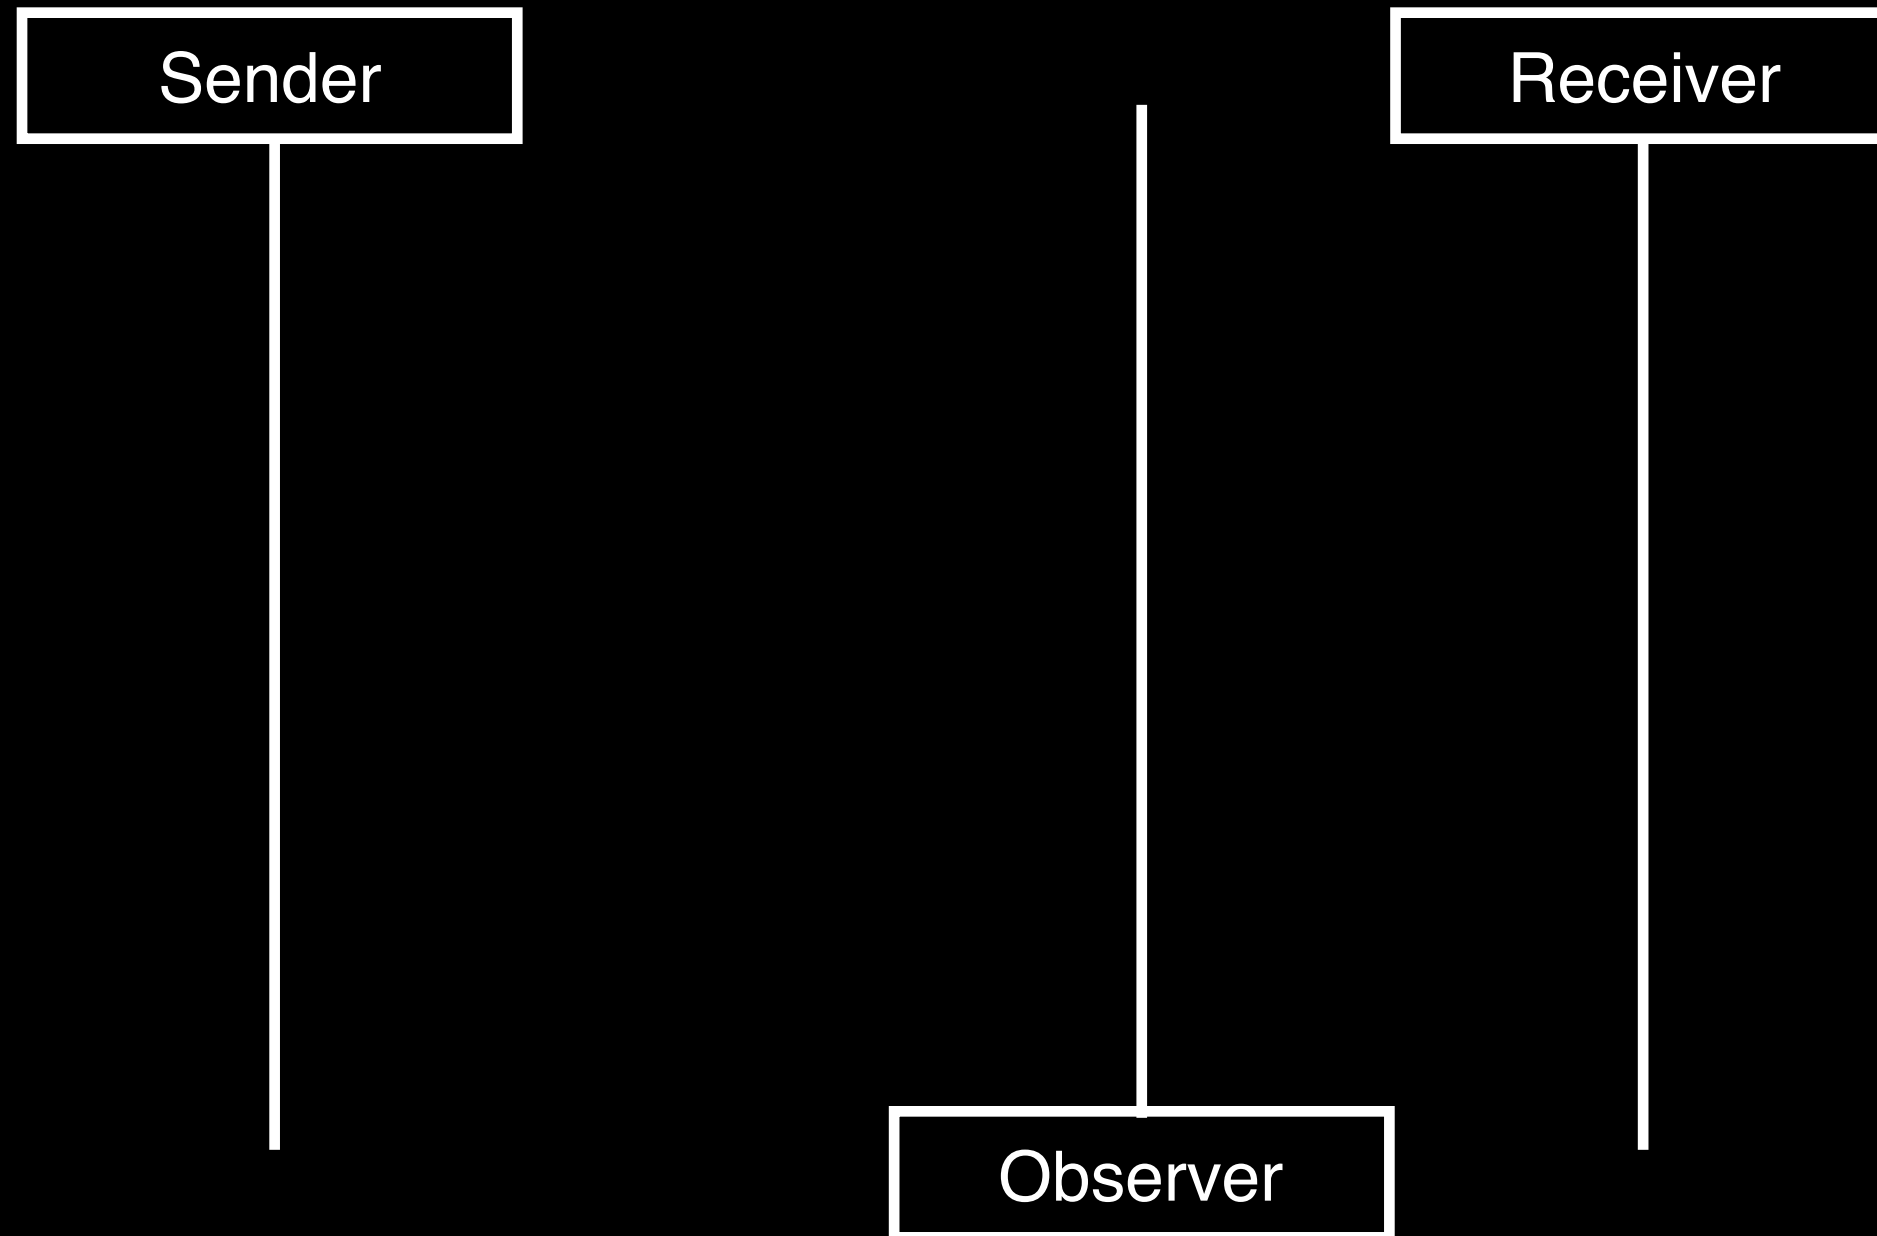


see <https://github.com/quicwg/base-drafts/pull/609>

The Latency Spin Bit

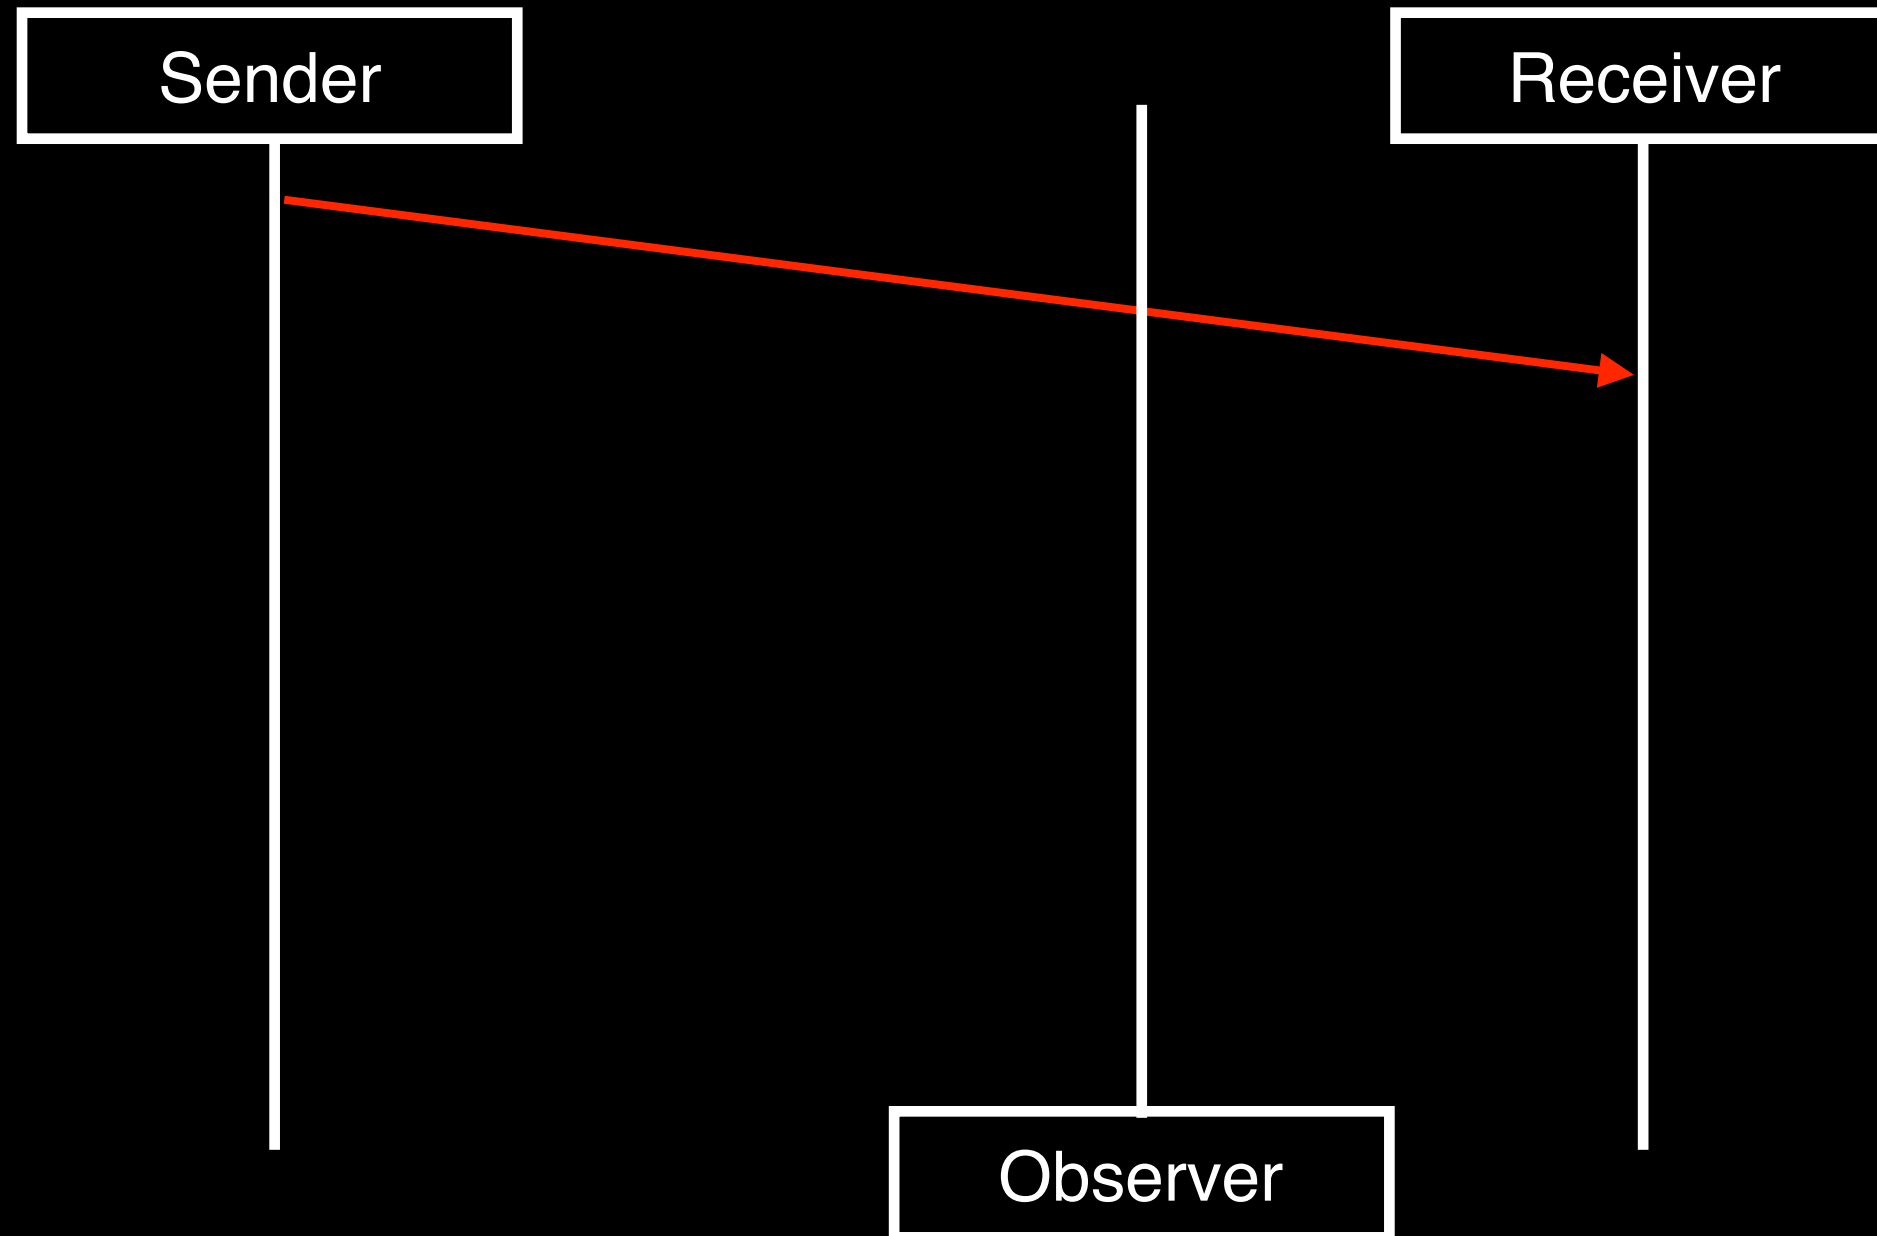


see <https://github.com/quicwg/base-drafts/pull/609>

The Latency Spin Bit

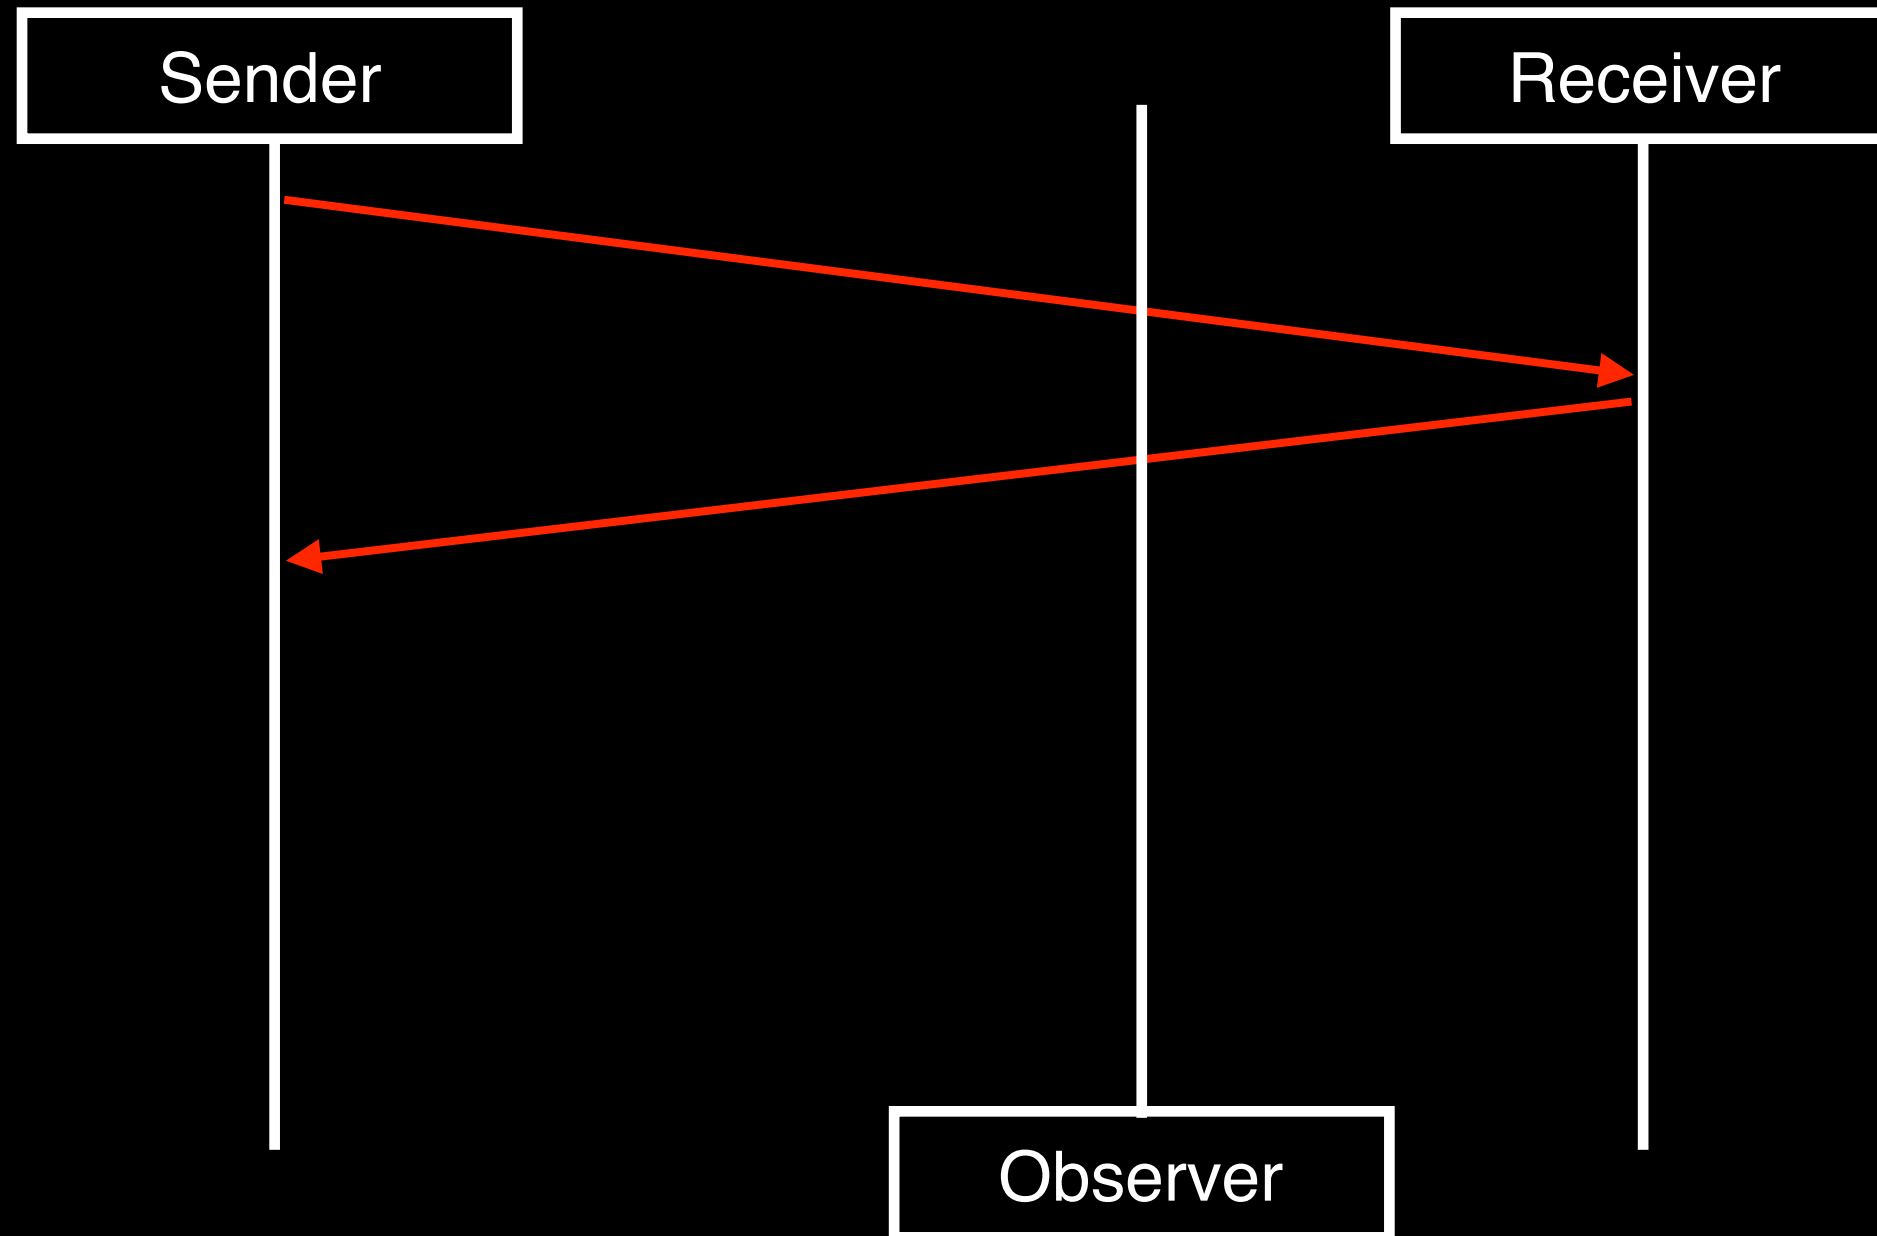


see <https://github.com/quicwg/base-drafts/pull/609>

The Latency Spin Bit

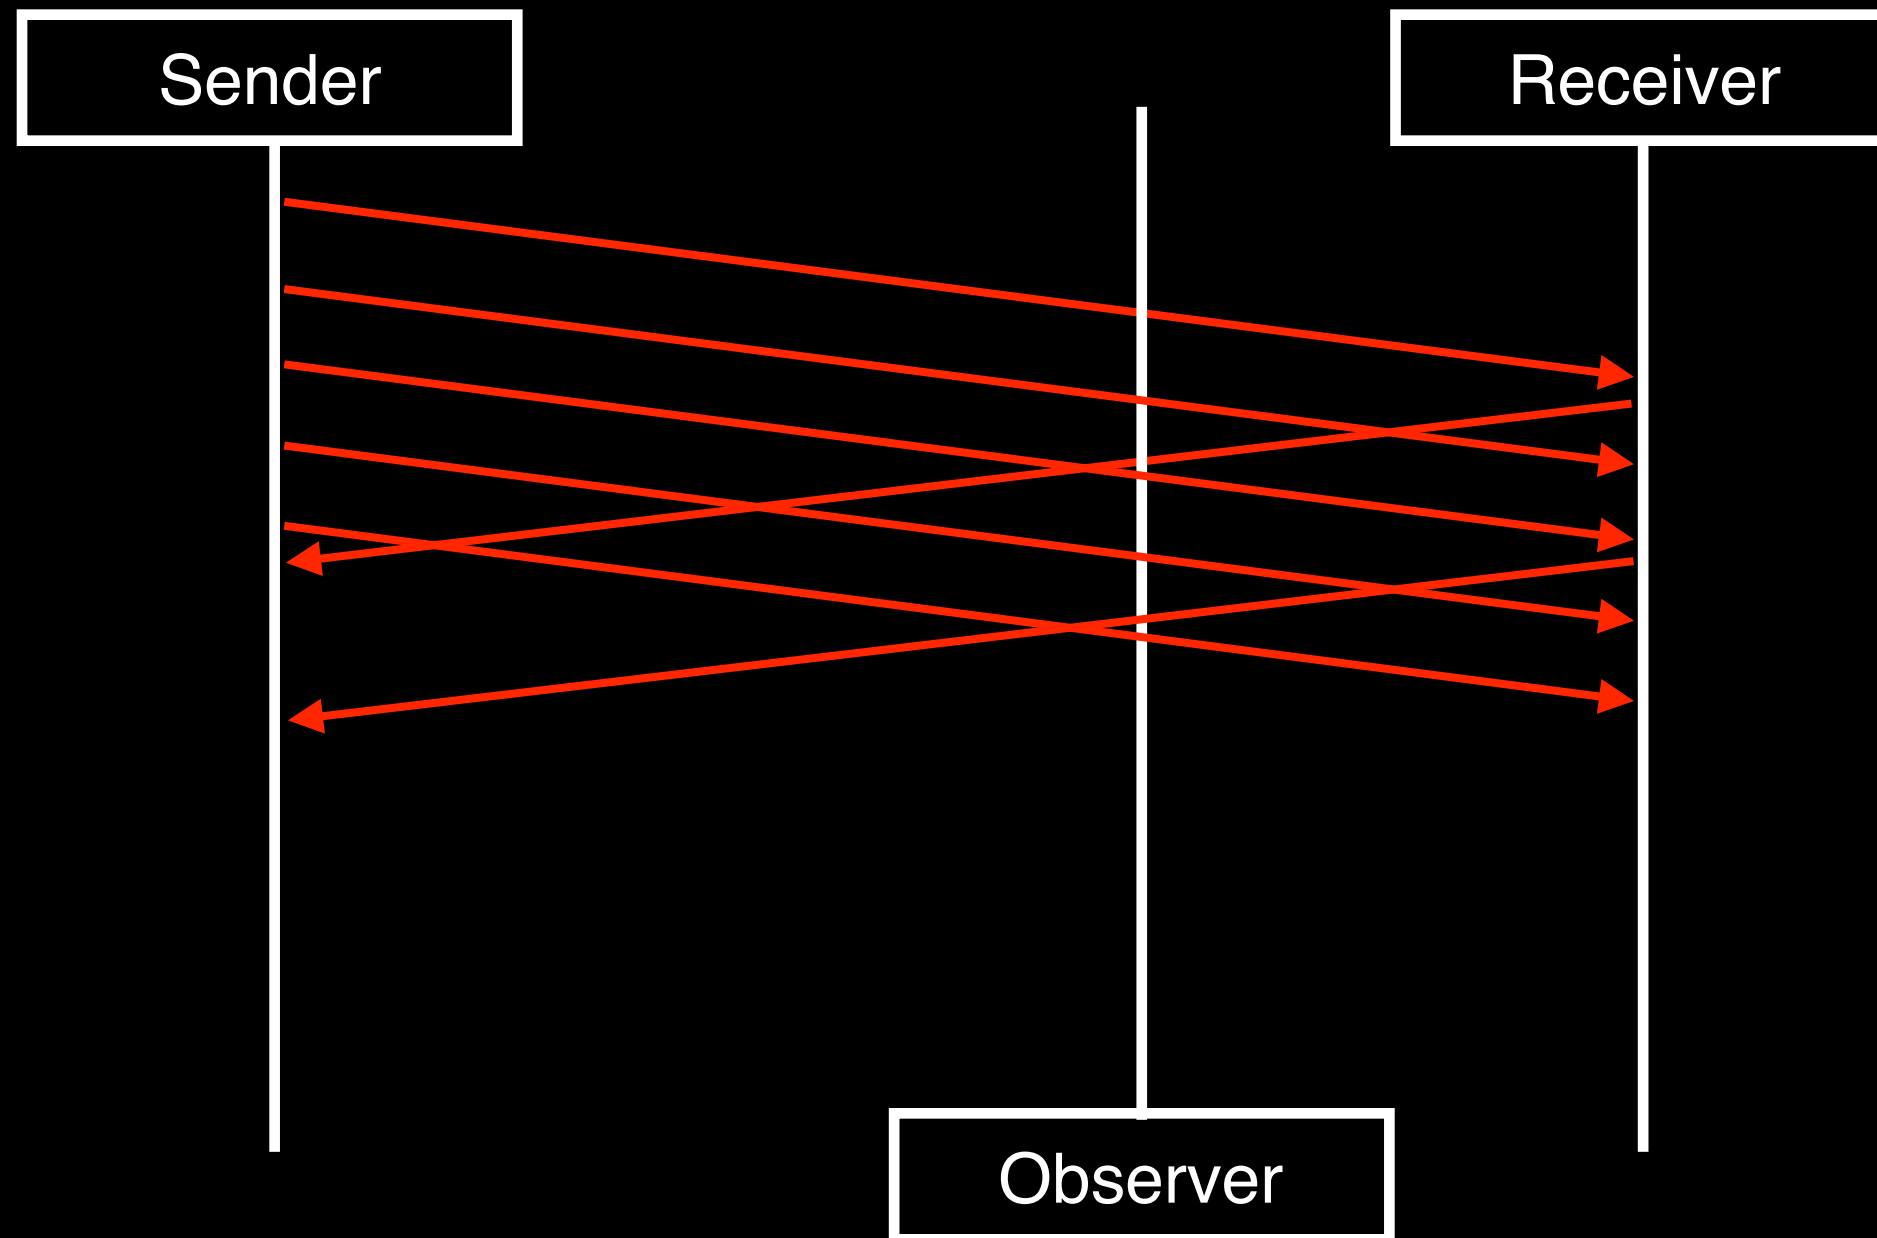


see <https://github.com/quicwg/base-drafts/pull/609>

The Latency Spin Bit

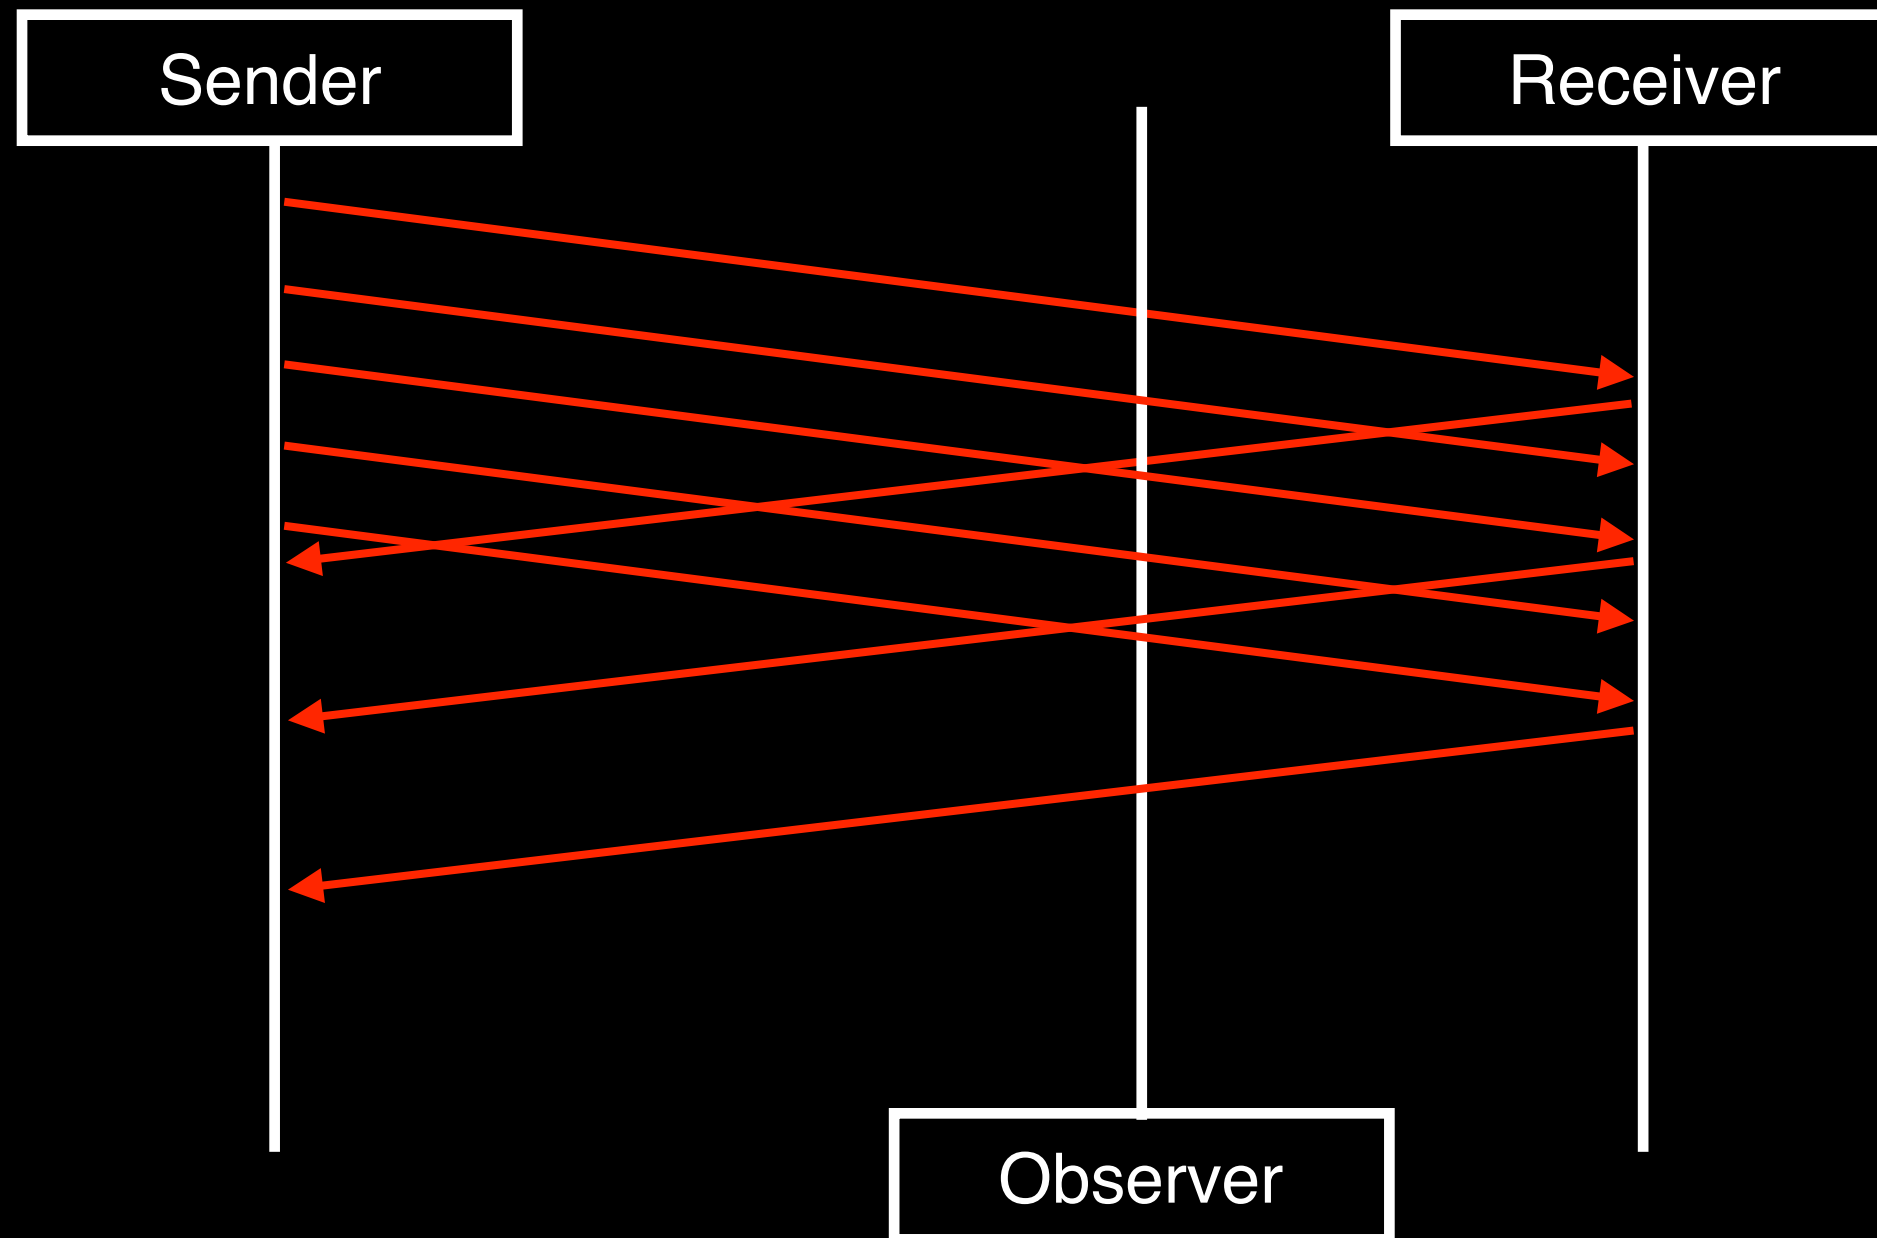


see <https://github.com/quicwg/base-drafts/pull/609>

The Latency Spin Bit

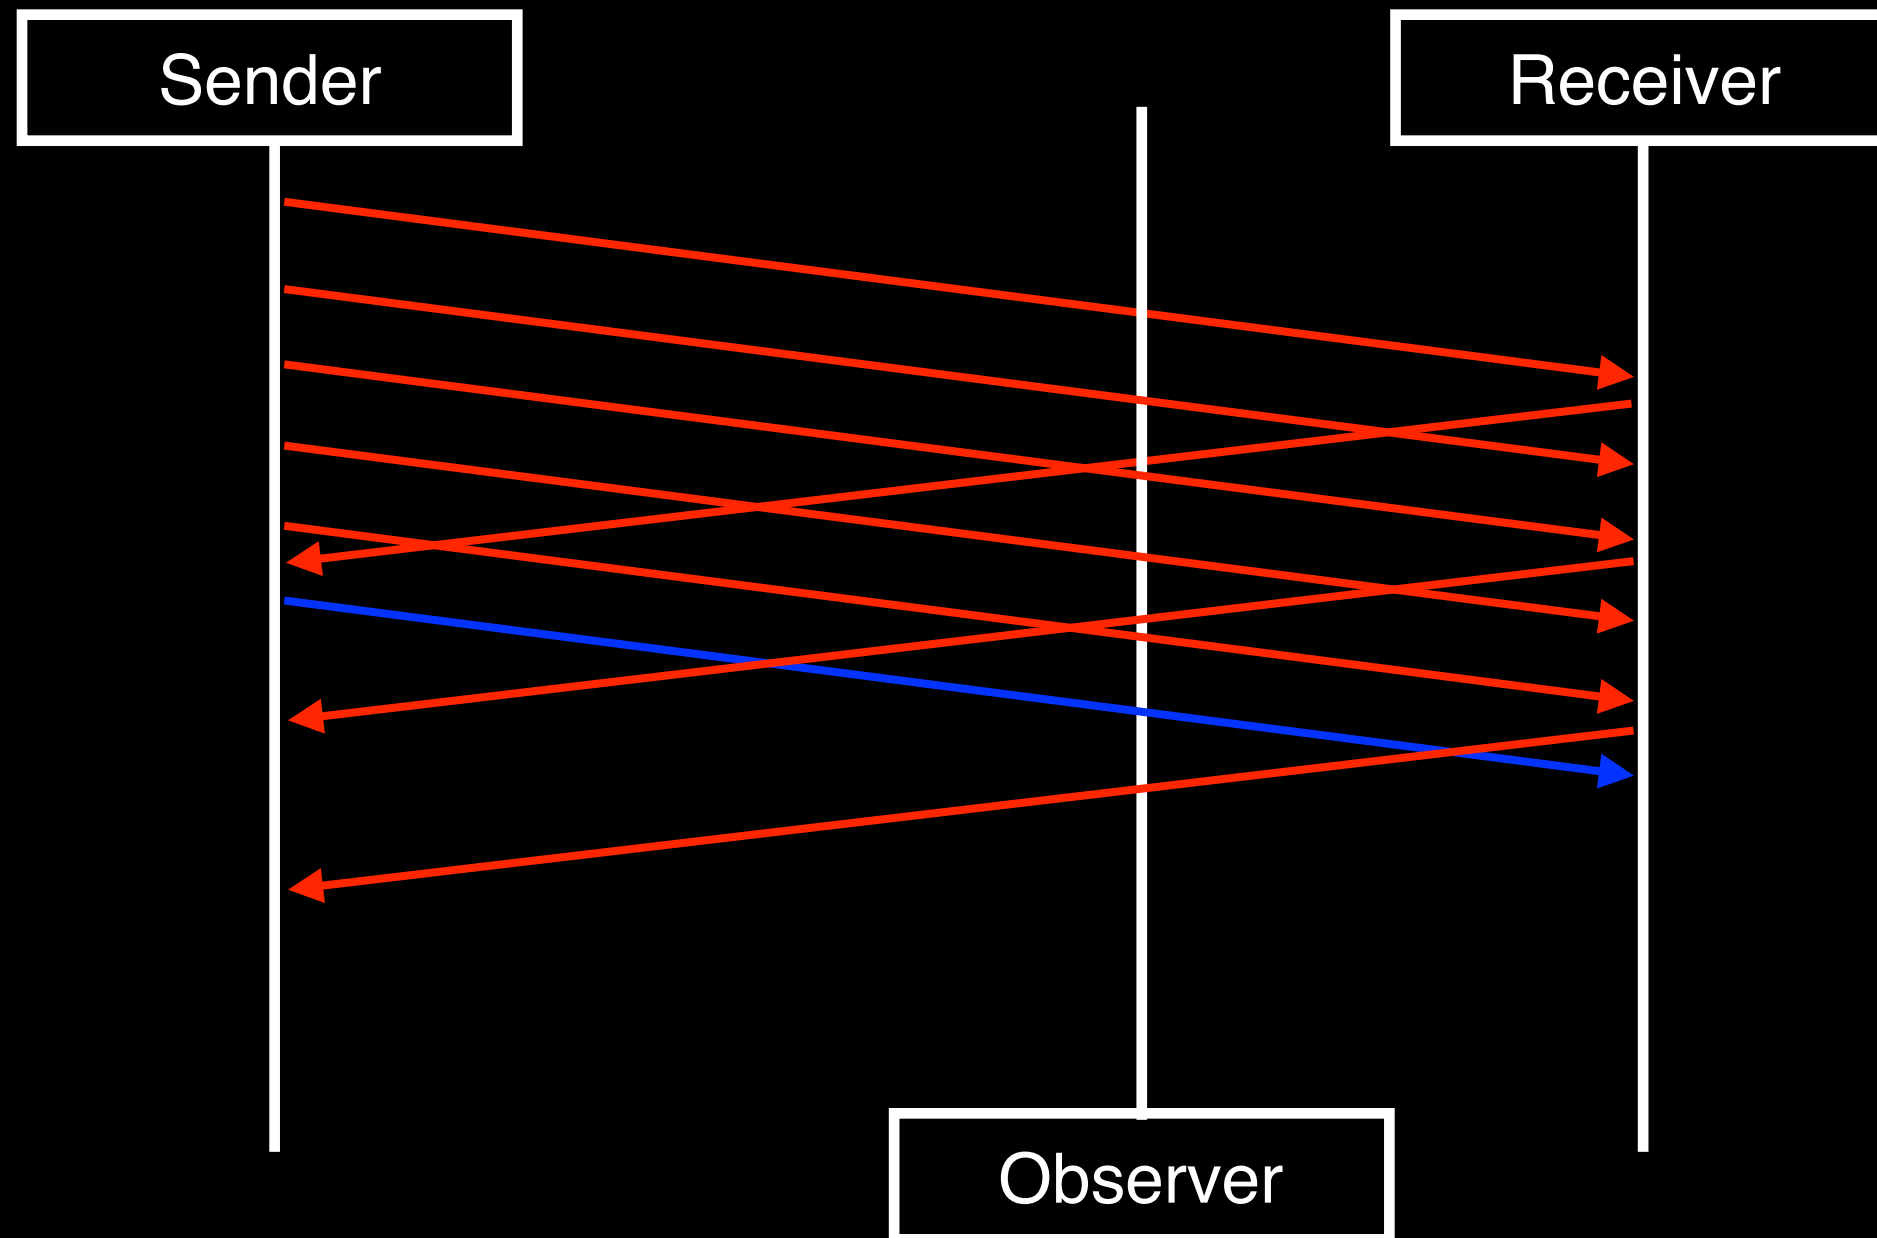


see <https://github.com/quicwg/base-drafts/pull/609>

The Latency Spin Bit

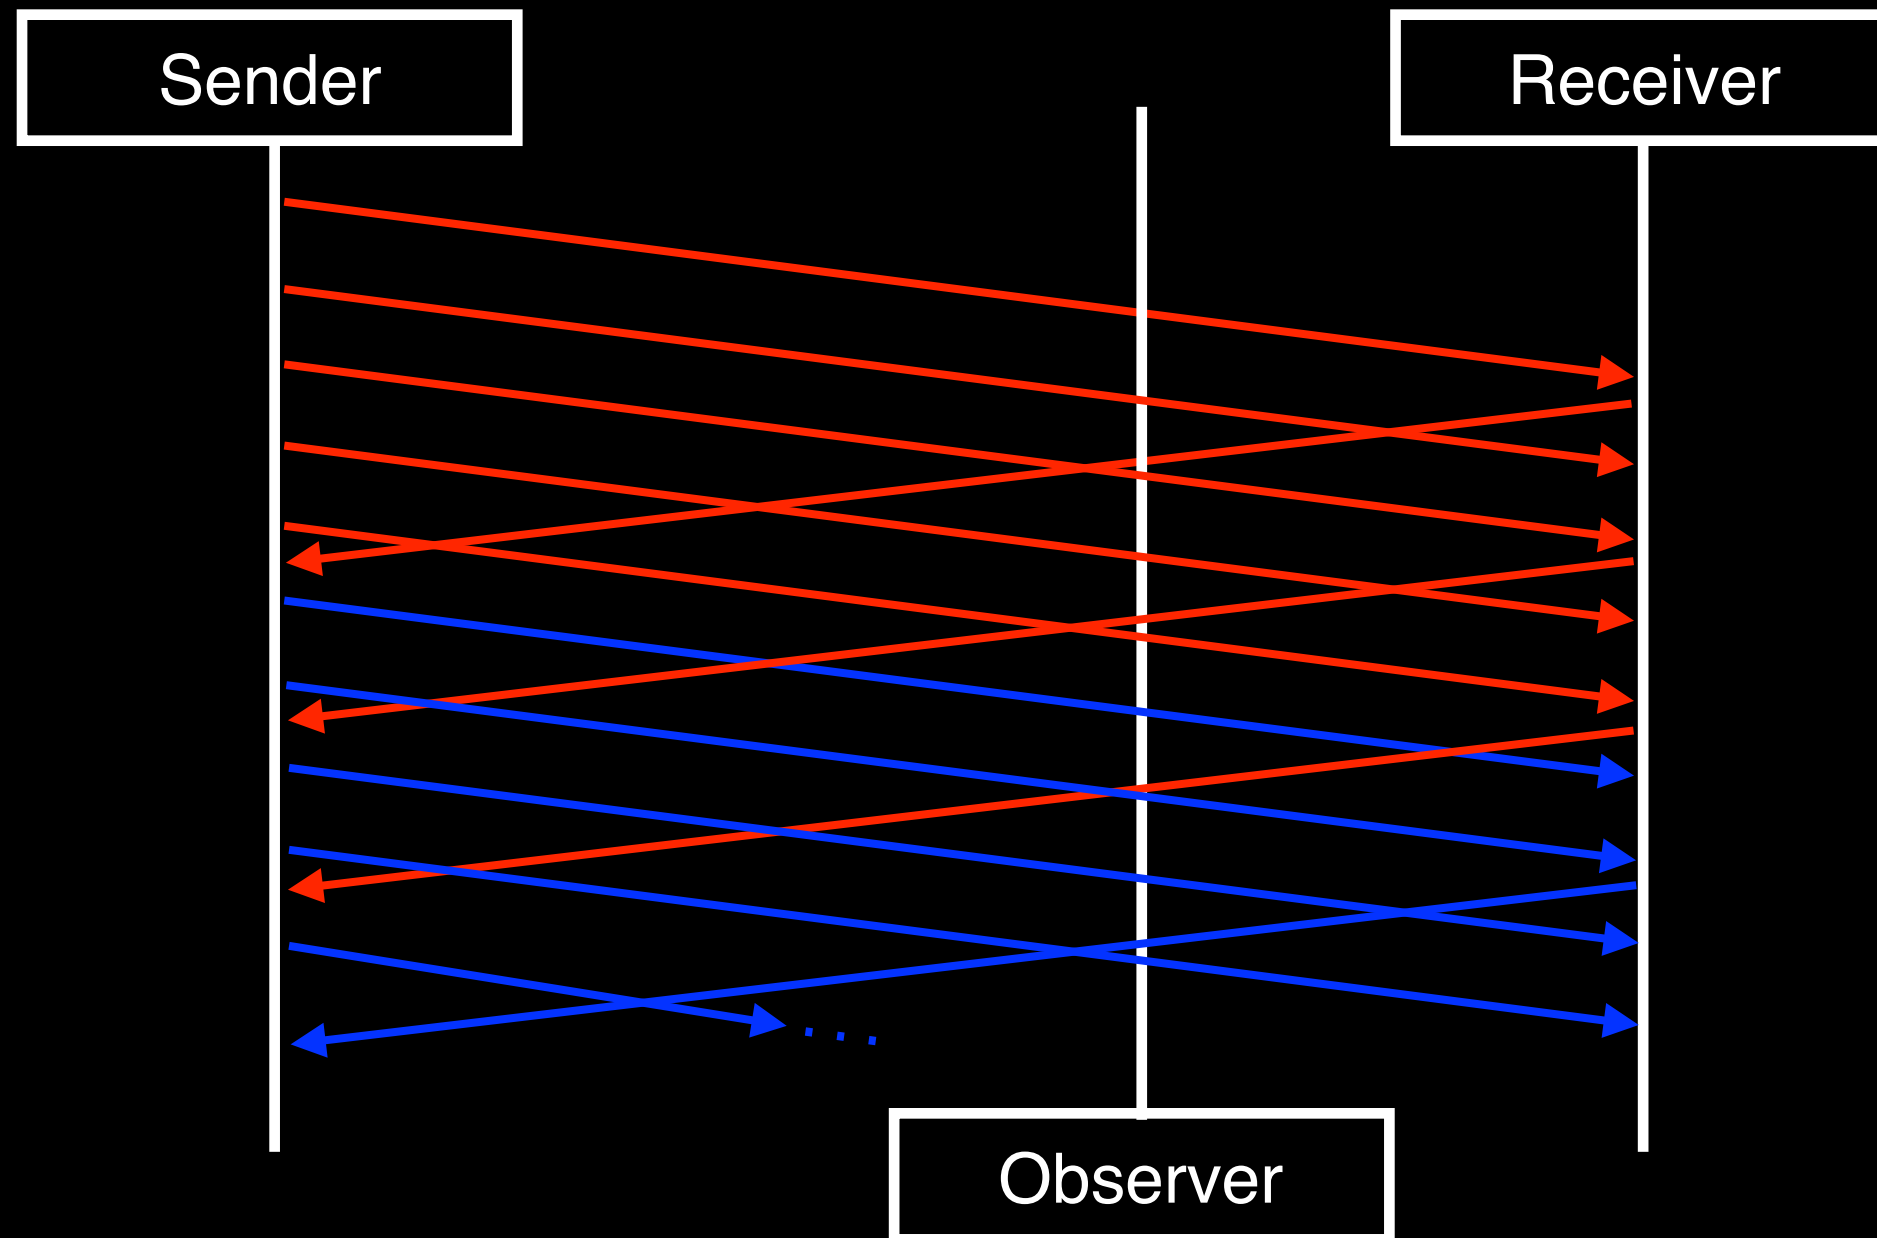


see <https://github.com/quicwg/base-drafts/pull/609>

The Latency Spin Bit

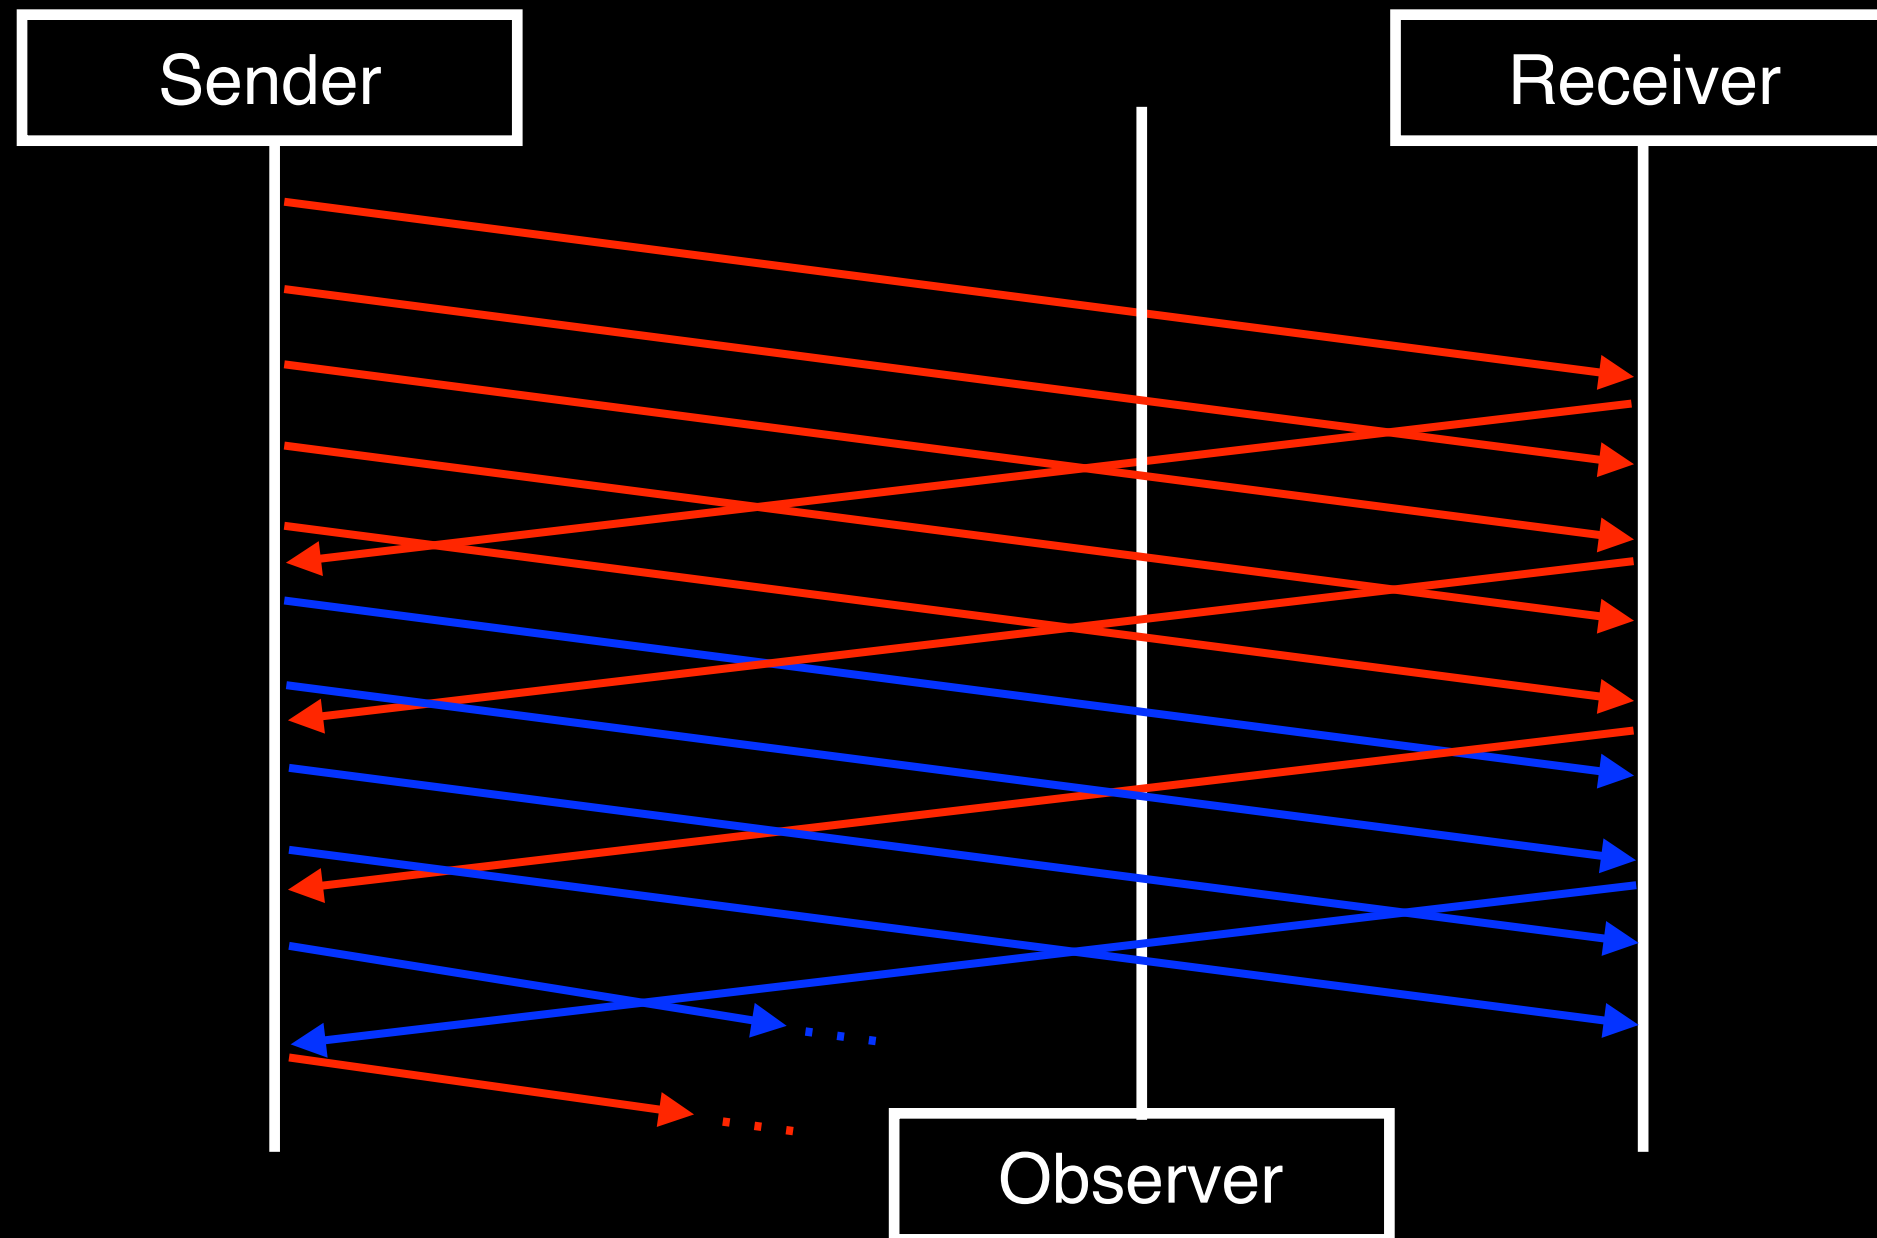


see <https://github.com/quicwg/base-drafts/pull/609>

The Latency Spin Bit

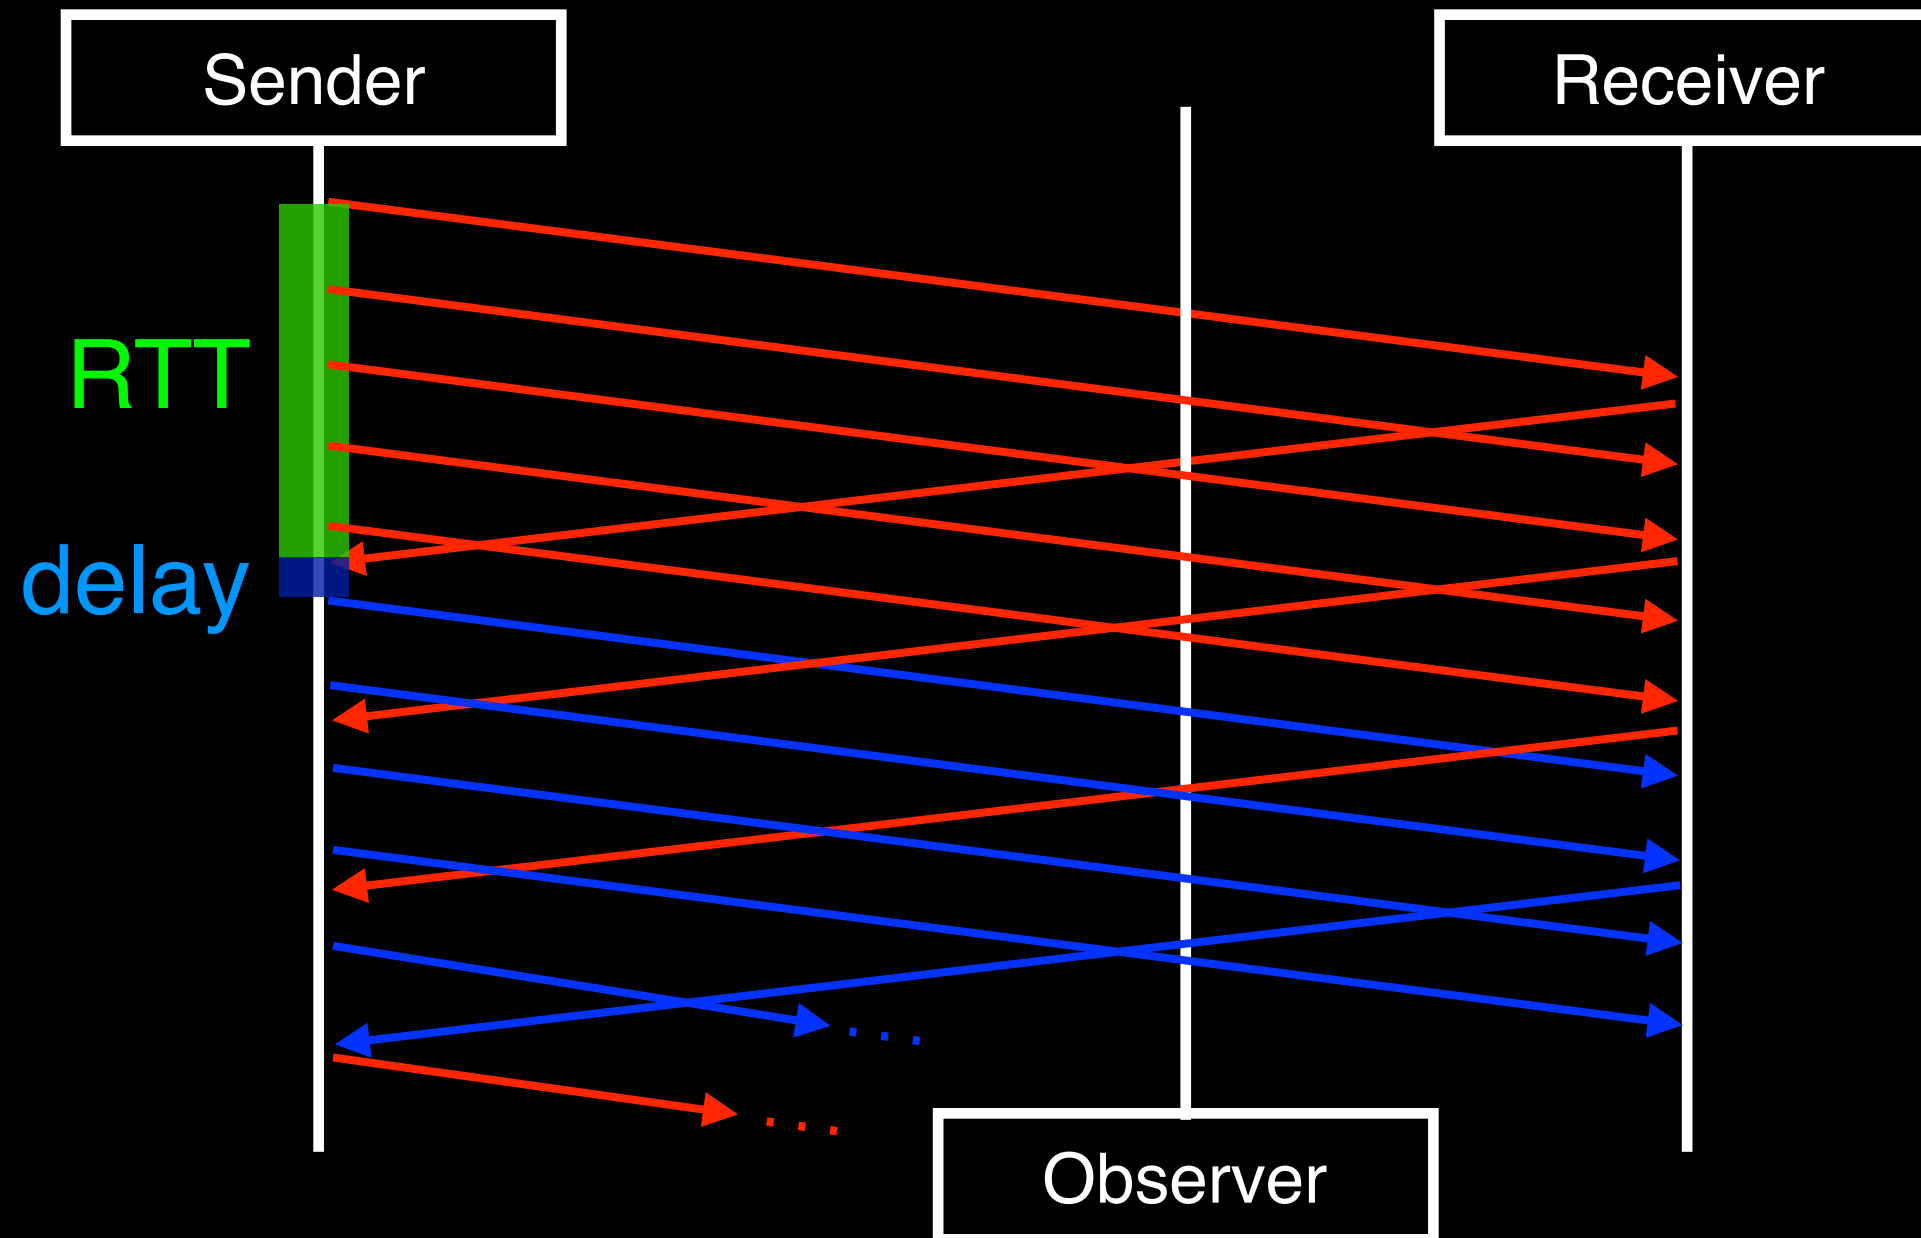

see <https://github.com/quicwg/base-drafts/pull/609>

The Latency Spin Bit

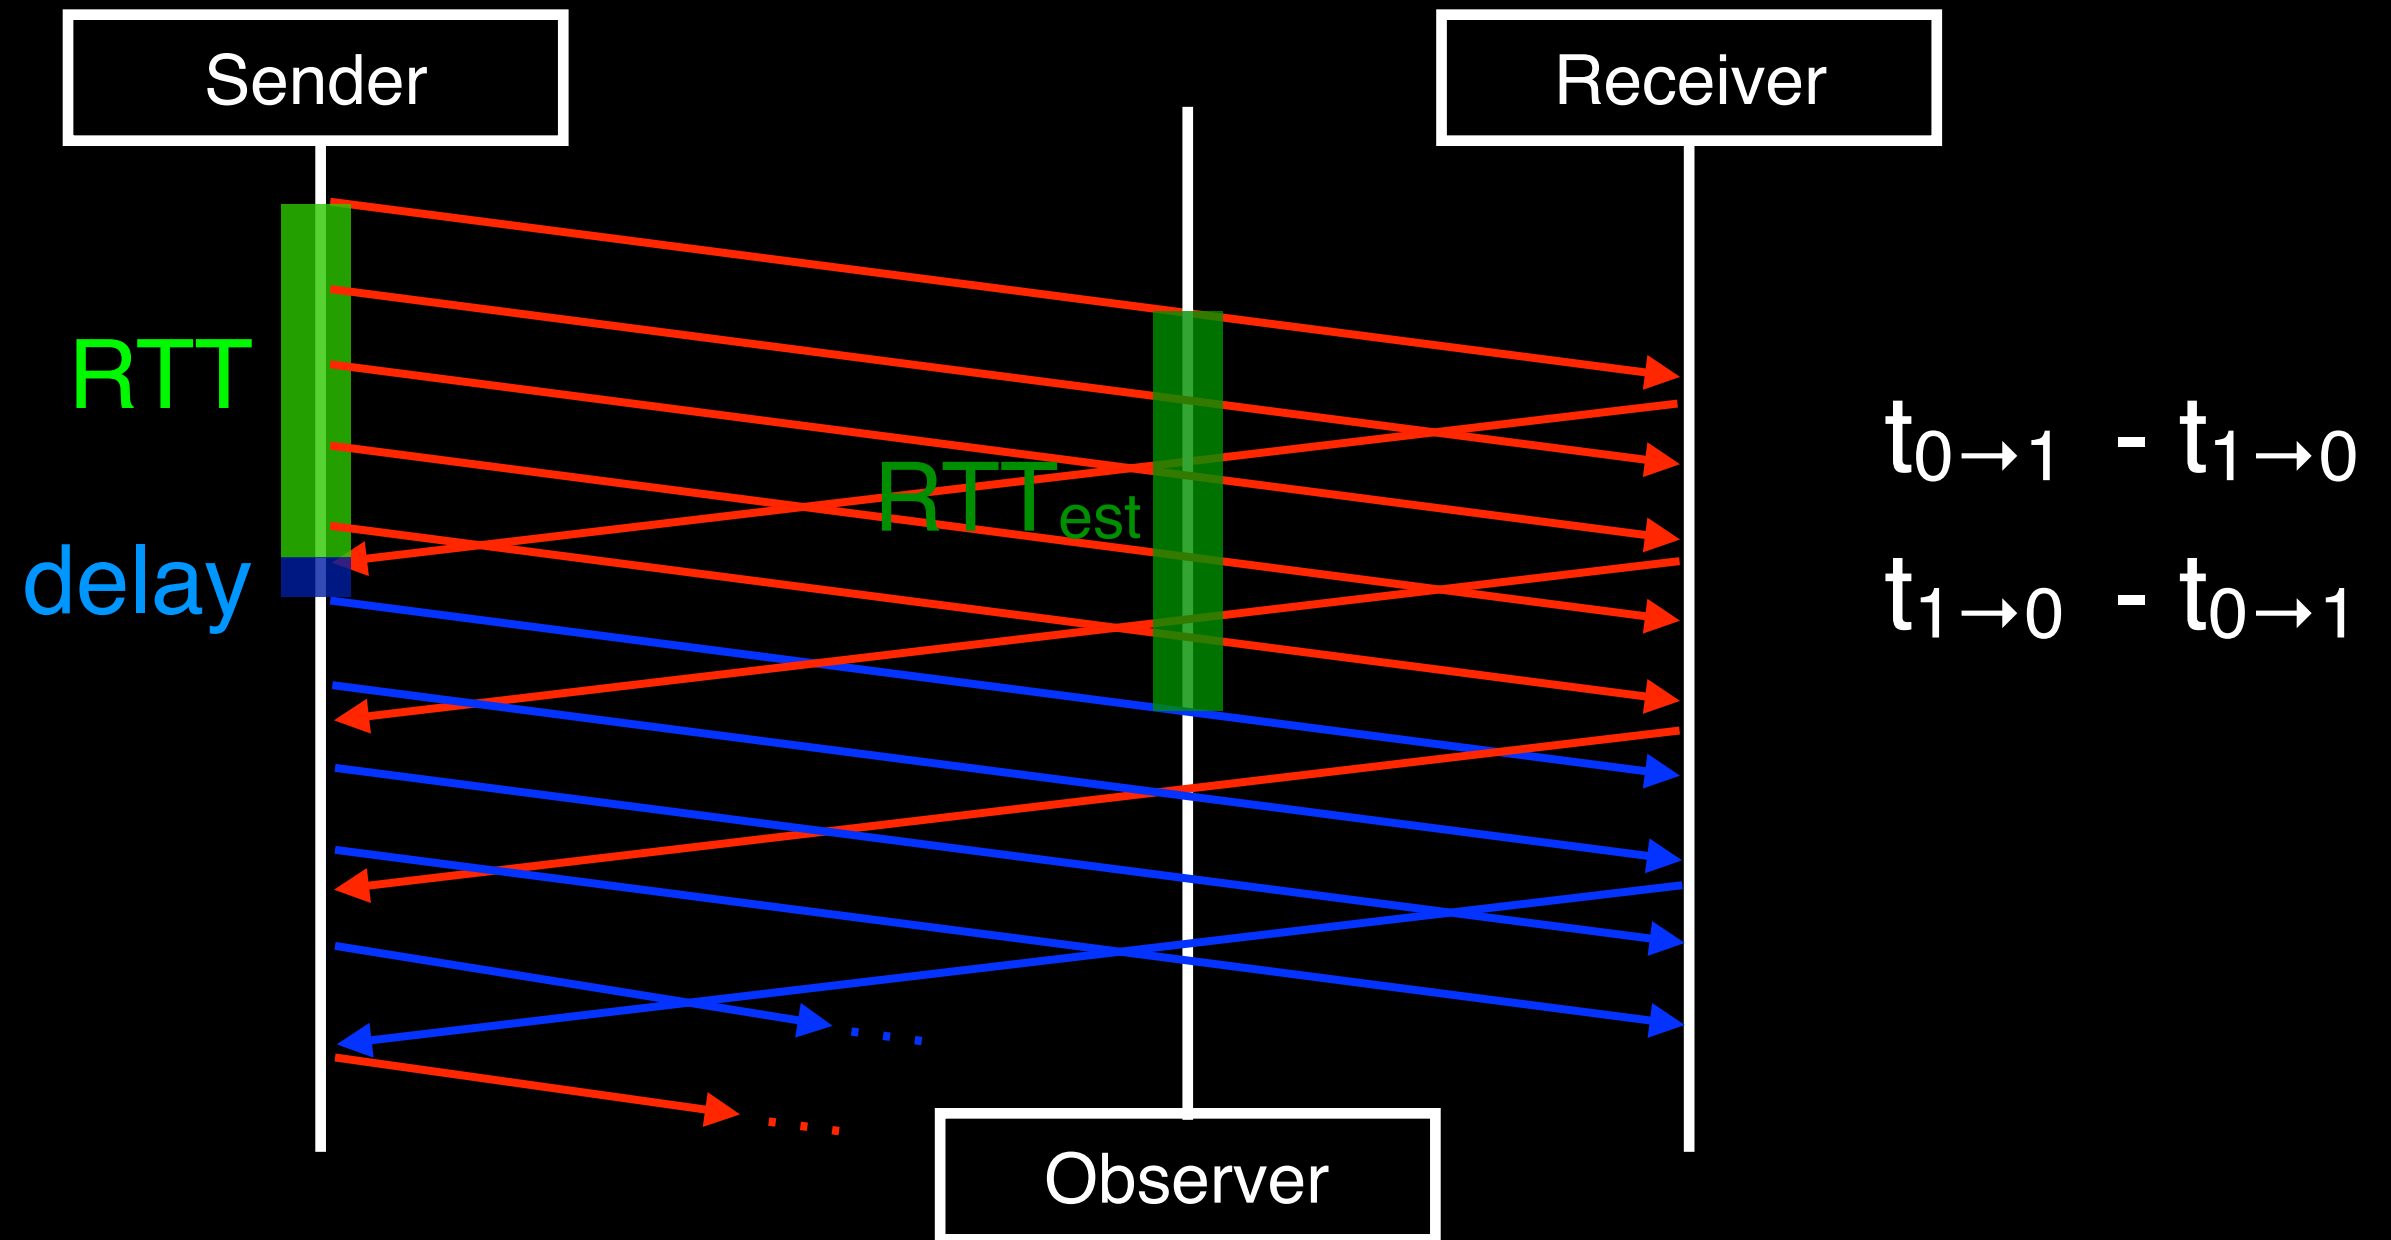

We need your input

- Do you presently use, or do you plan to use, passive RTT measurement on your network?
- IETF QUIC WG has appointed a design team to weigh utility v. risks, will (hopefully) come to conclusion at IETF 100 in Singapore in November.
- Come talk to me, or send mail to <ietf@trammell.ch>
- General issues in wire image utility addressed in [draft-ietf-quic-manageability](#)