measurement and architecture for a middleboxed Internet



An Observatory for Internet Path Transparency

Mirja Kühlewind and Brian Trammell, ETH Zürich

Motivation: Efforts to design protocols and protocol extensions to work in the face of rampant middlebox interference in the Internet need quantitative data about the **prevalence** of different types of interference.

Problem: How to make this data available to networking research, engineering and operations communities?

Approach: build an open repository around a common data model for **comparable** and **repeatable** measurement of **observations** of these phenomena.


Observation: an assertion that at a given *time* along a given *path*, a given *condition* held:

$$O = \{t, p, c\}$$


Path: sequence of elements (addresses, prefixes, BGP ASN, pseudonyms), allowing multi-resolution storage and correlation with topology (e.g. Tracebox)

$$[IP_{0}, *, IP_{8}] \rightarrow [IP_{0}, IP_{1}, AS_{3}, *, AS_{5}, IP_{6}, *, IP_{8}]$$


Condition: specific phenomenon observed on a path, defined in a structured namespace oriented to assign *states* to *aspects* of attempts to use a given protocol *feature*, fostering **comparability** of results.

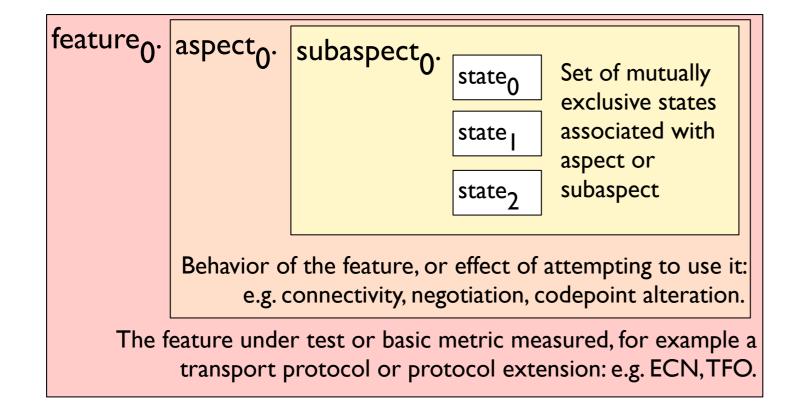


Aspect and state definition is feature-specific, based on examination of measurement data; e.g.:

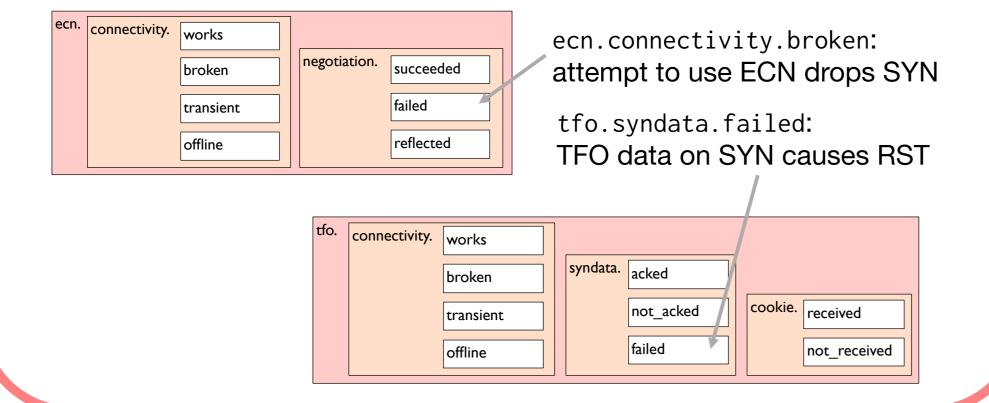

The PTO is implemented as a RESTful API, storing raw data files organized into campaigns, normalizing these into a queryable observation database.

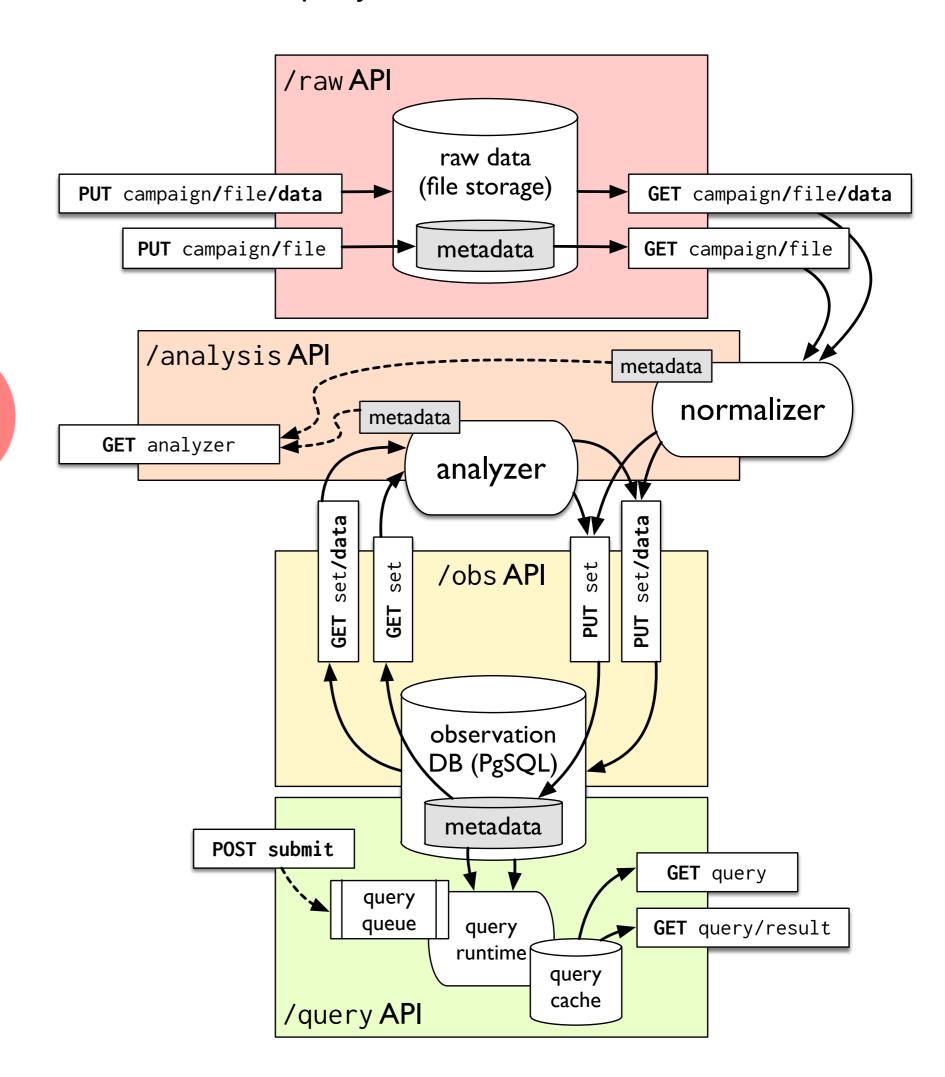

Every object stored in the observatory, including queries, keeps its *provenance*, including arbitrary metadata, fostering measurement **repeatability.** Following links yields all antecedents for any observation or aggregate.

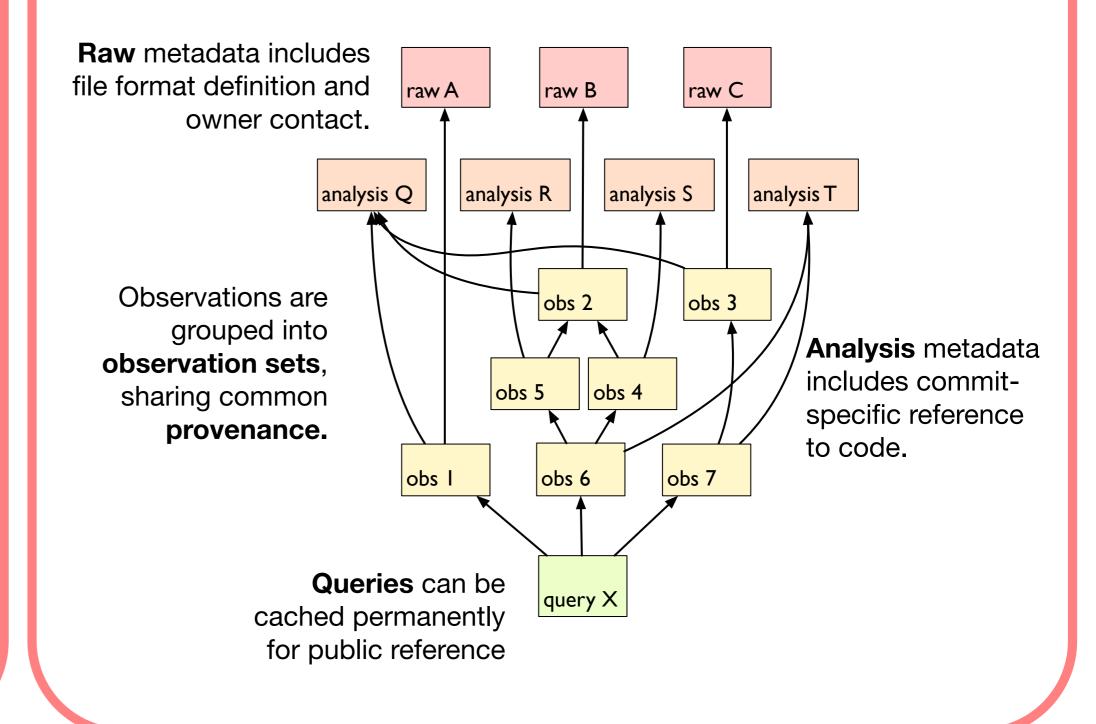

Deploying soon: https://observatory.mami-project.eu/ — code: https://github.com/mami-project/pto3-go

measurement

architecture

experimentation





The opinions expressed and arguments employed herein do not necessarily reflect the official views of the Swiss Government.