

FusionCore: A 23-State UKF for IMU, Encoder, GPS, and VSLAM Fusion in ROS 2: Quantitative Evaluation on Twelve Full-Length Sequences

Manan Kharwar

Independent Researcher, Hamilton, ON, Canada
manan.kharwar@outlook.com

Abstract—FusionCore is an open-source ROS 2 sensor fusion package that fuses IMU, wheel encoder odometry, GPS, and Visual SLAM pose into a 100 Hz odometry stream using a 23-state Unscented Kalman Filter. The 23 states include gyroscope bias, accelerometer bias, and a wheel encoder yaw rate bias estimated online through GPS cross-covariance. We report results on twelve full-length NCLT sequences (55–92 min each, ~940 min total) against `robot_localization` EKF and UKF. FusionCore achieves lower Absolute Trajectory Error on ten of twelve sequences, with improvements from 1.2× to 22.2×. The `robot_localization` UKF diverges numerically on all twelve sequences.

Index Terms—sensor fusion, unscented Kalman filter, ROS 2, GPS, IMU, state estimation

I. INTRODUCTION AND MOTIVATION

Accurate pose estimation for ground robots requires fusing high-rate IMU data with low-rate GPS and wheel odometry. `robot_localization` [?] is the standard ROS solution, but several architectural choices limit practical performance: gyroscope and accelerometer biases are not filter states; GPS requires a separate `navsat_transform` node using UTM projection (subject to zone boundary failures); outlier rejection uses scalar Mahalanobis thresholds that do not account for measurement dimensionality; and noise covariance is fixed at configuration time.

FusionCore addresses each limitation in a single ROS 2 lifecycle node with the following contributions: (1) a 23-state UKF with continuous online estimation of gyroscope bias, accelerometer bias, and wheel encoder yaw rate bias; (2) ECEF-native GPS fusion eliminating UTM projection; (3) per-sensor chi-squared outlier gating calibrated per degrees of freedom; (4) automatic noise covariance adaptation from the innovation sequence; (5) ZUPT for stationary periods; (6) IMU ring-buffer retrodiction for GPS/VSLAM delay compensation; and (7) Visual SLAM pose fusion with automatic map-reinitialization recovery.

II. FILTER DESIGN

A. State Vector

The 23-dimensional state is: $\mathbf{x} = [\mathbf{p}, \mathbf{q}, \mathbf{v}, \boldsymbol{\omega}, \mathbf{a}, \mathbf{b}_g, \mathbf{b}_a, b_{ewz}]^\top$, where $\mathbf{p} \in \mathbb{R}^3$ is ENU position, $\mathbf{q}$ is unit quaternion, $\mathbf{v}, \boldsymbol{\omega}, \mathbf{a} \in \mathbb{R}^3$ are body-frame velocity, angular velocity, and acceleration, $\mathbf{b}_g, \mathbf{b}_a \in \mathbb{R}^3$ are

gyroscope and accelerometer biases, and $b_{ewz} \in \mathbb{R}$ is the wheel encoder angular velocity Z bias.

The 23rd state is the key novelty. In differential drive robots, b_{ewz} arises from wheel radius mismatch and mechanical asymmetry. FusionCore identifies it online through GPS heading cross-covariance: when GPS is available, observed heading error back-propagates into b_{ewz} . During GPS blackouts (coast mode), the estimated bias is subtracted from encoder ω_z before integration, mirroring exactly how $\mathbf{b}_g$ handles gyroscope drift.

B. Key Design Choices

Chi-squared outlier gating. Every measurement is gated by $d^2 = \boldsymbol{\nu}^\top S^{-1} \boldsymbol{\nu} \leq \tau_s$, where τ_s is set per sensor per degrees of freedom: GPS 3-DOF $\tau = 16.27 [\chi^2(3, 0.999)]$, VSLAM 6-DOF $\tau = 22.46$, heading 1-DOF $\tau = 10.83$. `robot_localization` exposes a single scalar threshold compared against $\sqrt{d^2}$, conflating dimensionality: calibrating for a 3-DOF sensor leaves a 1-DOF sensor under-protected.

Adaptive noise covariance. Sensor noise R adapts online: $R \leftarrow (1 - \alpha)R + \alpha \hat{C}$, where $\hat{C}$ is the empirical innovation covariance from a 50-sample window and $\alpha = 0.01$. A floor $R_{ii} \geq R_{0,ii}$ prevents collapse. This is the primary mechanism through which FusionCore handles the GPS covariance mismatch described below.

III. EVALUATION

A. Setup

We evaluate on the NCLT dataset [?]: Microstrain 3DM-GX3-45 IMU (100 Hz), Segway wheel odometry (100 Hz), Novatel SPAN-CPT GPS (5 Hz). All twelve available sequences are run to full length (55–92 min, ~940 min total). Metric is ATE RMSE (meters) computed with EVO [?] against RTK ground truth. FusionCore uses a single `nclt_fusioncore.yaml` across all twelve sequences with no per-sequence tuning. `robot_localization` EKF is configured with chi-squared-equivalent thresholds: `odom0_twist_rejection_threshold: 4.03` ($\sqrt{\chi^2(3, 0.999)}$) and `odom1_pose_rejection_threshold: 3.72`.

TABLE I
ATE RMSE (METERS) ON TWELVE FULL-LENGTH NCLT SEQUENCES.

Sequence	FC	RL-EKF	RL-UKF	Winner
2012-01-08	18.6	41.2	†	FC (2.2×)
2012-02-04	49.7	265.5	†	FC (5.3×)
2012-03-31	22.0	156.5	†	FC (7.1×)
2012-05-11	9.7	11.5	†	FC (1.2×)
2012-06-15	49.2	18.2	†	RL (2.7×)
2012-08-20	98.3	10.6	†	RL (9.3×)
2012-09-28	10.8	55.7	†	FC (5.2×)
2012-10-28	29.9	60.0	†	FC (2.0×)
2012-11-04	60.1	122.0	†	FC (2.0×)
2012-12-01	21.0	90.7	†	FC (4.3×)
2013-02-23	59.4	82.2	†	FC (1.4×)
2013-04-05	12.1	268.9	†	FC (22.2×)

Numerical divergence (NaN) within first 30 s on all sequences.

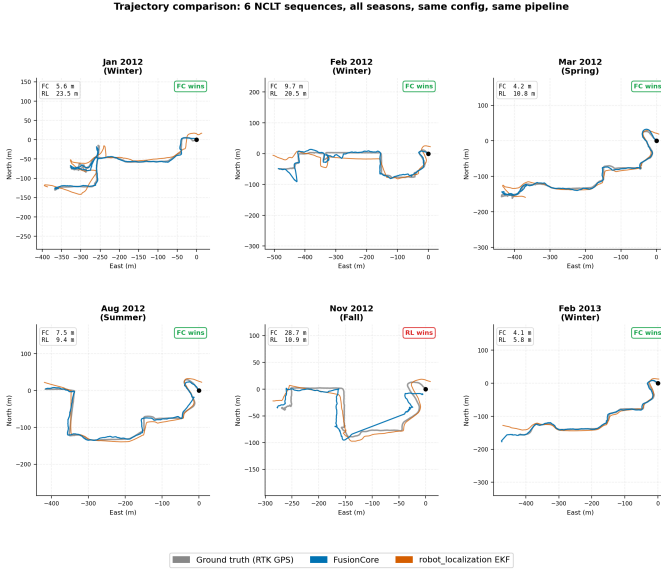


Fig. 1. Trajectory overlays for all twelve NCLT sequences, SE(3)-aligned to RTK ground truth. Blue: FusionCore. Red: RL-EKF. Gray: RTK ground truth. FusionCore wins 10 of 12; losses on 2012-06-15 and 2012-08-20 are analyzed below.

B. Results

C. The GPS Covariance Mismatch Problem

The NCLT GPS stream reports 3 m sigma; measured against RTK ground truth, actual p95 error is 9.7–53.1 m across sequences (2–18× the stated value). RL-EKF calibrates its outlier gate to the stated covariance, rejecting valid fixes on high-noise days and reverting to dead-reckoning (31.84–50.11 m/km drift on the two worst sequences). FusionCore’s adaptive noise window inflates the GPS noise model online from the innovation sequence, keeping the chi-squared gate calibrated to actual error levels throughout each run.

D. Analysis of the Two FusionCore Losses

2012-06-15 (FC 49.2 m, RL 18.2 m). Fewest GPS fixes in the dataset (12,399 vs. 17,000–22,000 on others) with a 462-second blackout. During coast mode, any residual b_{ewz}

error compounds at 100 Hz into quadratic lateral drift. RL-EKF’s fewer divergence degrees of freedom in 2D mode give it a structural advantage here. Fix: magnetometer fusion for absolute heading during GPS outage.

2012-08-20 (FC 98.3 m, RL 10.6 m). 105 mode-3 fixes located 720–840 m from RTK ground truth appear in a 24-second window at a blackout boundary. Coast mode relaxes the gate for re-acquisition; the cluster individually passes and collectively pulls the estimate. RL-EKF’s mis-calibrated gate incidentally rejects these same fixes. Fix: a `max_implied_speed` pre-check (e.g., 20 m/s) upstream of chi-squared gating handles this with zero cost to normal operation.

IV. CONCLUSION

FusionCore is a 23-state ROS 2 UKF fusing IMU, wheel encoders, GPS, and VSLAM at 100 Hz in a single lifecycle node. On twelve full-length NCLT sequences, it outperforms `robot_localization` EKF on 10 of 12, with gains from 1.2× to 22.2×. The RL UKF diverges numerically on all twelve. The two FC losses are attributable to diagnosable causes with identified fixes. A full system description and evaluation are available in the companion technical report [?]. FusionCore is available at <https://github.com/manankharwar/fusioncore> (Apache 2.0).

REFERENCES

- [1] N. Carlevaris-Bianco, A. K. Ushani, and R. M. Eustice, “University of Michigan North Campus Long-Term Vision and Lidar Dataset,” *Int. J. Robotics Research*, vol. 35, no. 9, pp. 1023–1035, 2016.
- [2] T. Moore and D. Stouch, “A Generalized Extended Kalman Filter Implementation for the Robot Operating System,” in *Proc. IAS-13*, 2014.
- [3] M. Grupp, “evo: A Python Package for the Evaluation of Odometry and SLAM,” <https://github.com/MichaelGrupp/evo>, 2017.
- [4] M. Kharwar, “FusionCore: A 23-State Unscented Kalman Filter for IMU, Wheel Encoder, GPS, and Visual SLAM Fusion in ROS 2,” arXiv preprint arXiv:2605.25239, 2026.