




The following chart displays the time when the attack occurred.

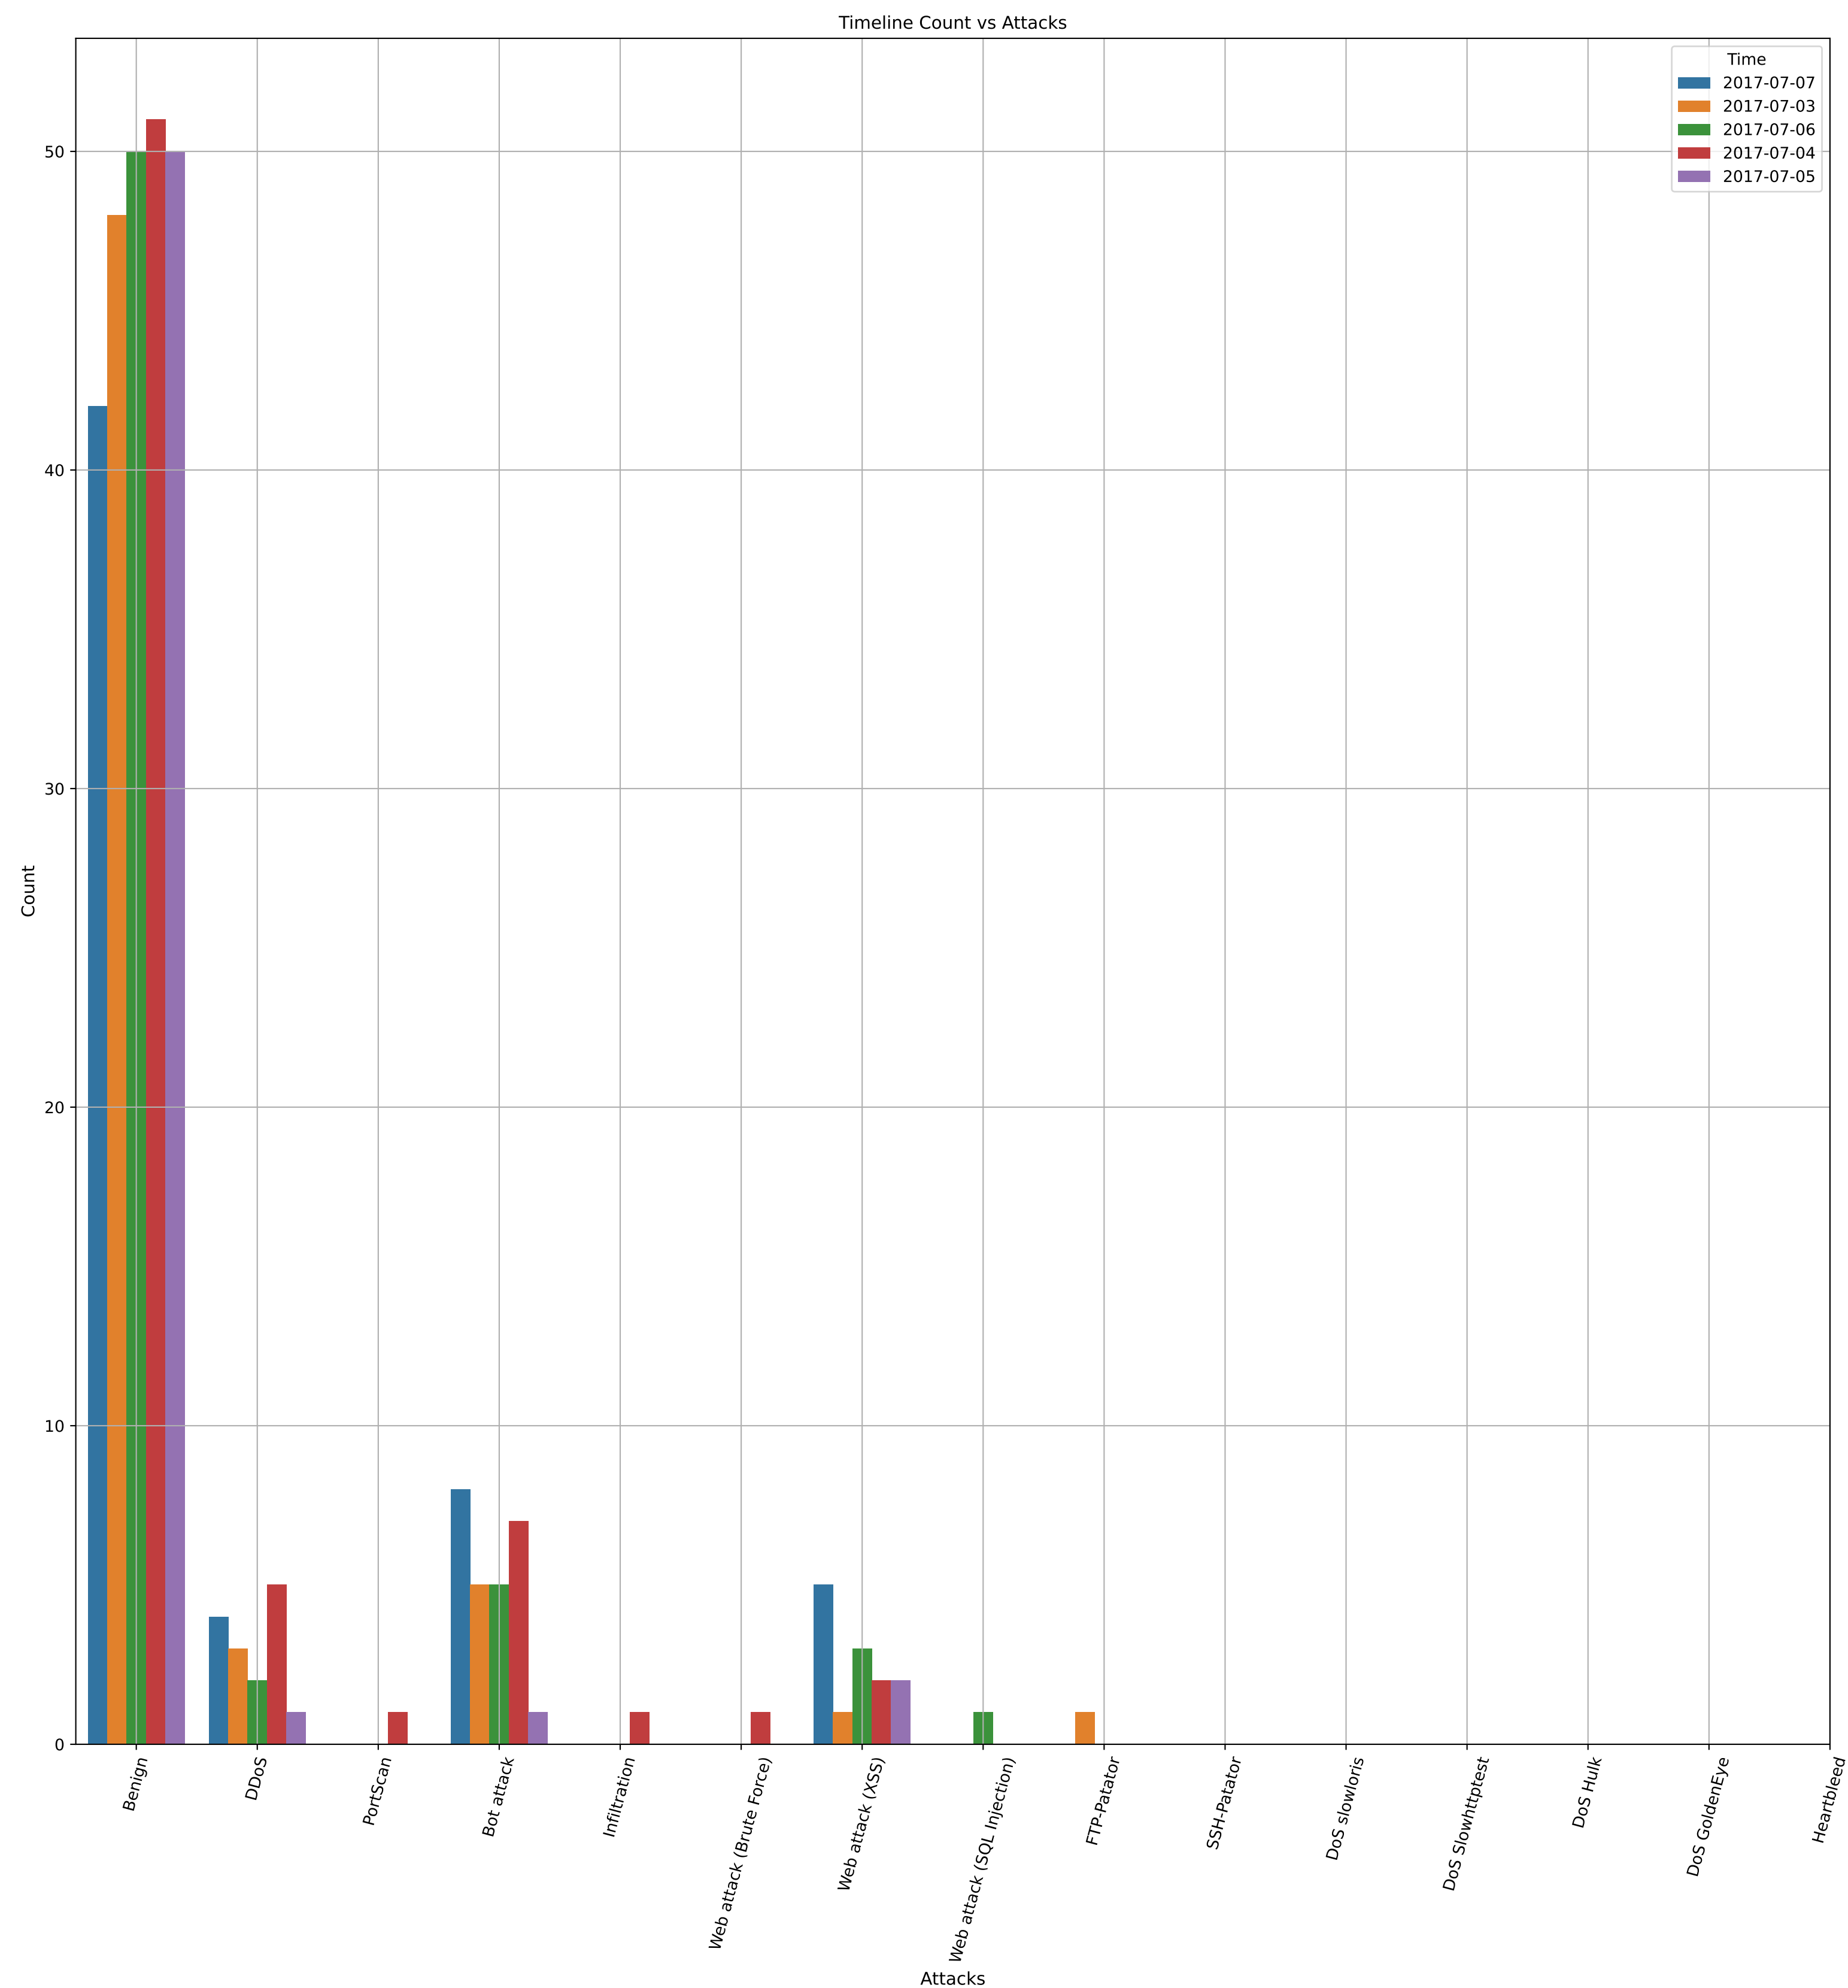


The most common value (mode) of Destination Port is 53

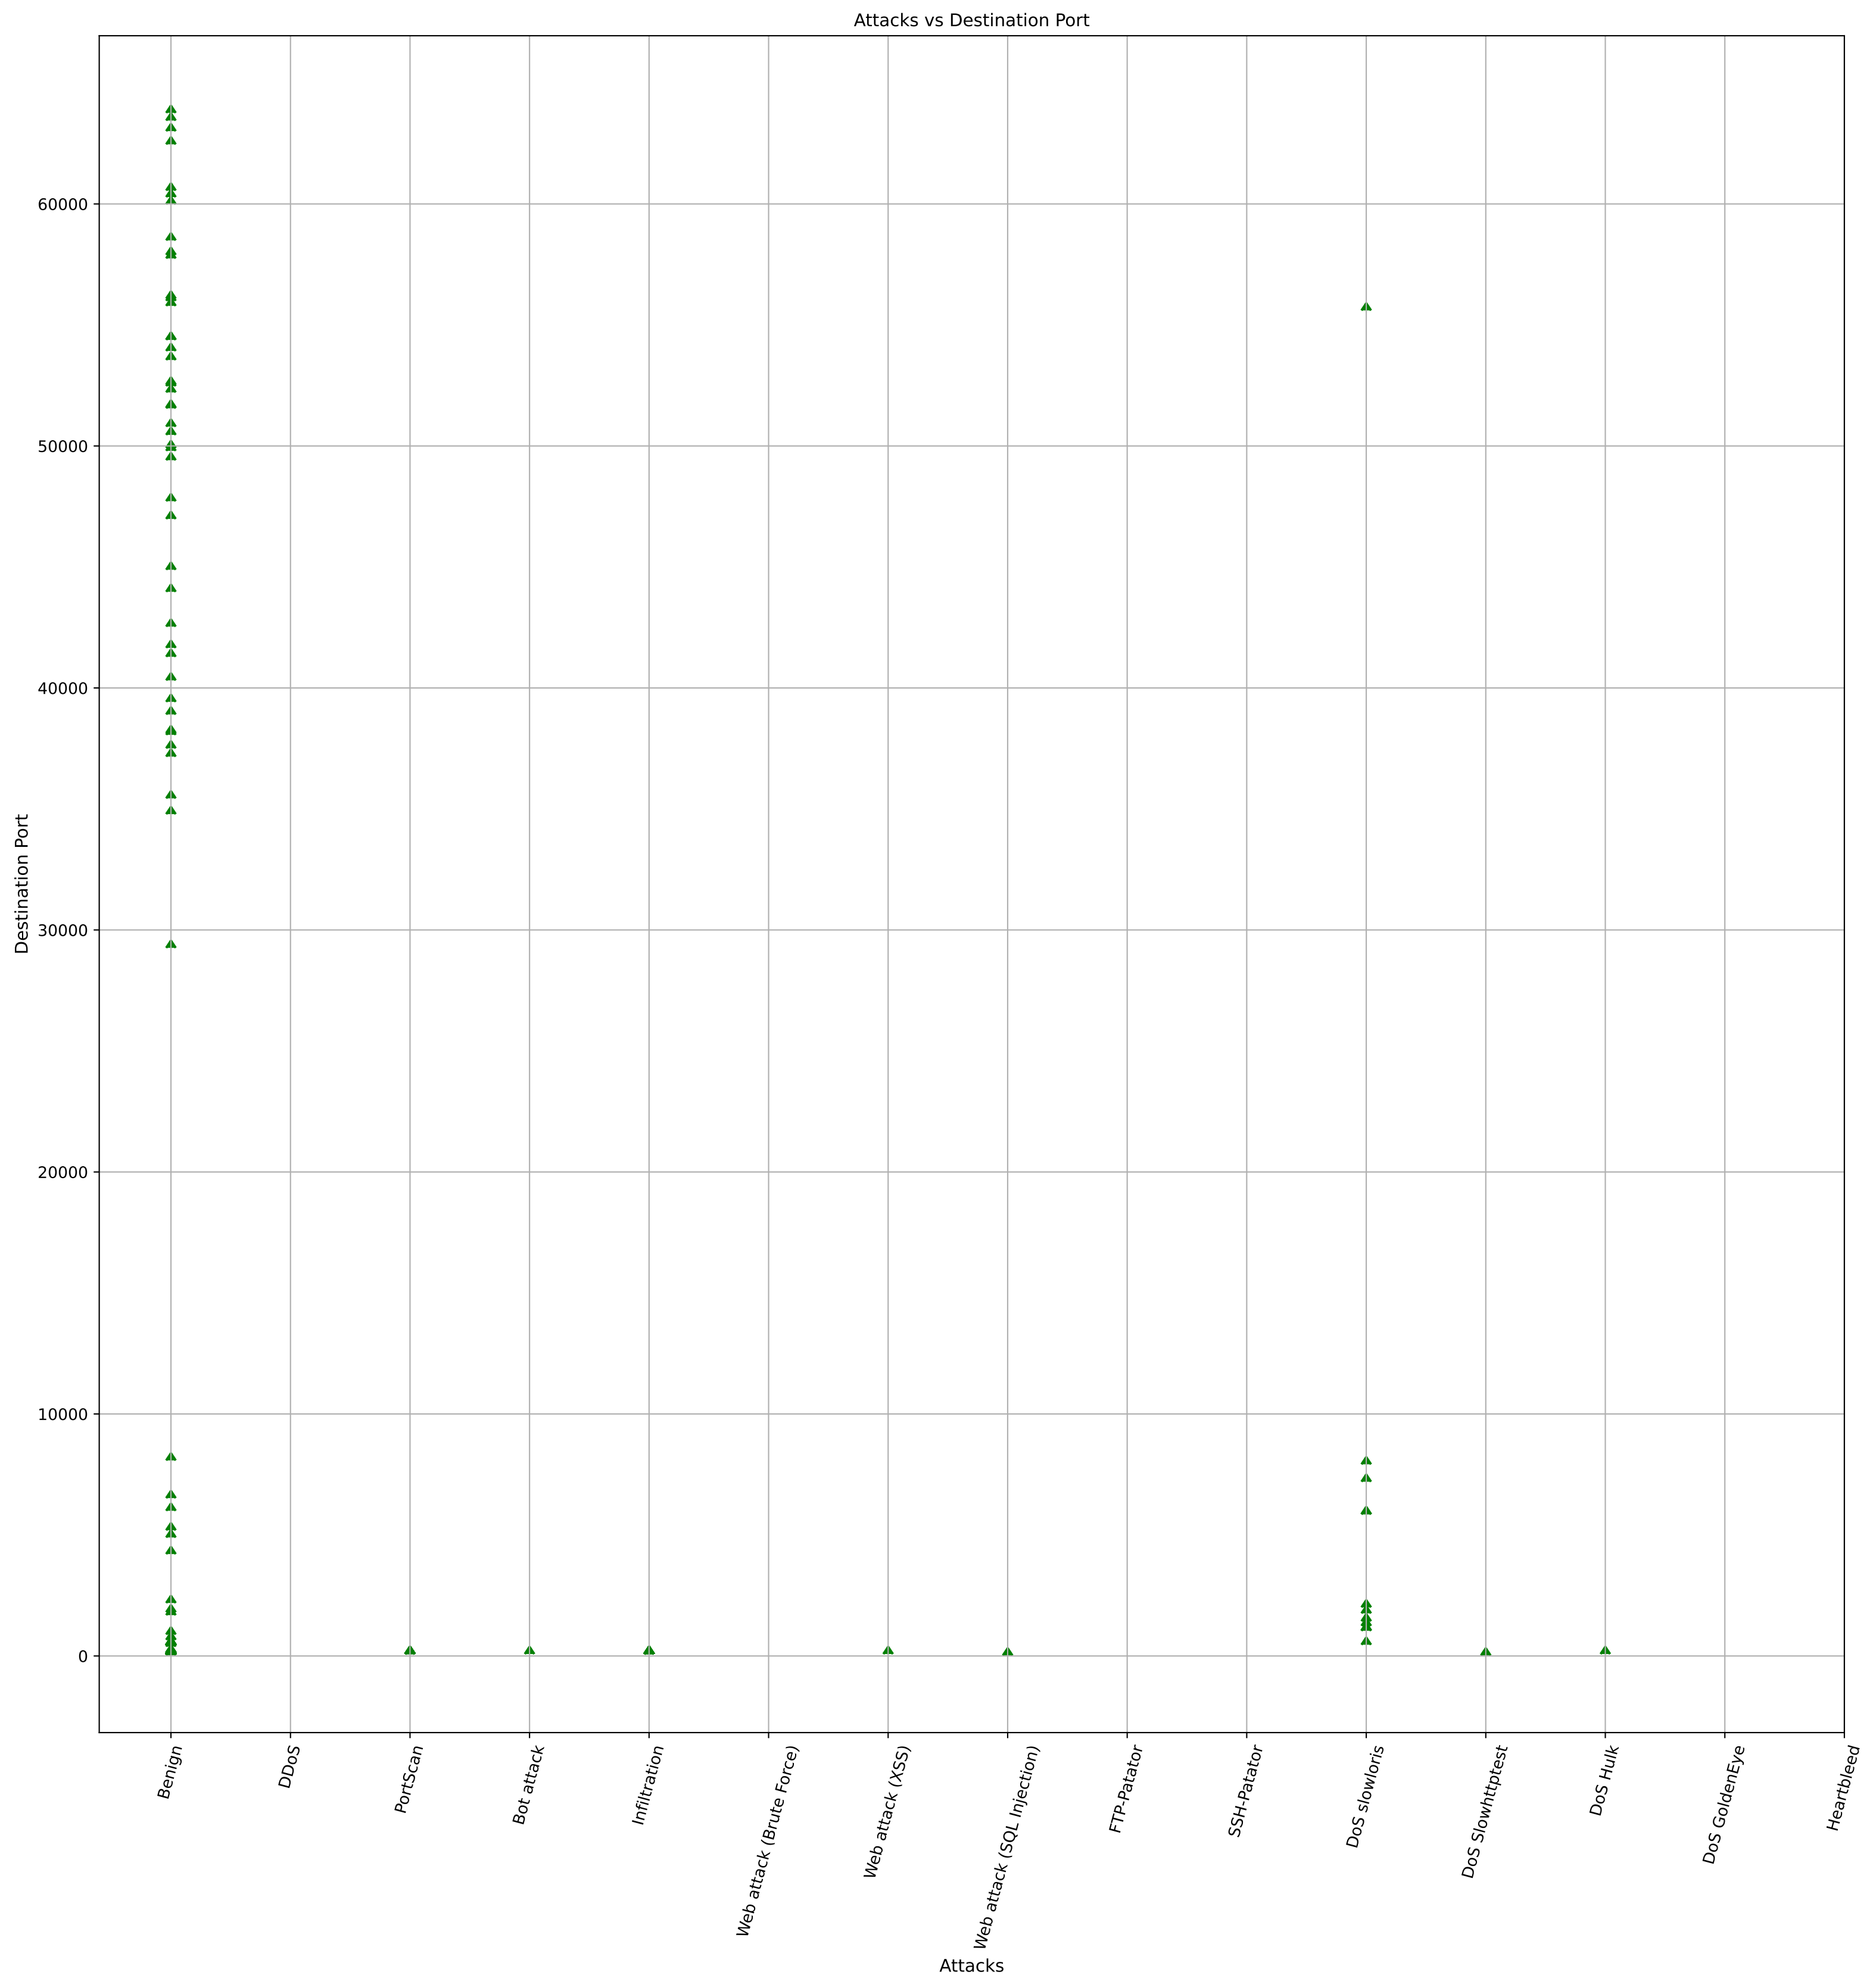


The most common value (mode) of Flow Duration is 3

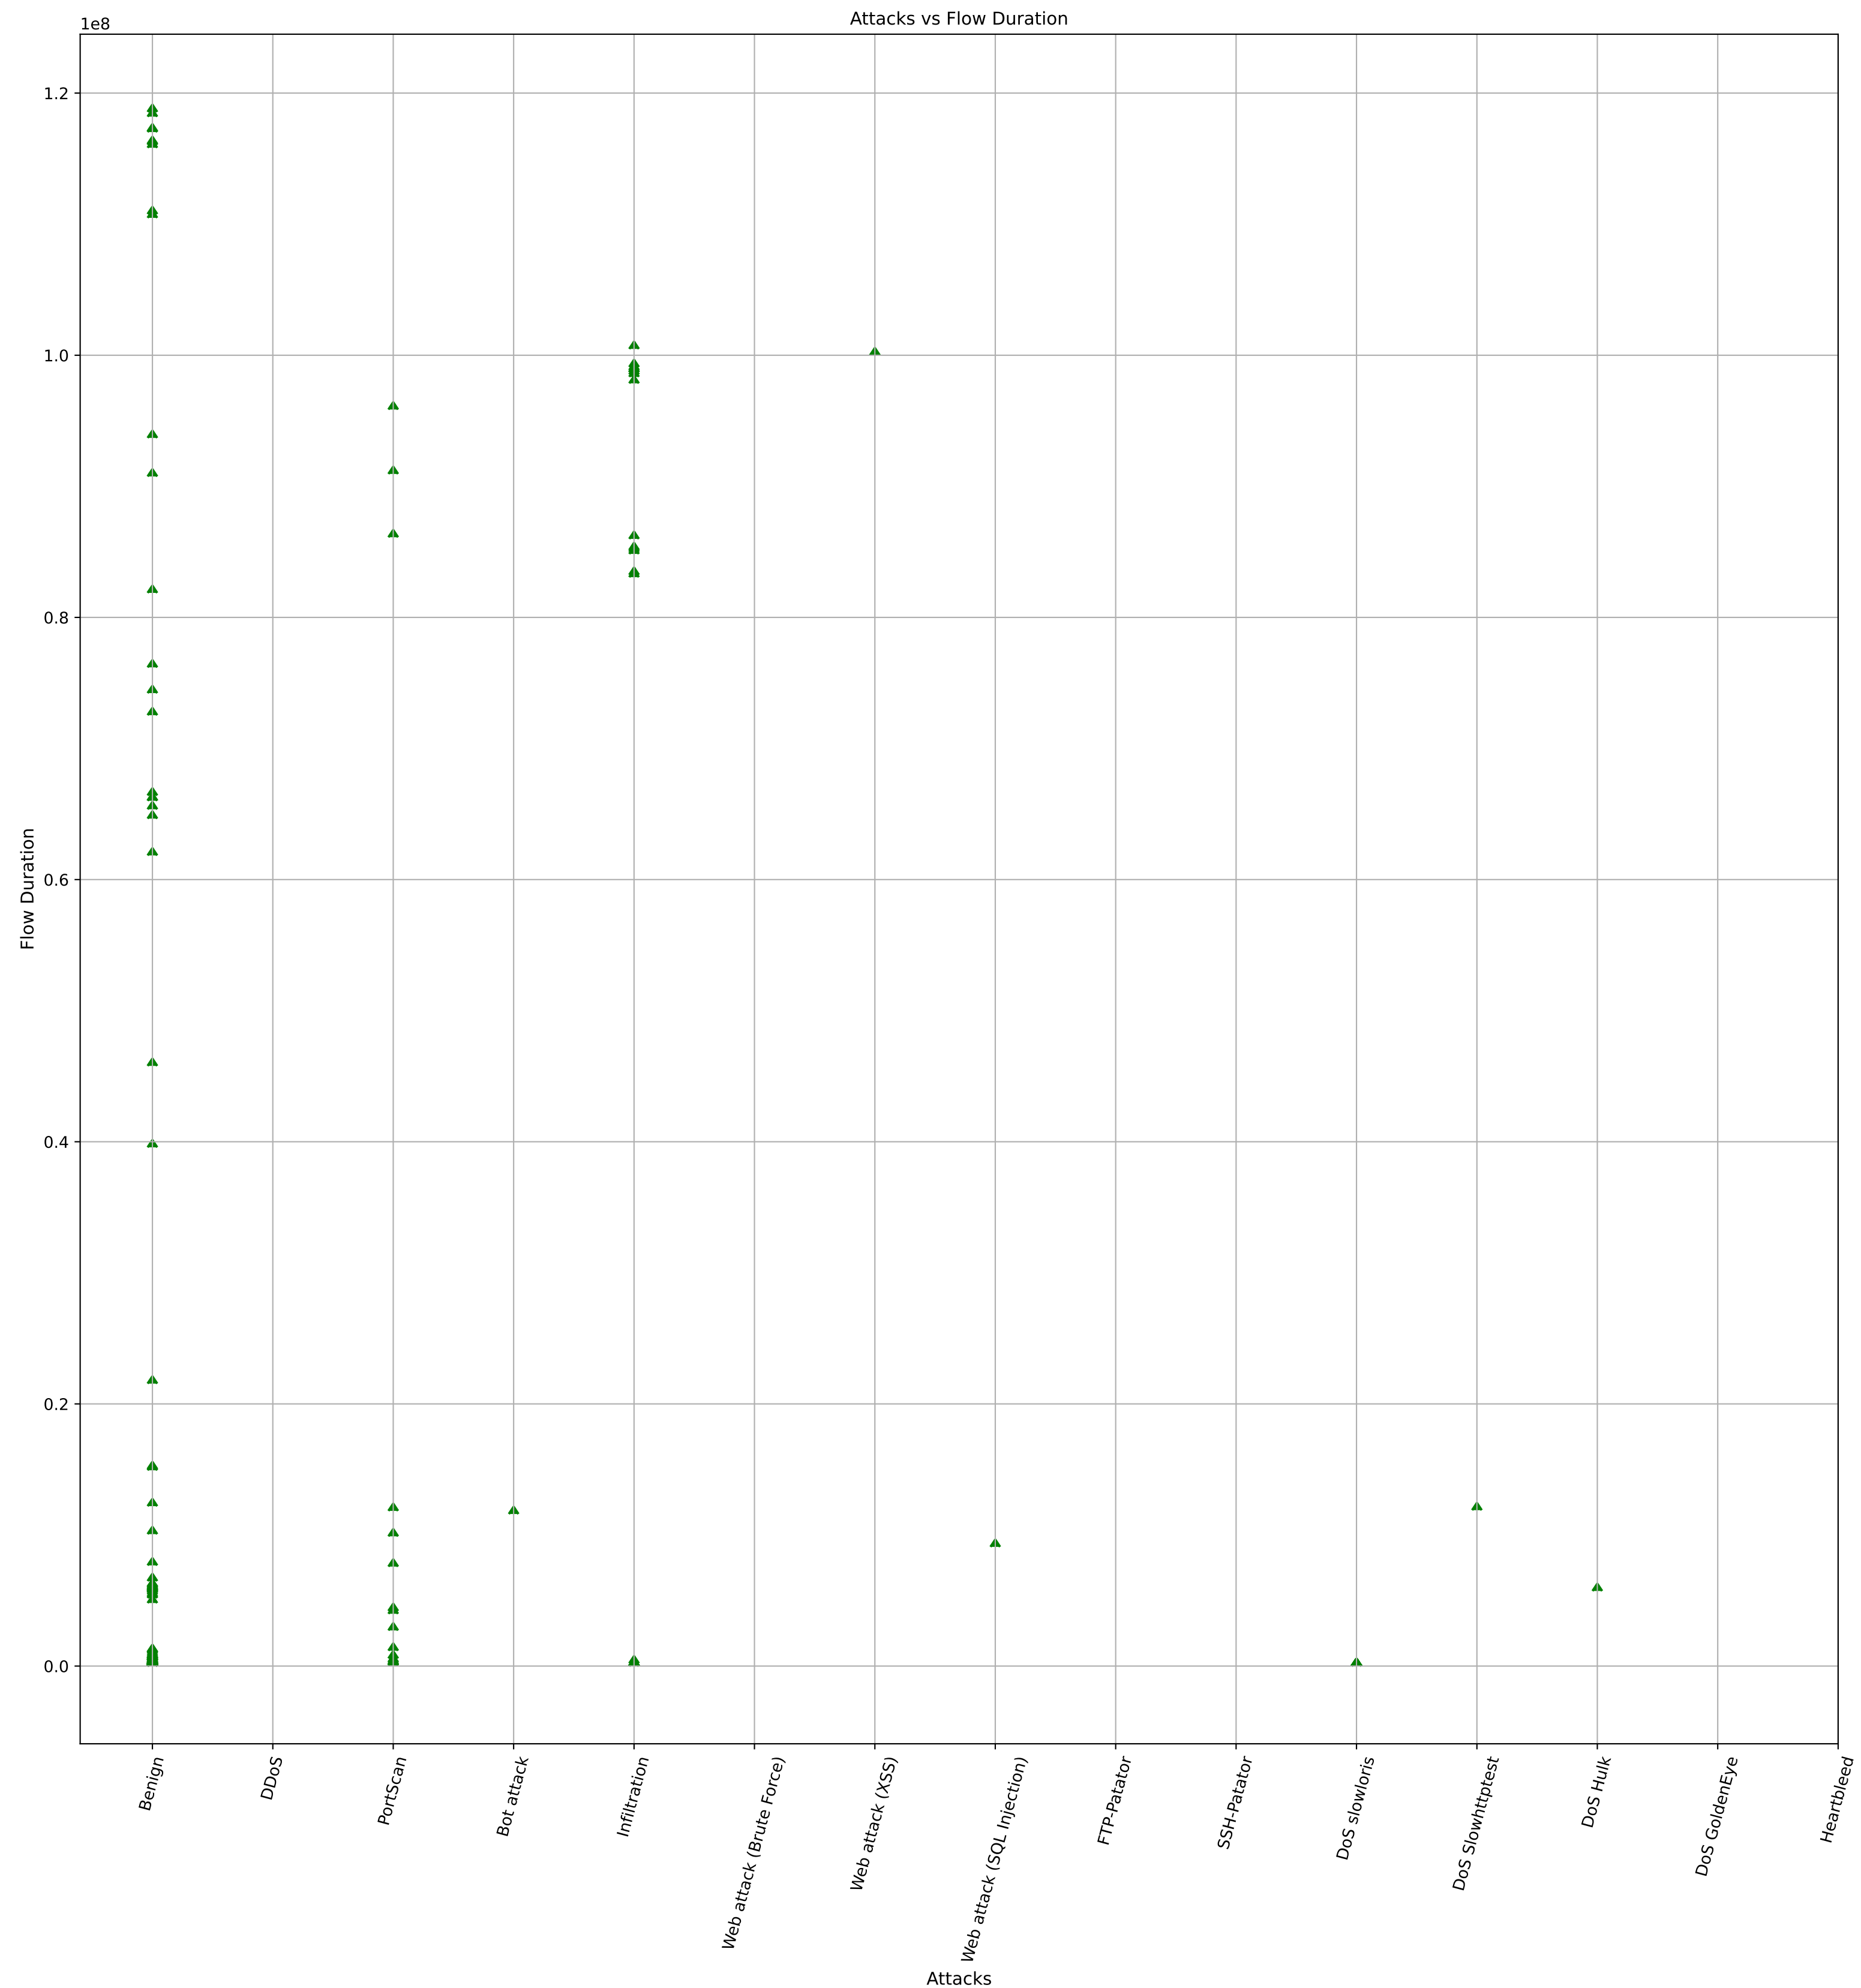


The most common value (mode) of Total Fwd Packets is 2

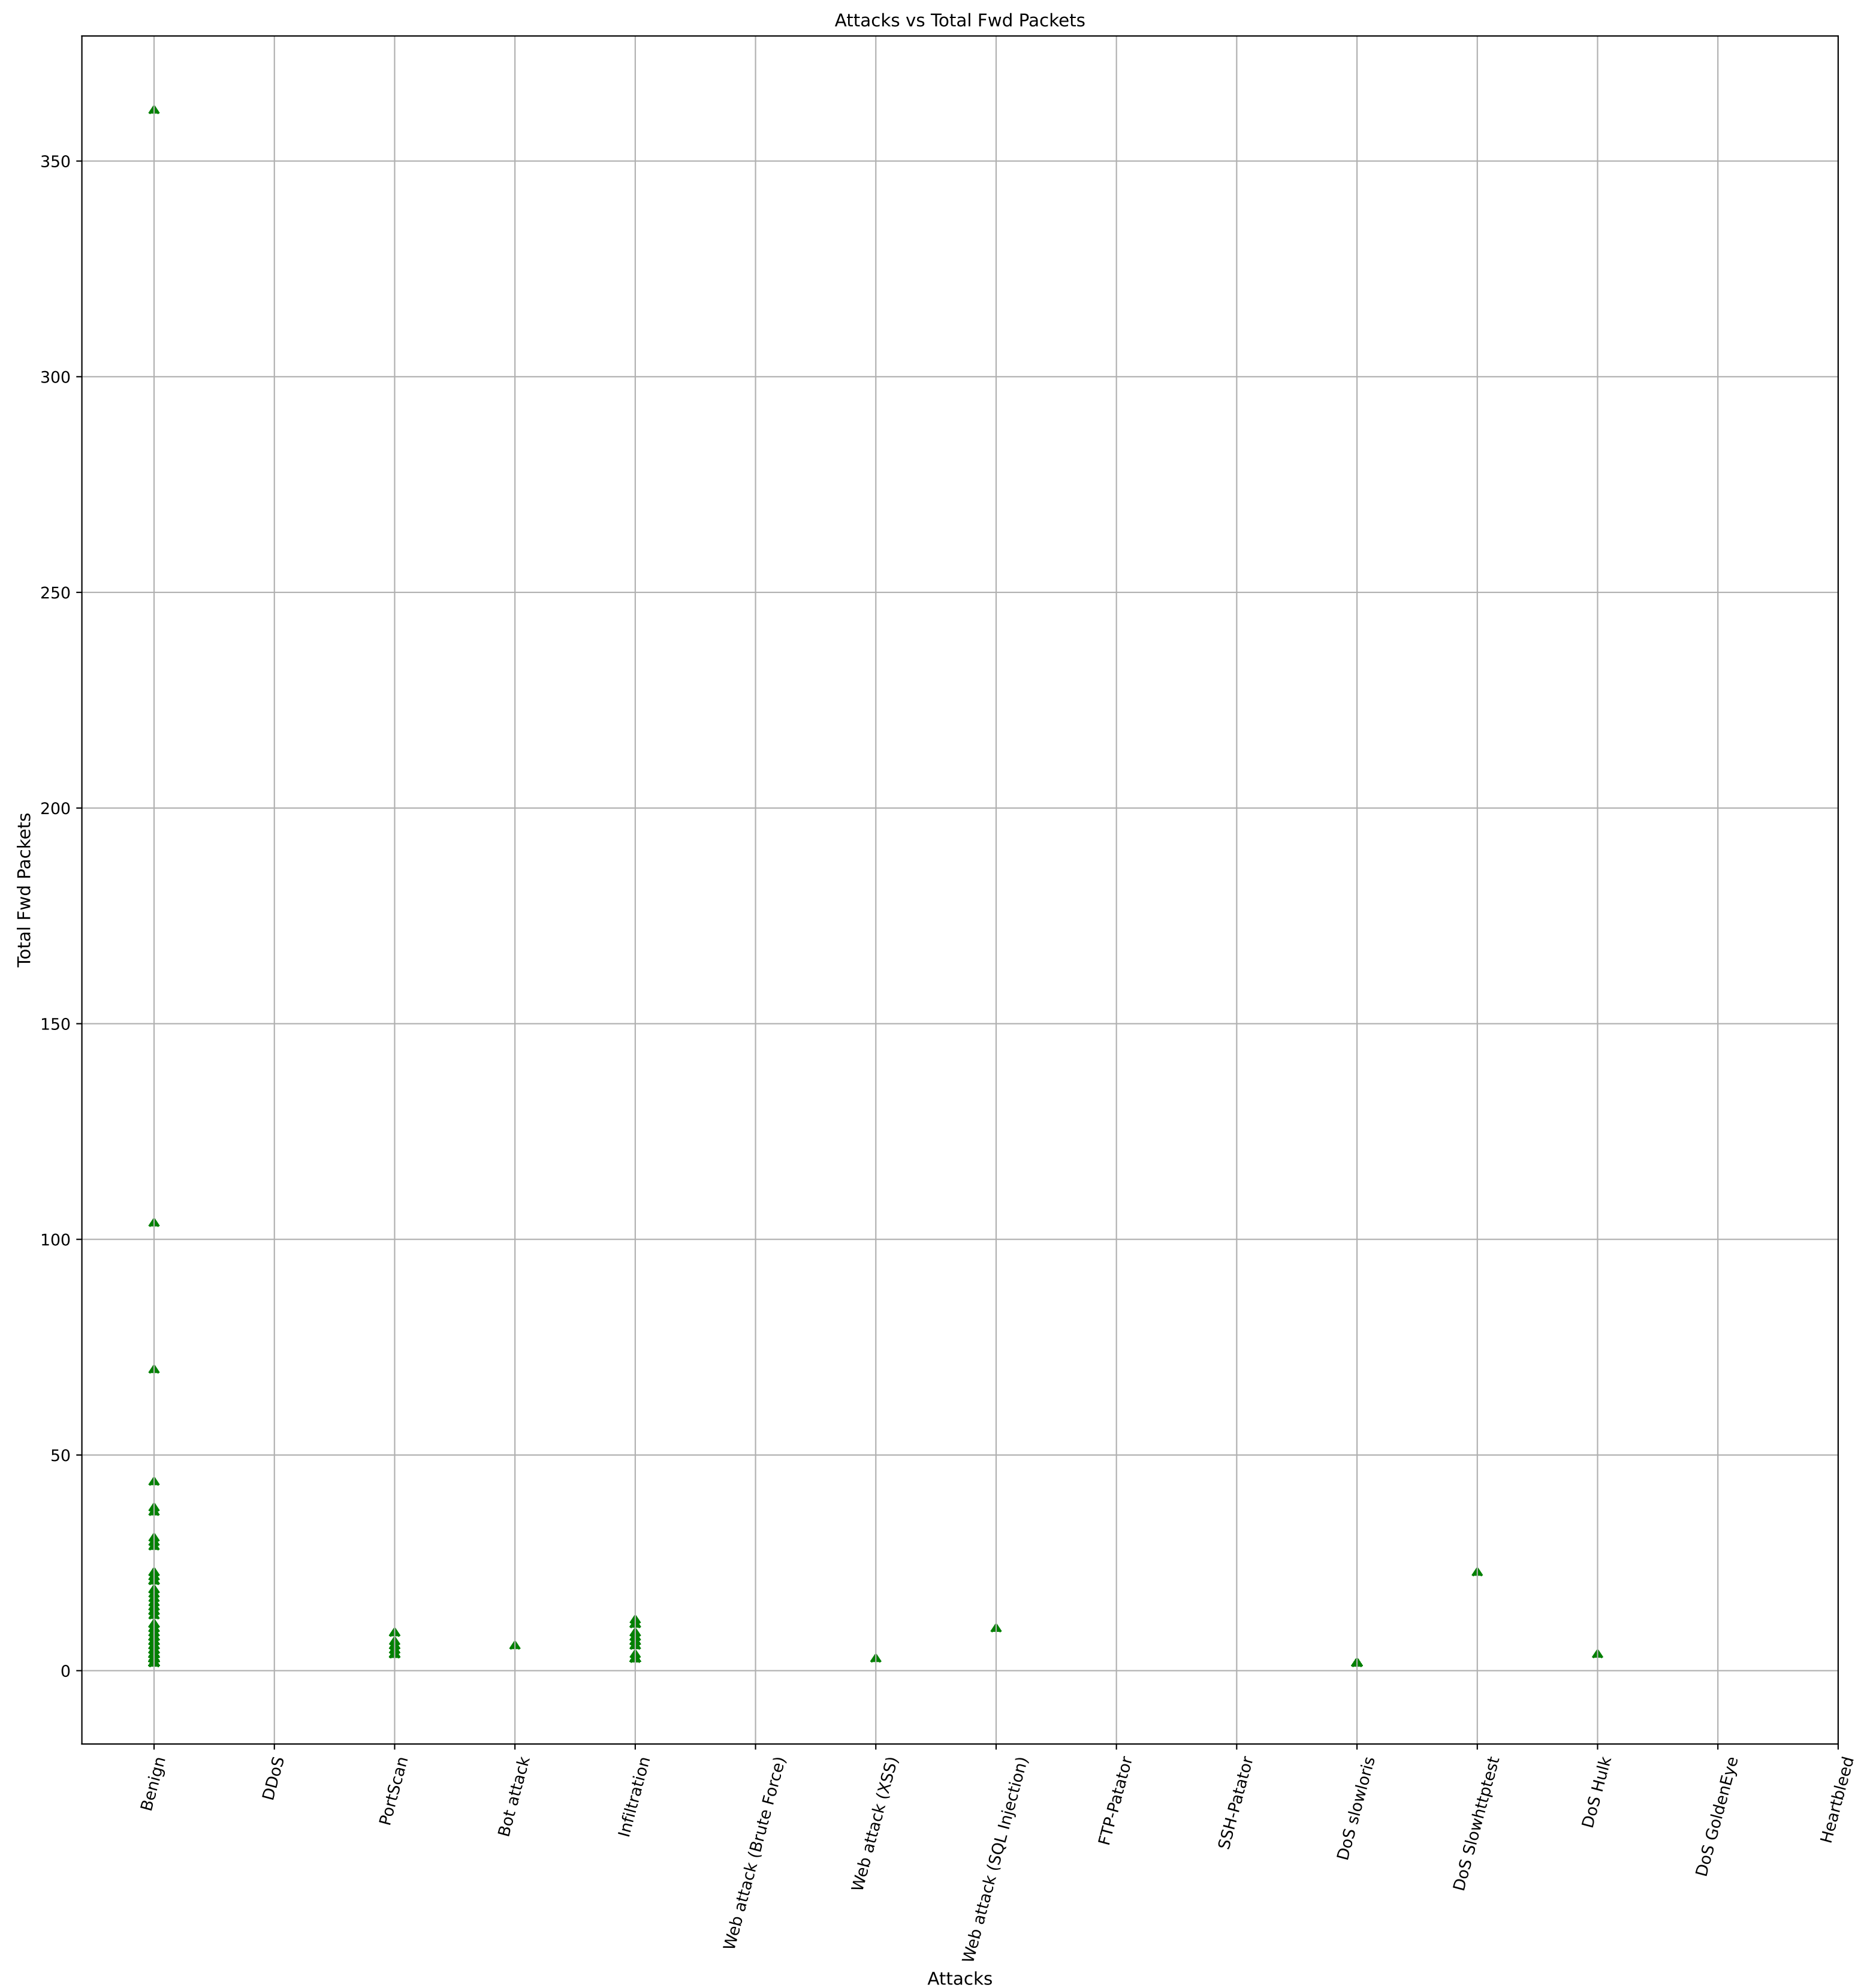


The most common value (mode) of Total Backward Packets is 2

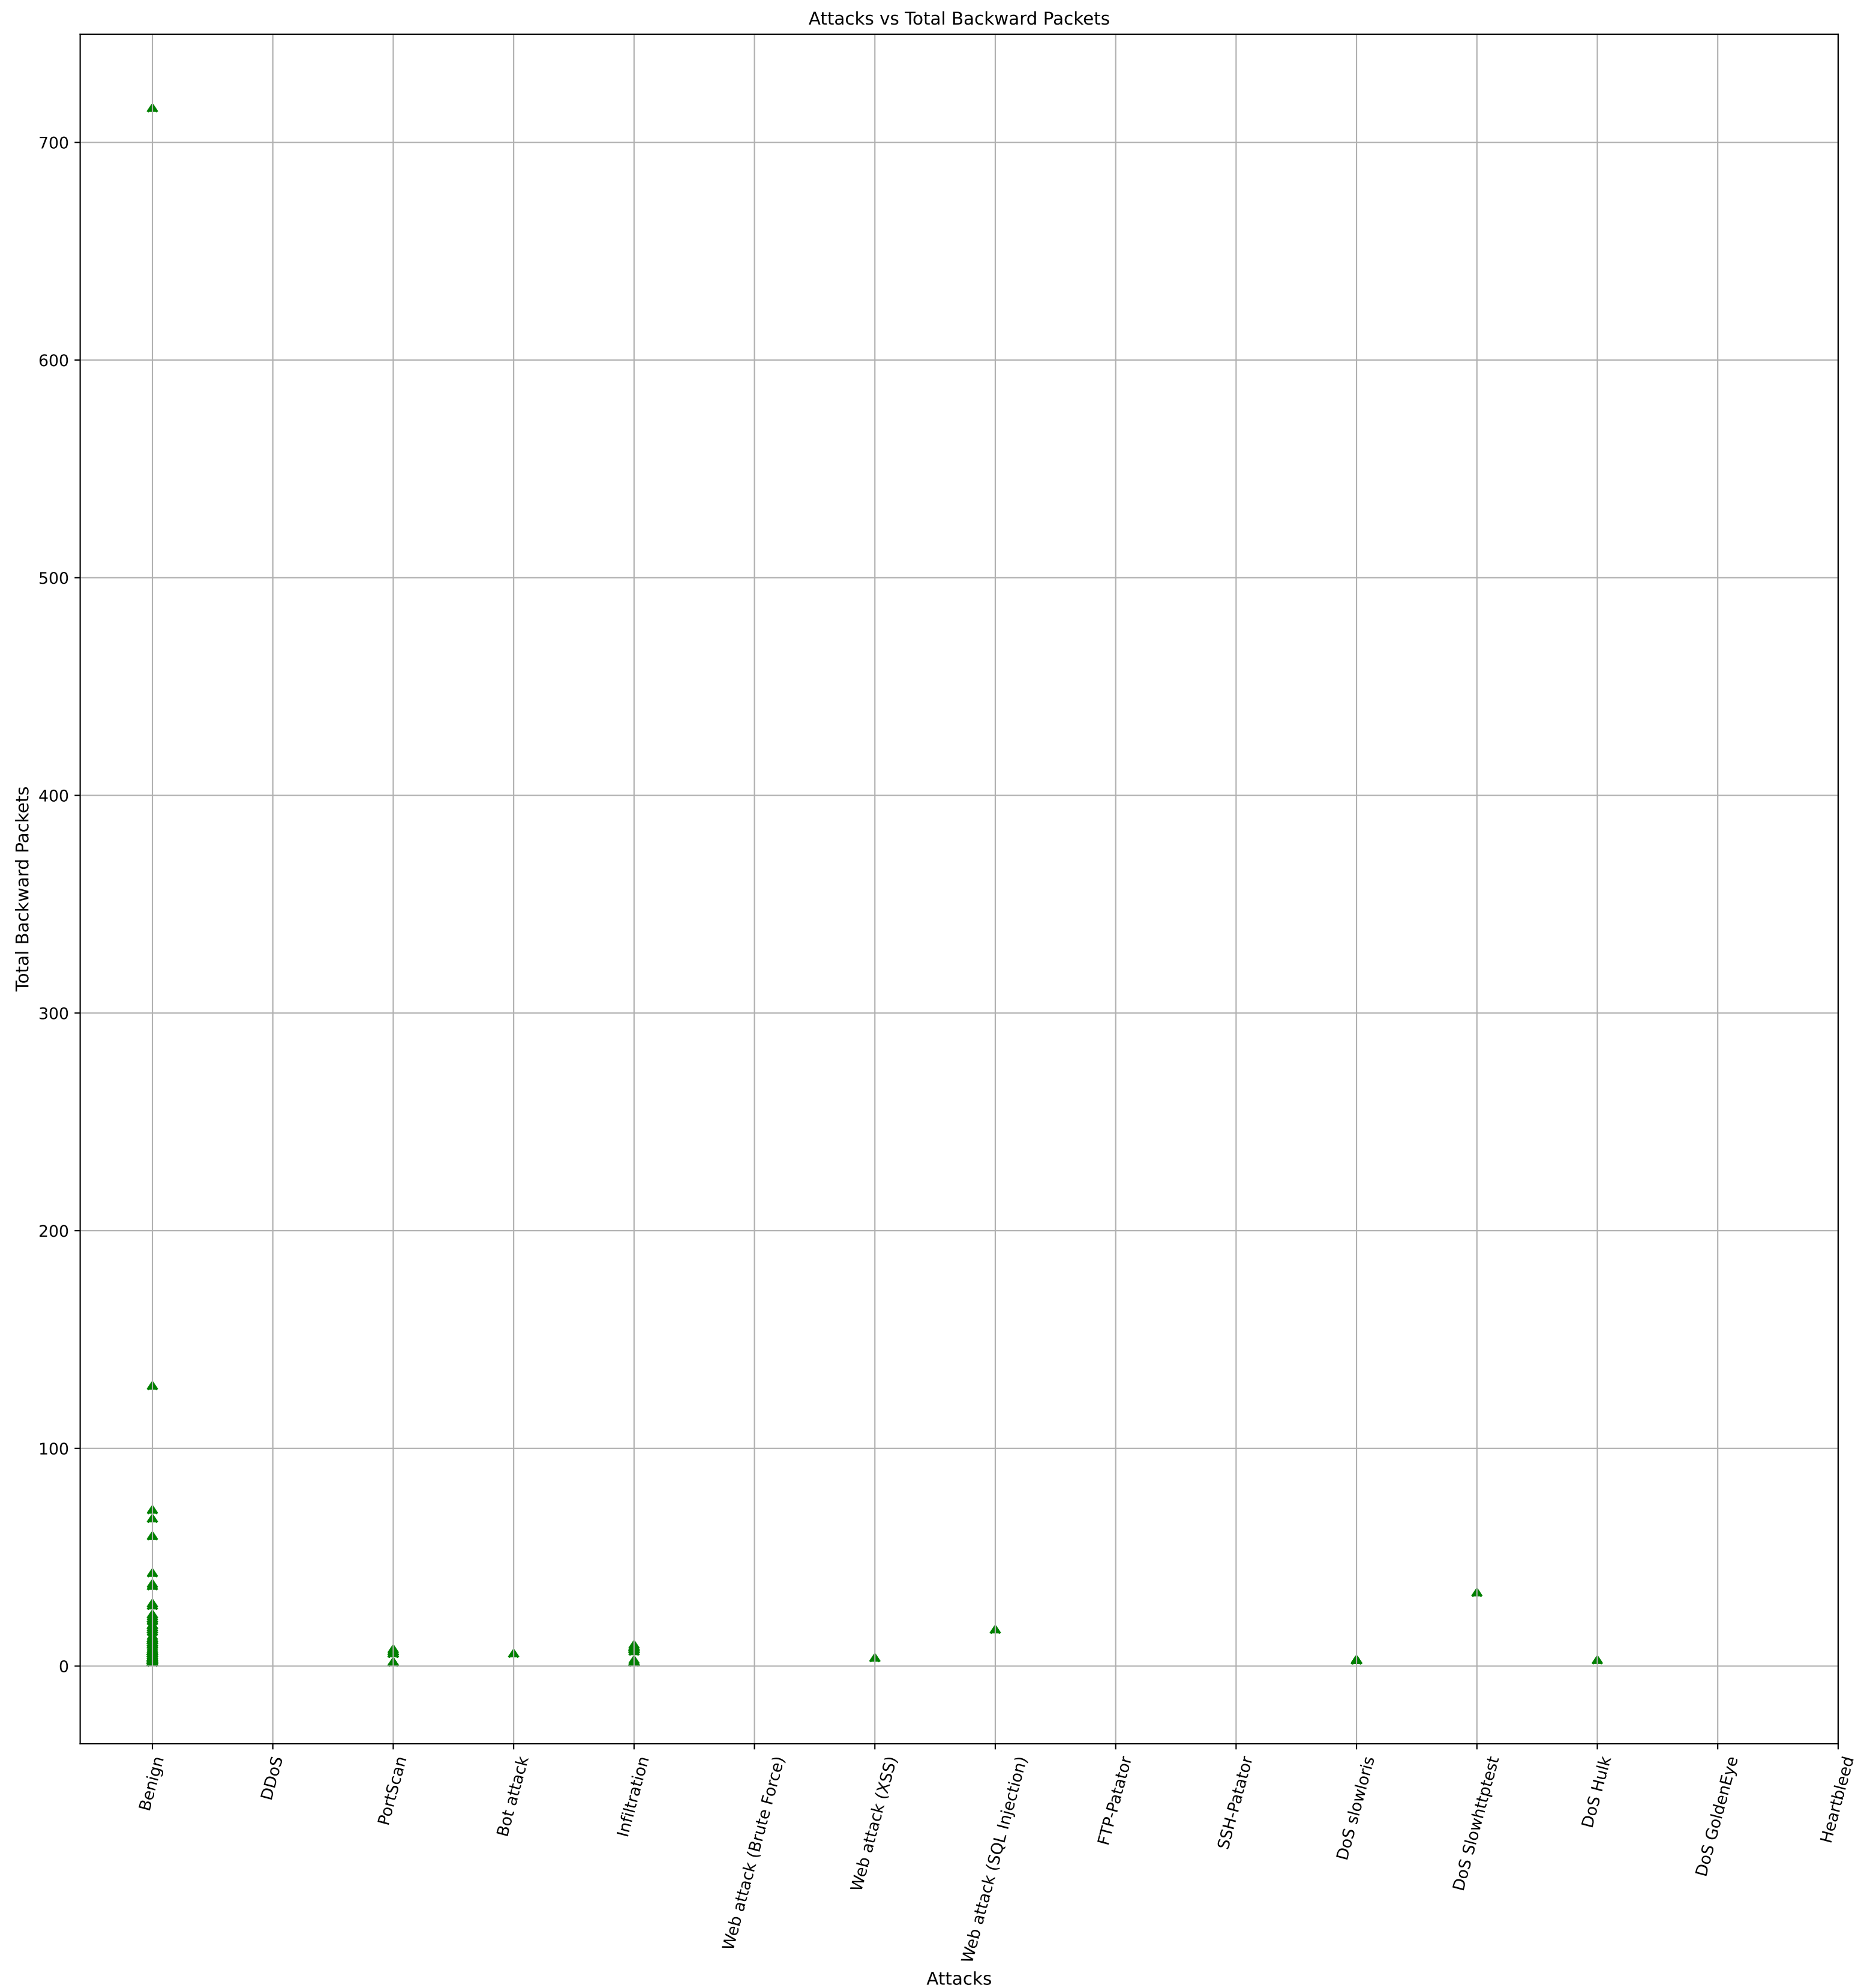


The most common value (mode) of Total Length of Fwd Packets is 0

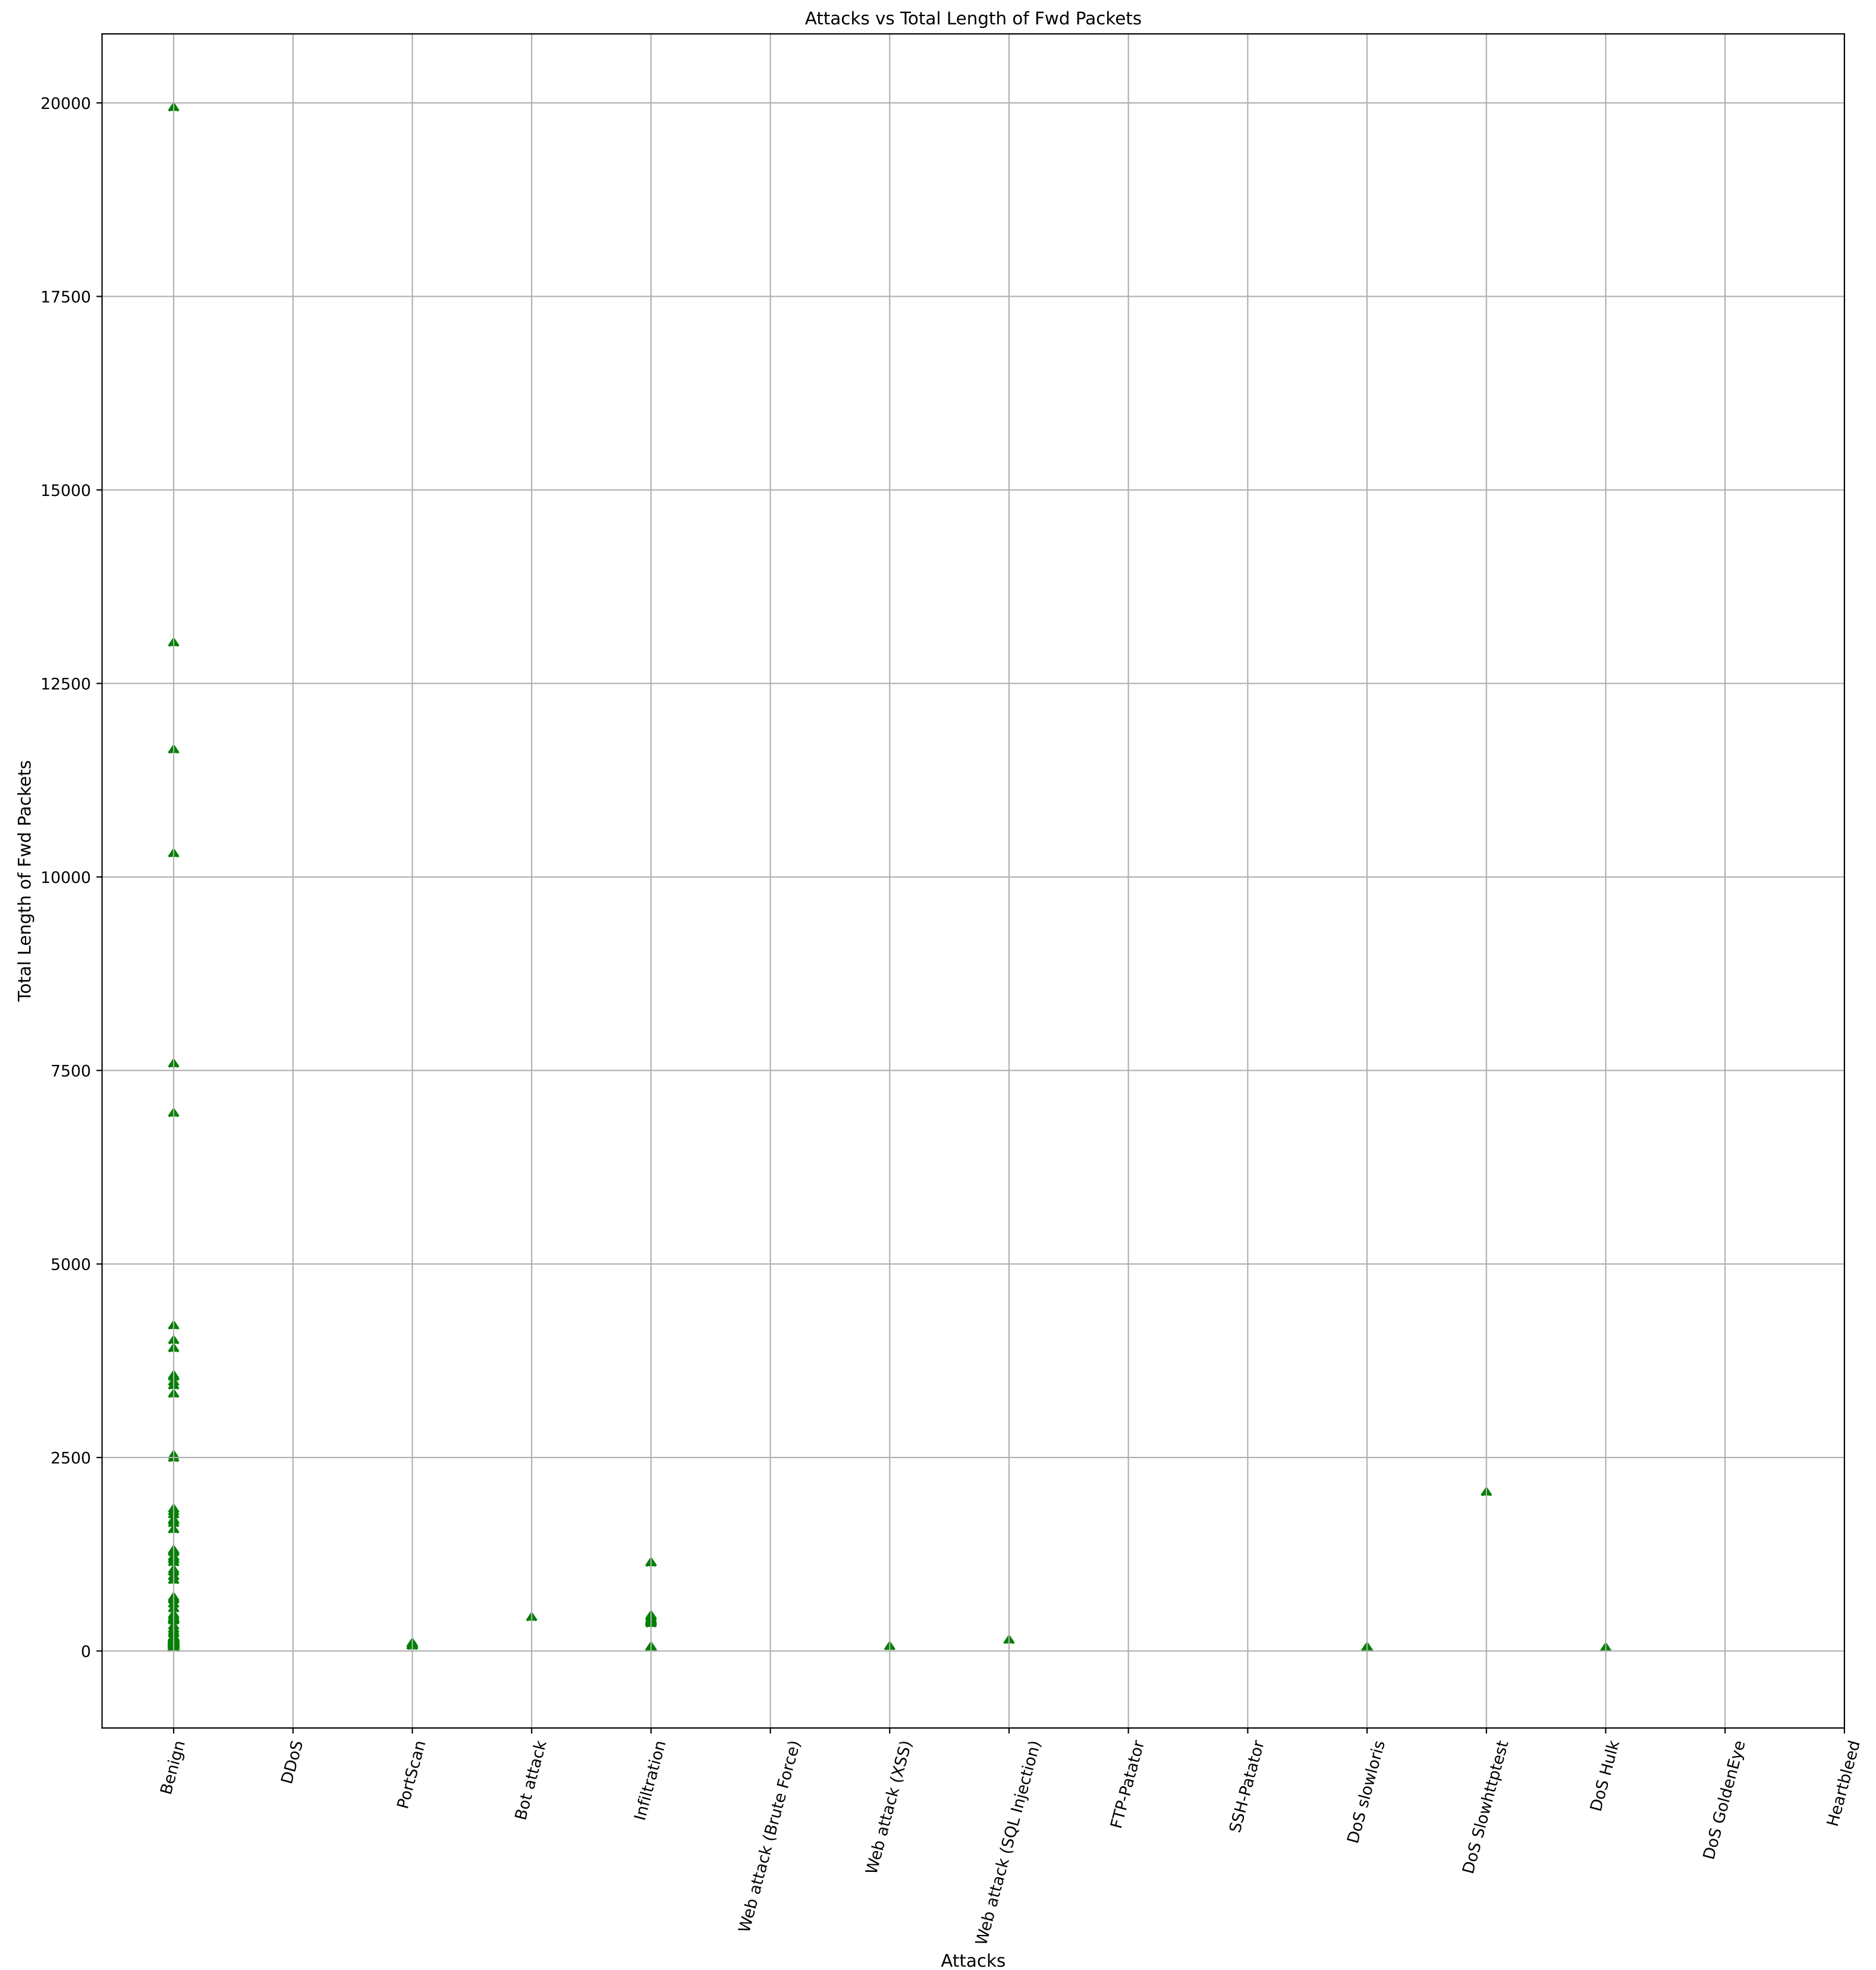


The most common value (mode) of Total Length of Bwd Packets is 0

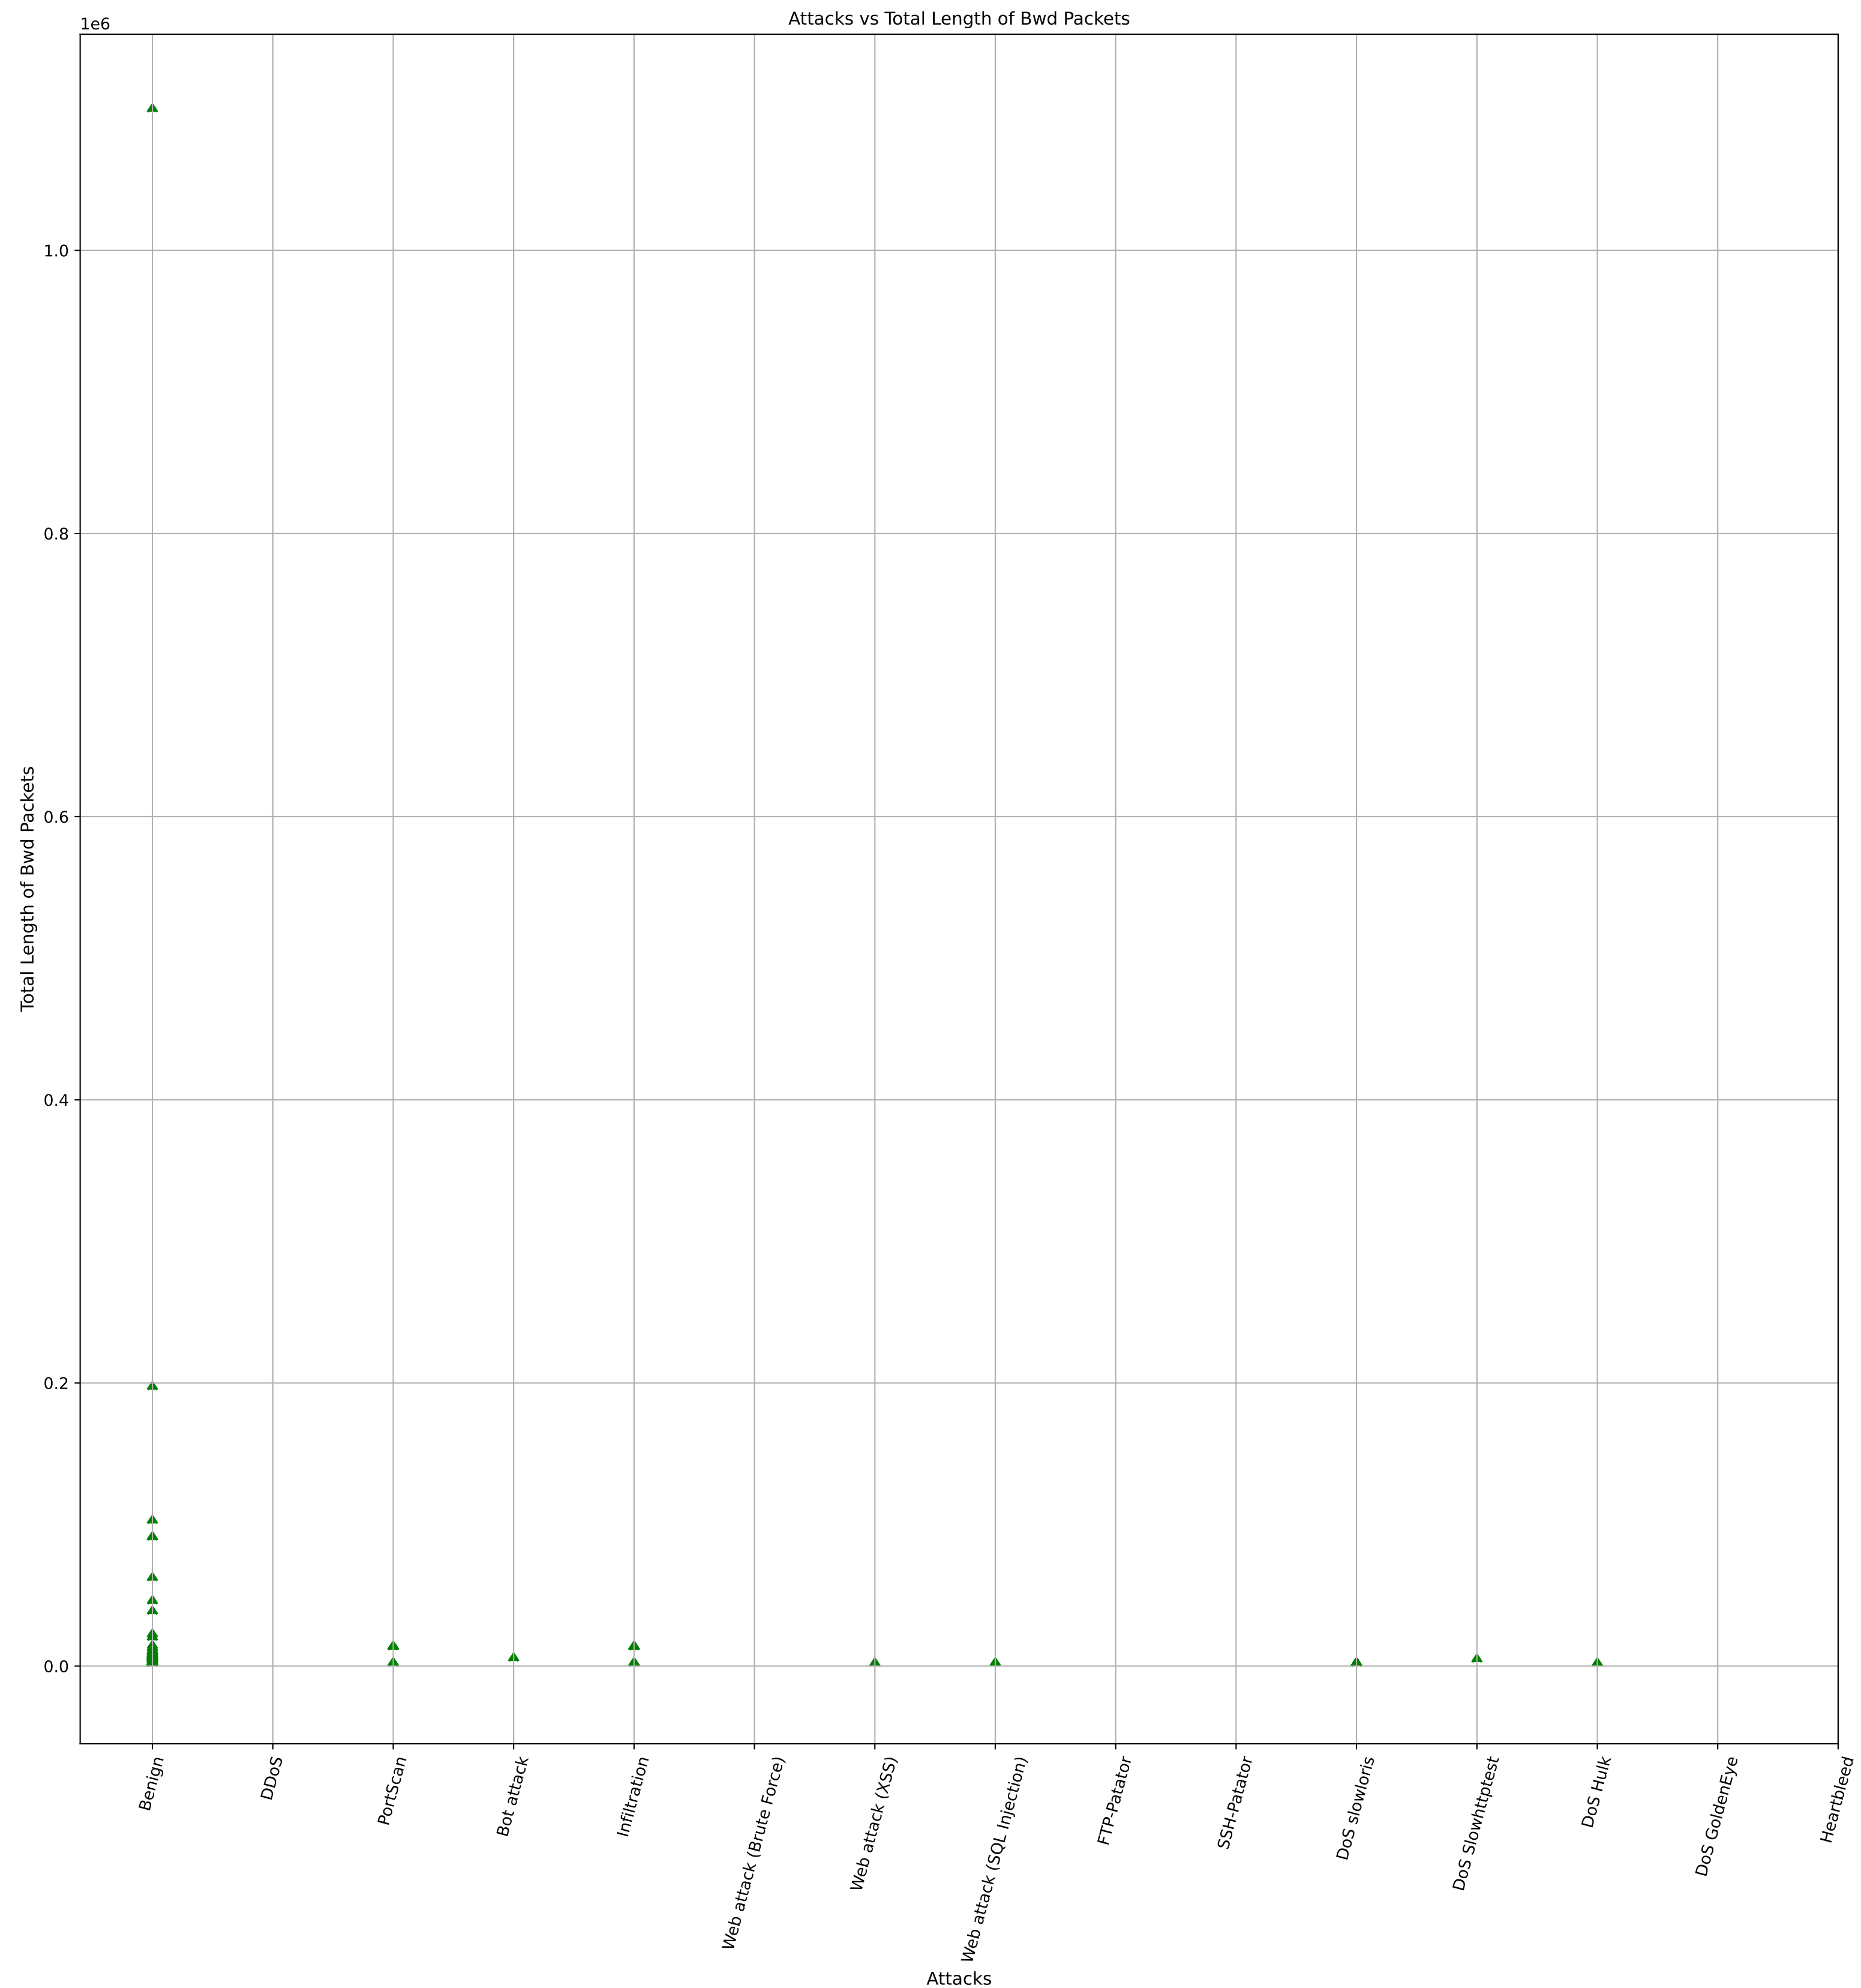


The most common value (mode) of Fwd Packet Length Max is 0

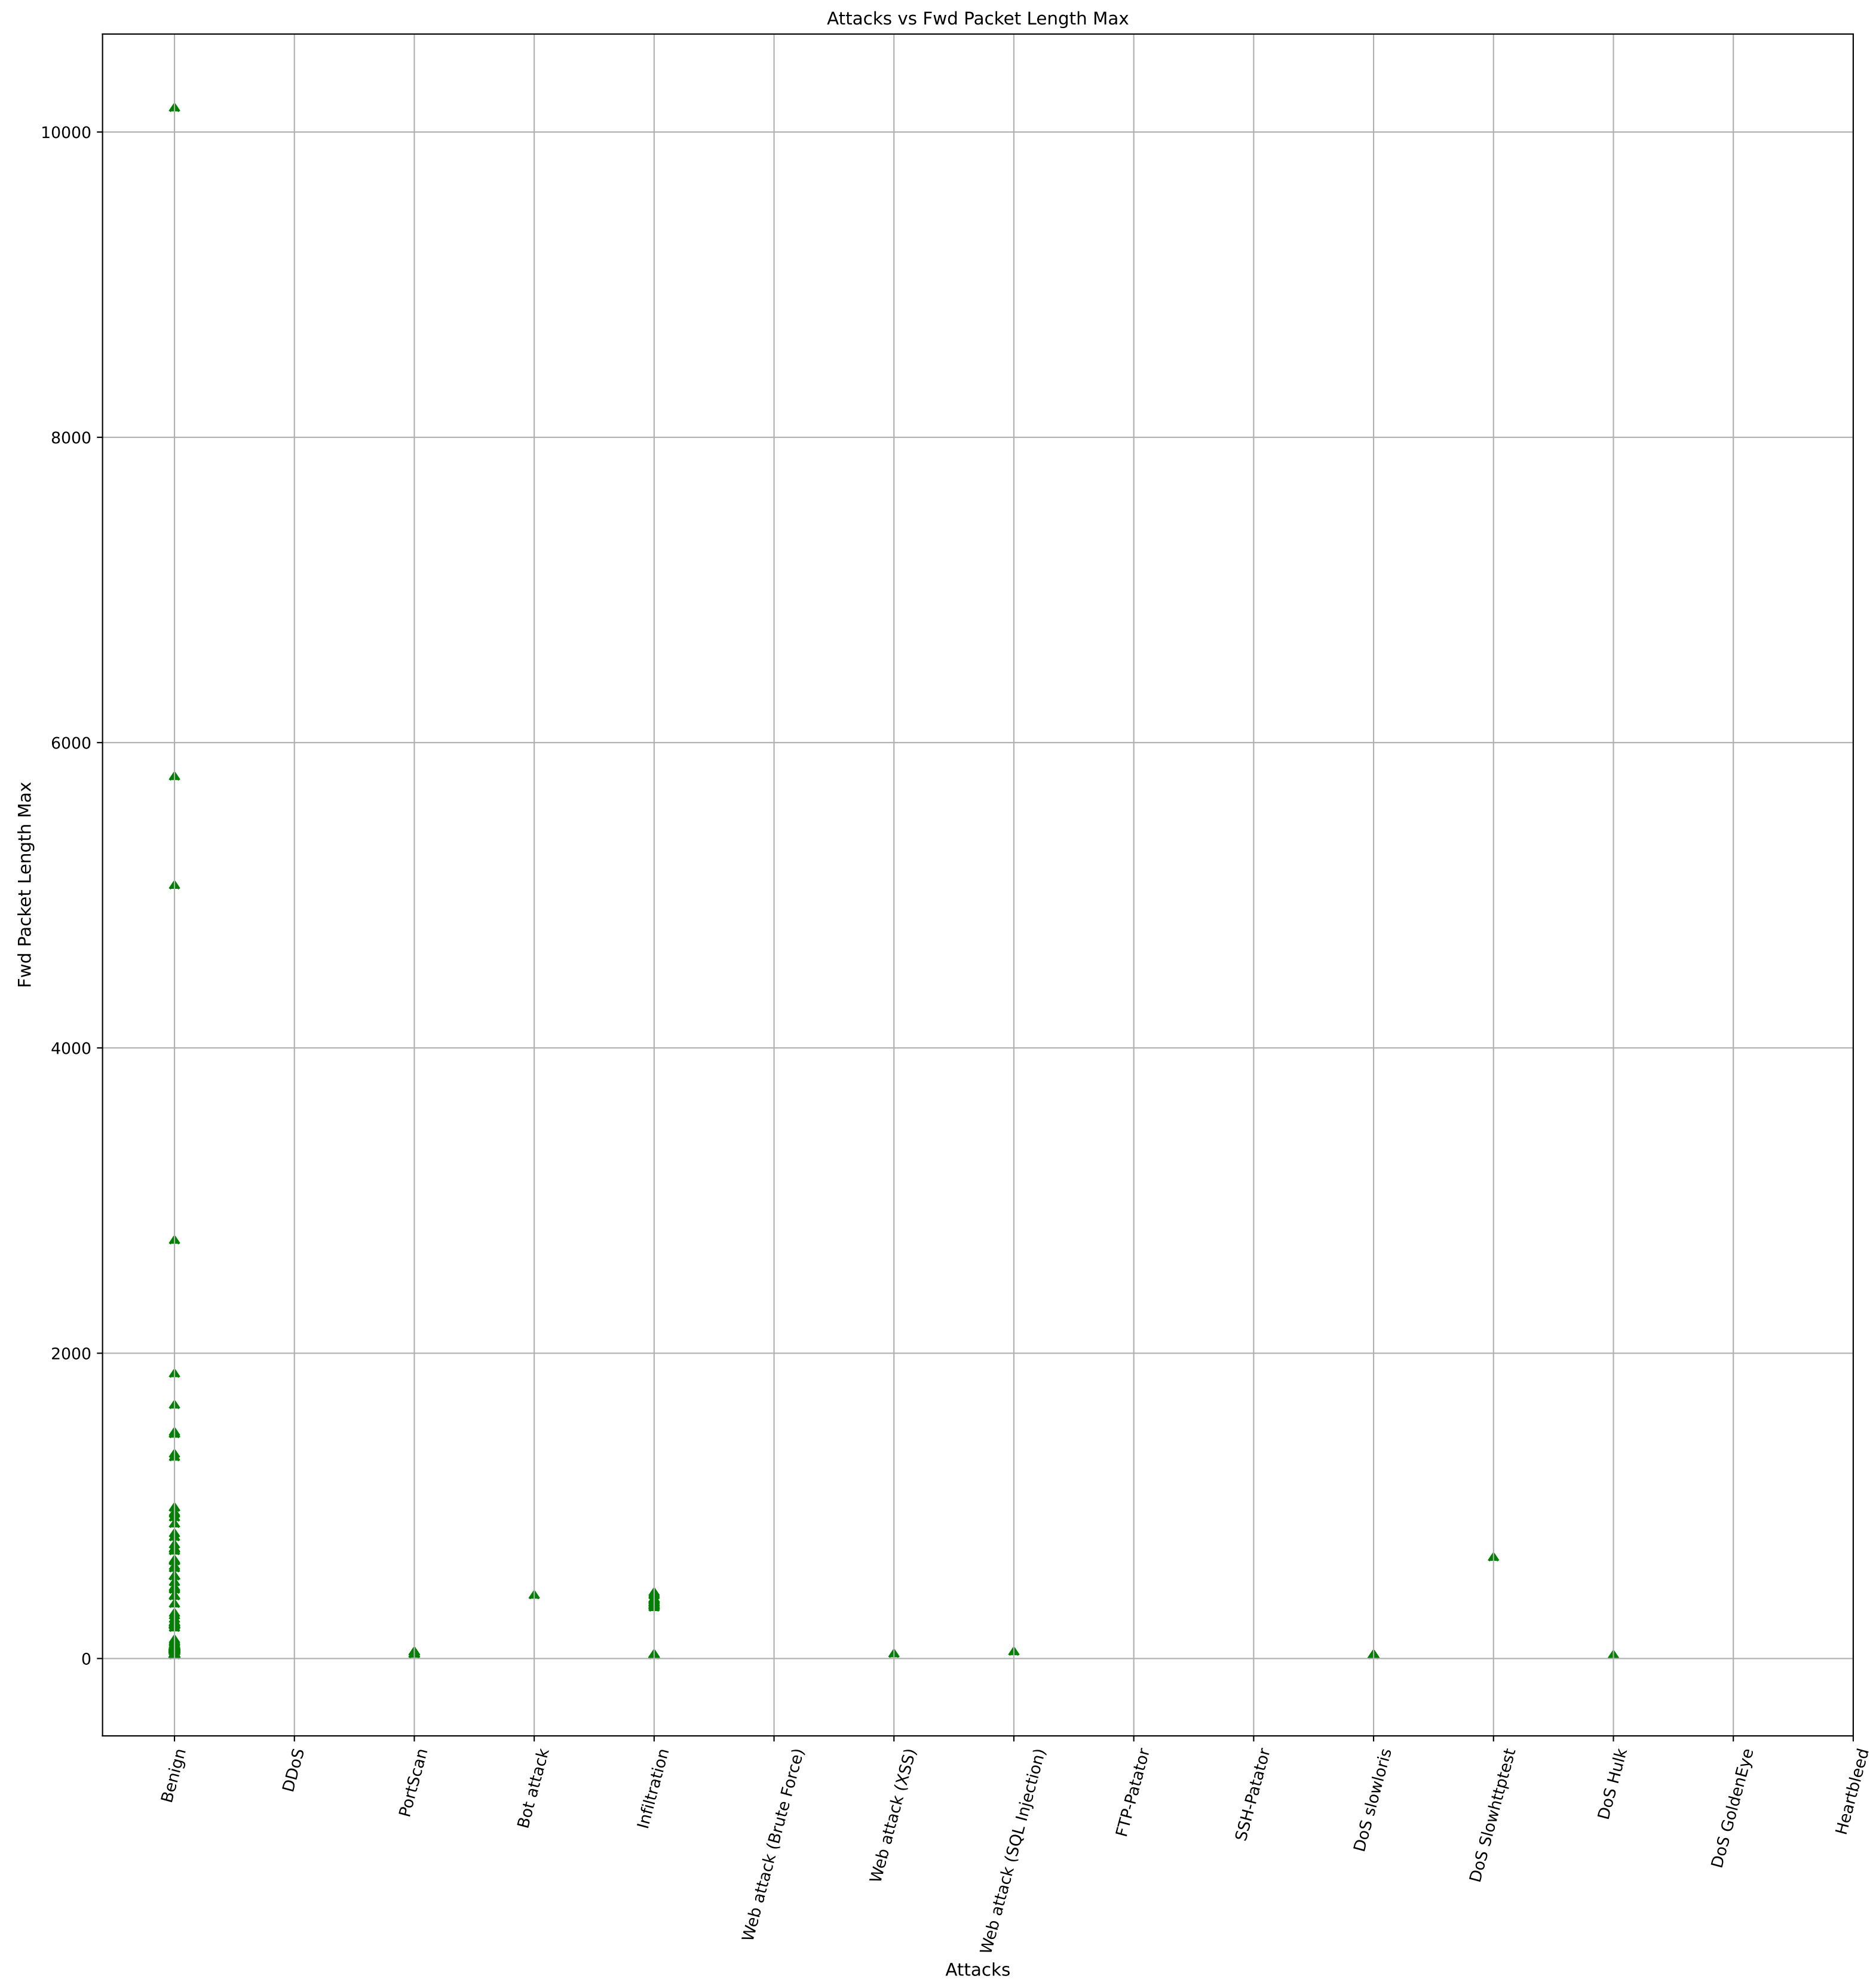


The most common value (mode) of Fwd Packet Length Min is 0

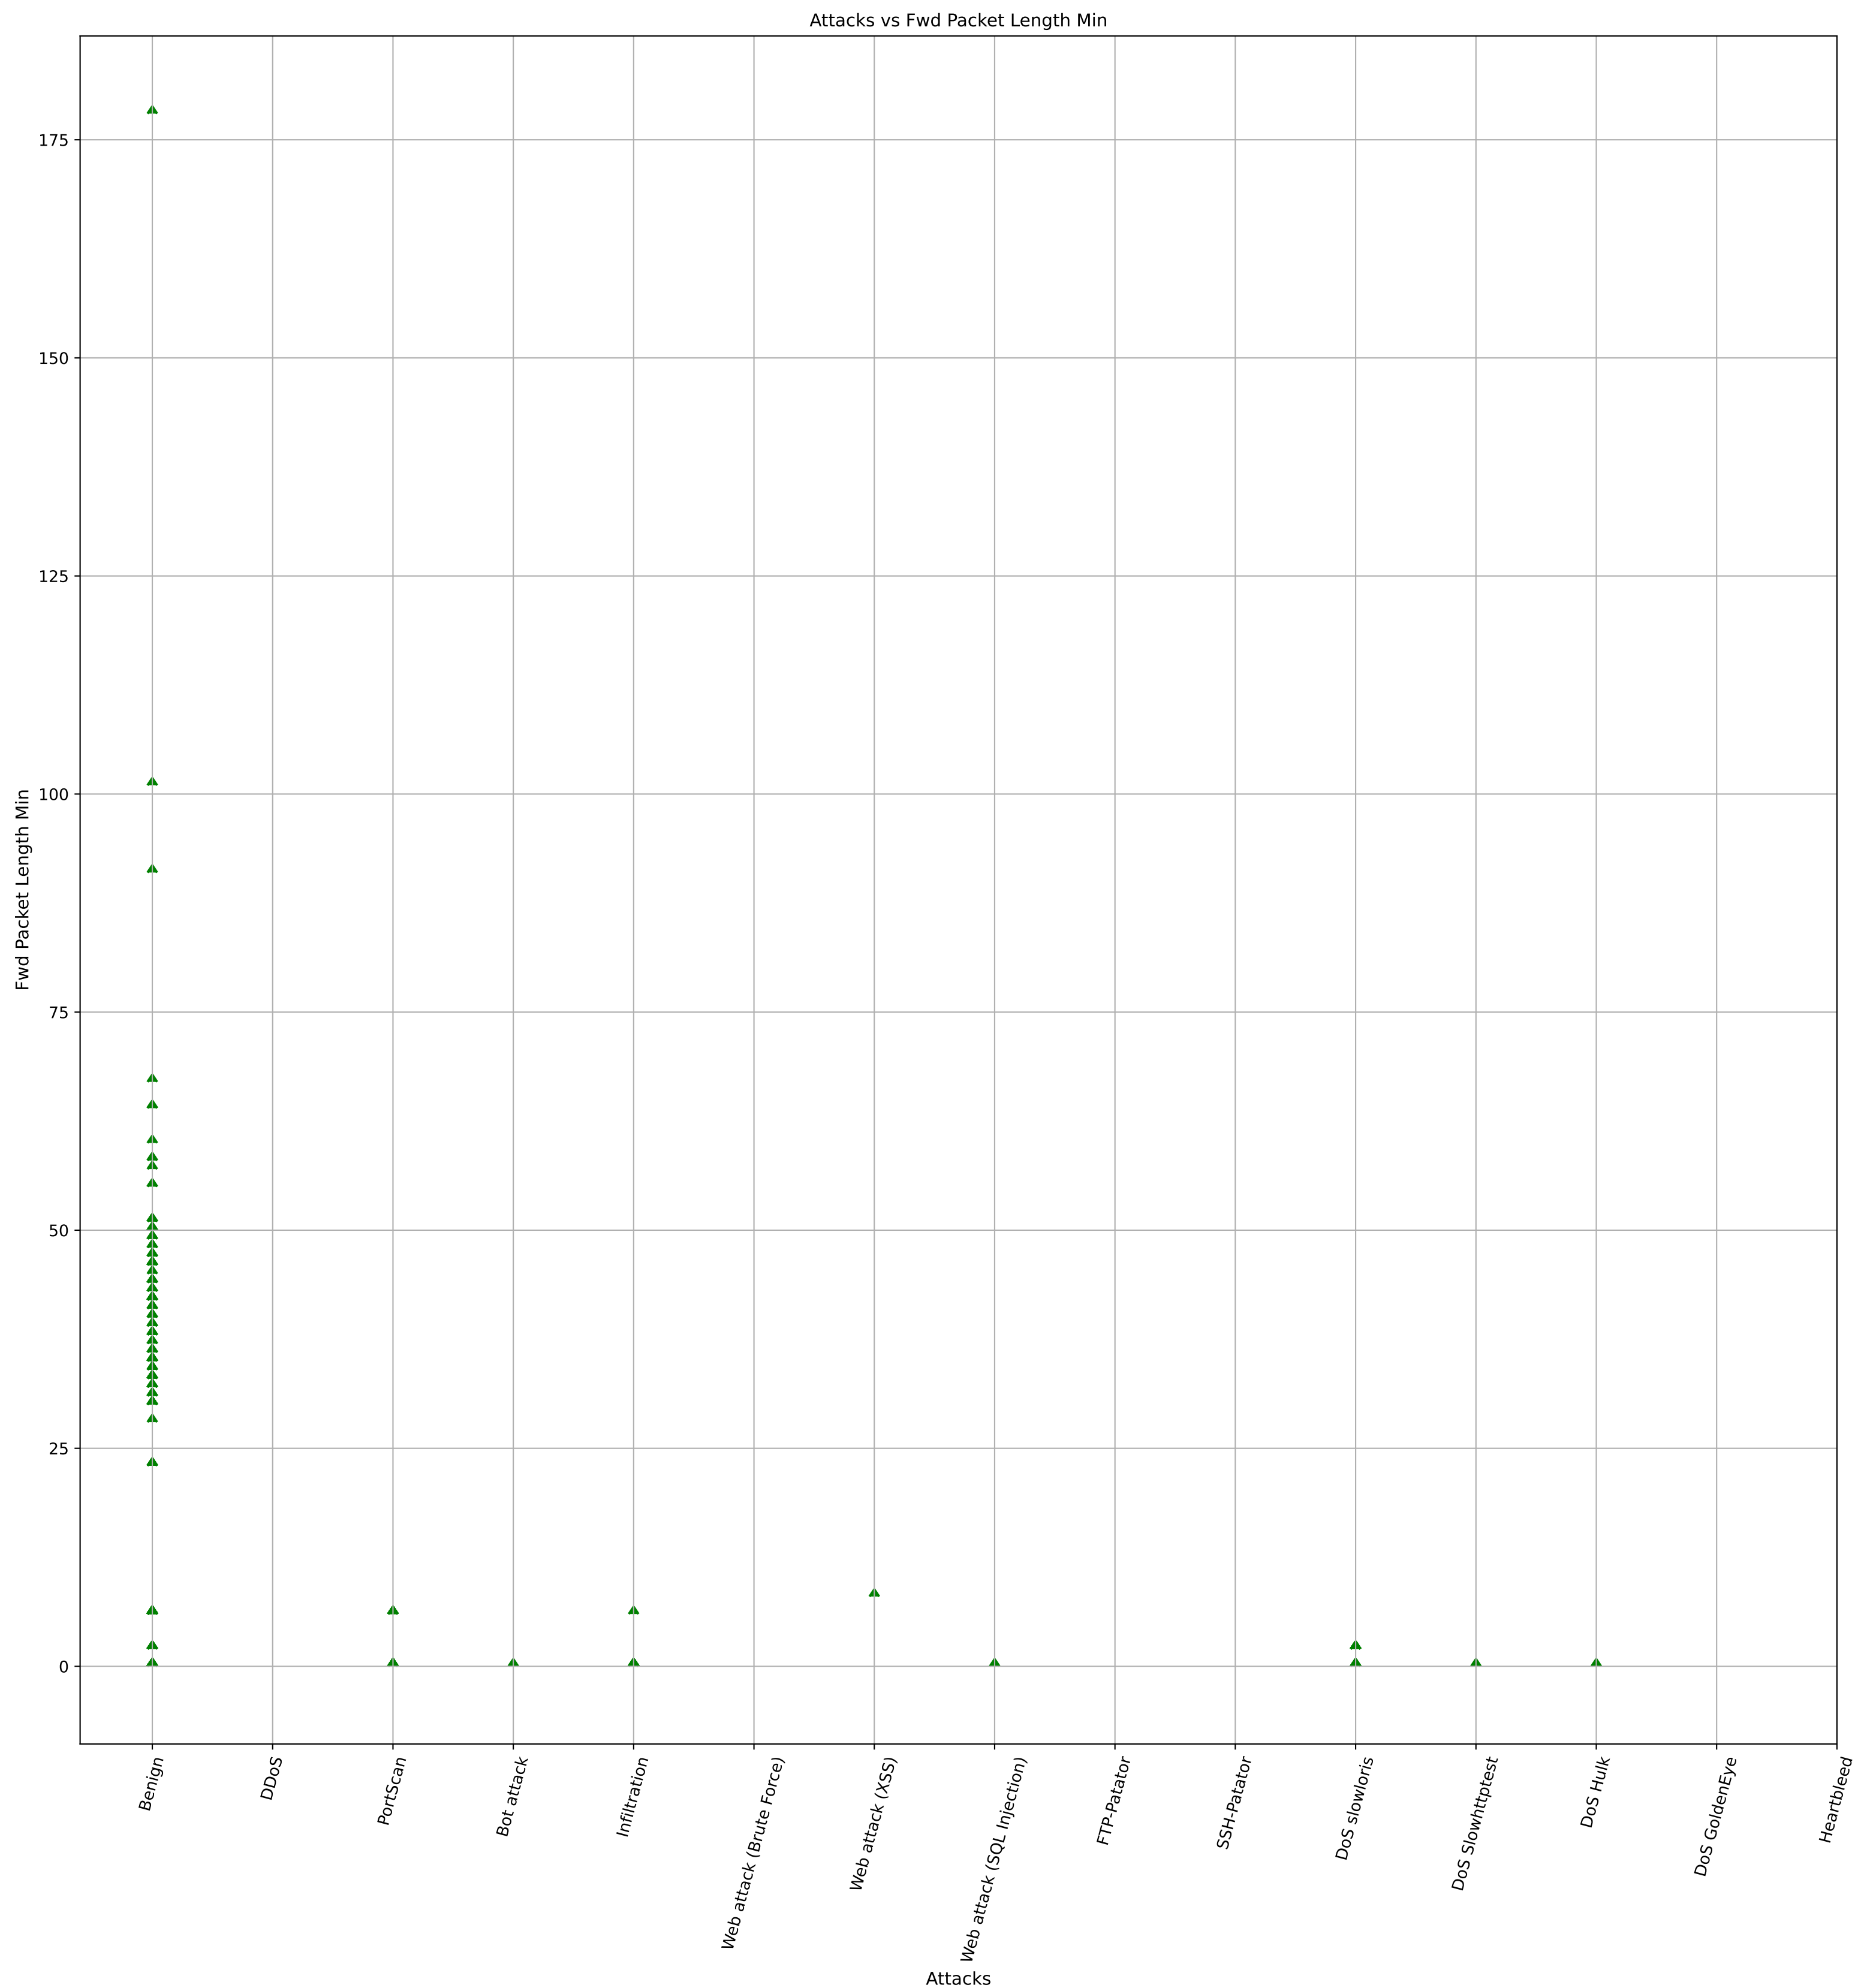


The most common value (mode) of Fwd Packet Length Mean is 0.0

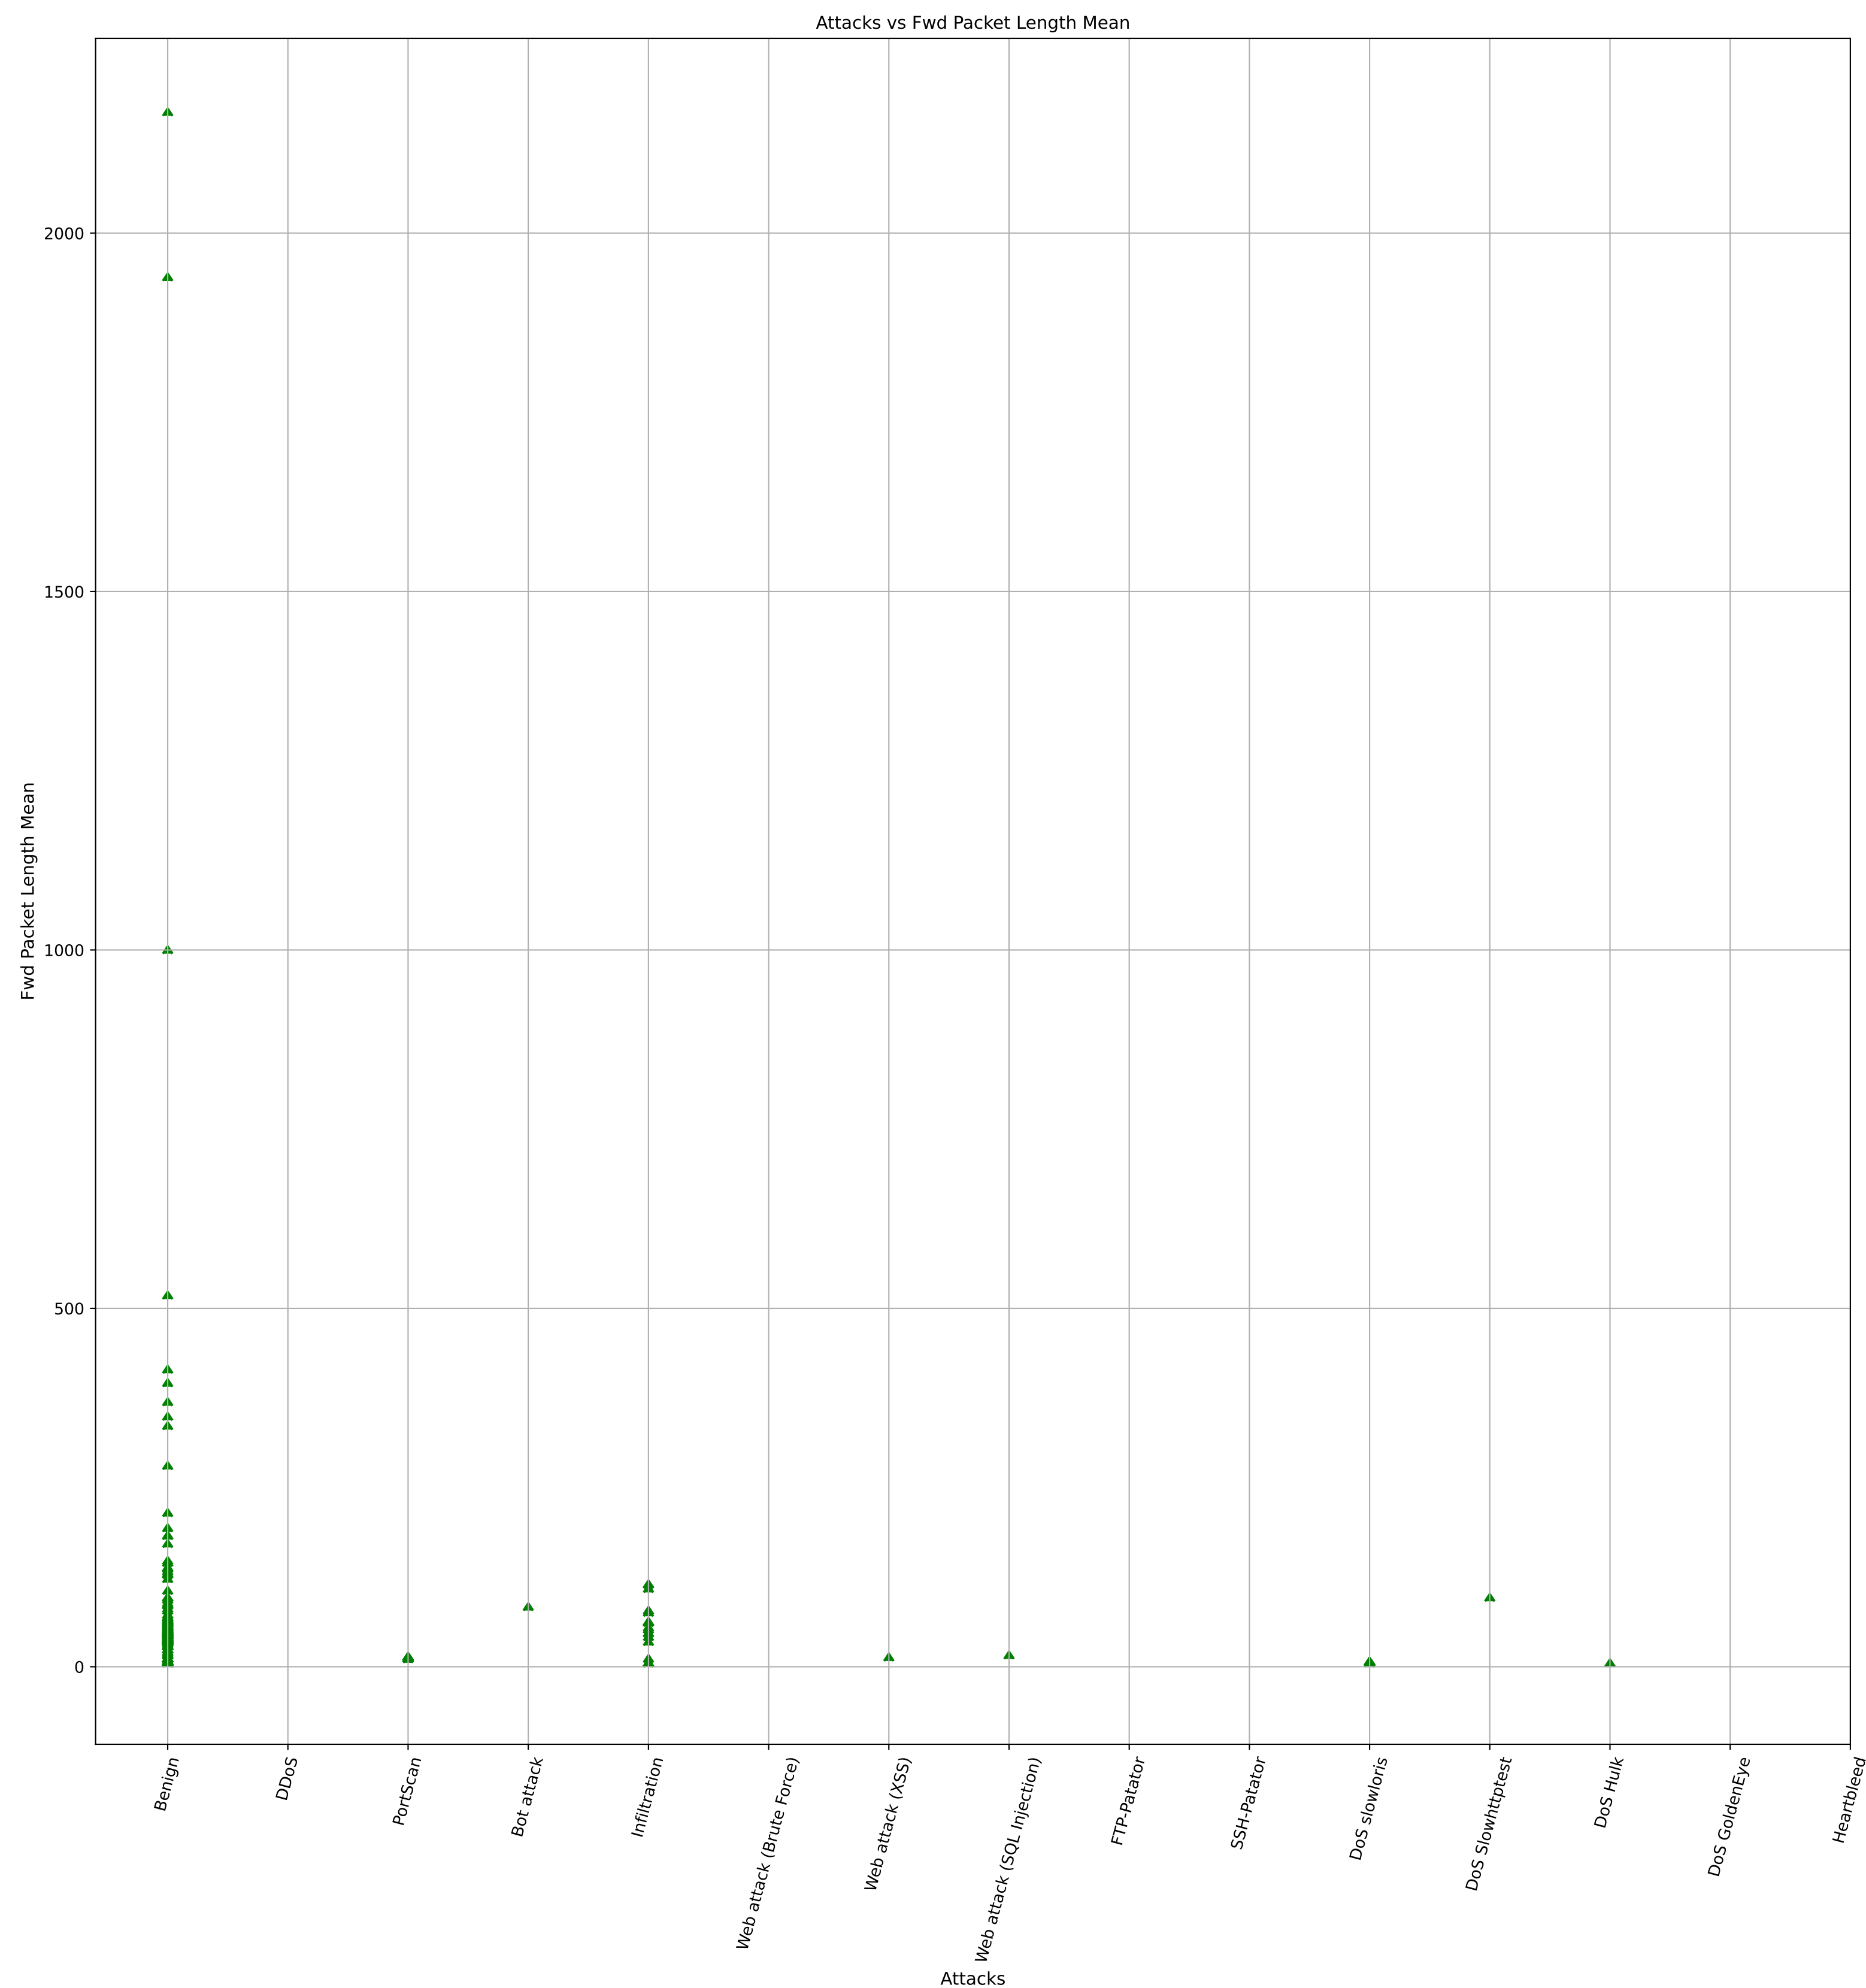


The most common value (mode) of Fwd Packet Length Std is 0.0

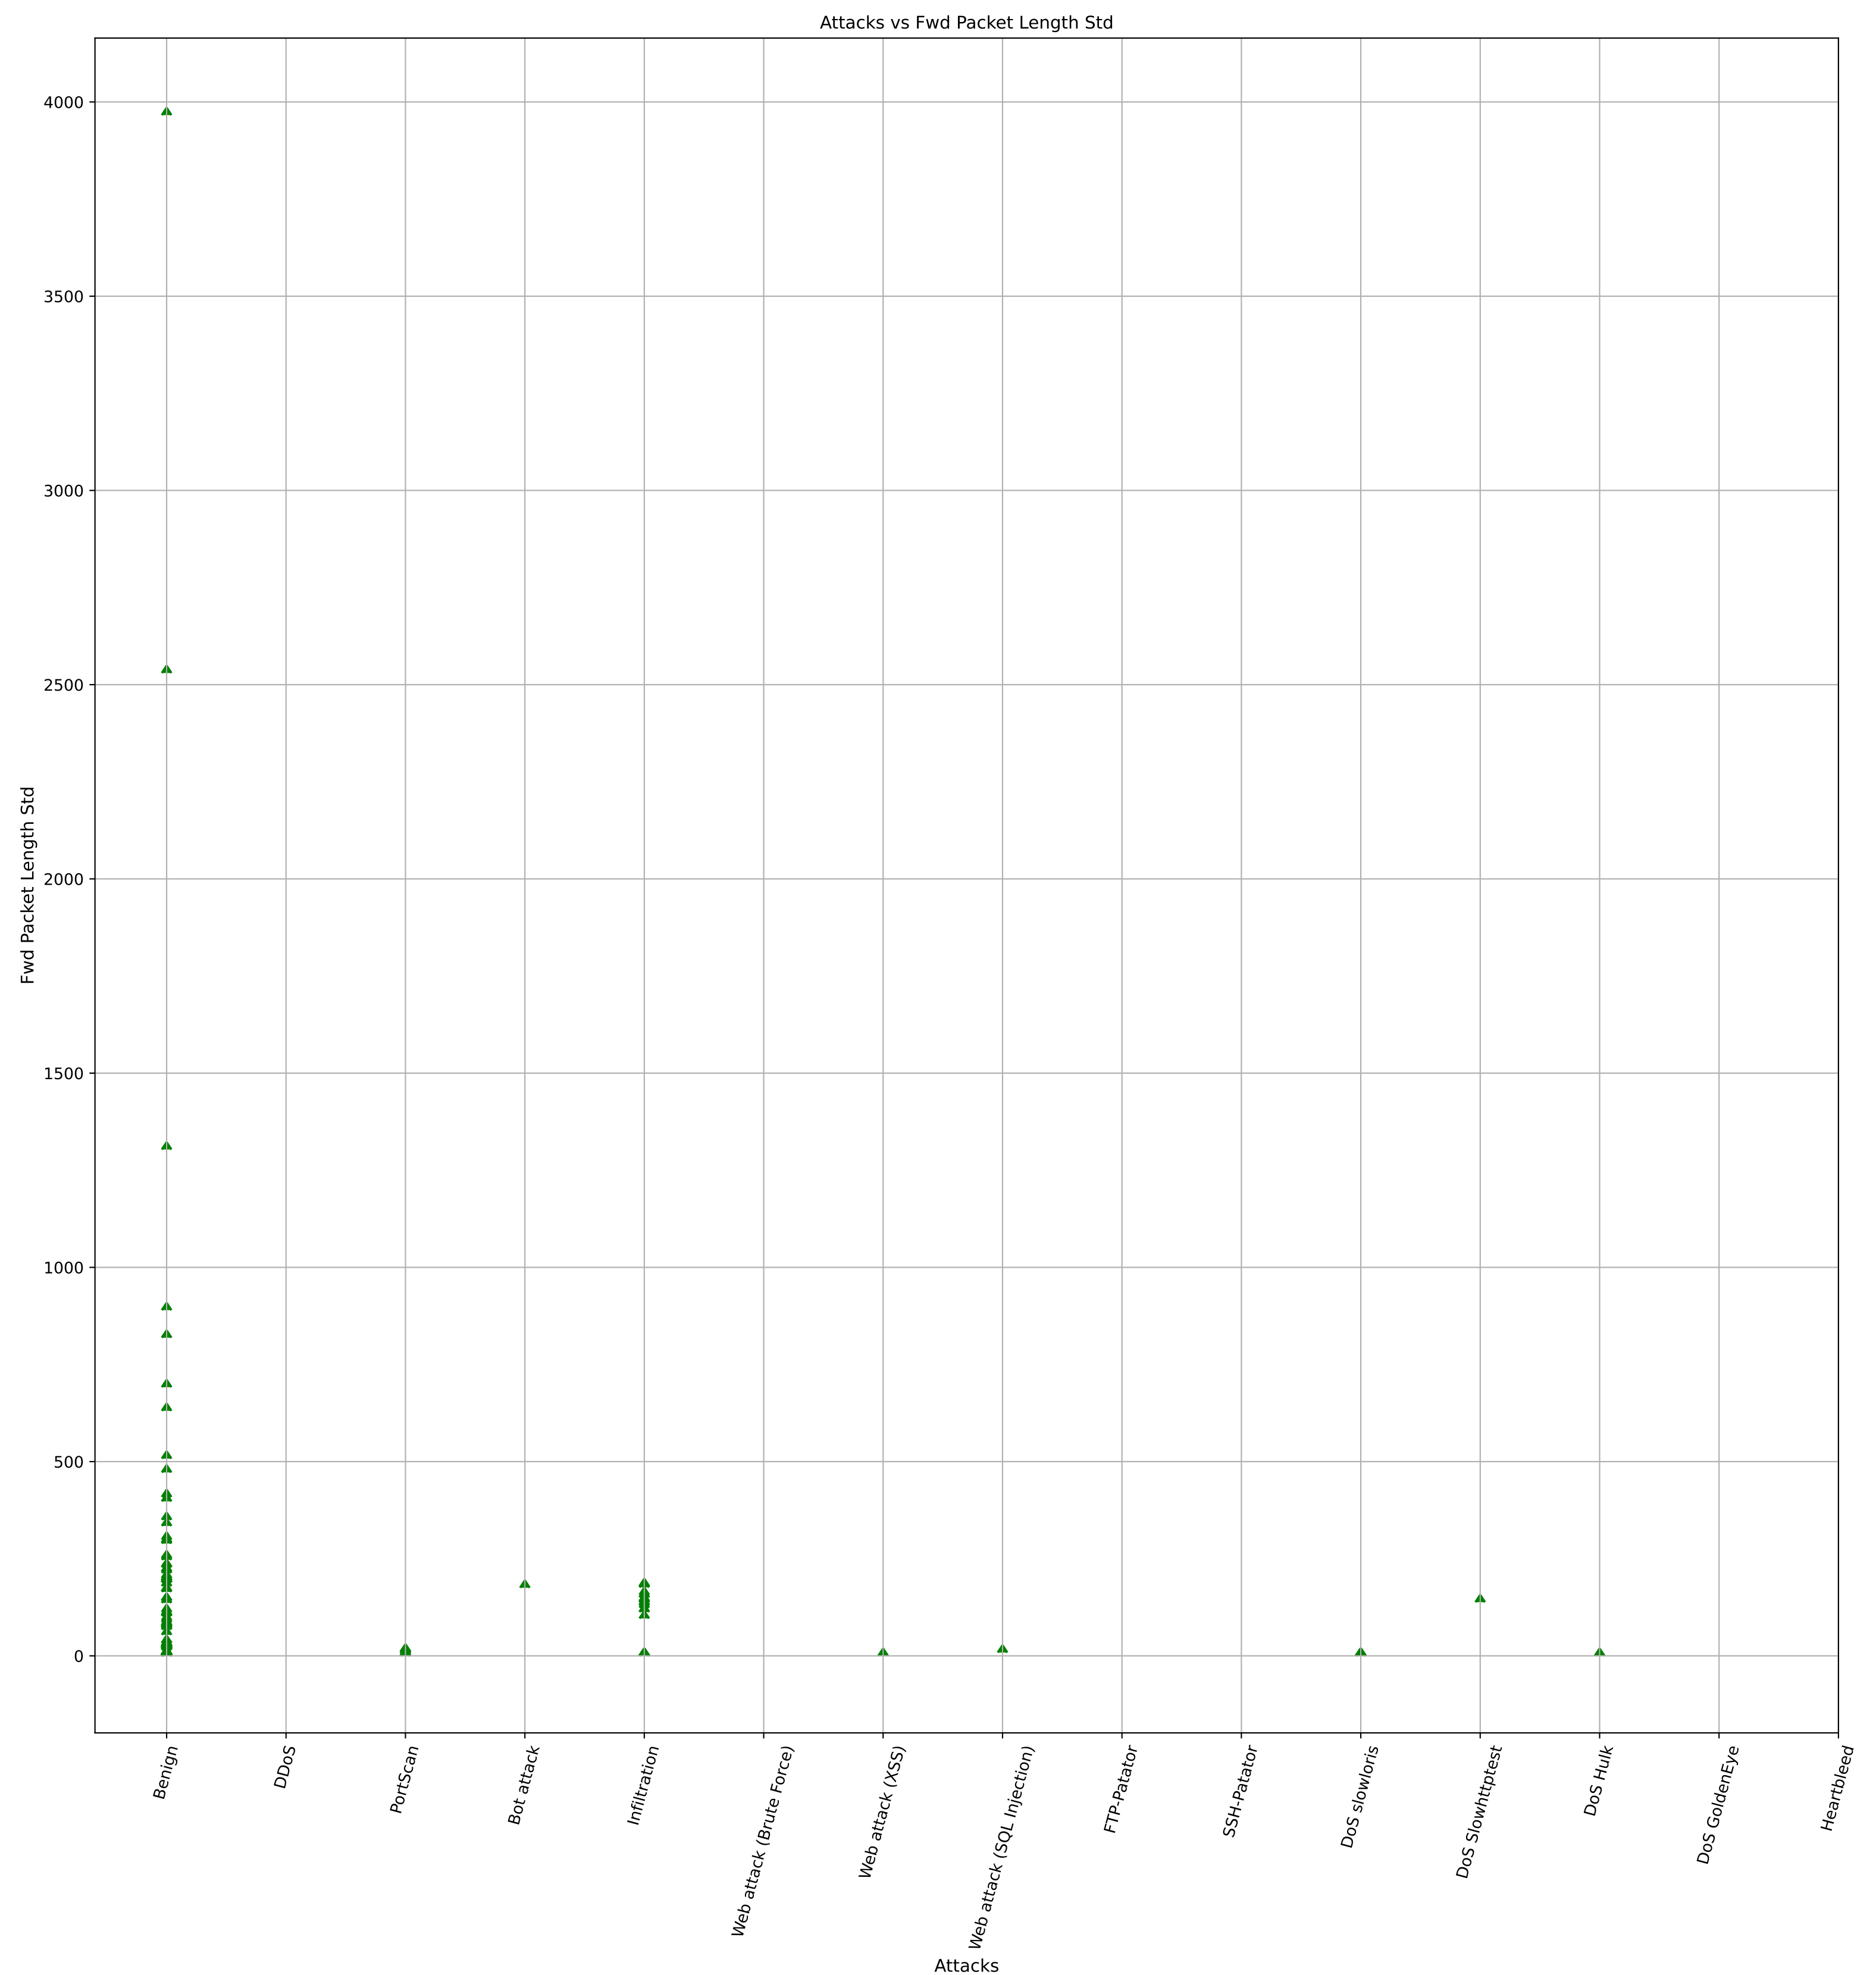


The most common value (mode) of Bwd Packet Length Max is 0

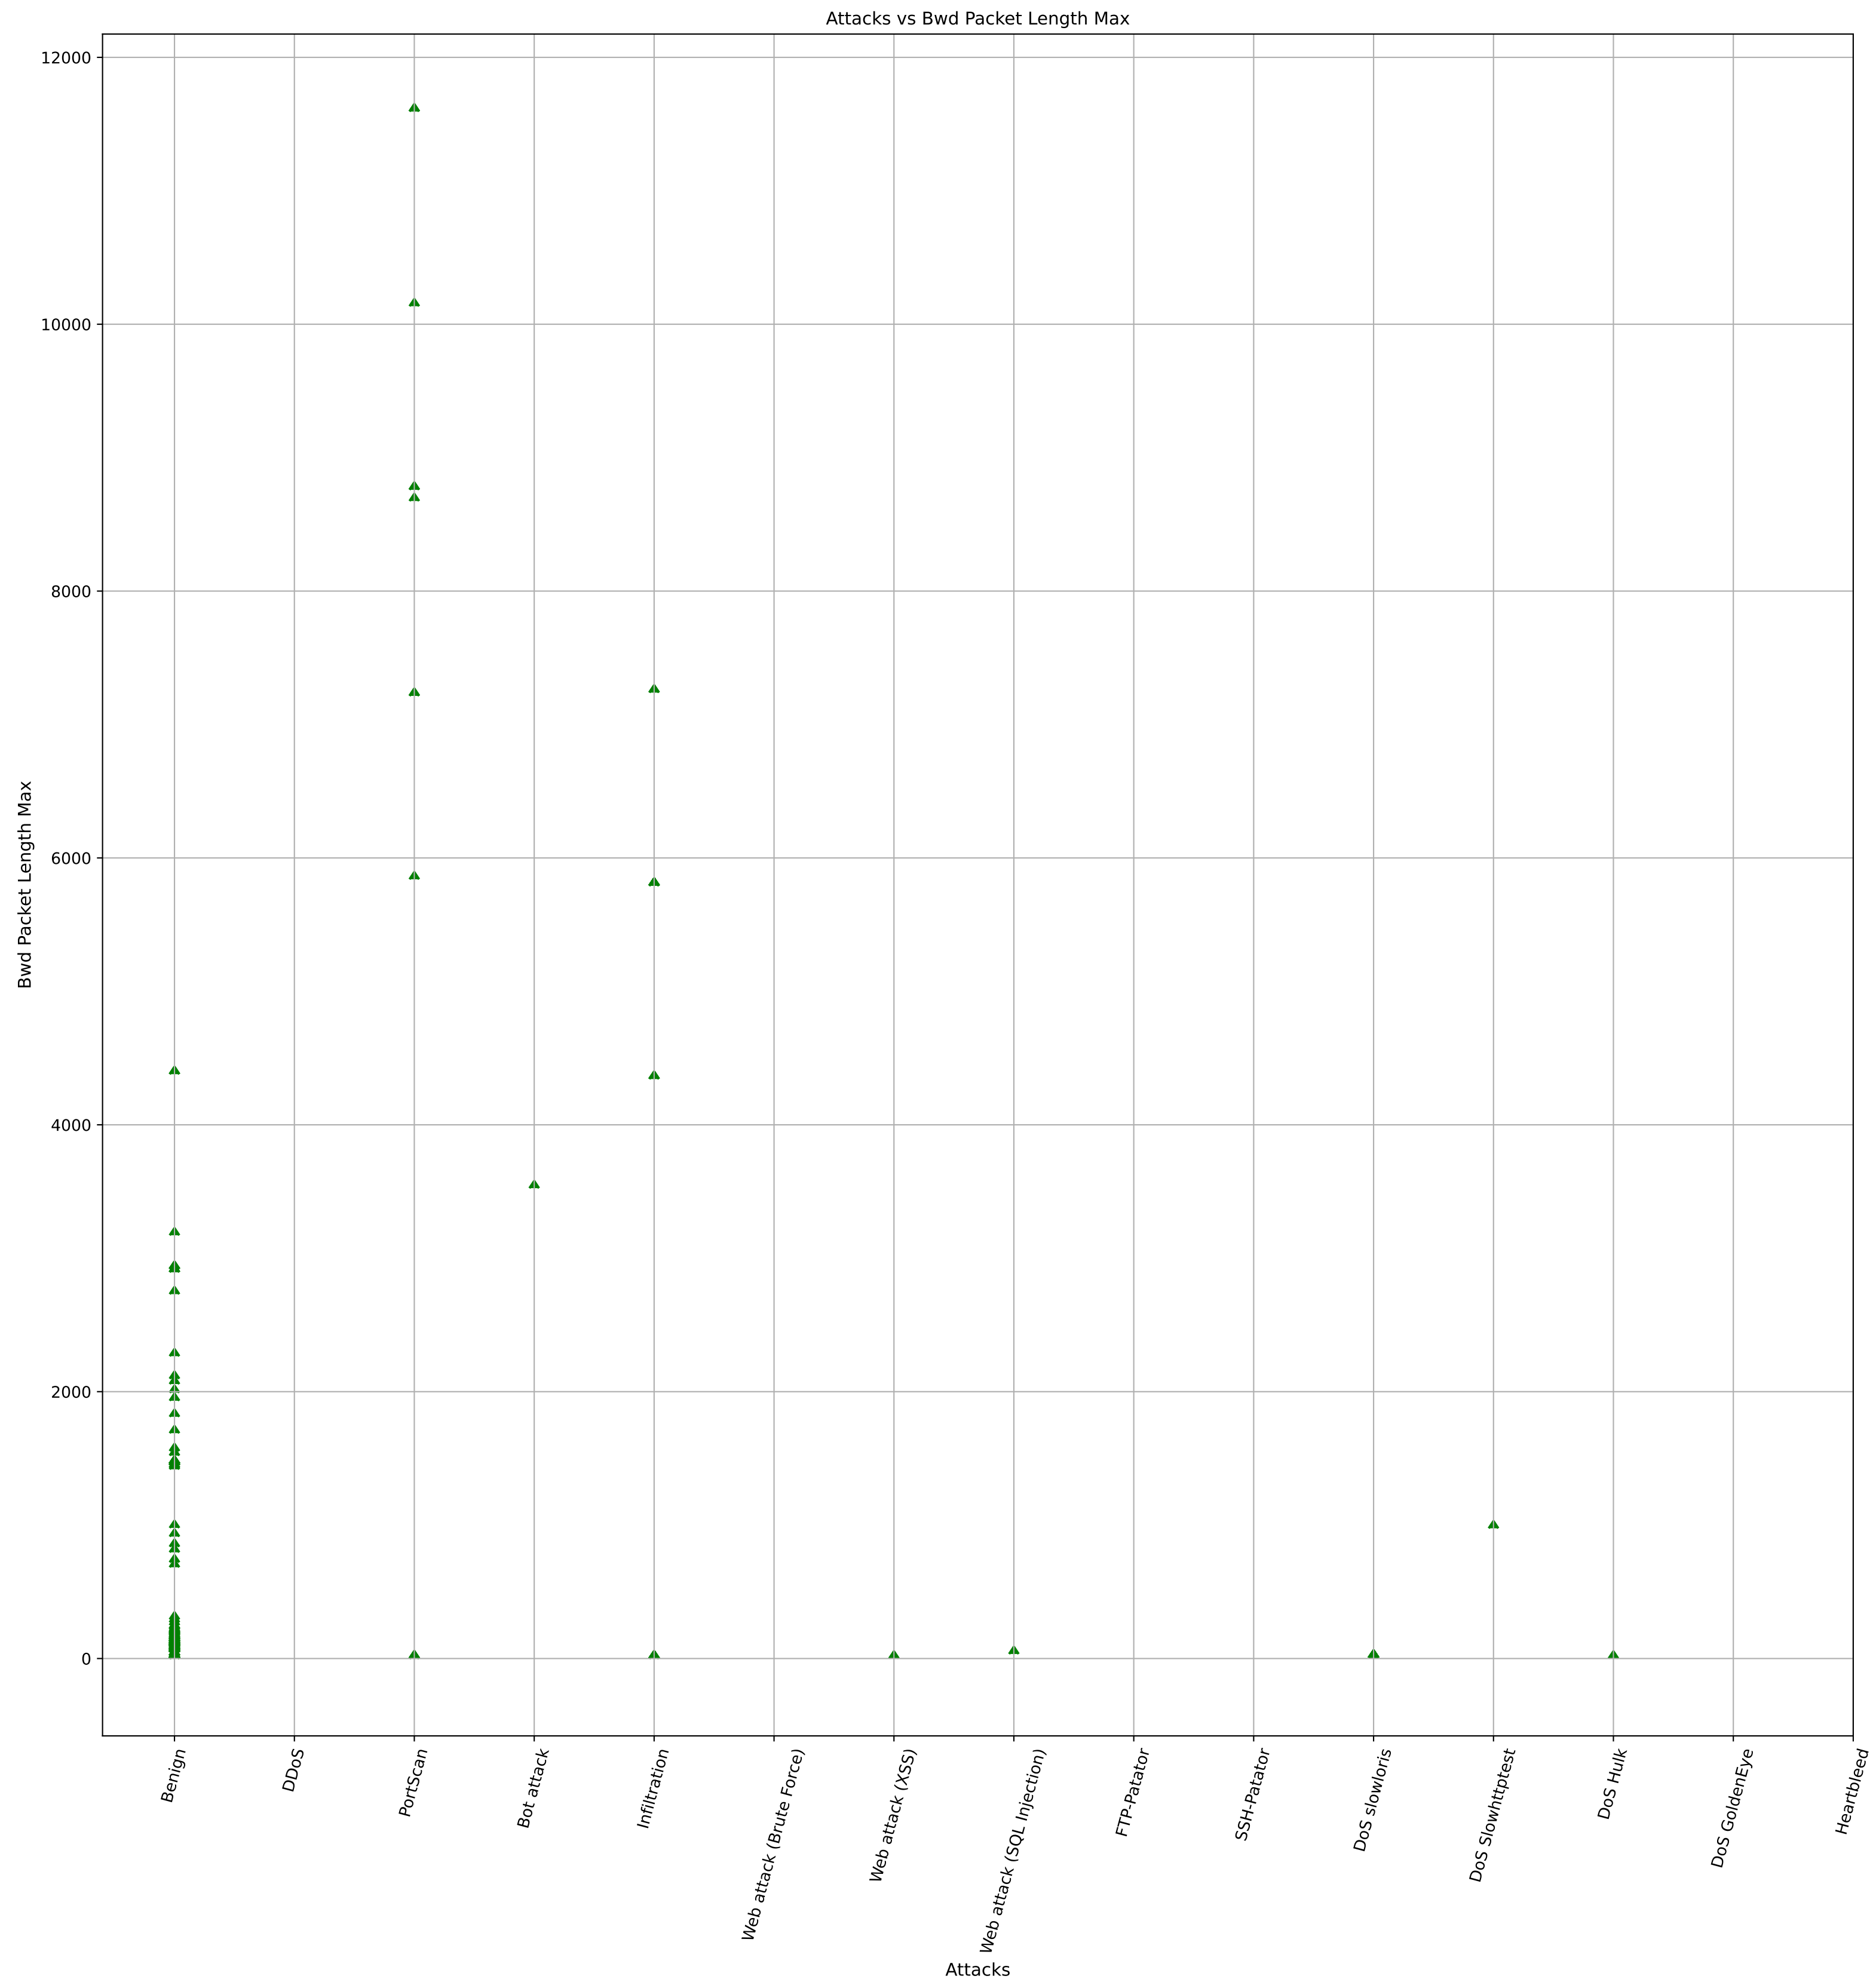


The most common value (mode) of Bwd Packet Length Min is 0

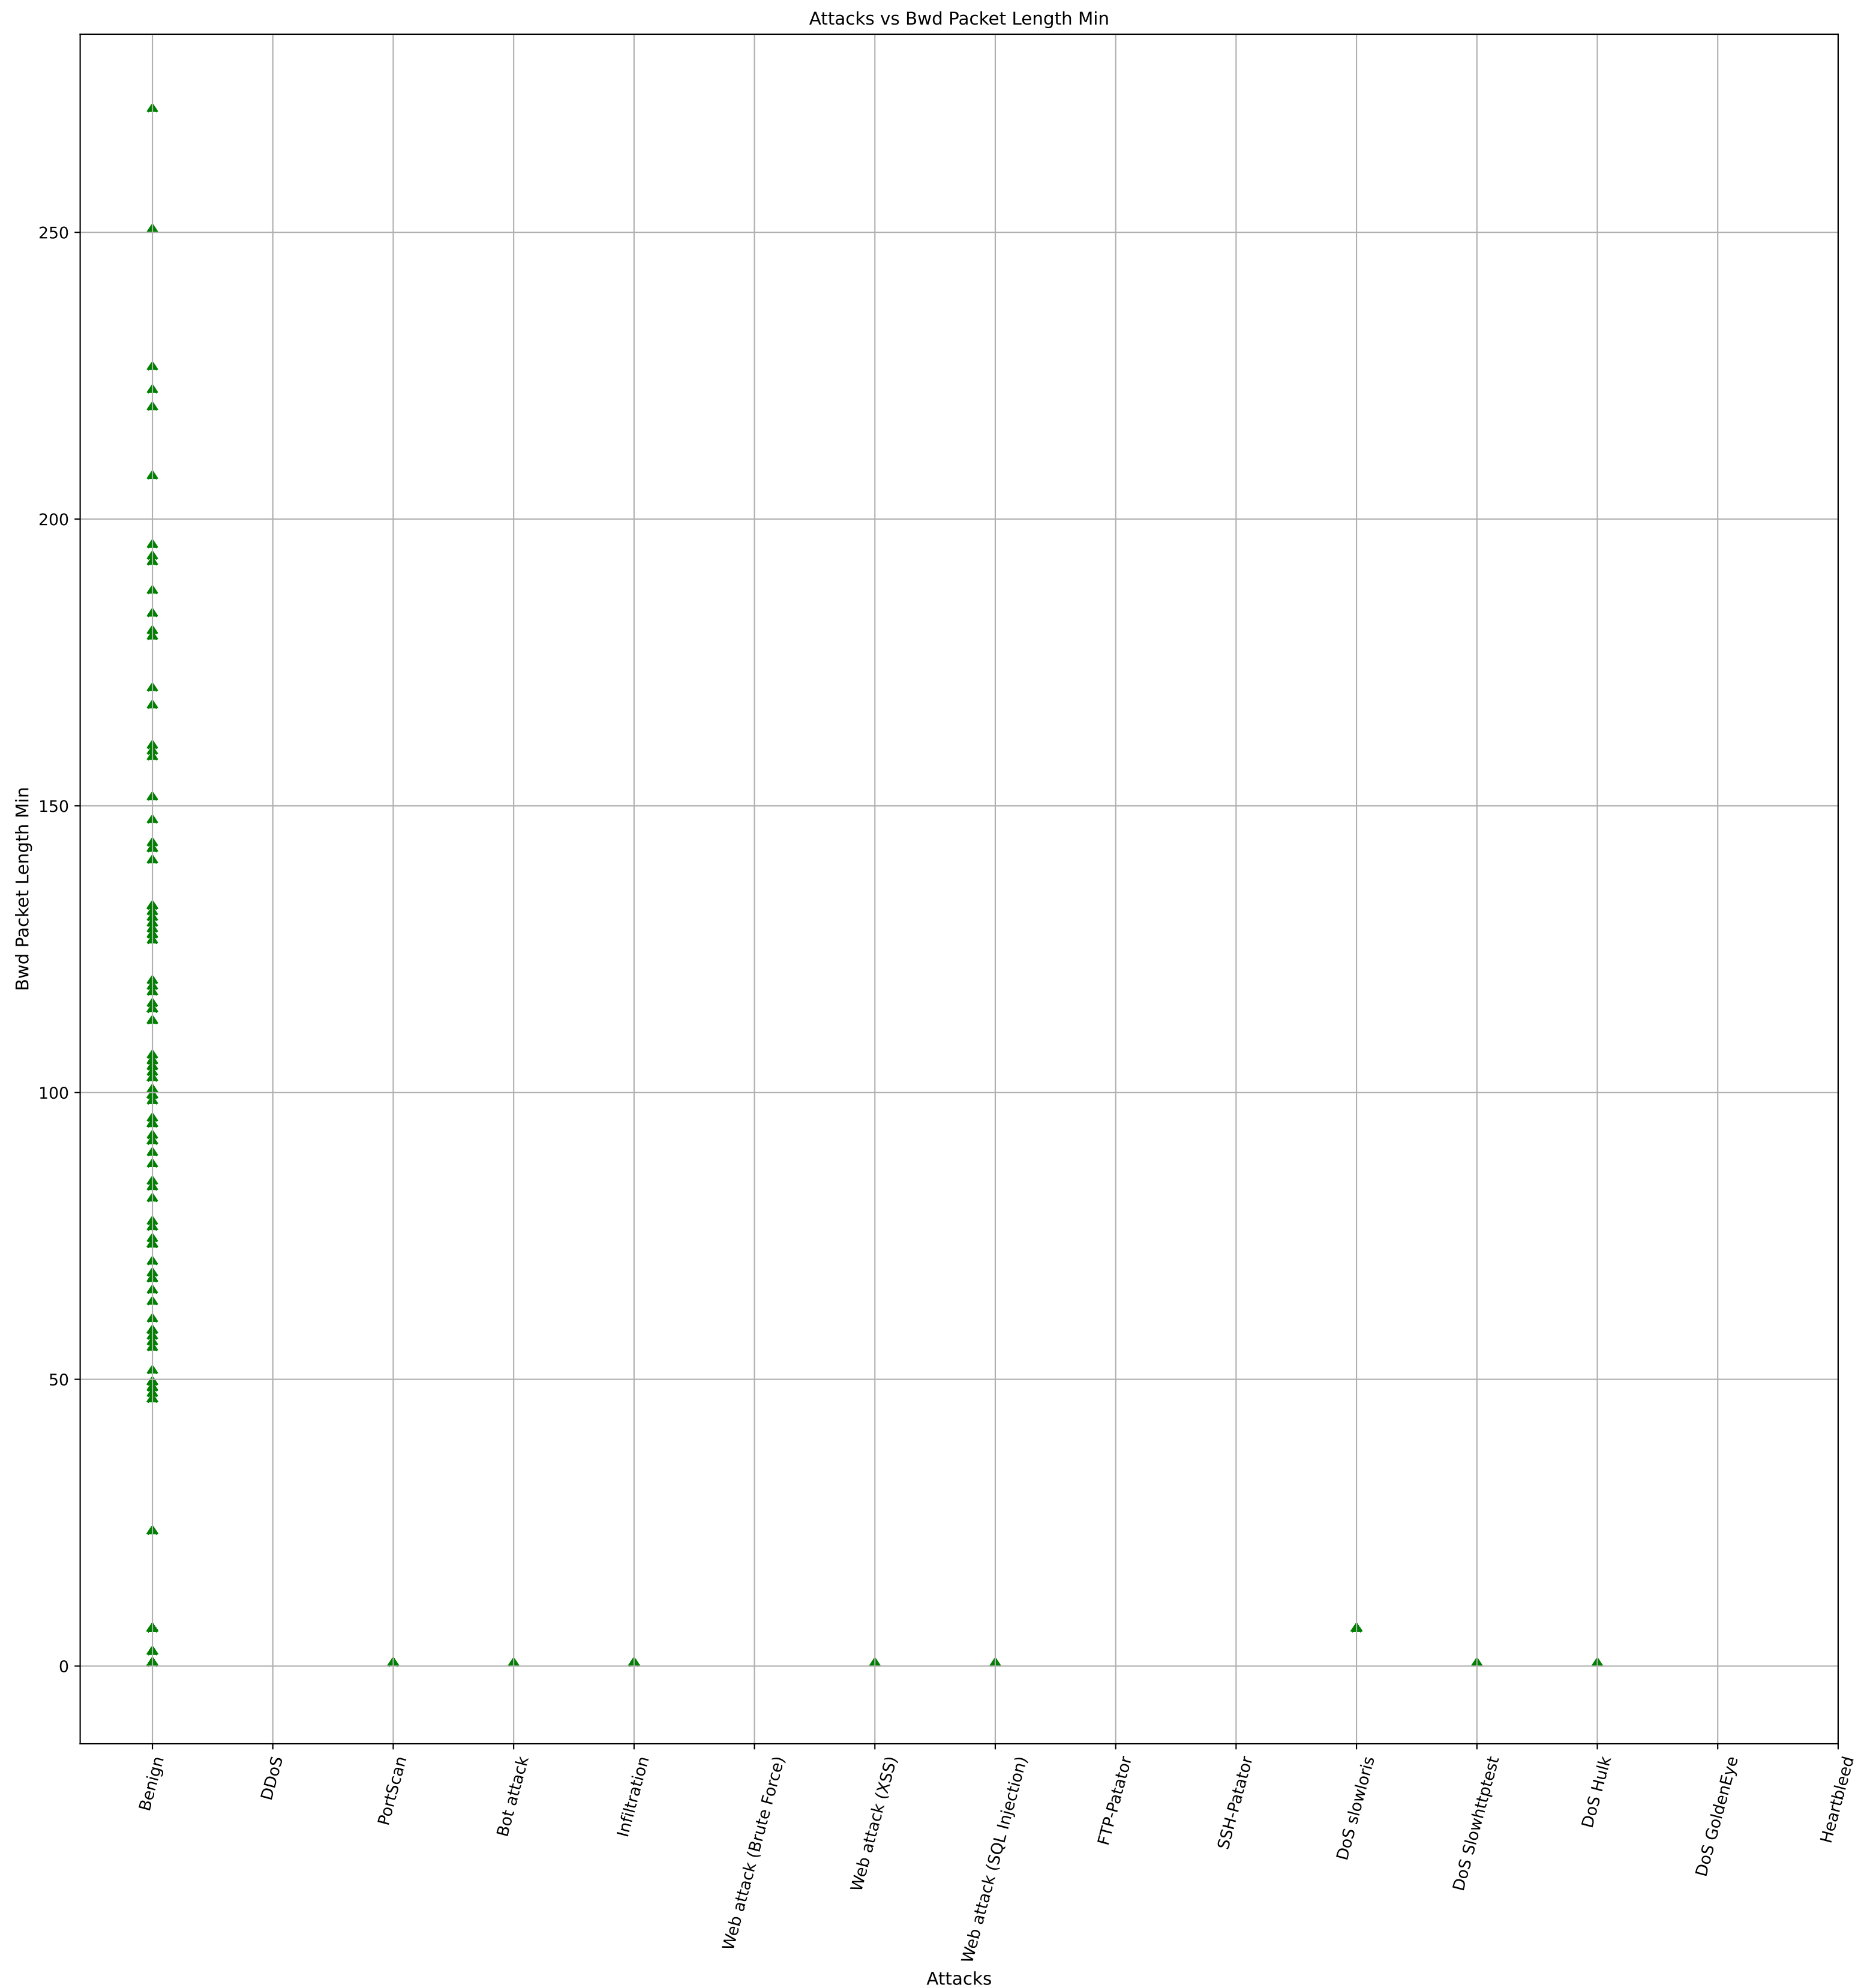


The most common value (mode) of Bwd Packet Length Mean is 0.0

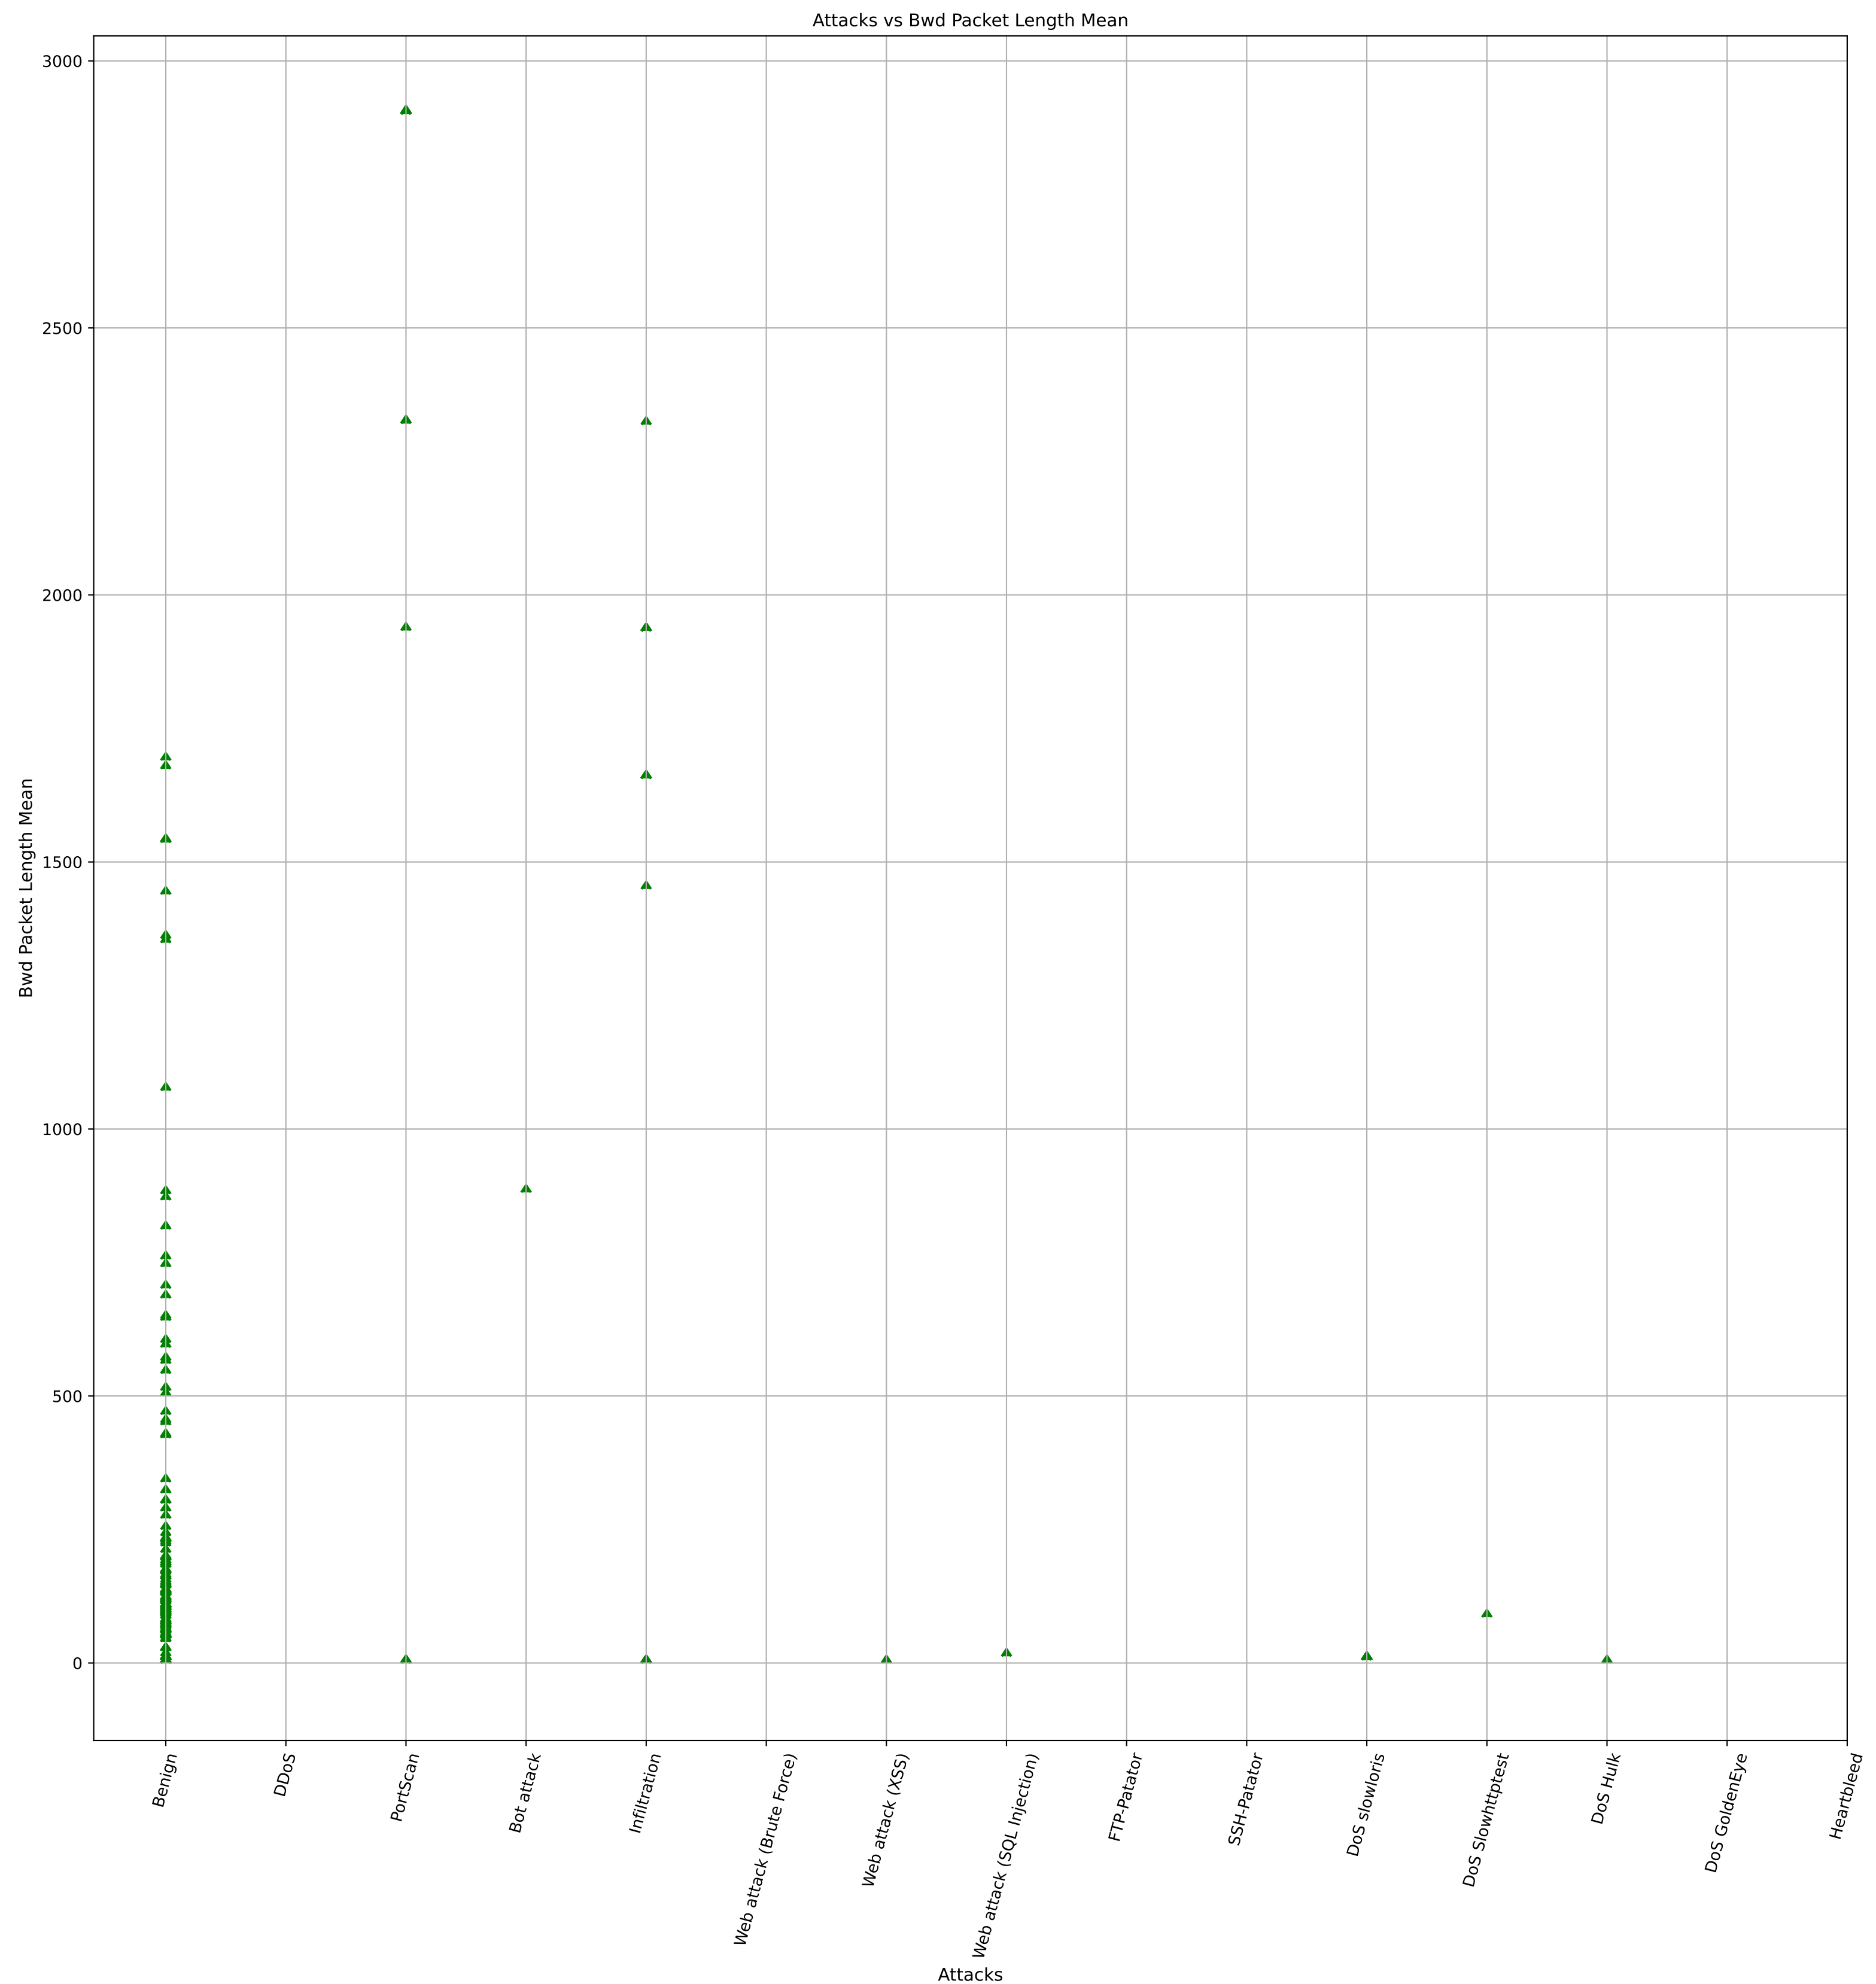


The most common value (mode) of Bwd Packet Length Std is 0.0

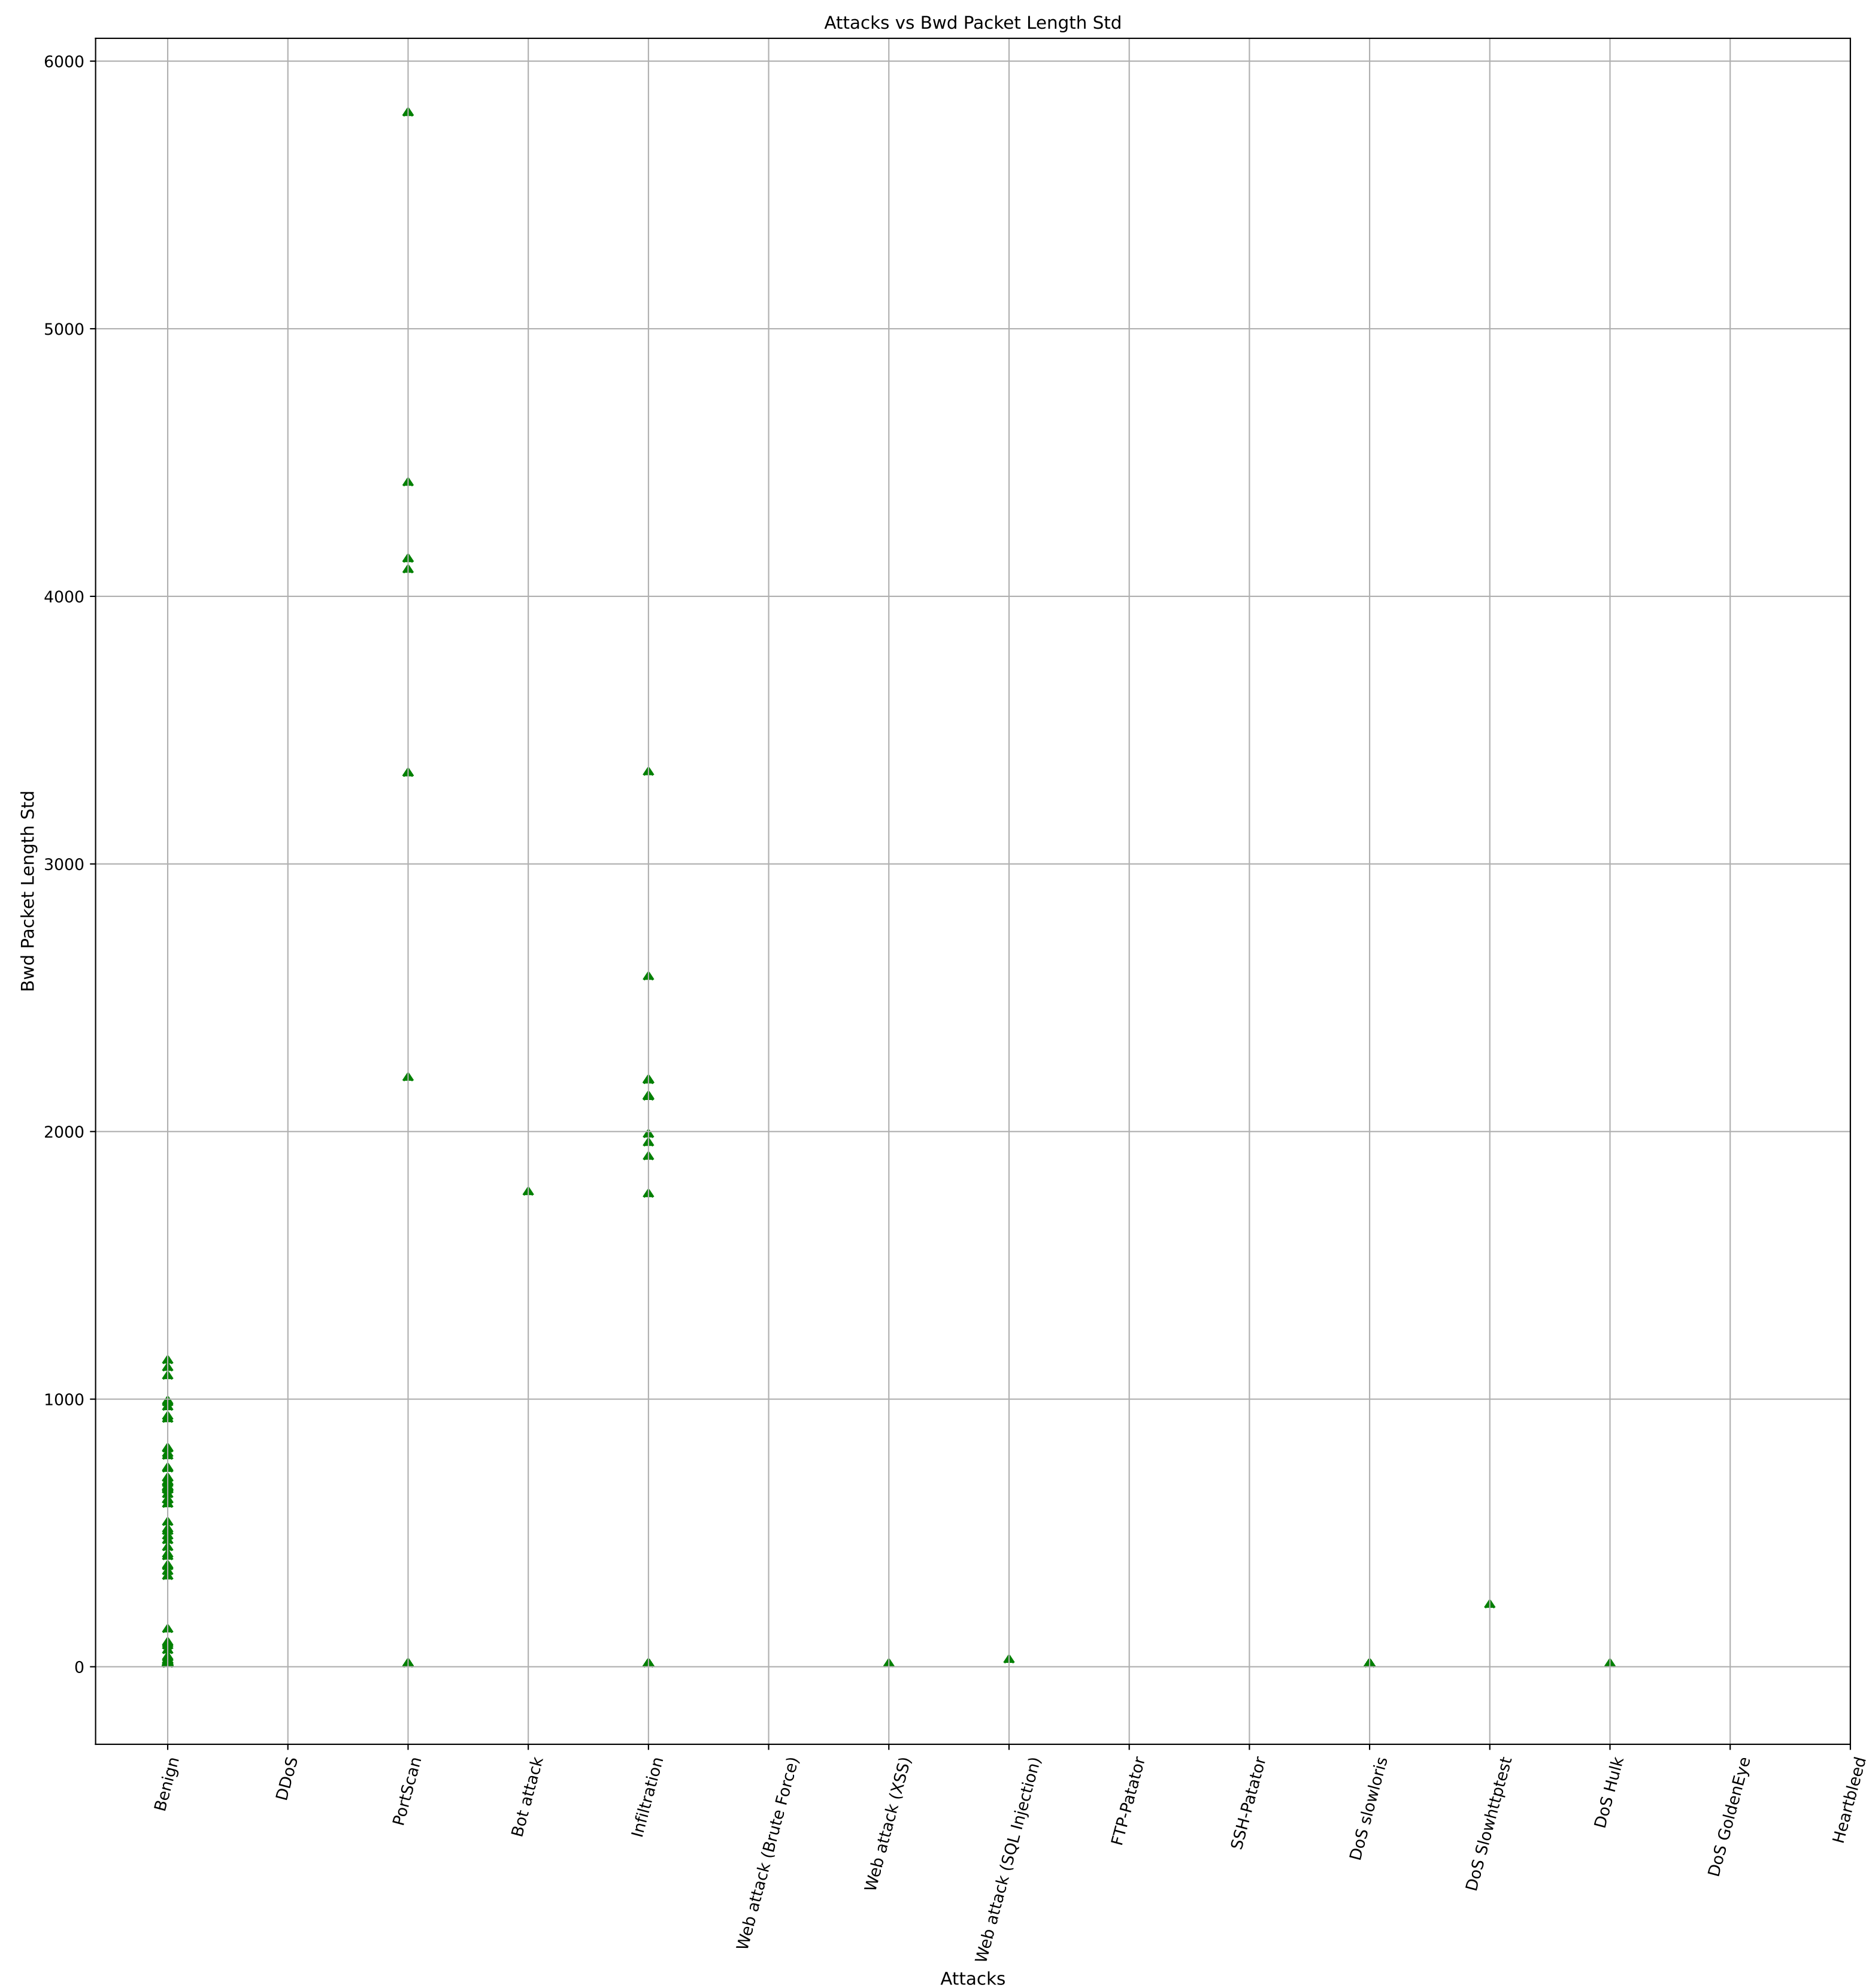


The most common value (mode) of Flow Bytes/s is 0.0

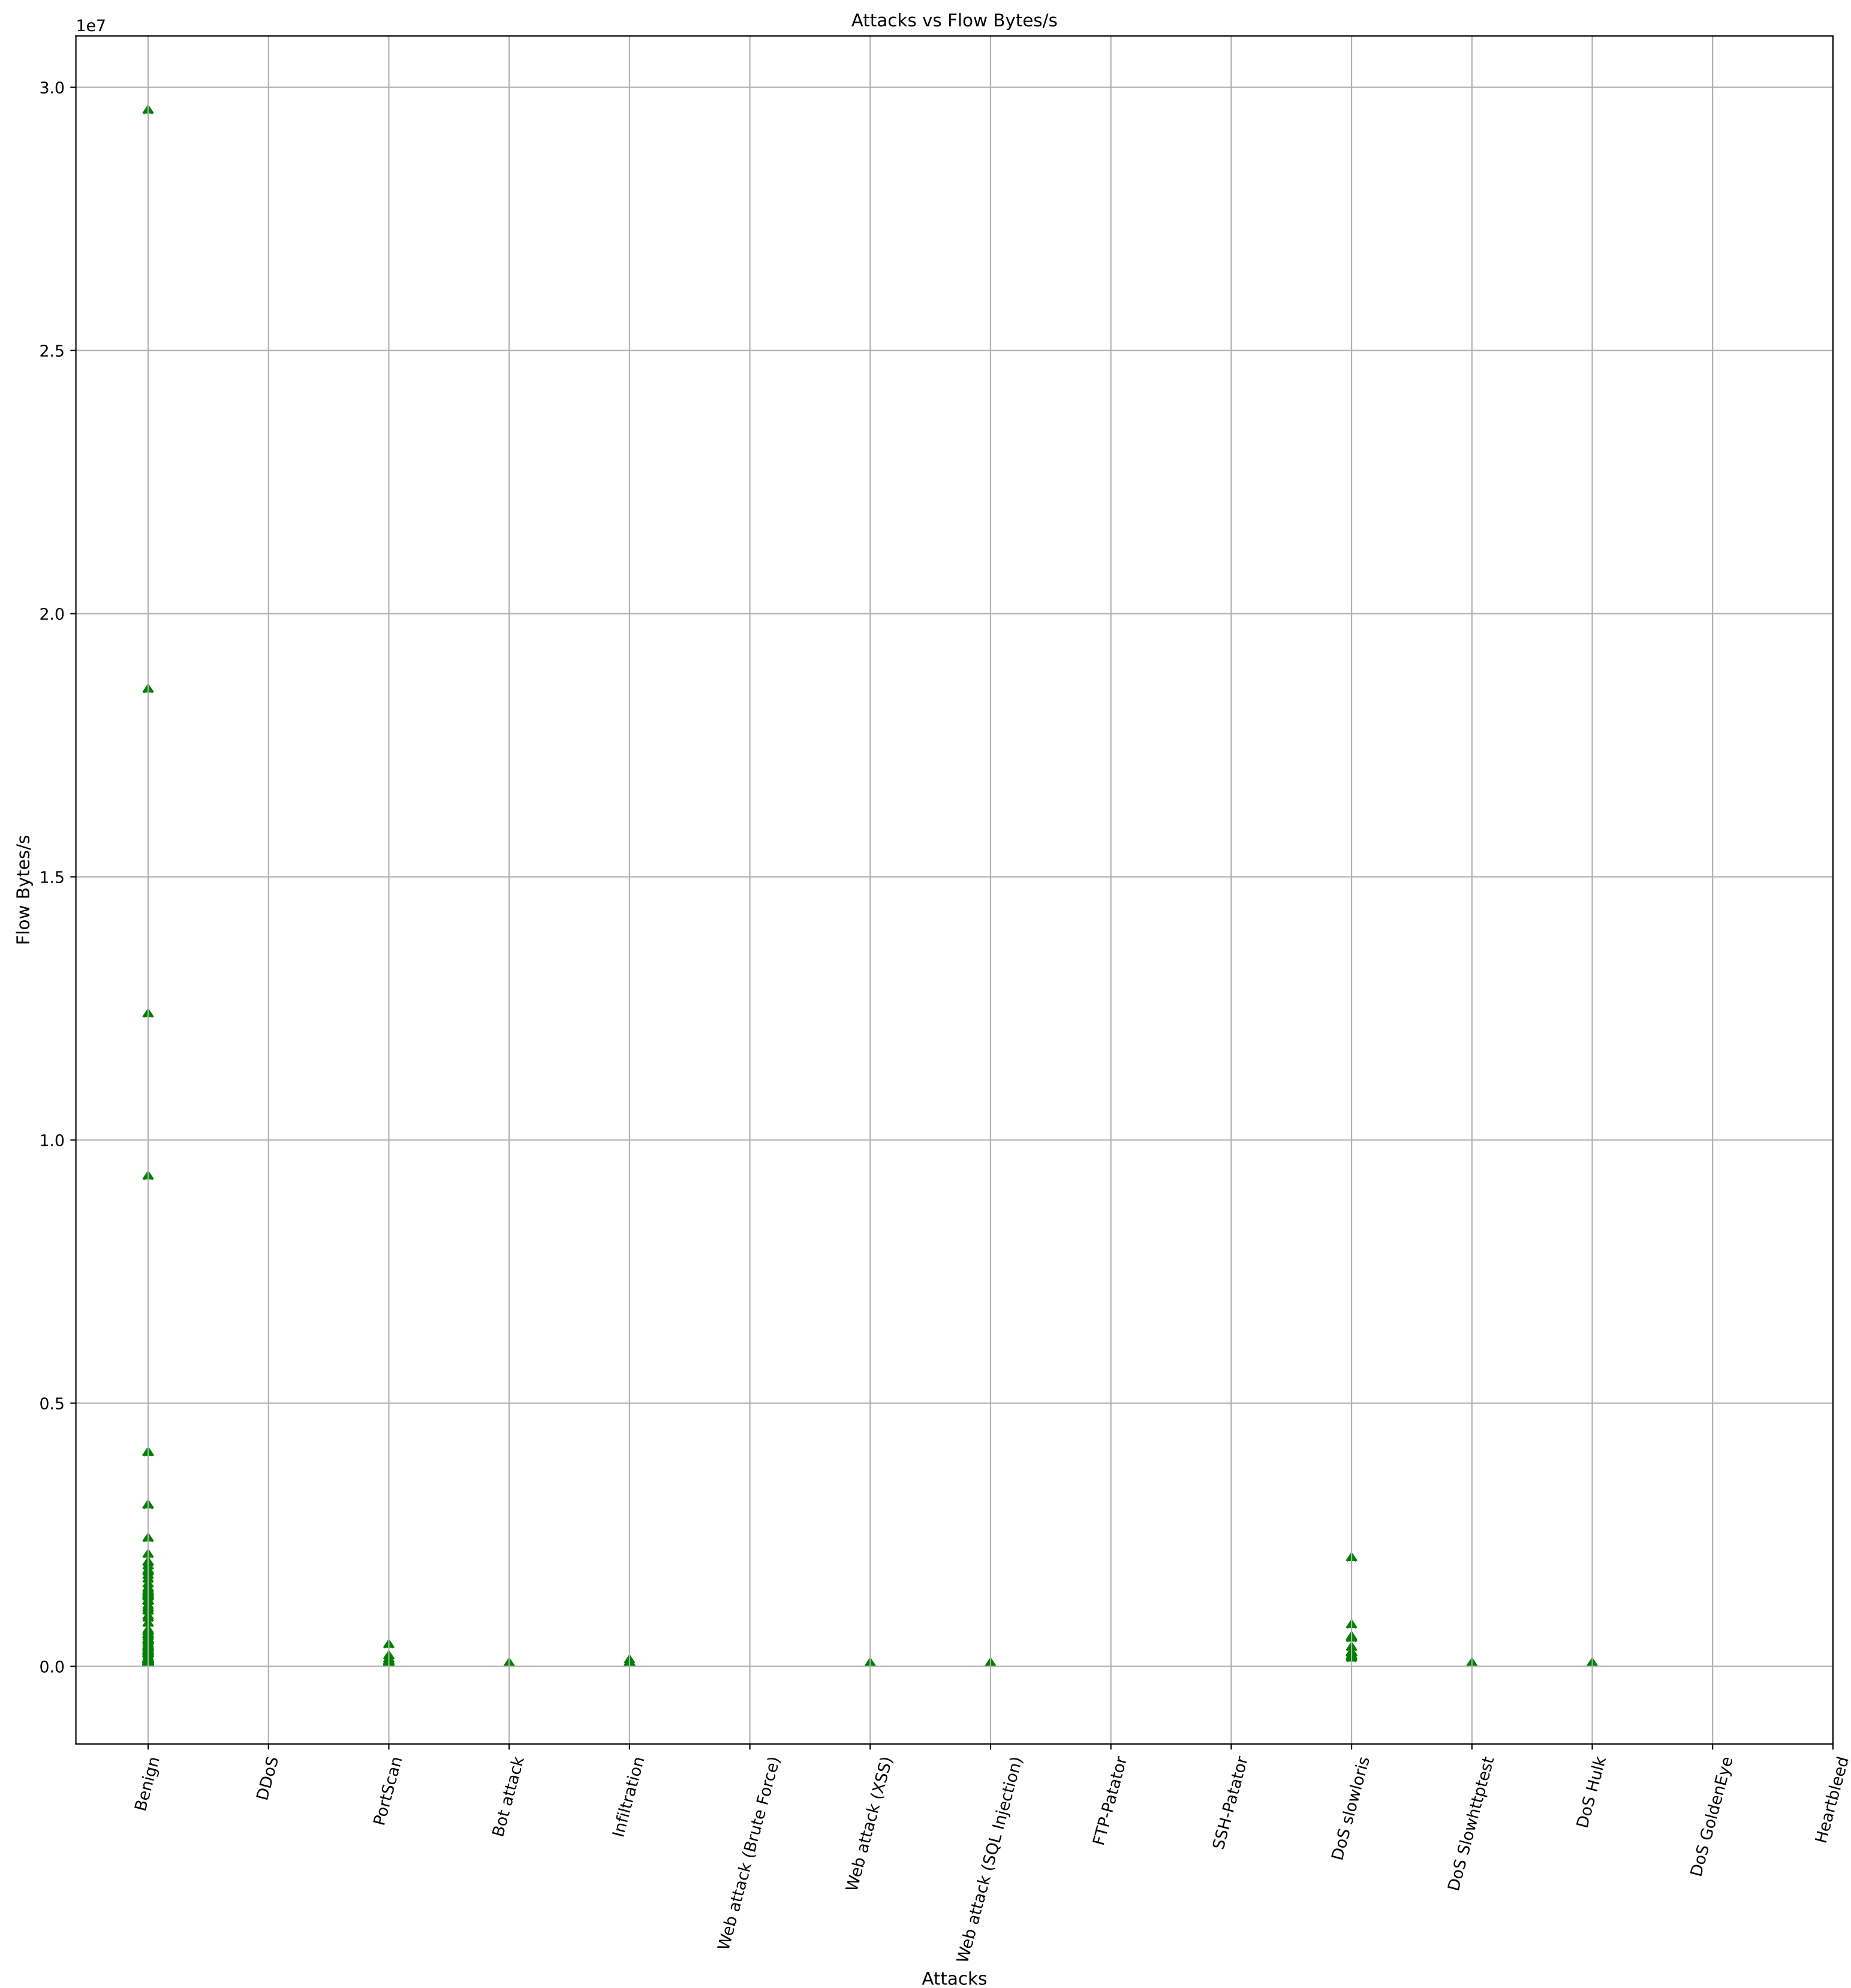


The most common value (mode) of Flow Packets/s is 666666.6667

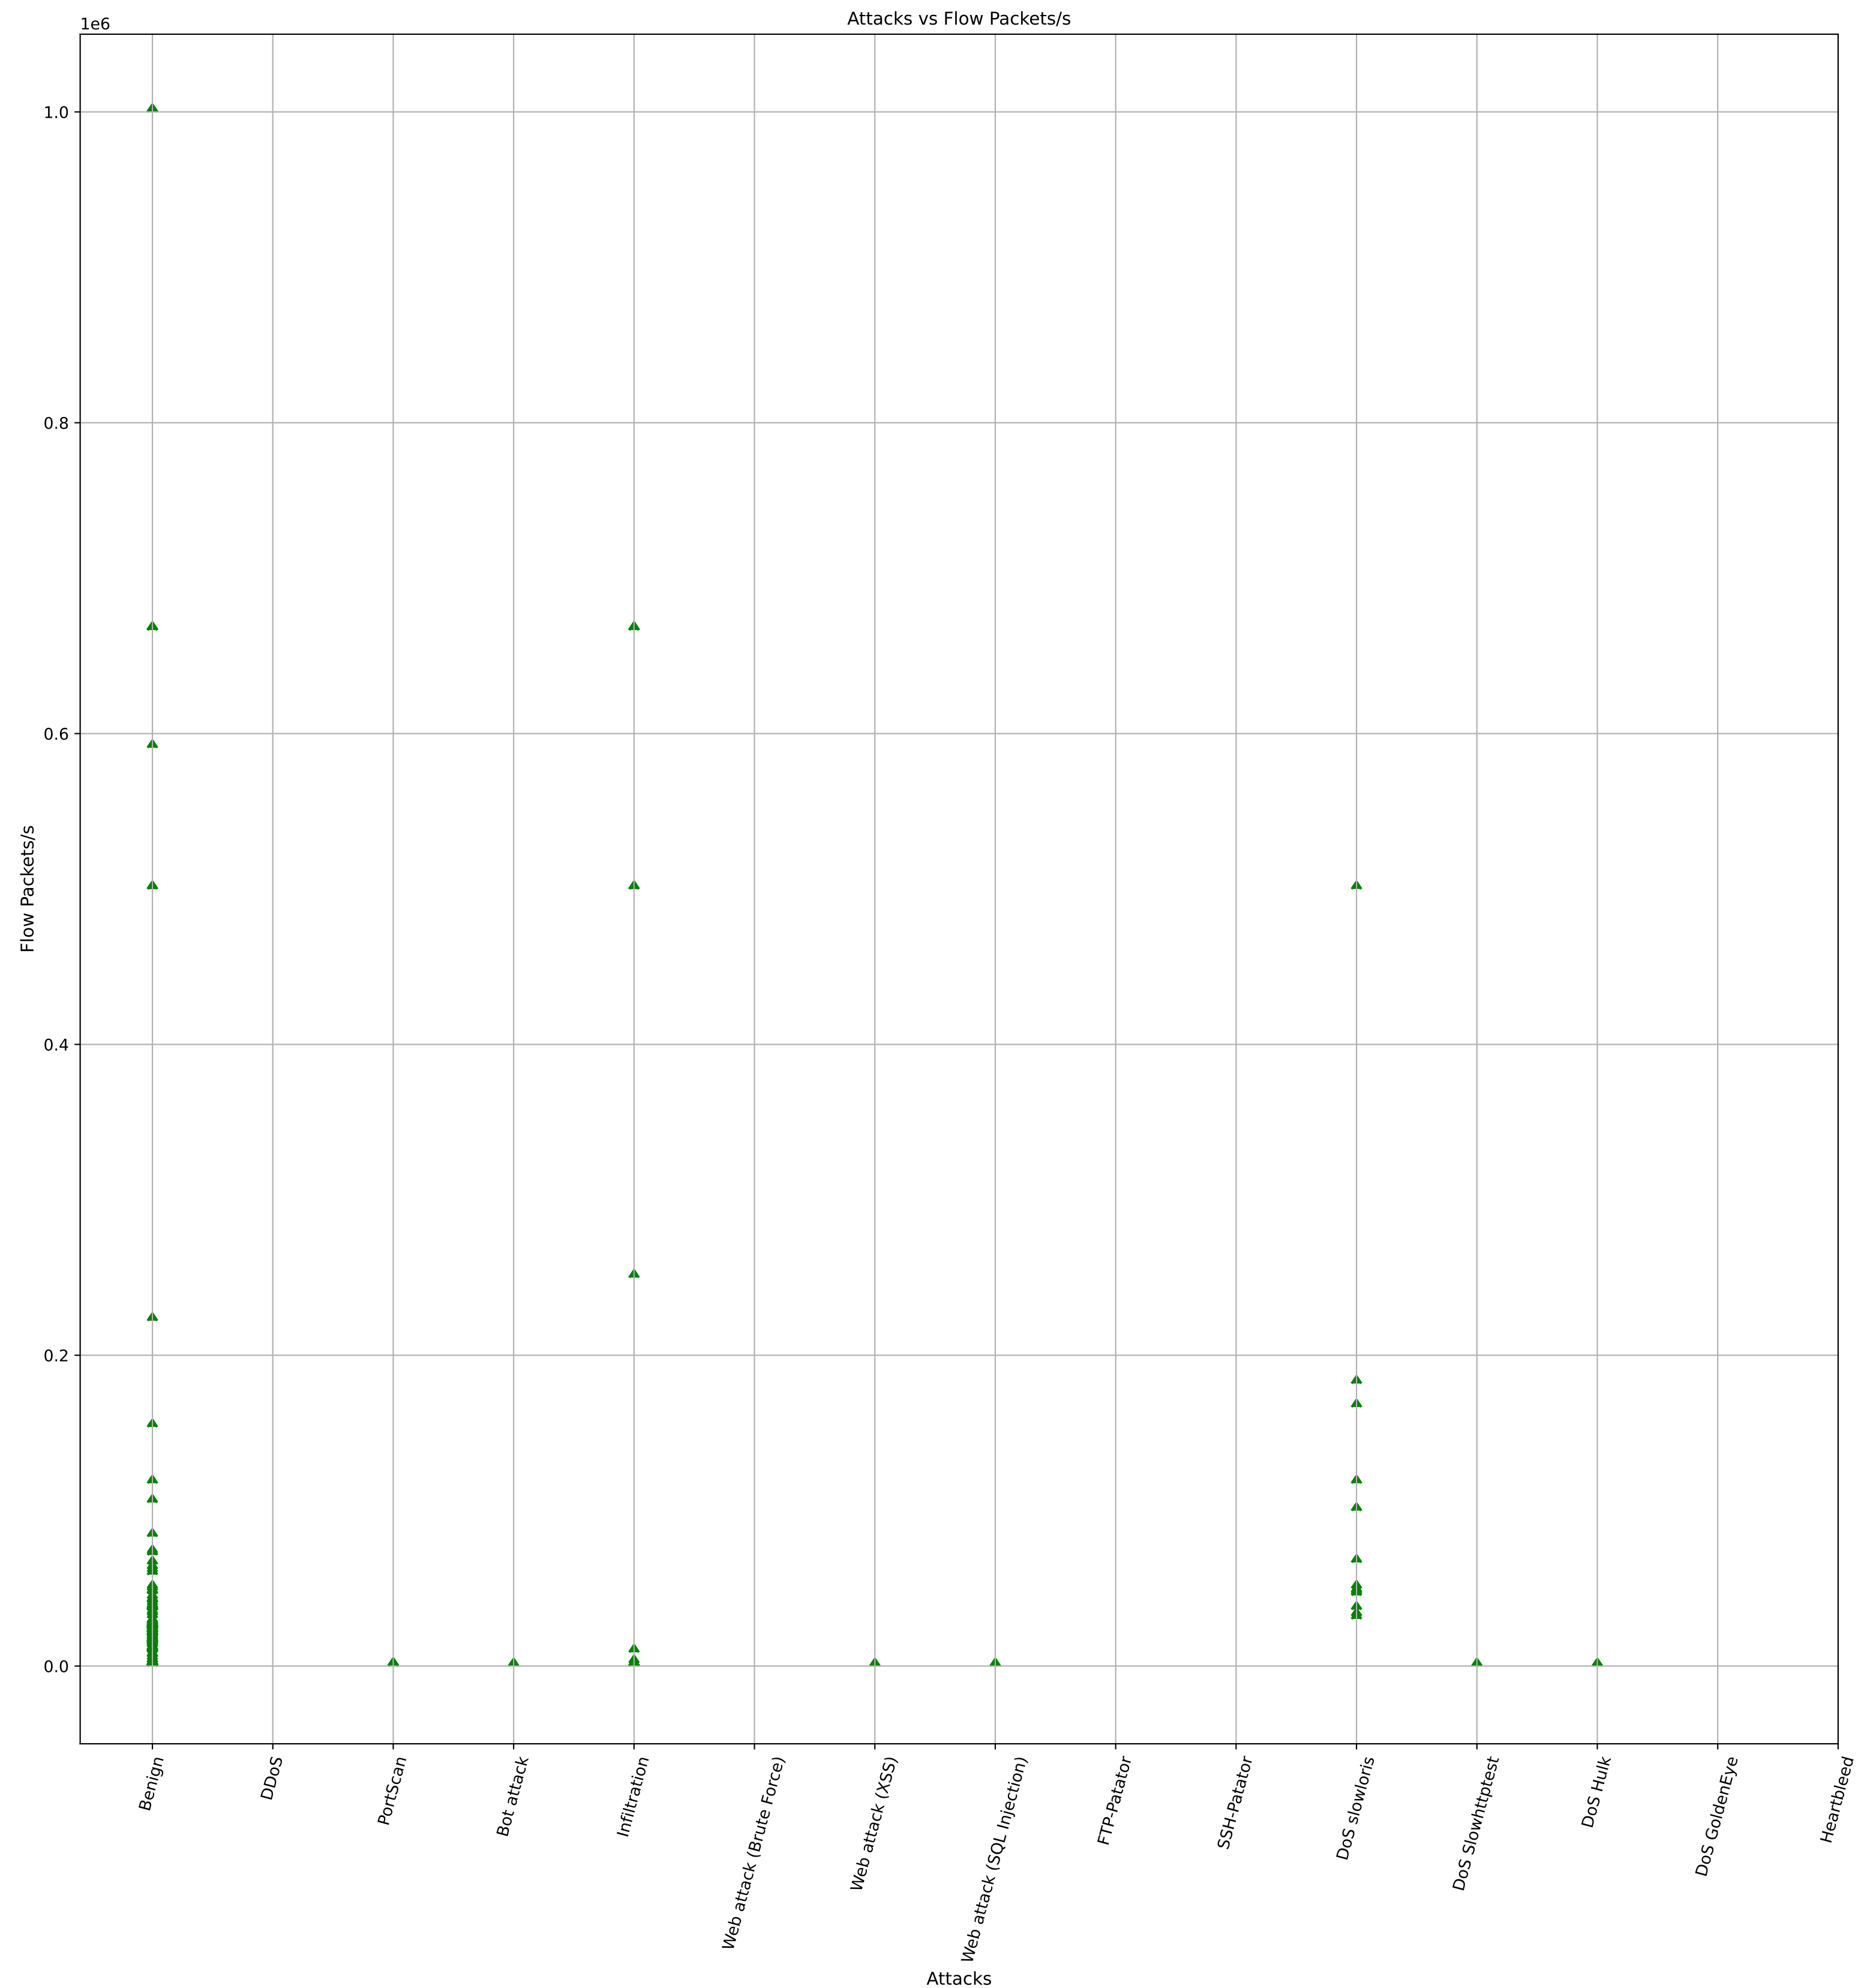


The most common value (mode) of Flow IAT Mean is 3.0

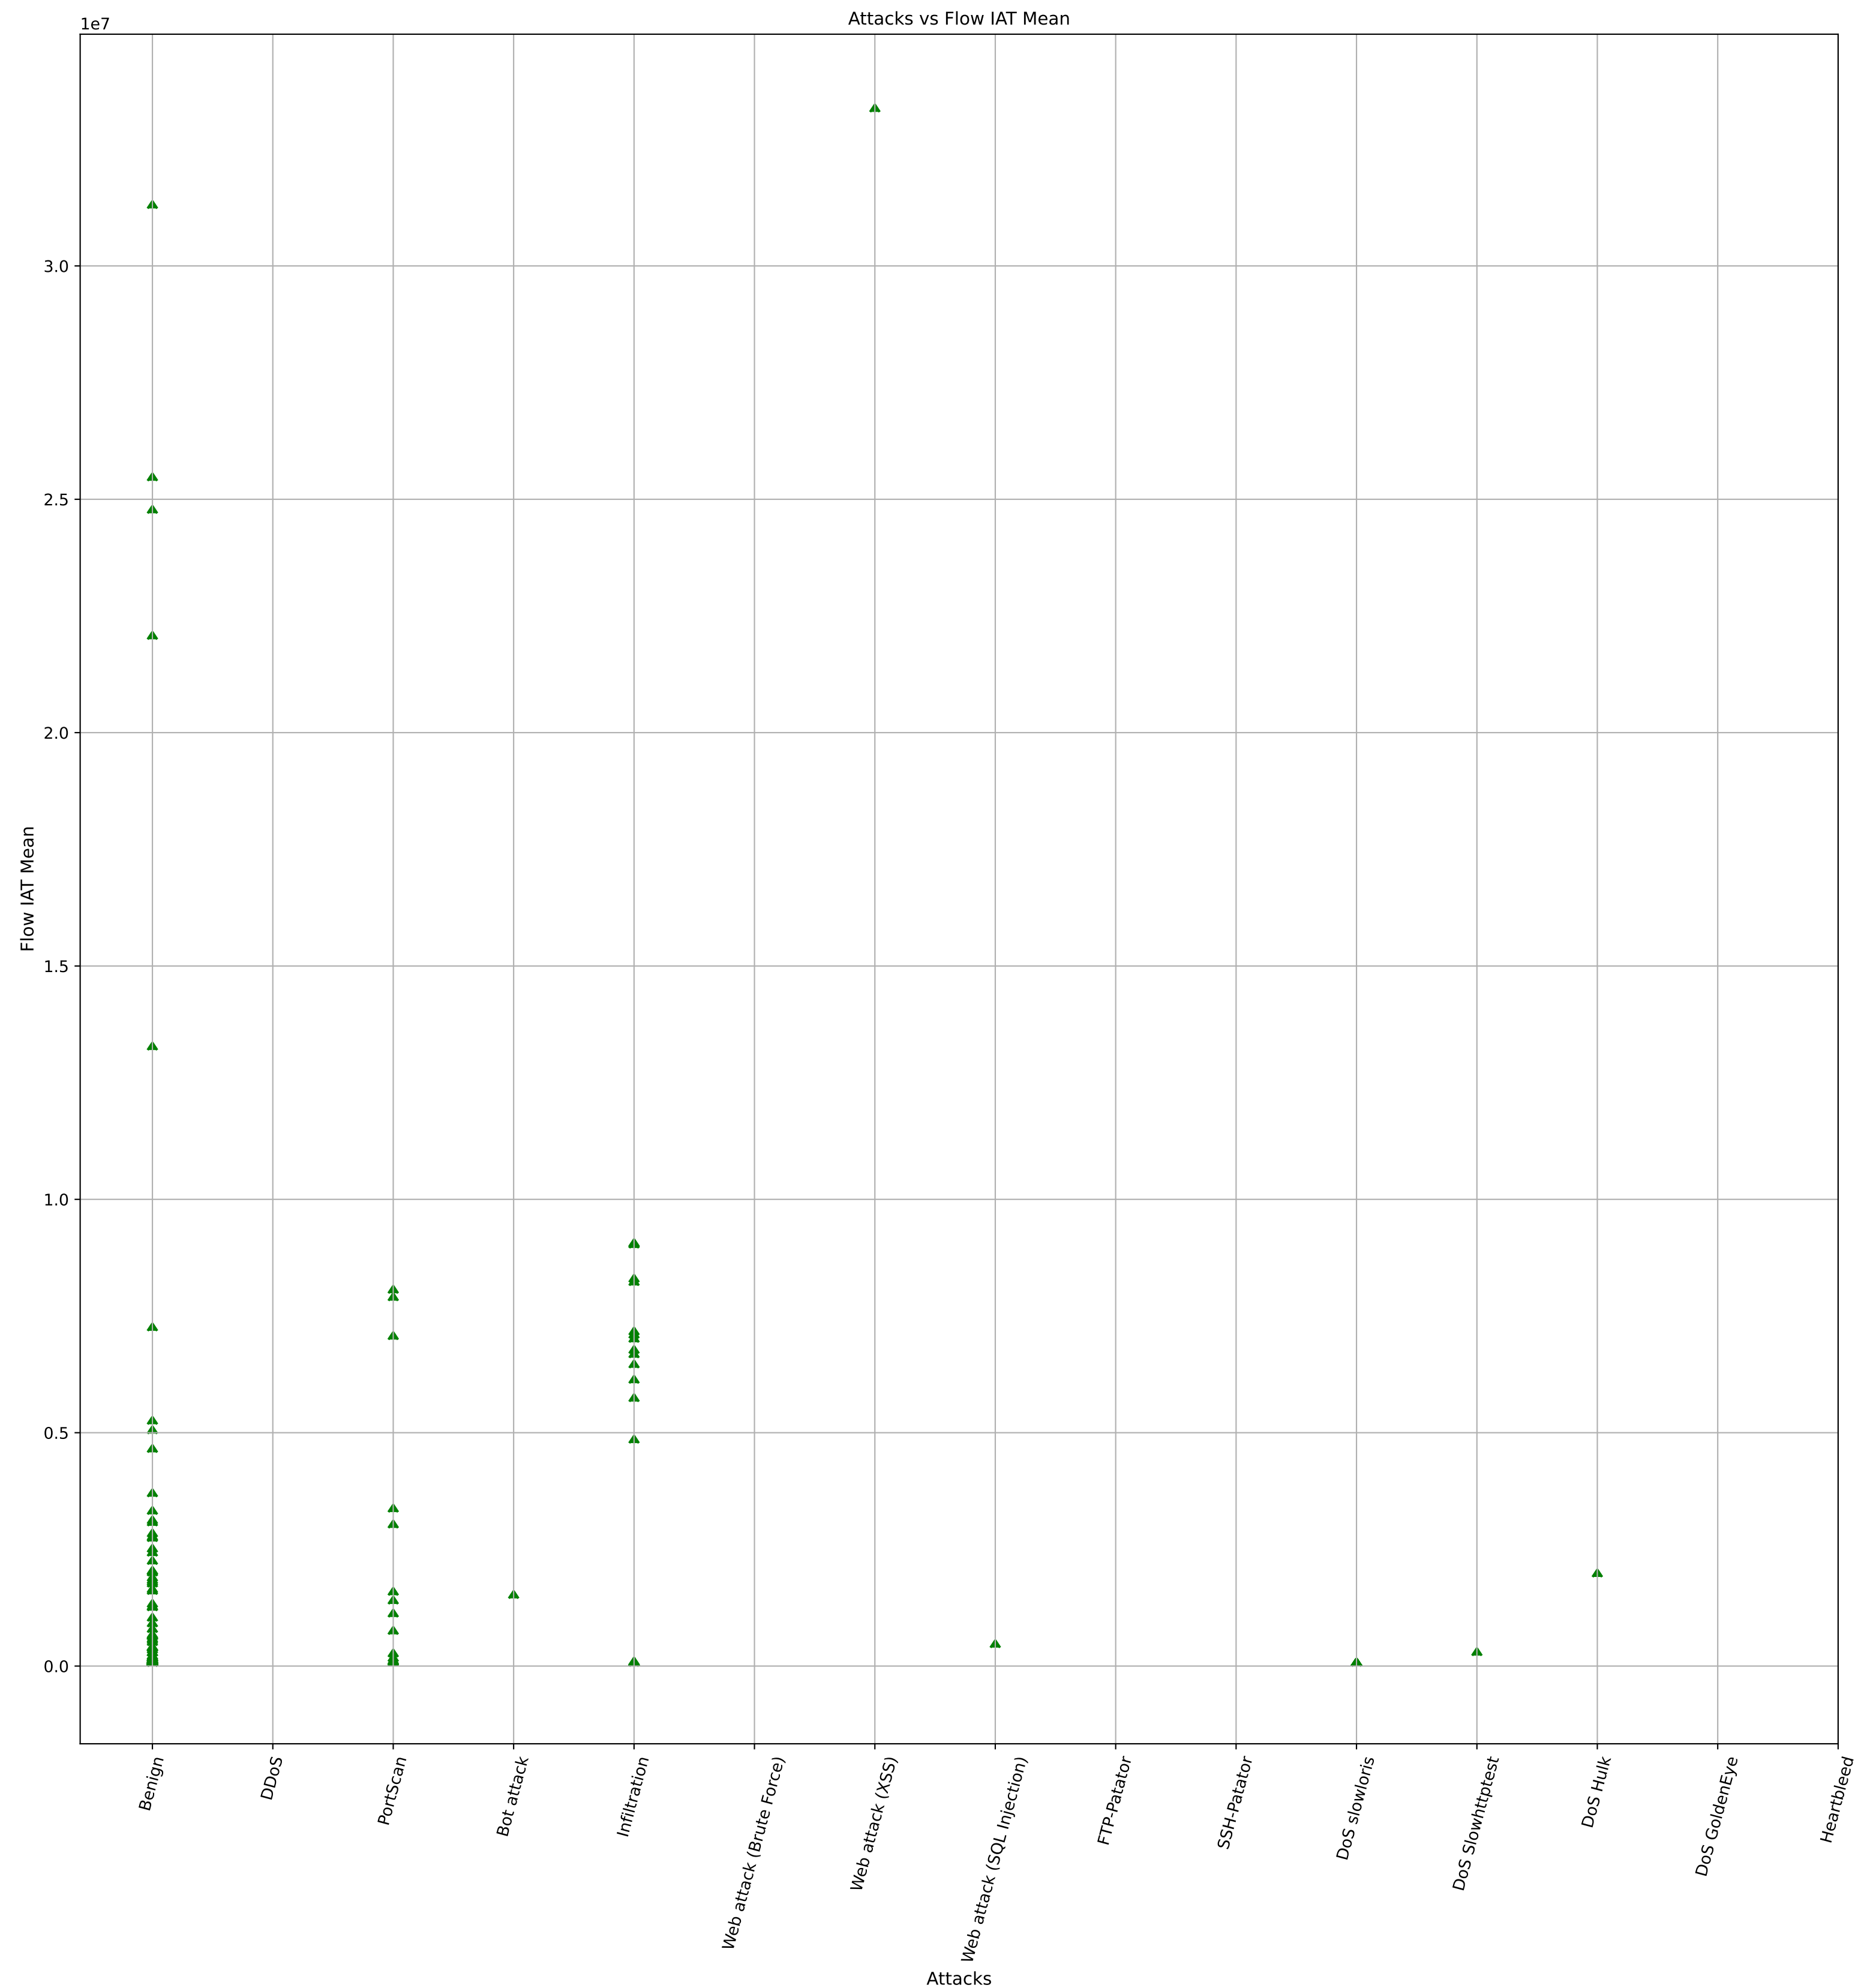


The most common value (mode) of Flow IAT Std is 0.0

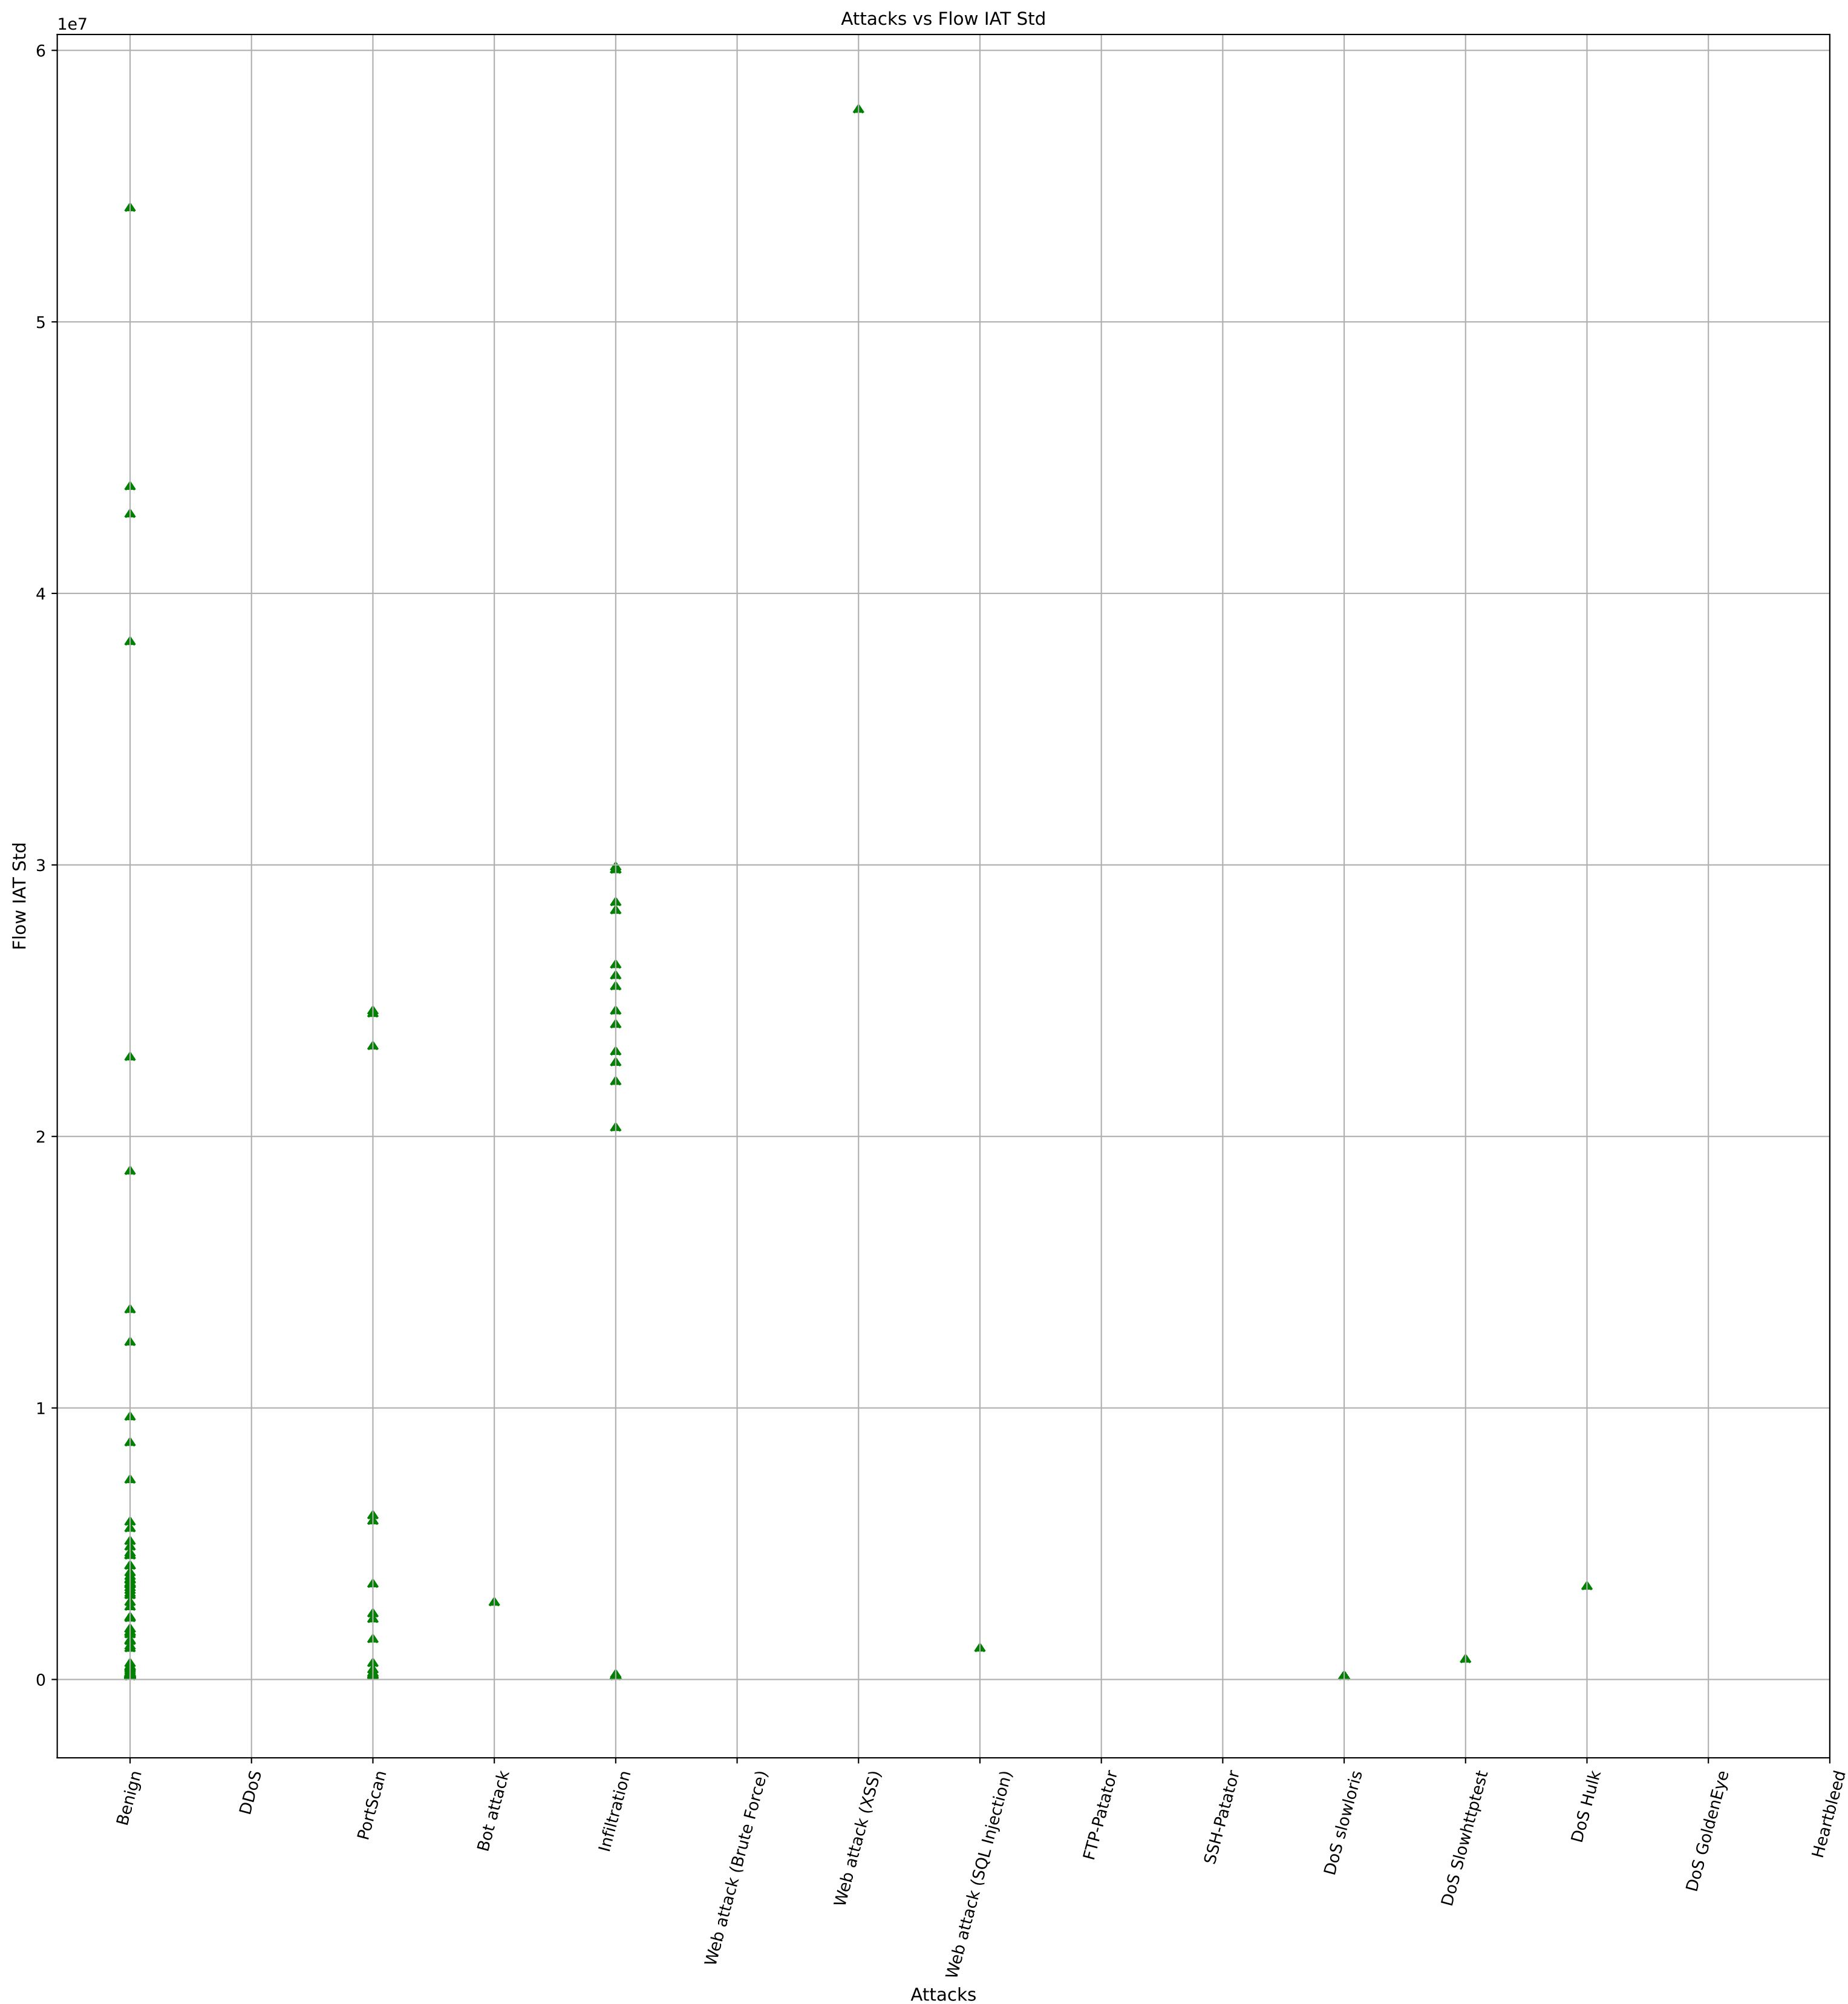


The most common value (mode) of Flow IAT Max is 3

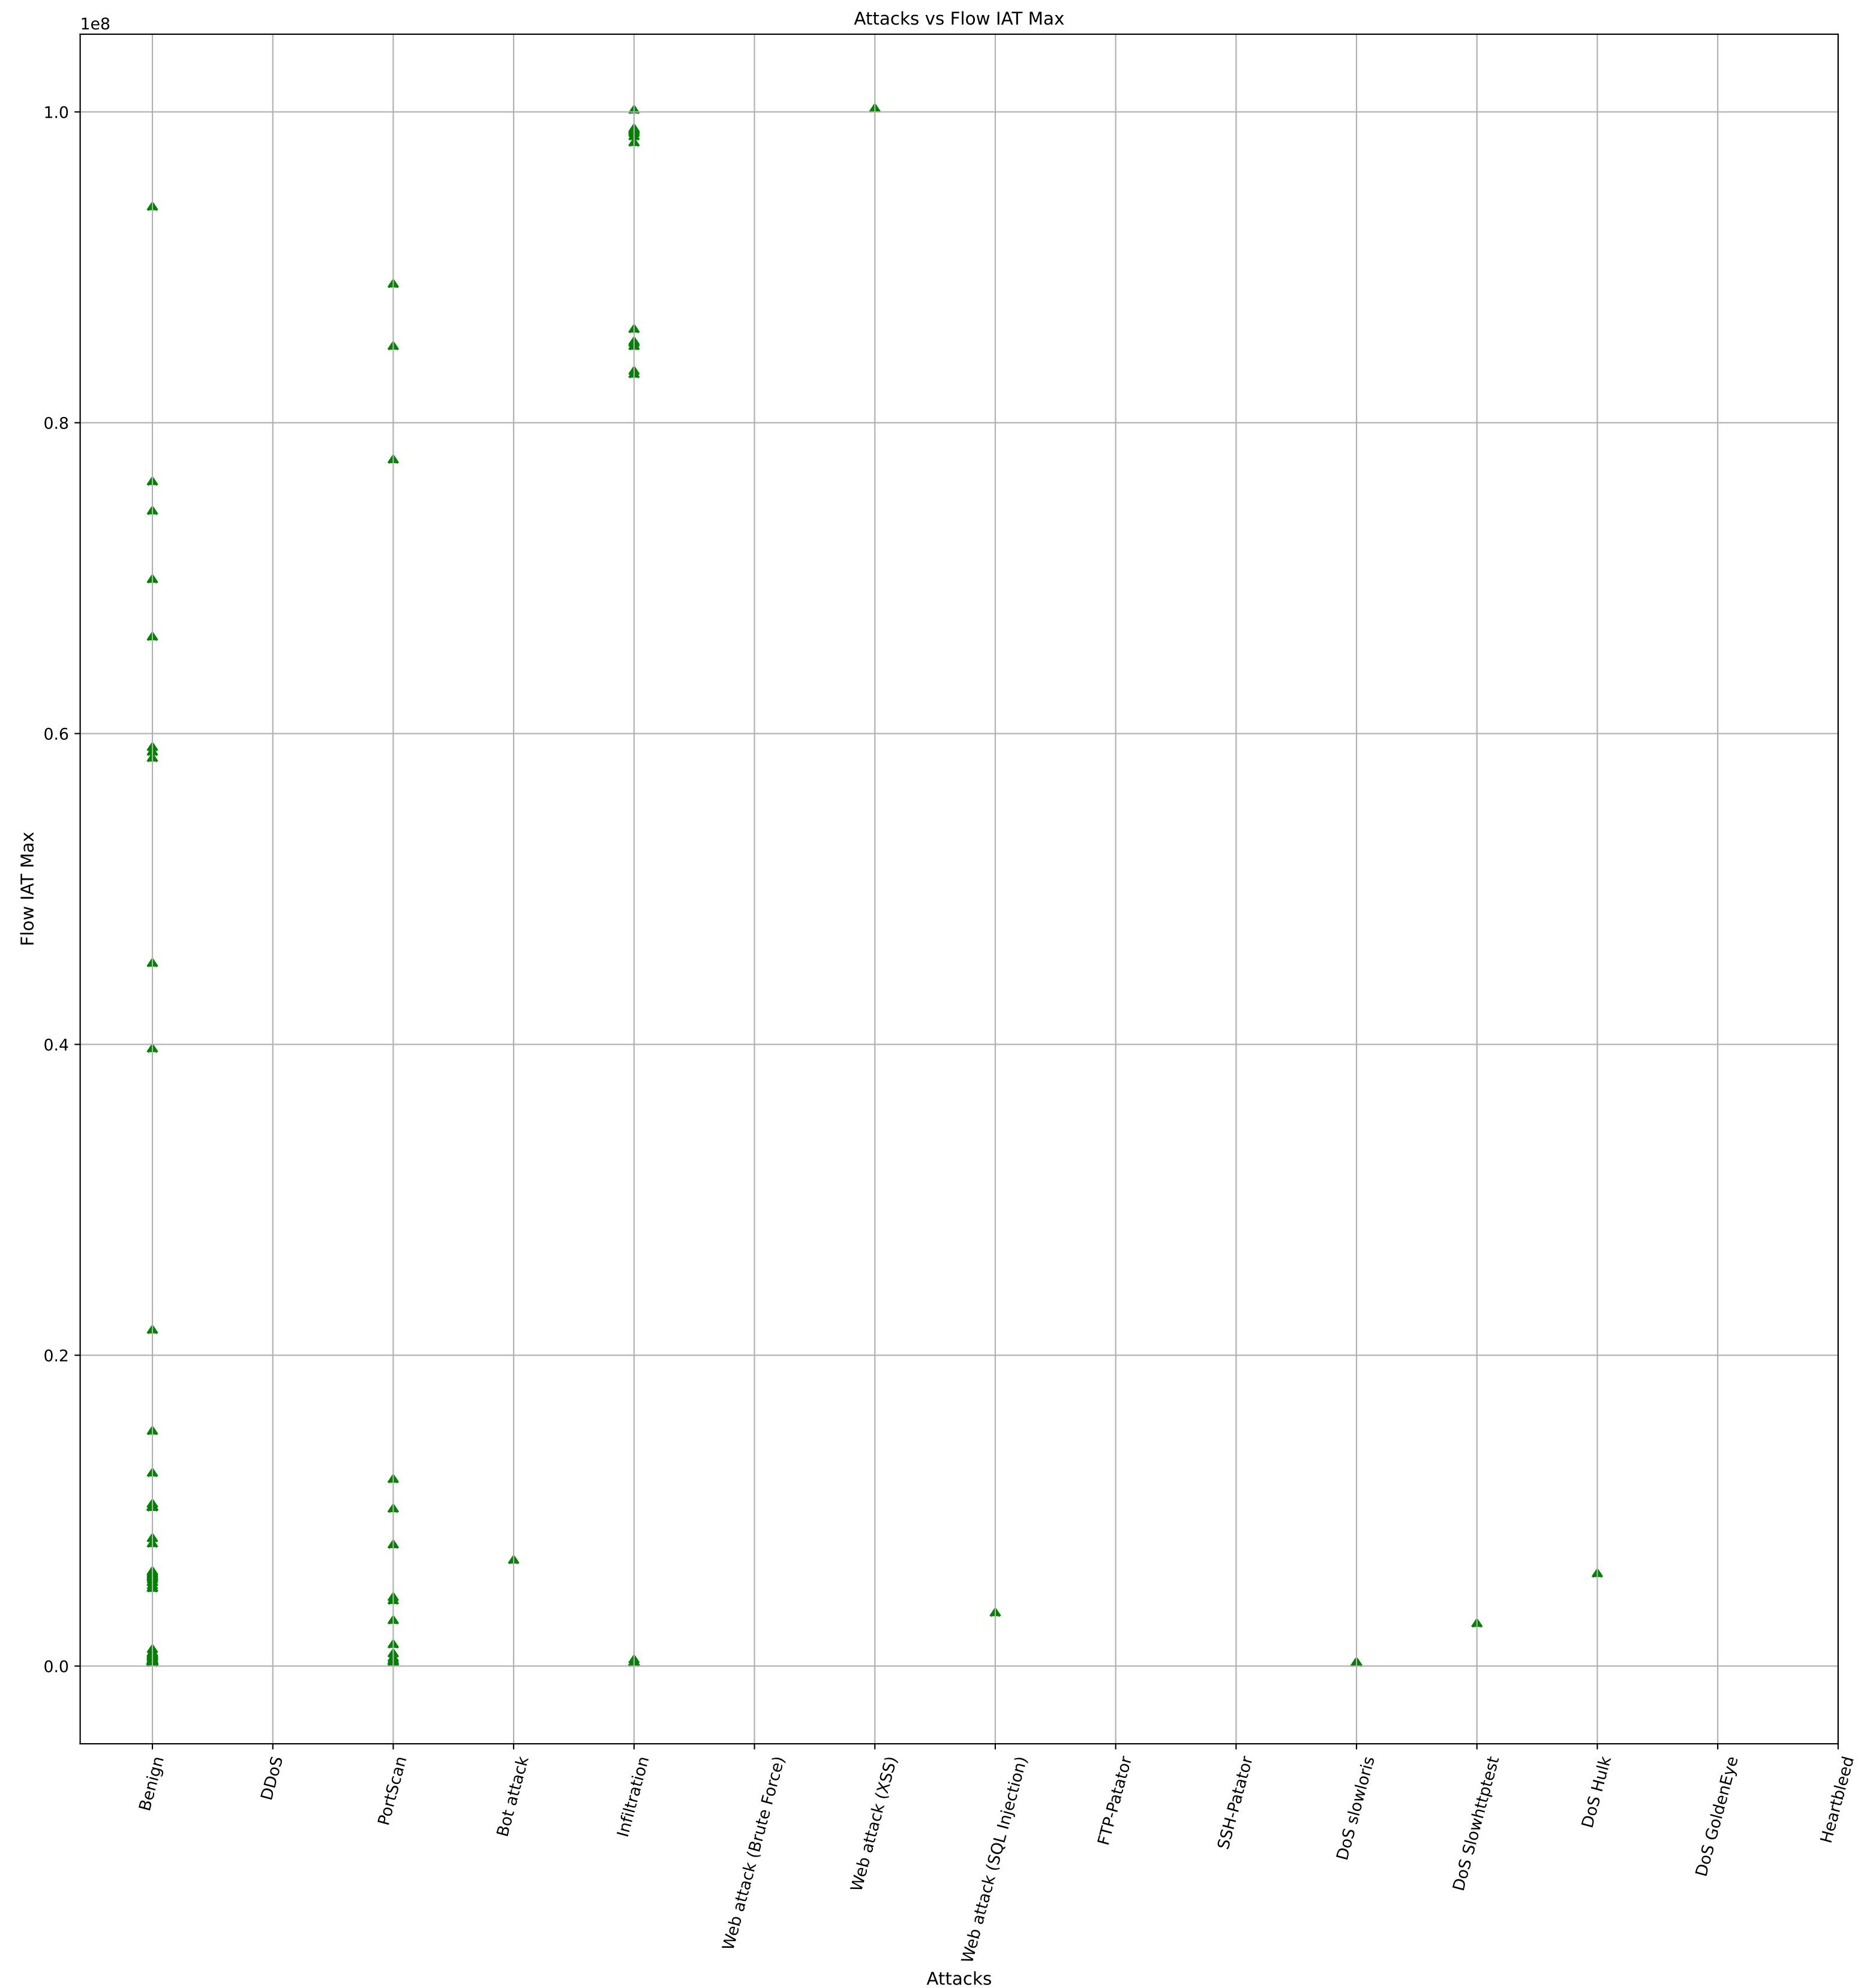


The most common value (mode) of Flow IAT Min is 3

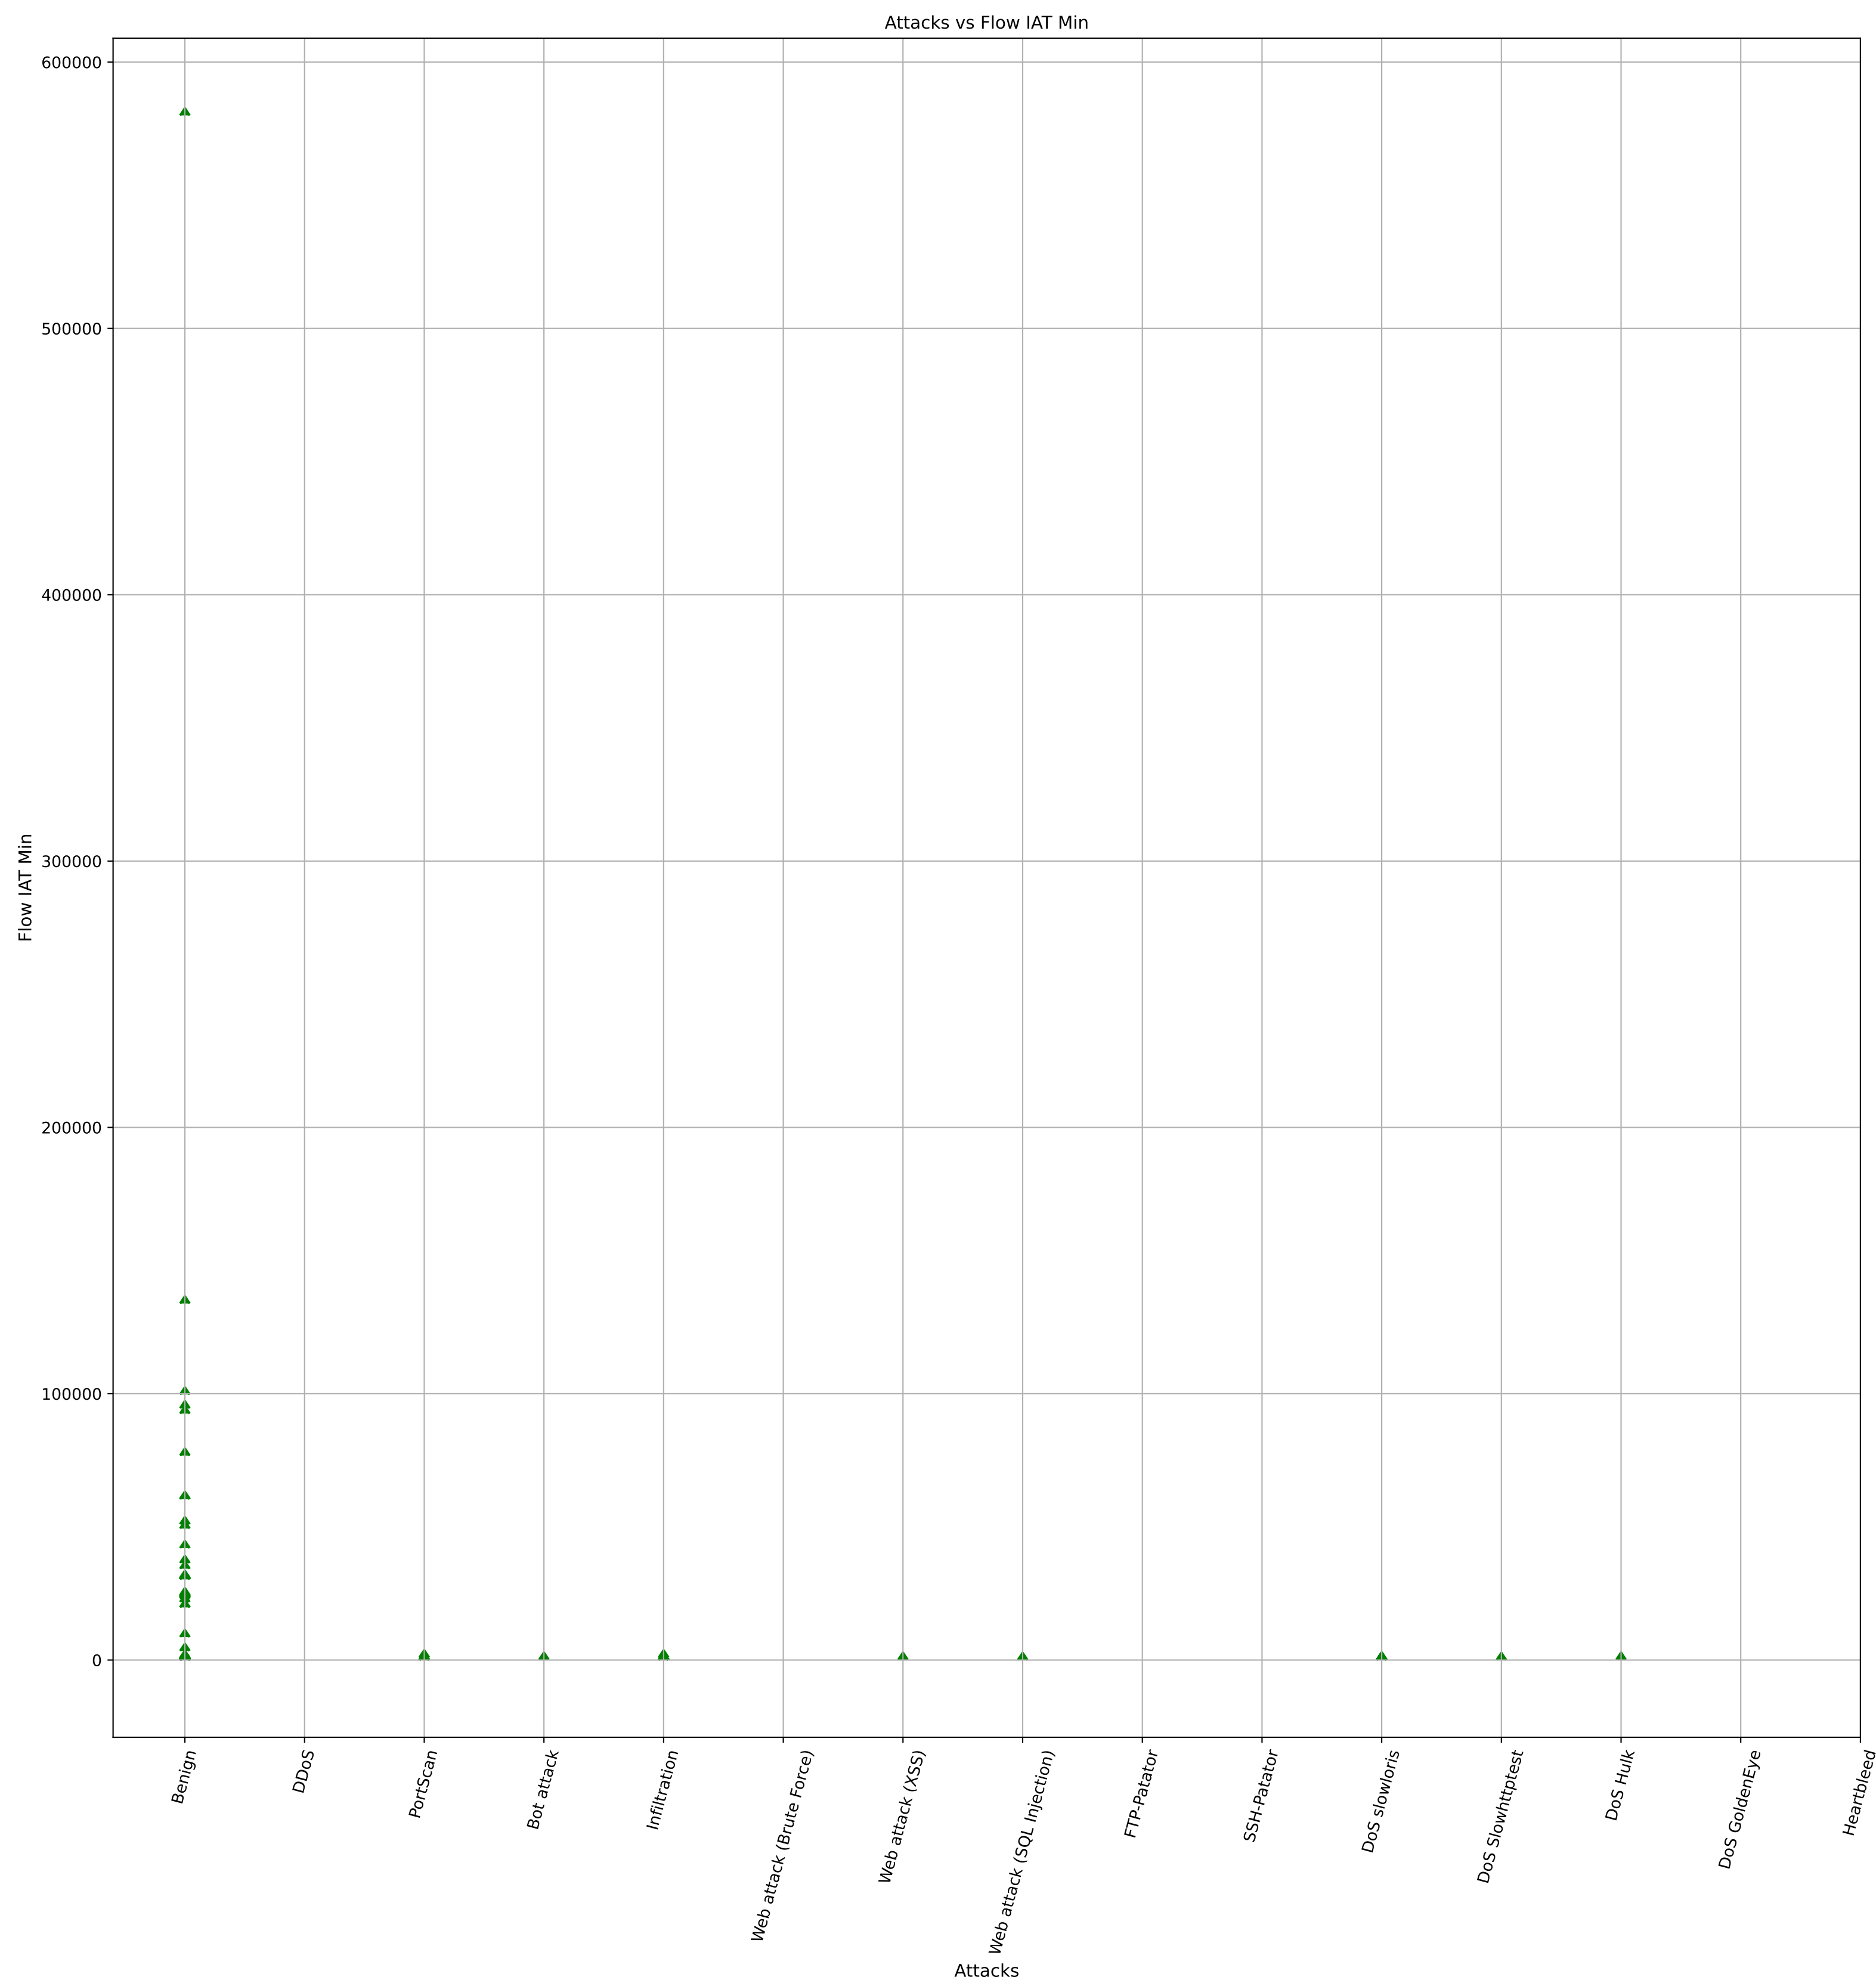


The most common value (mode) of Fwd IAT Total is 0

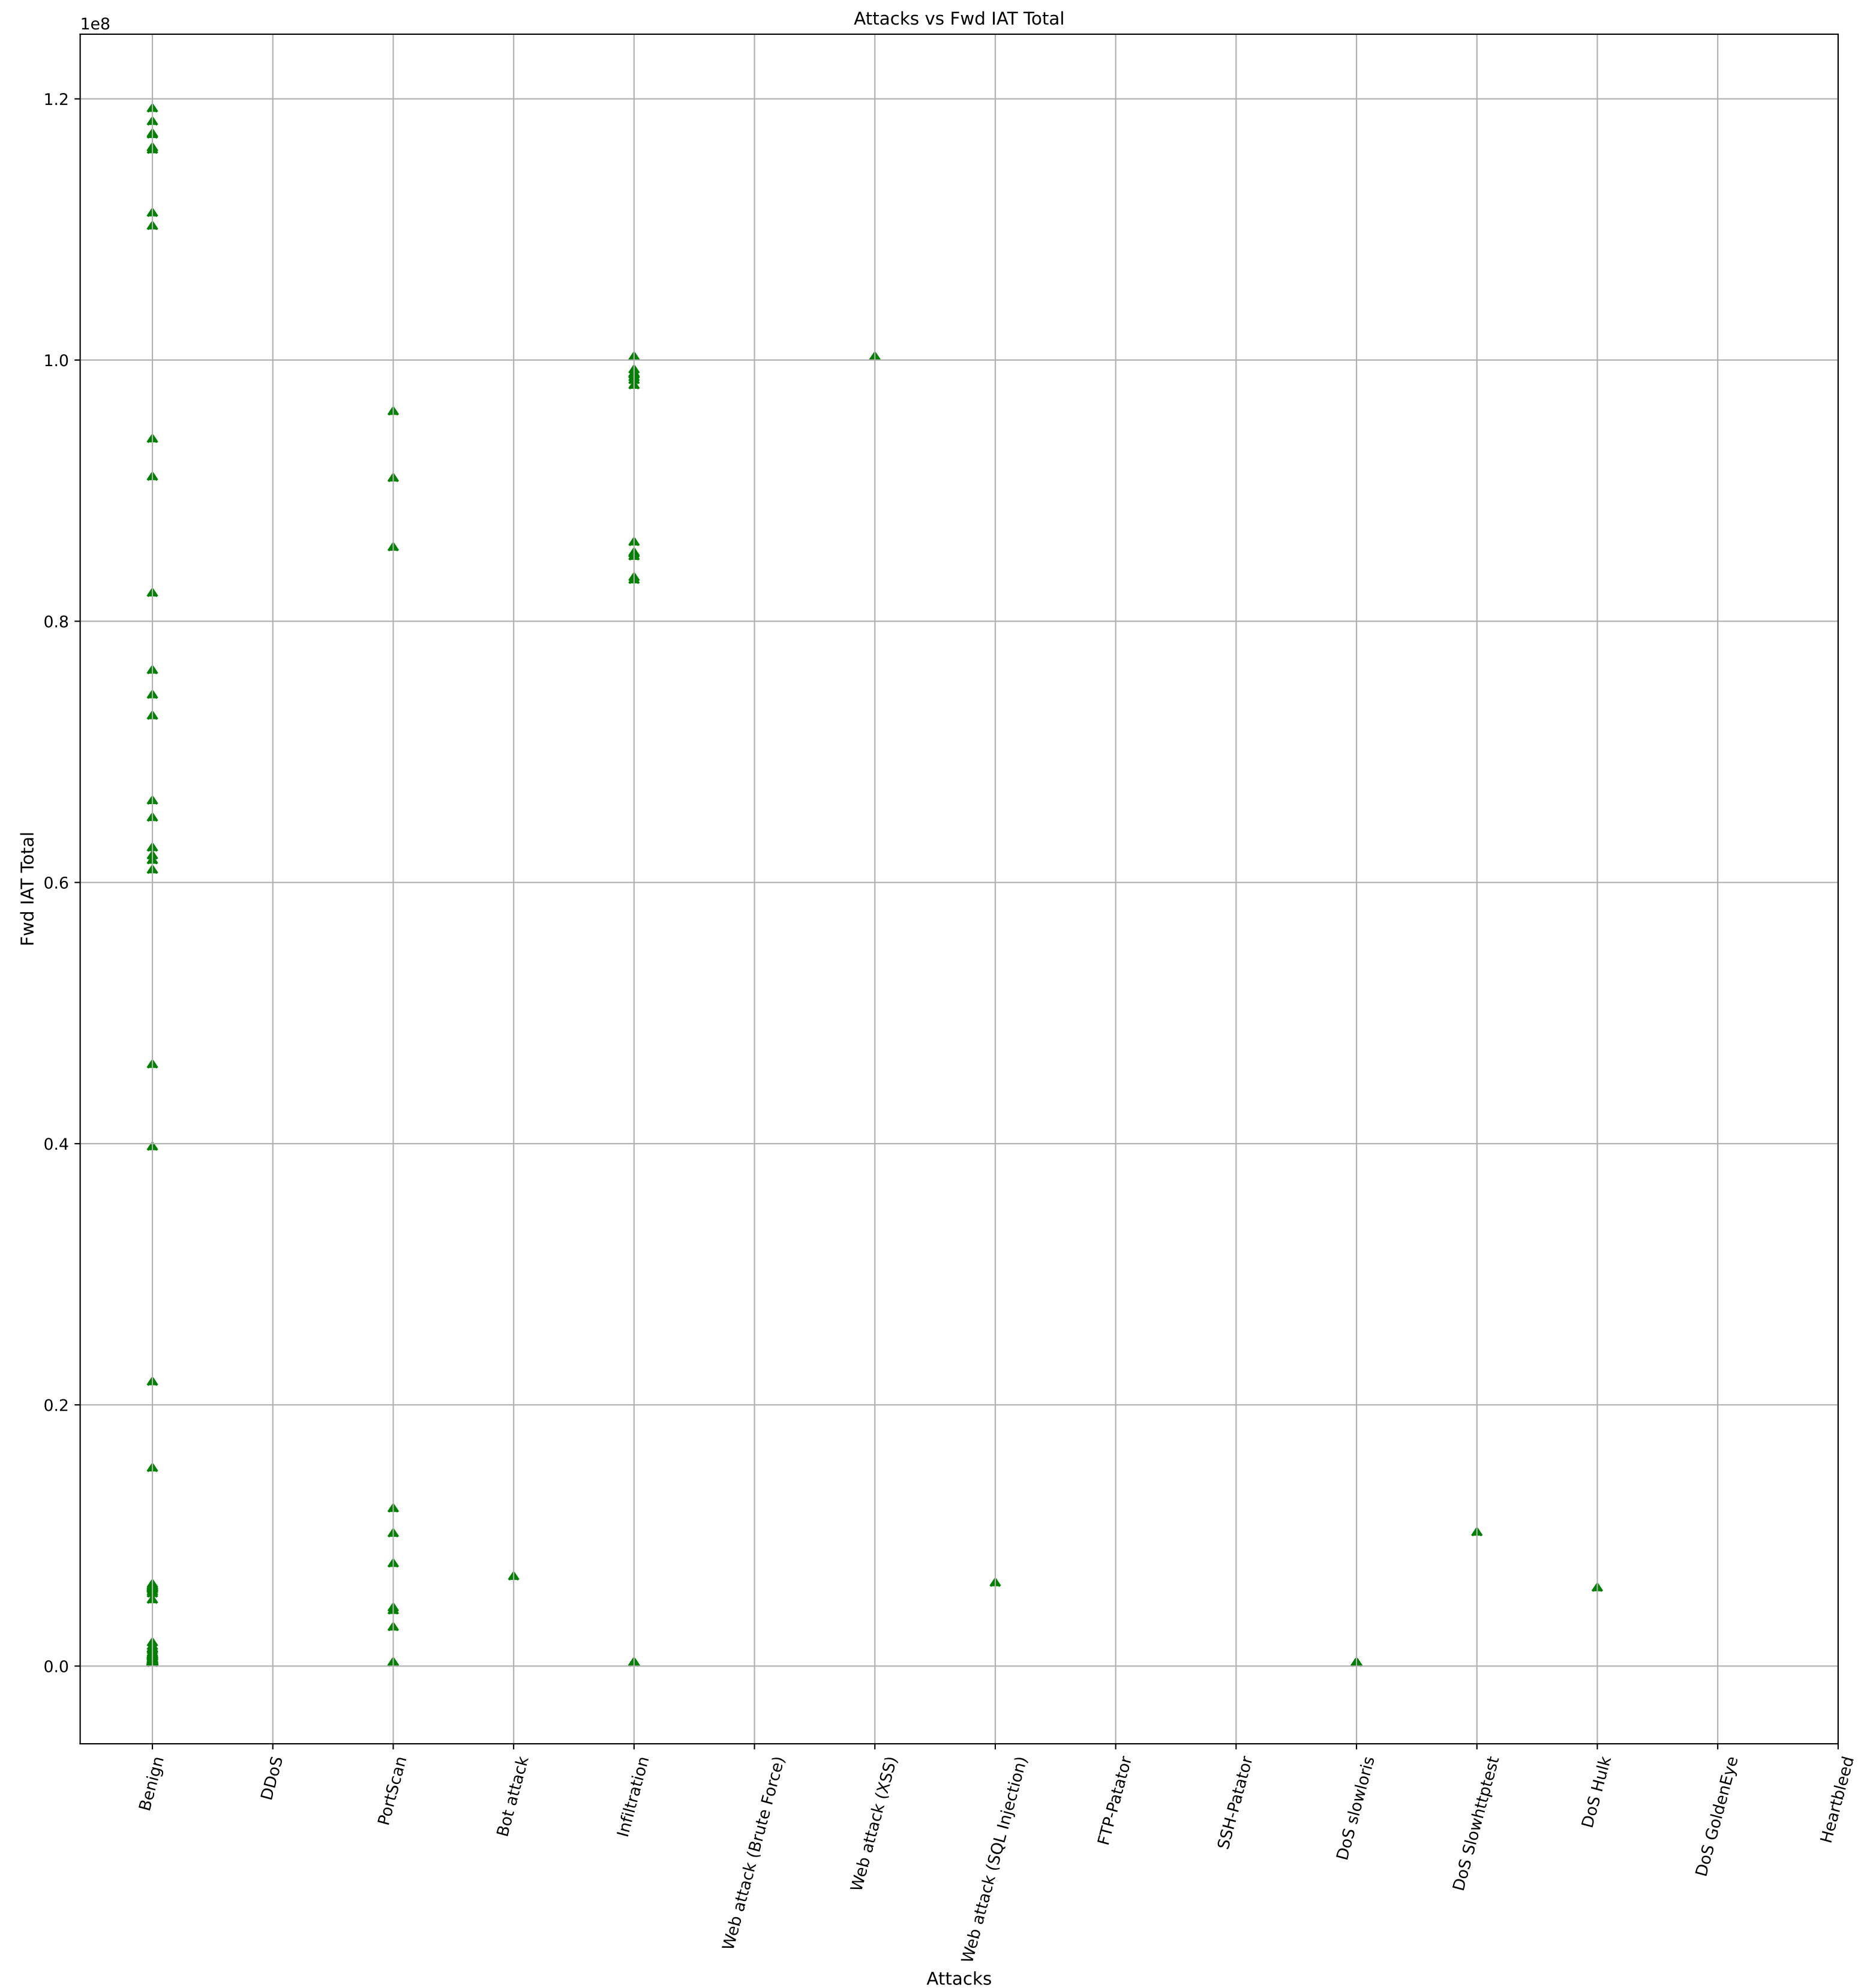


The most common value (mode) of Fwd IAT Mean is 0.0

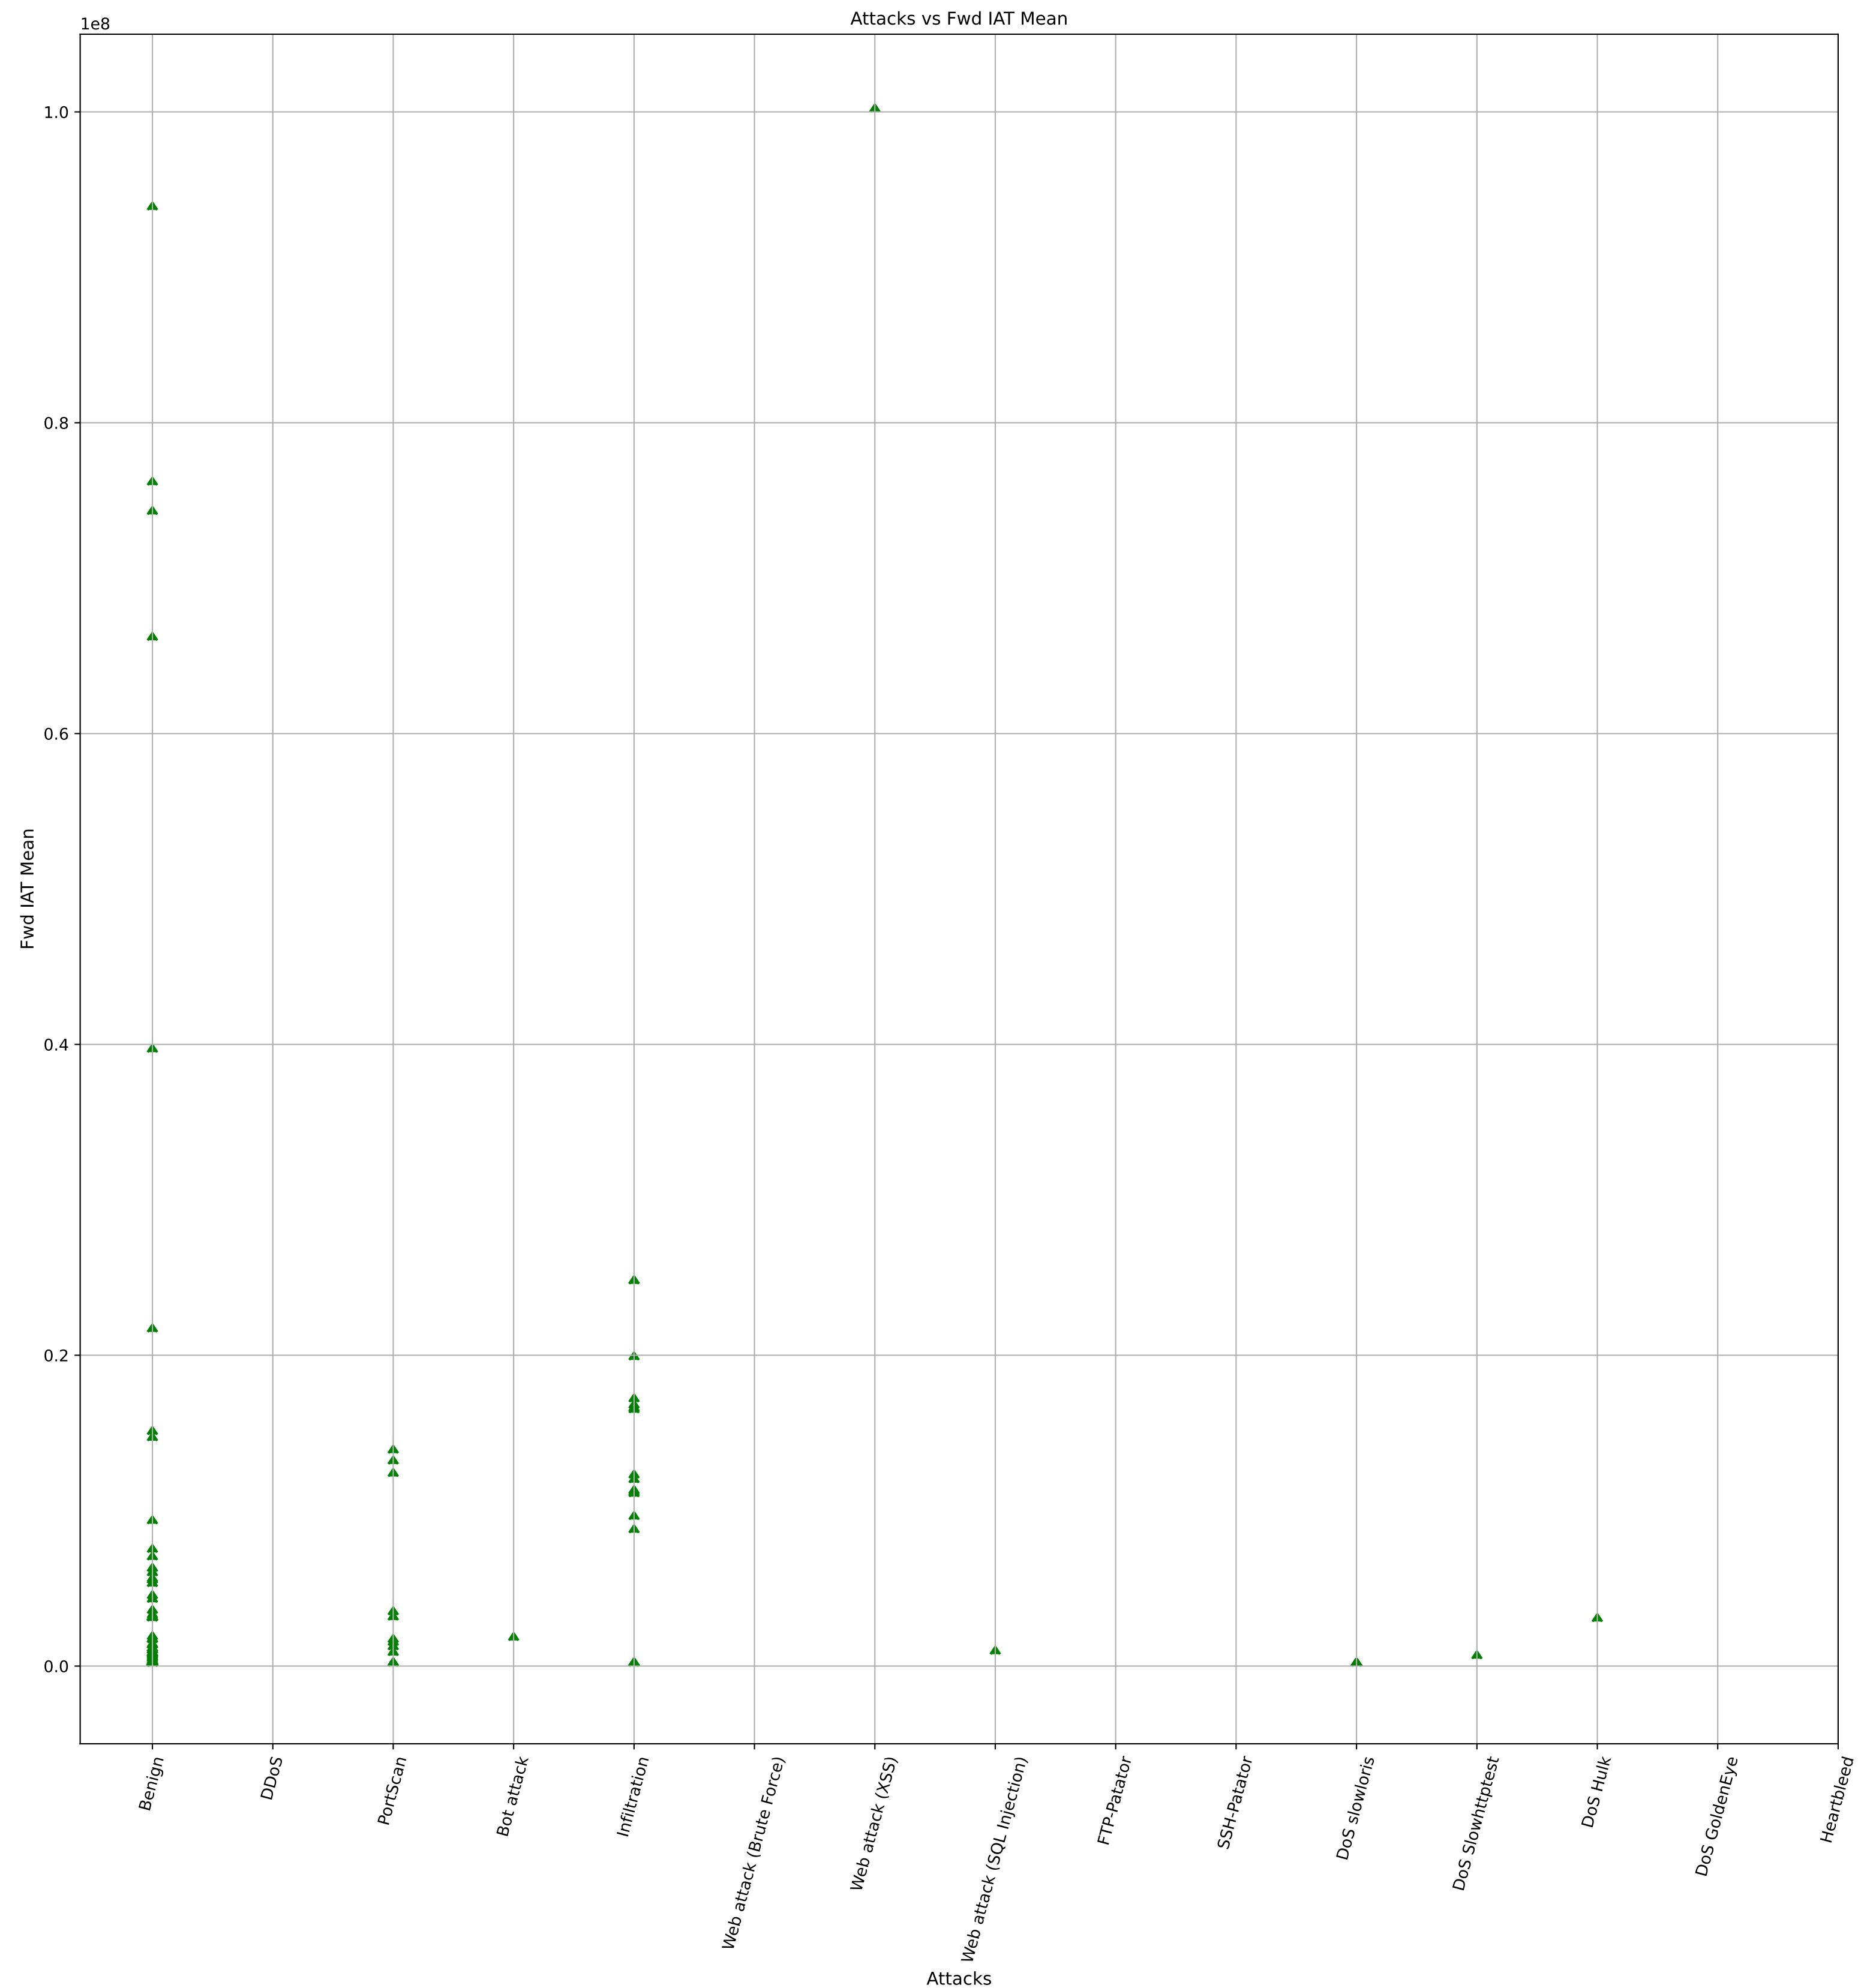


The most common value (mode) of Fwd IAT Std is 0.0

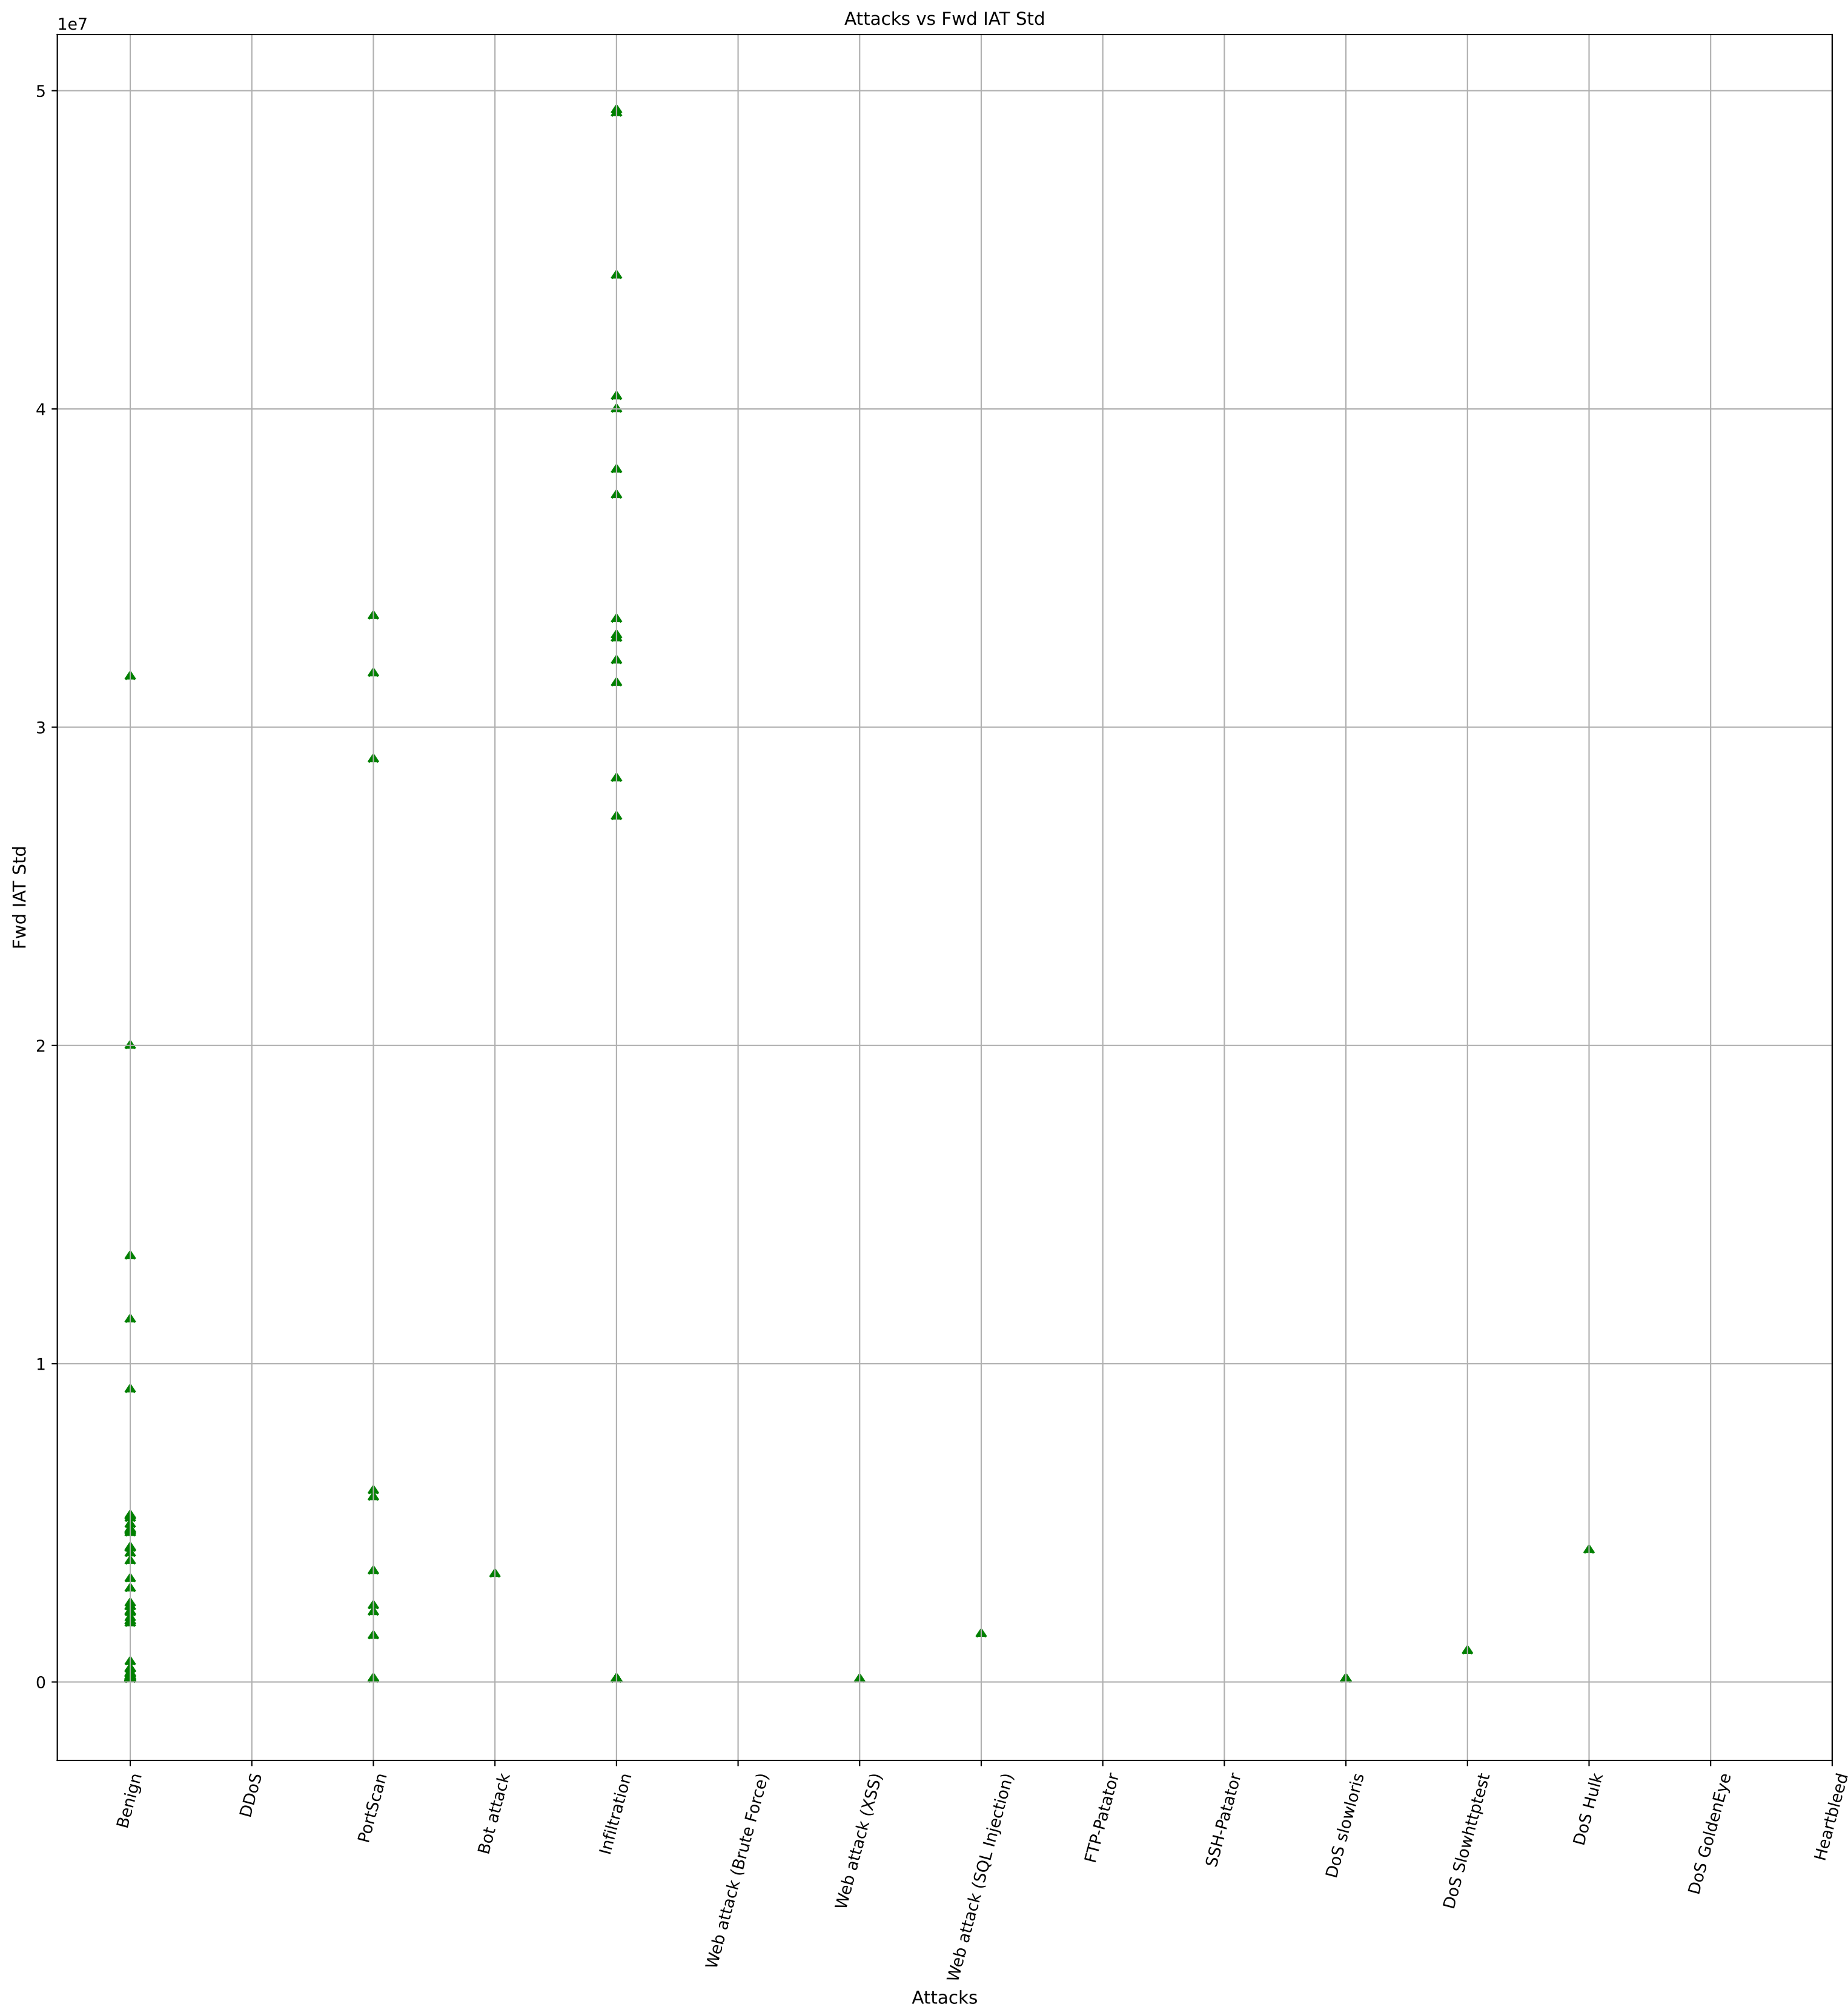


The most common value (mode) of Fwd IAT Max is 0

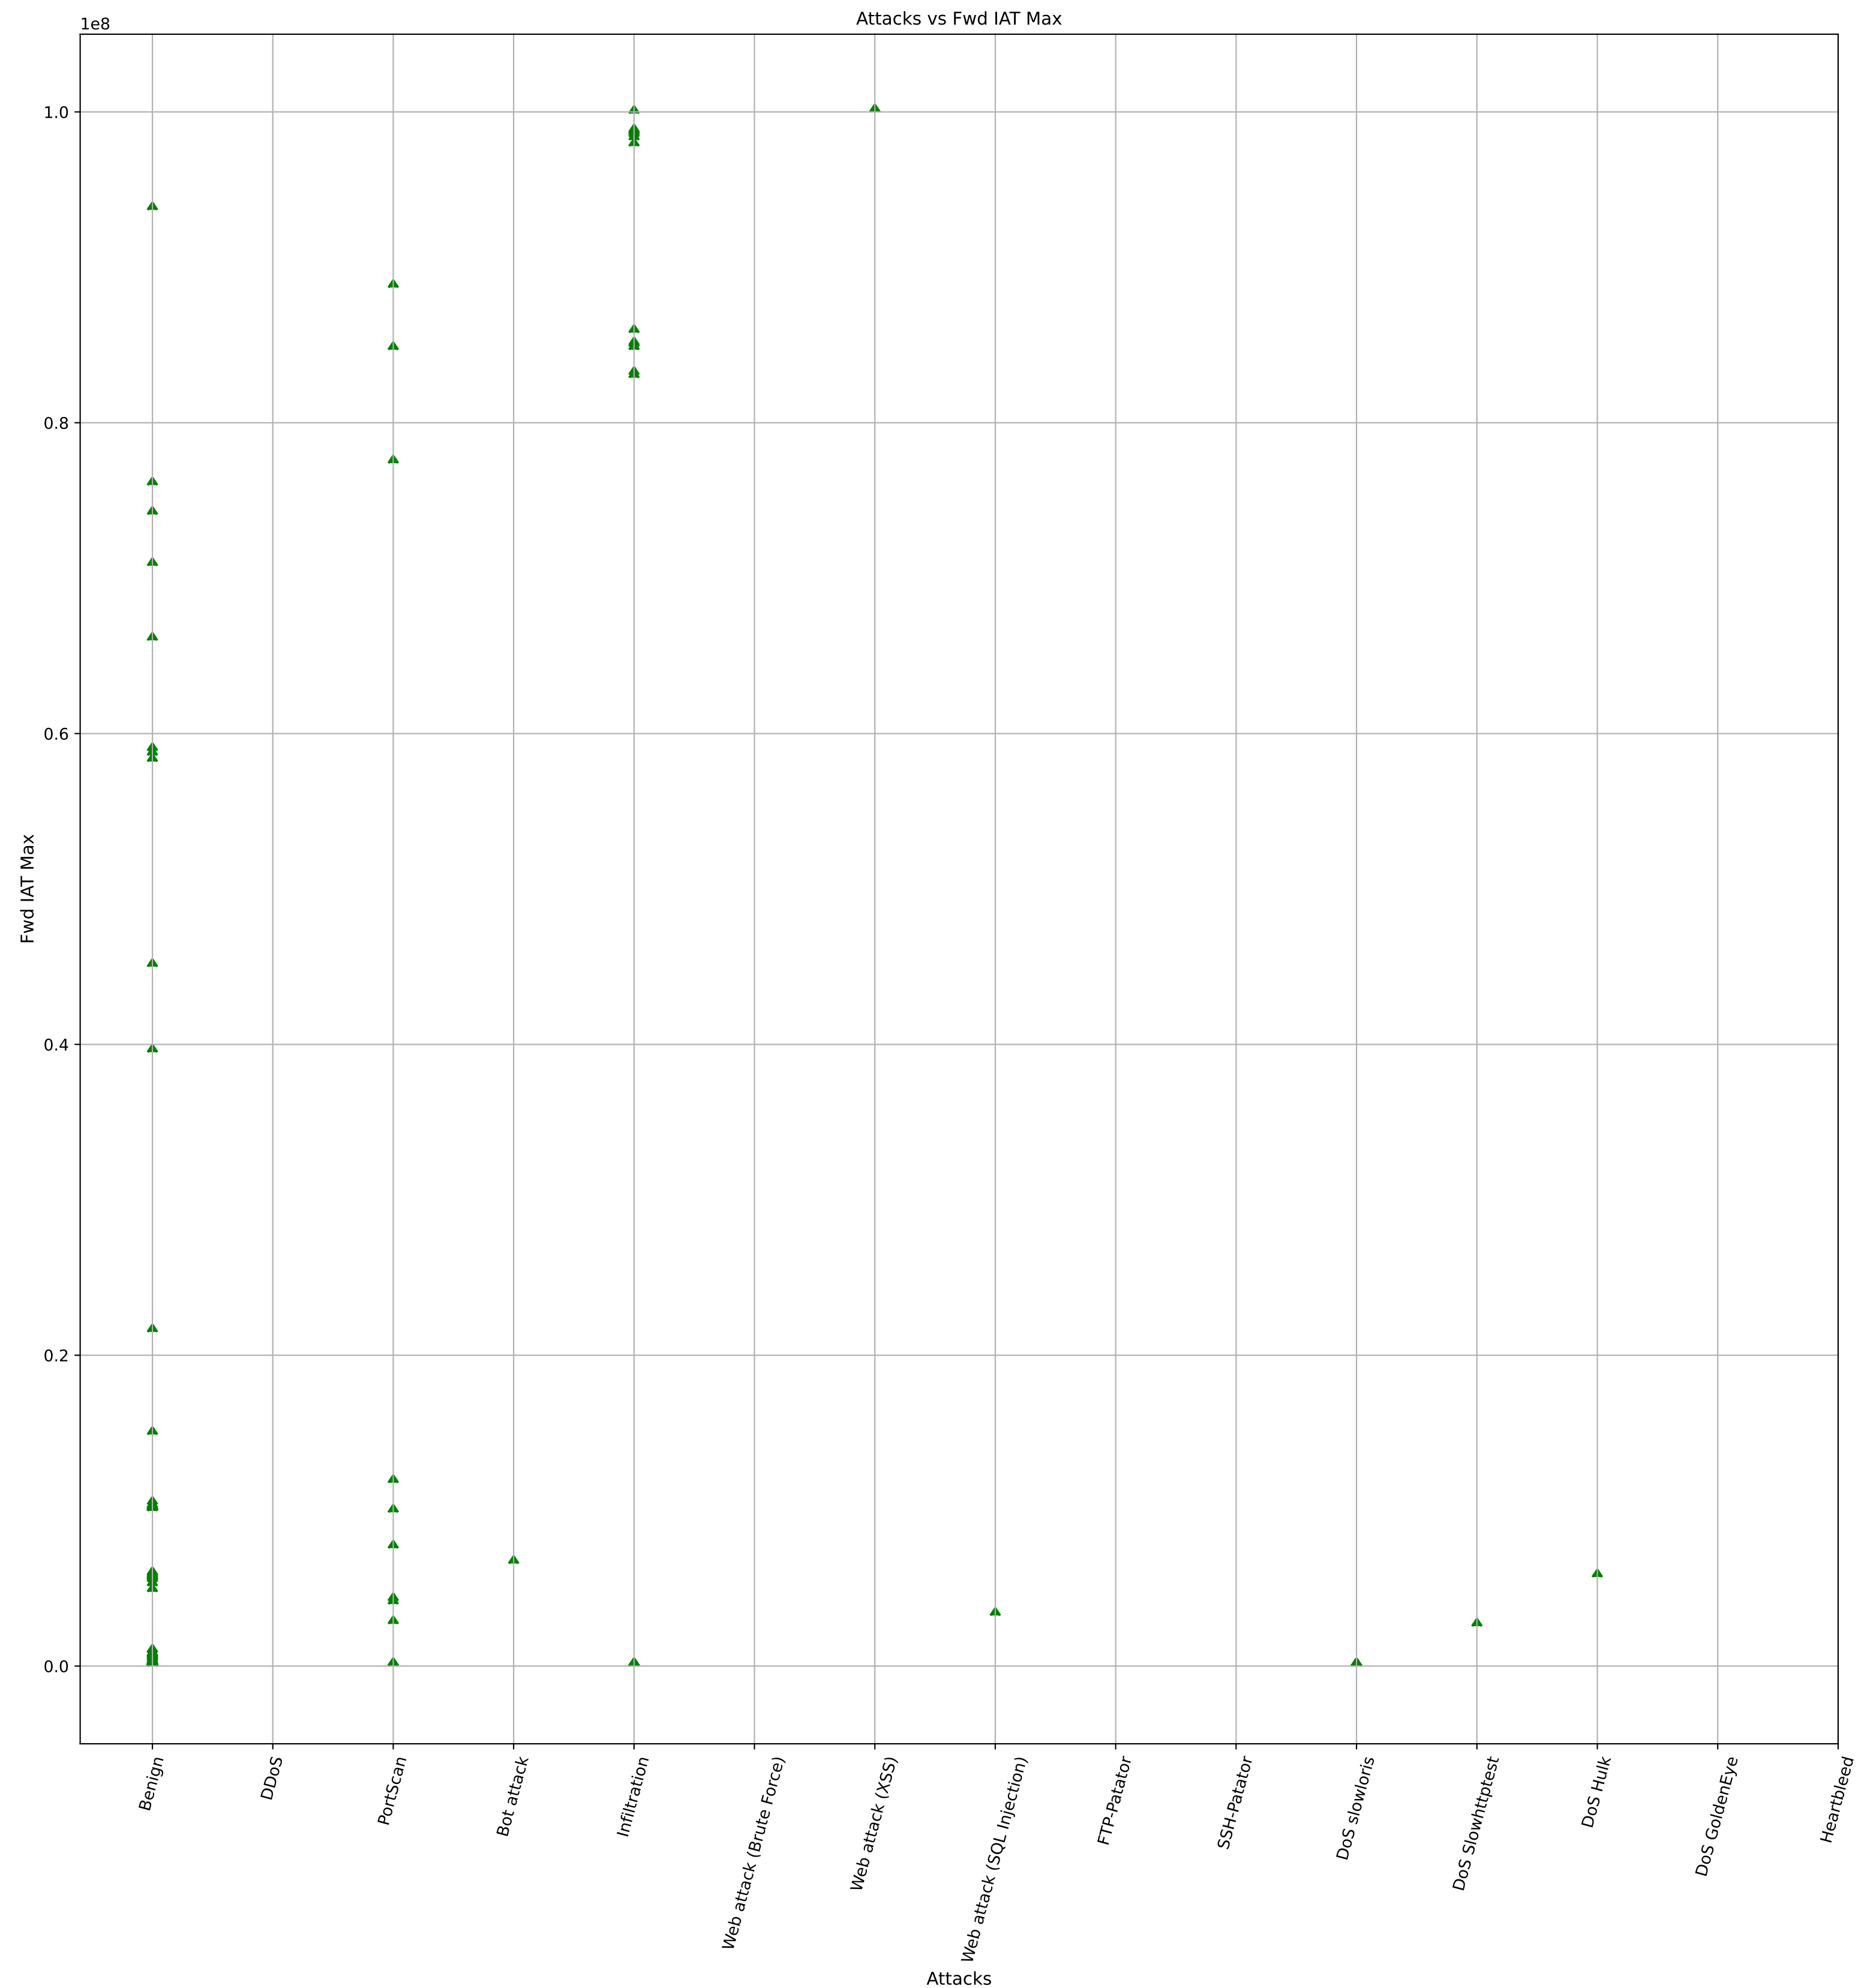


The most common value (mode) of Fwd IAT Min is 0

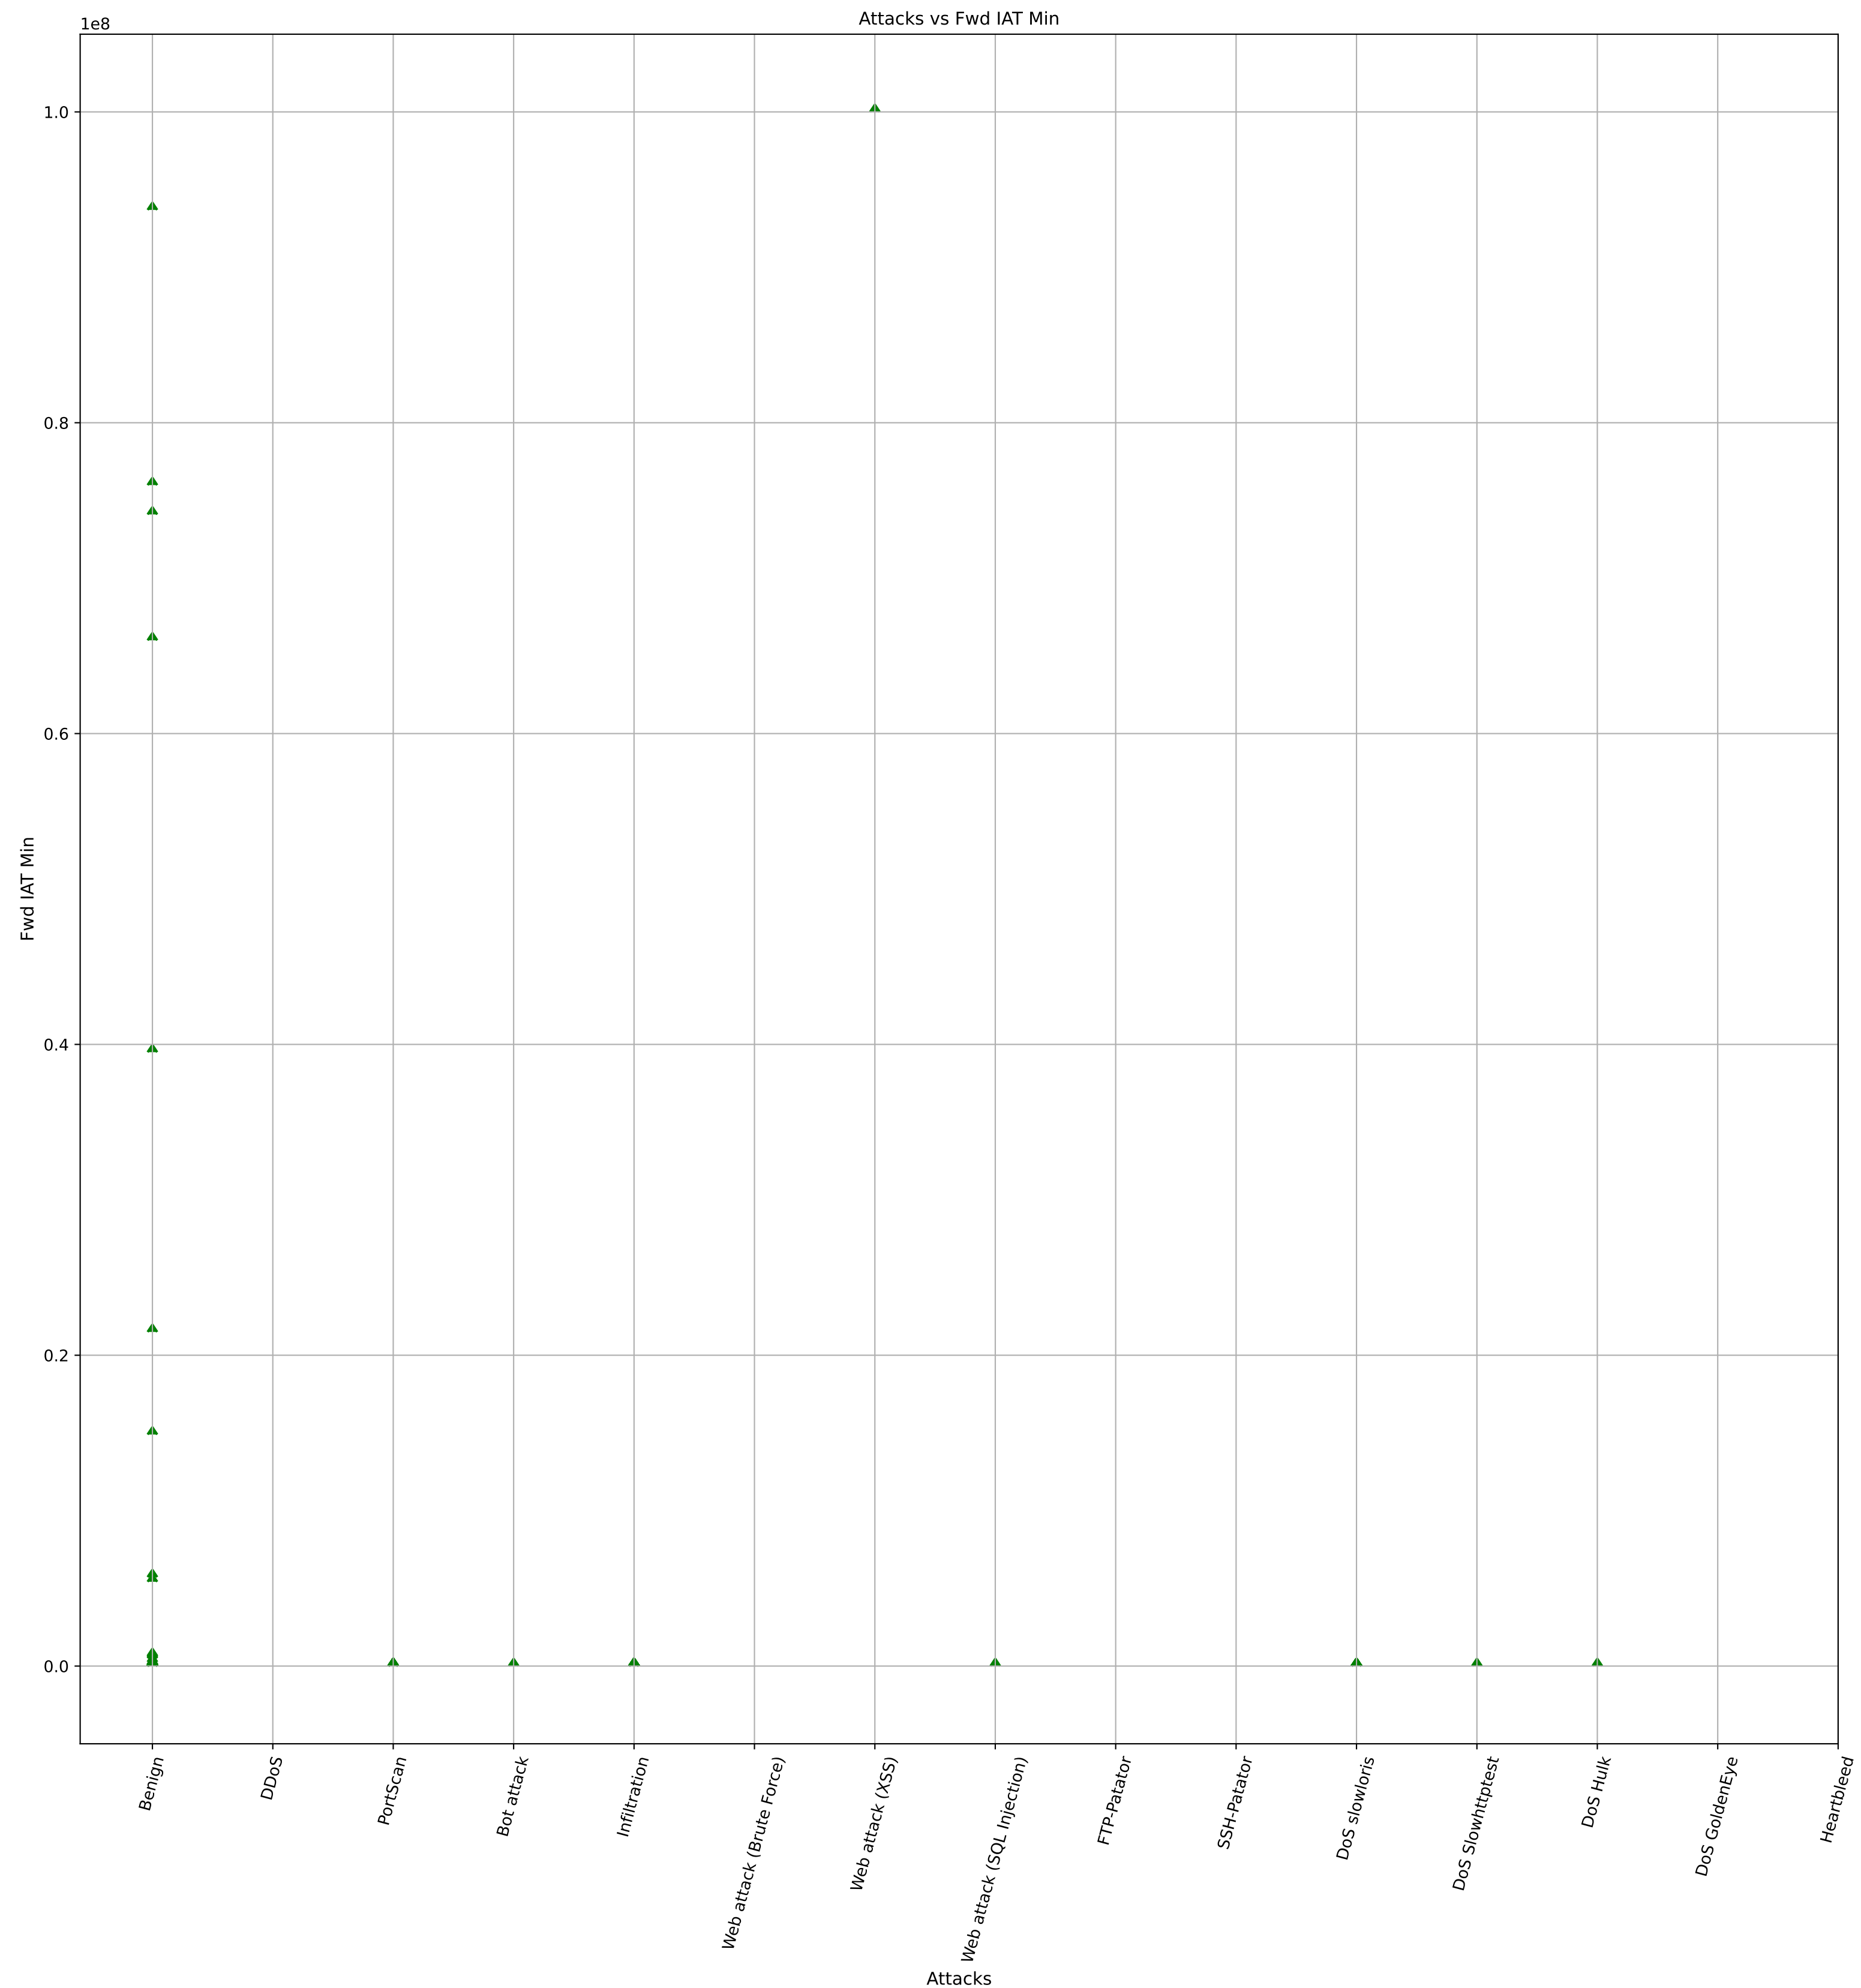


The most common value (mode) of Bwd IAT Total is 0

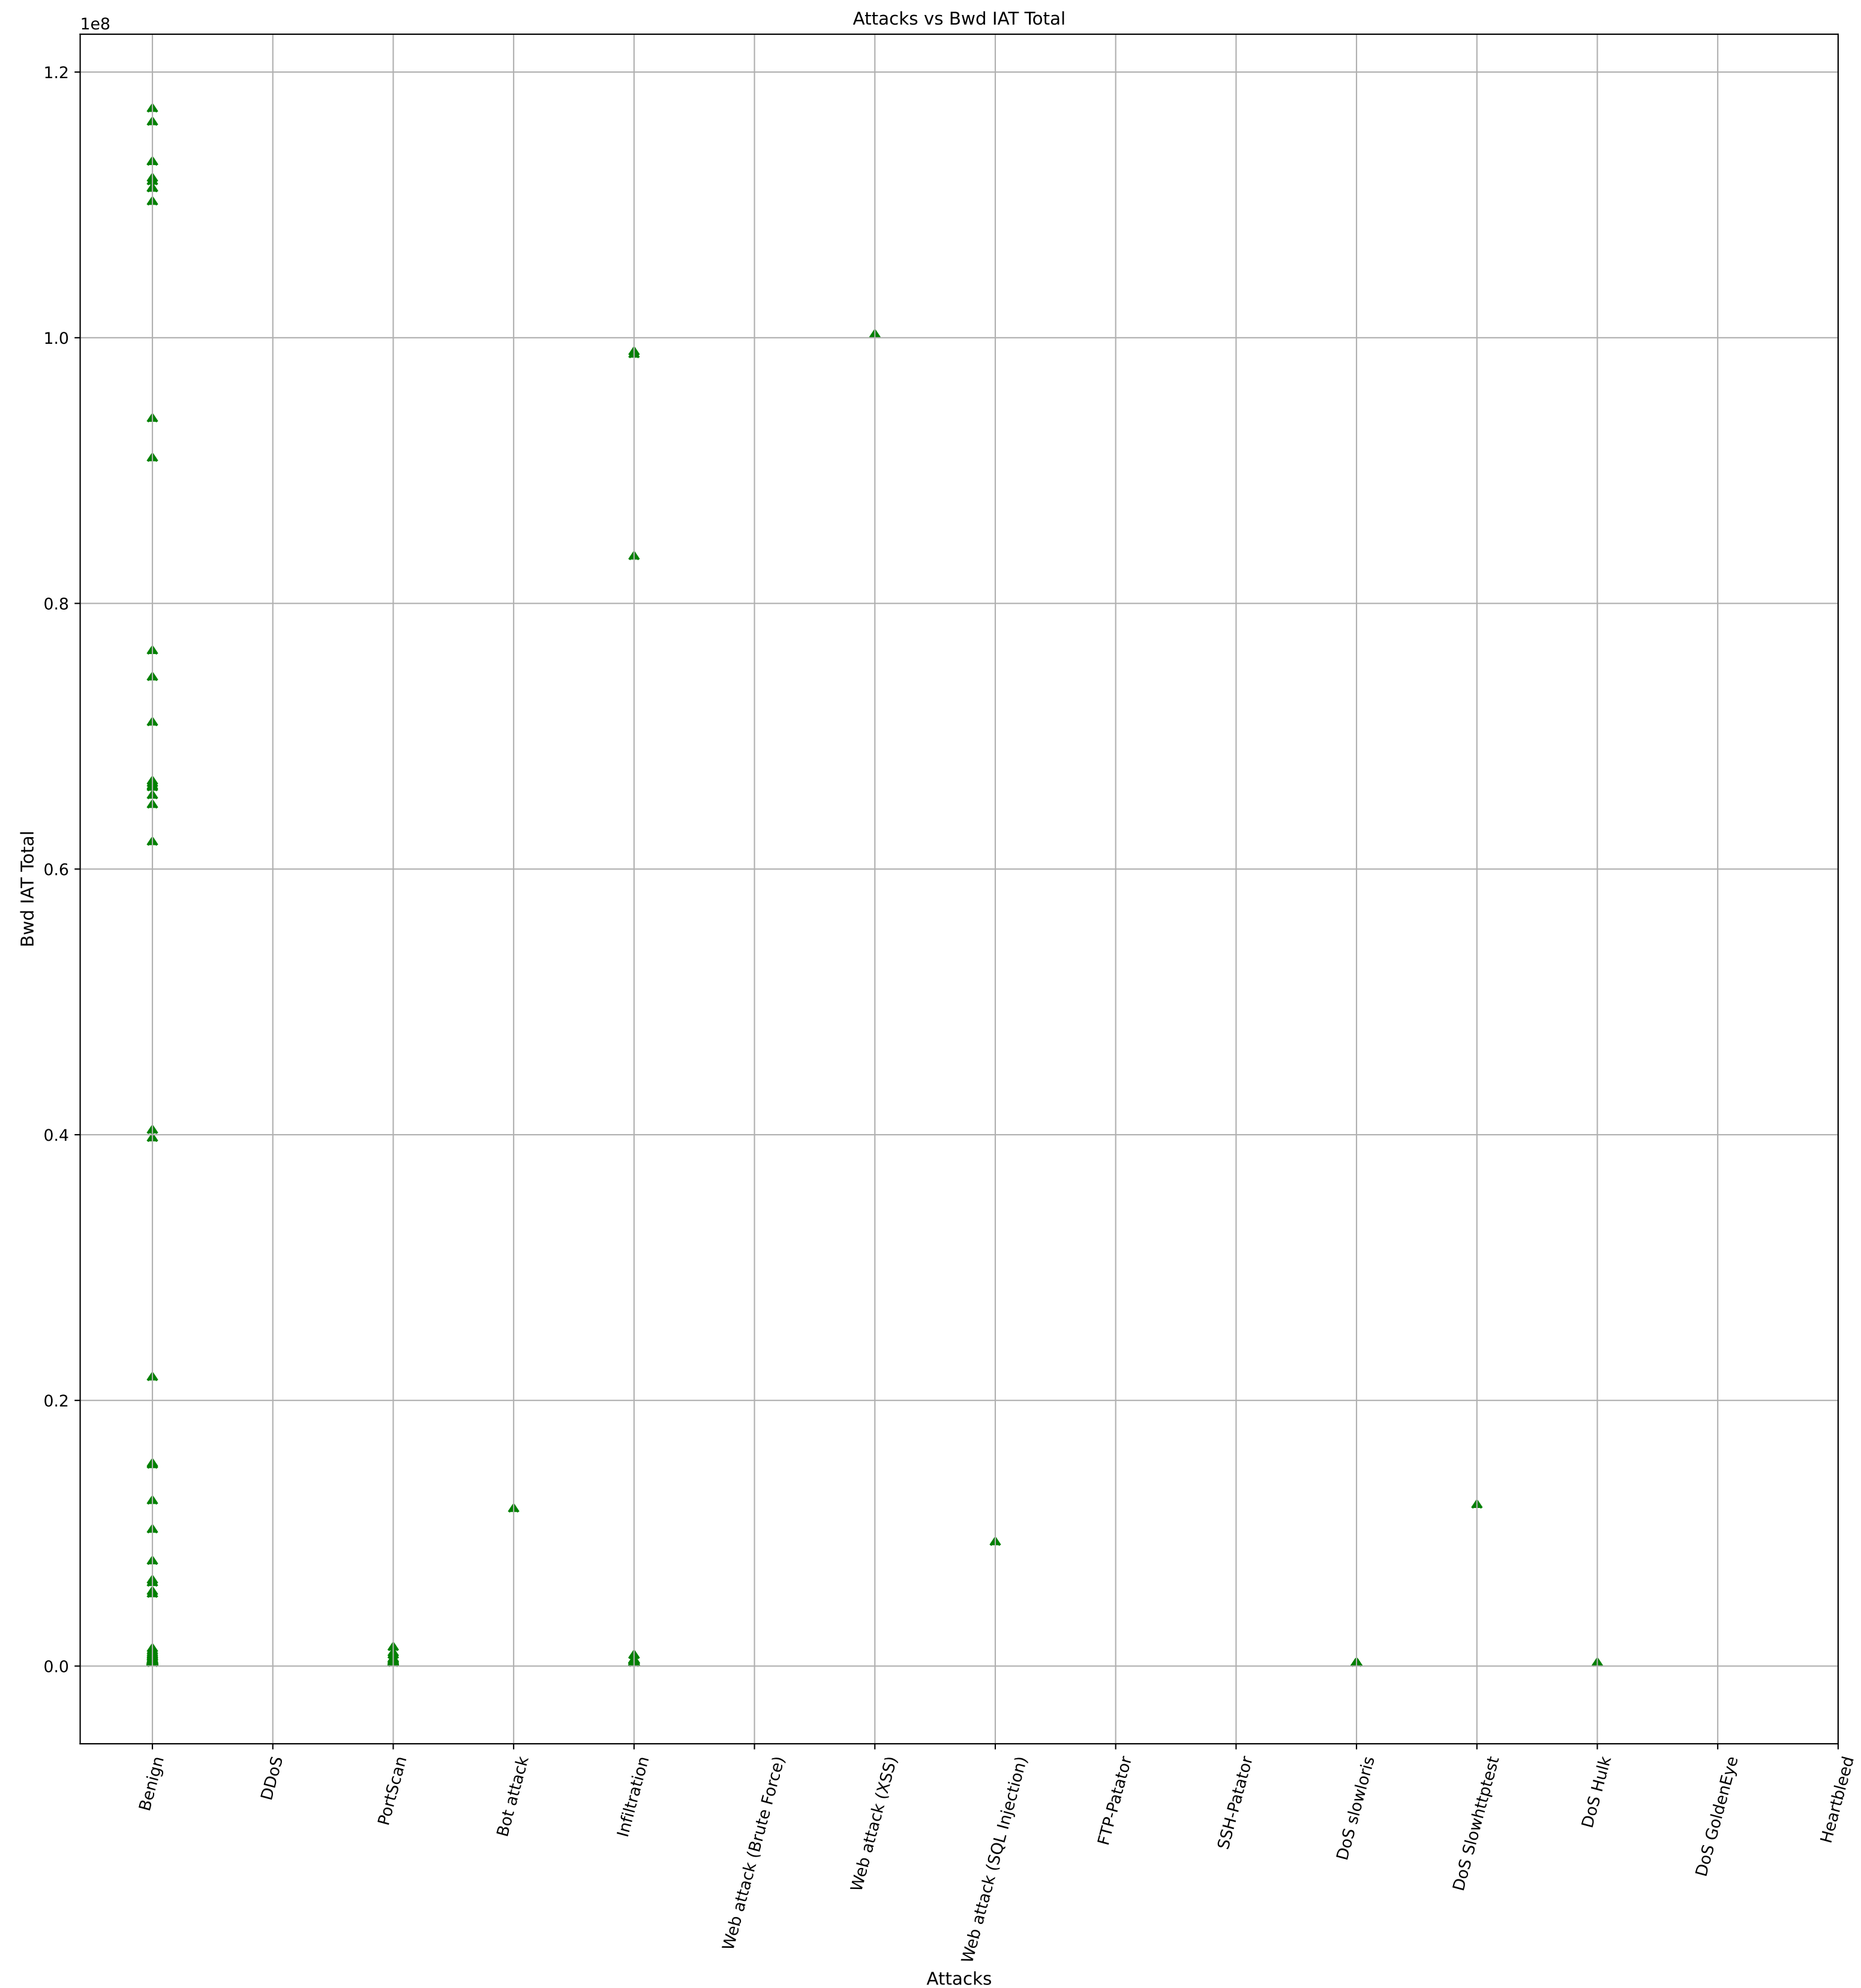


The most common value (mode) of Bwd IAT Mean is 0.0

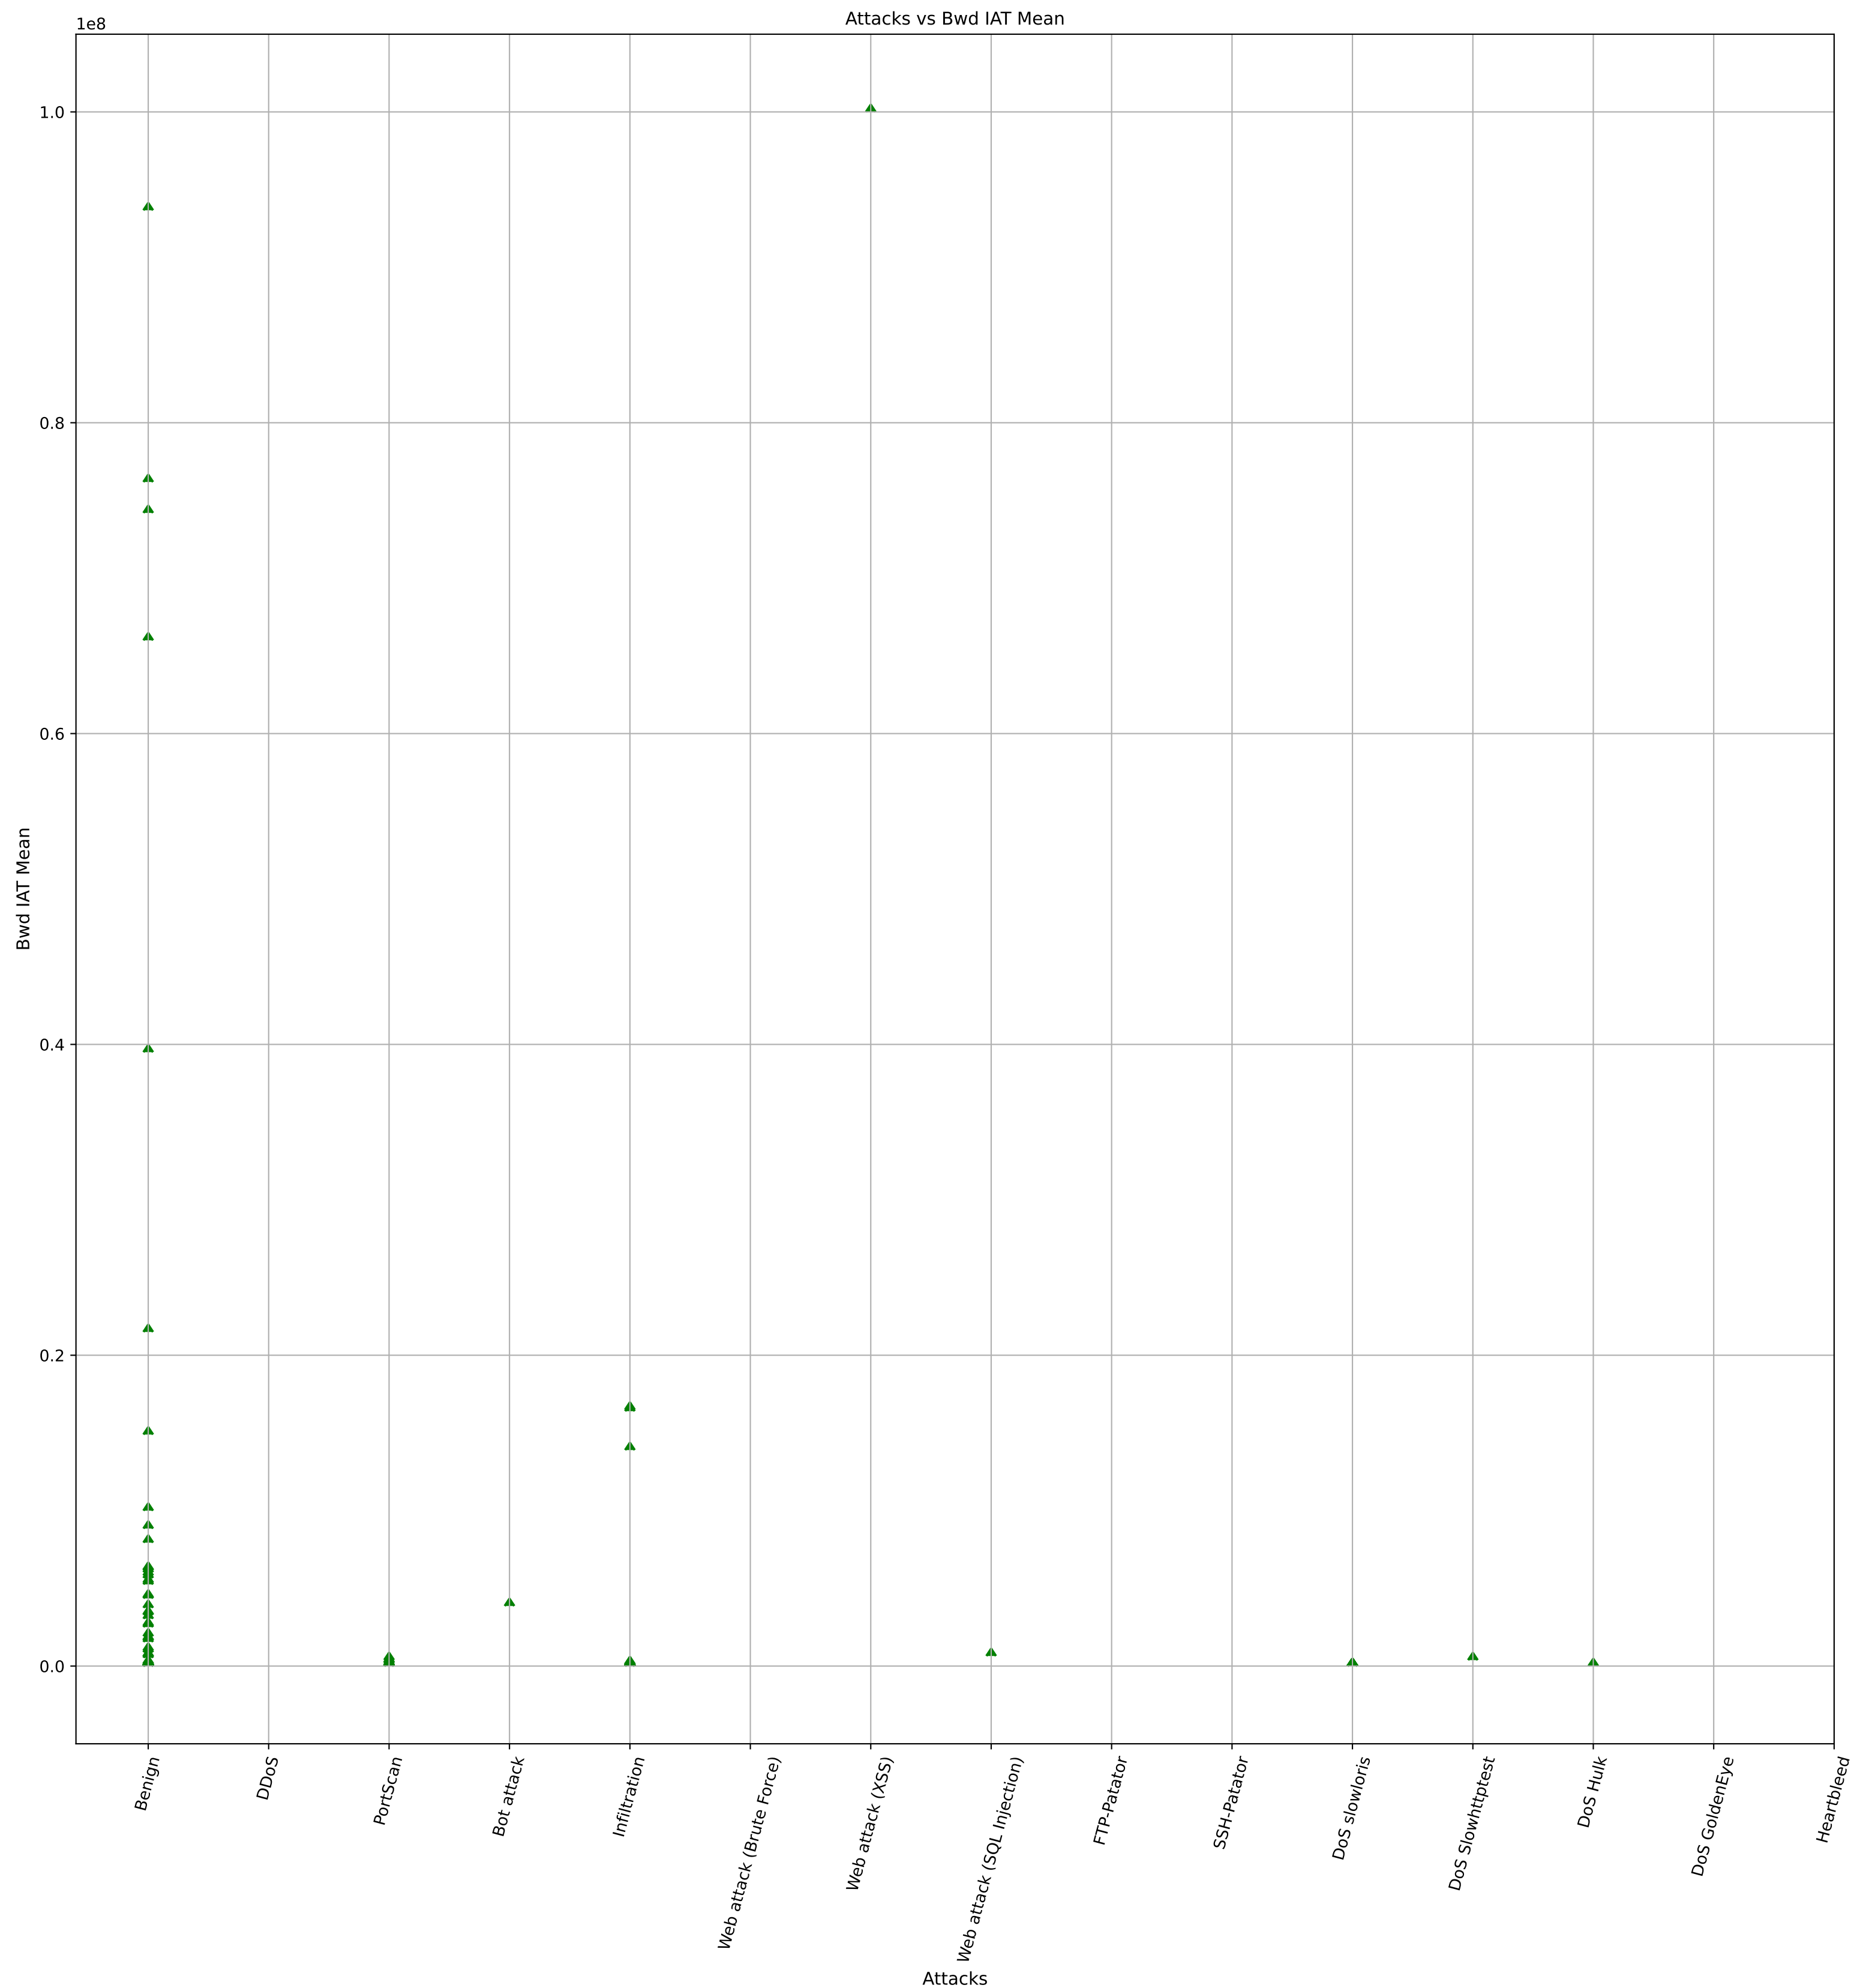


The most common value (mode) of Bwd IAT Std is 0.0

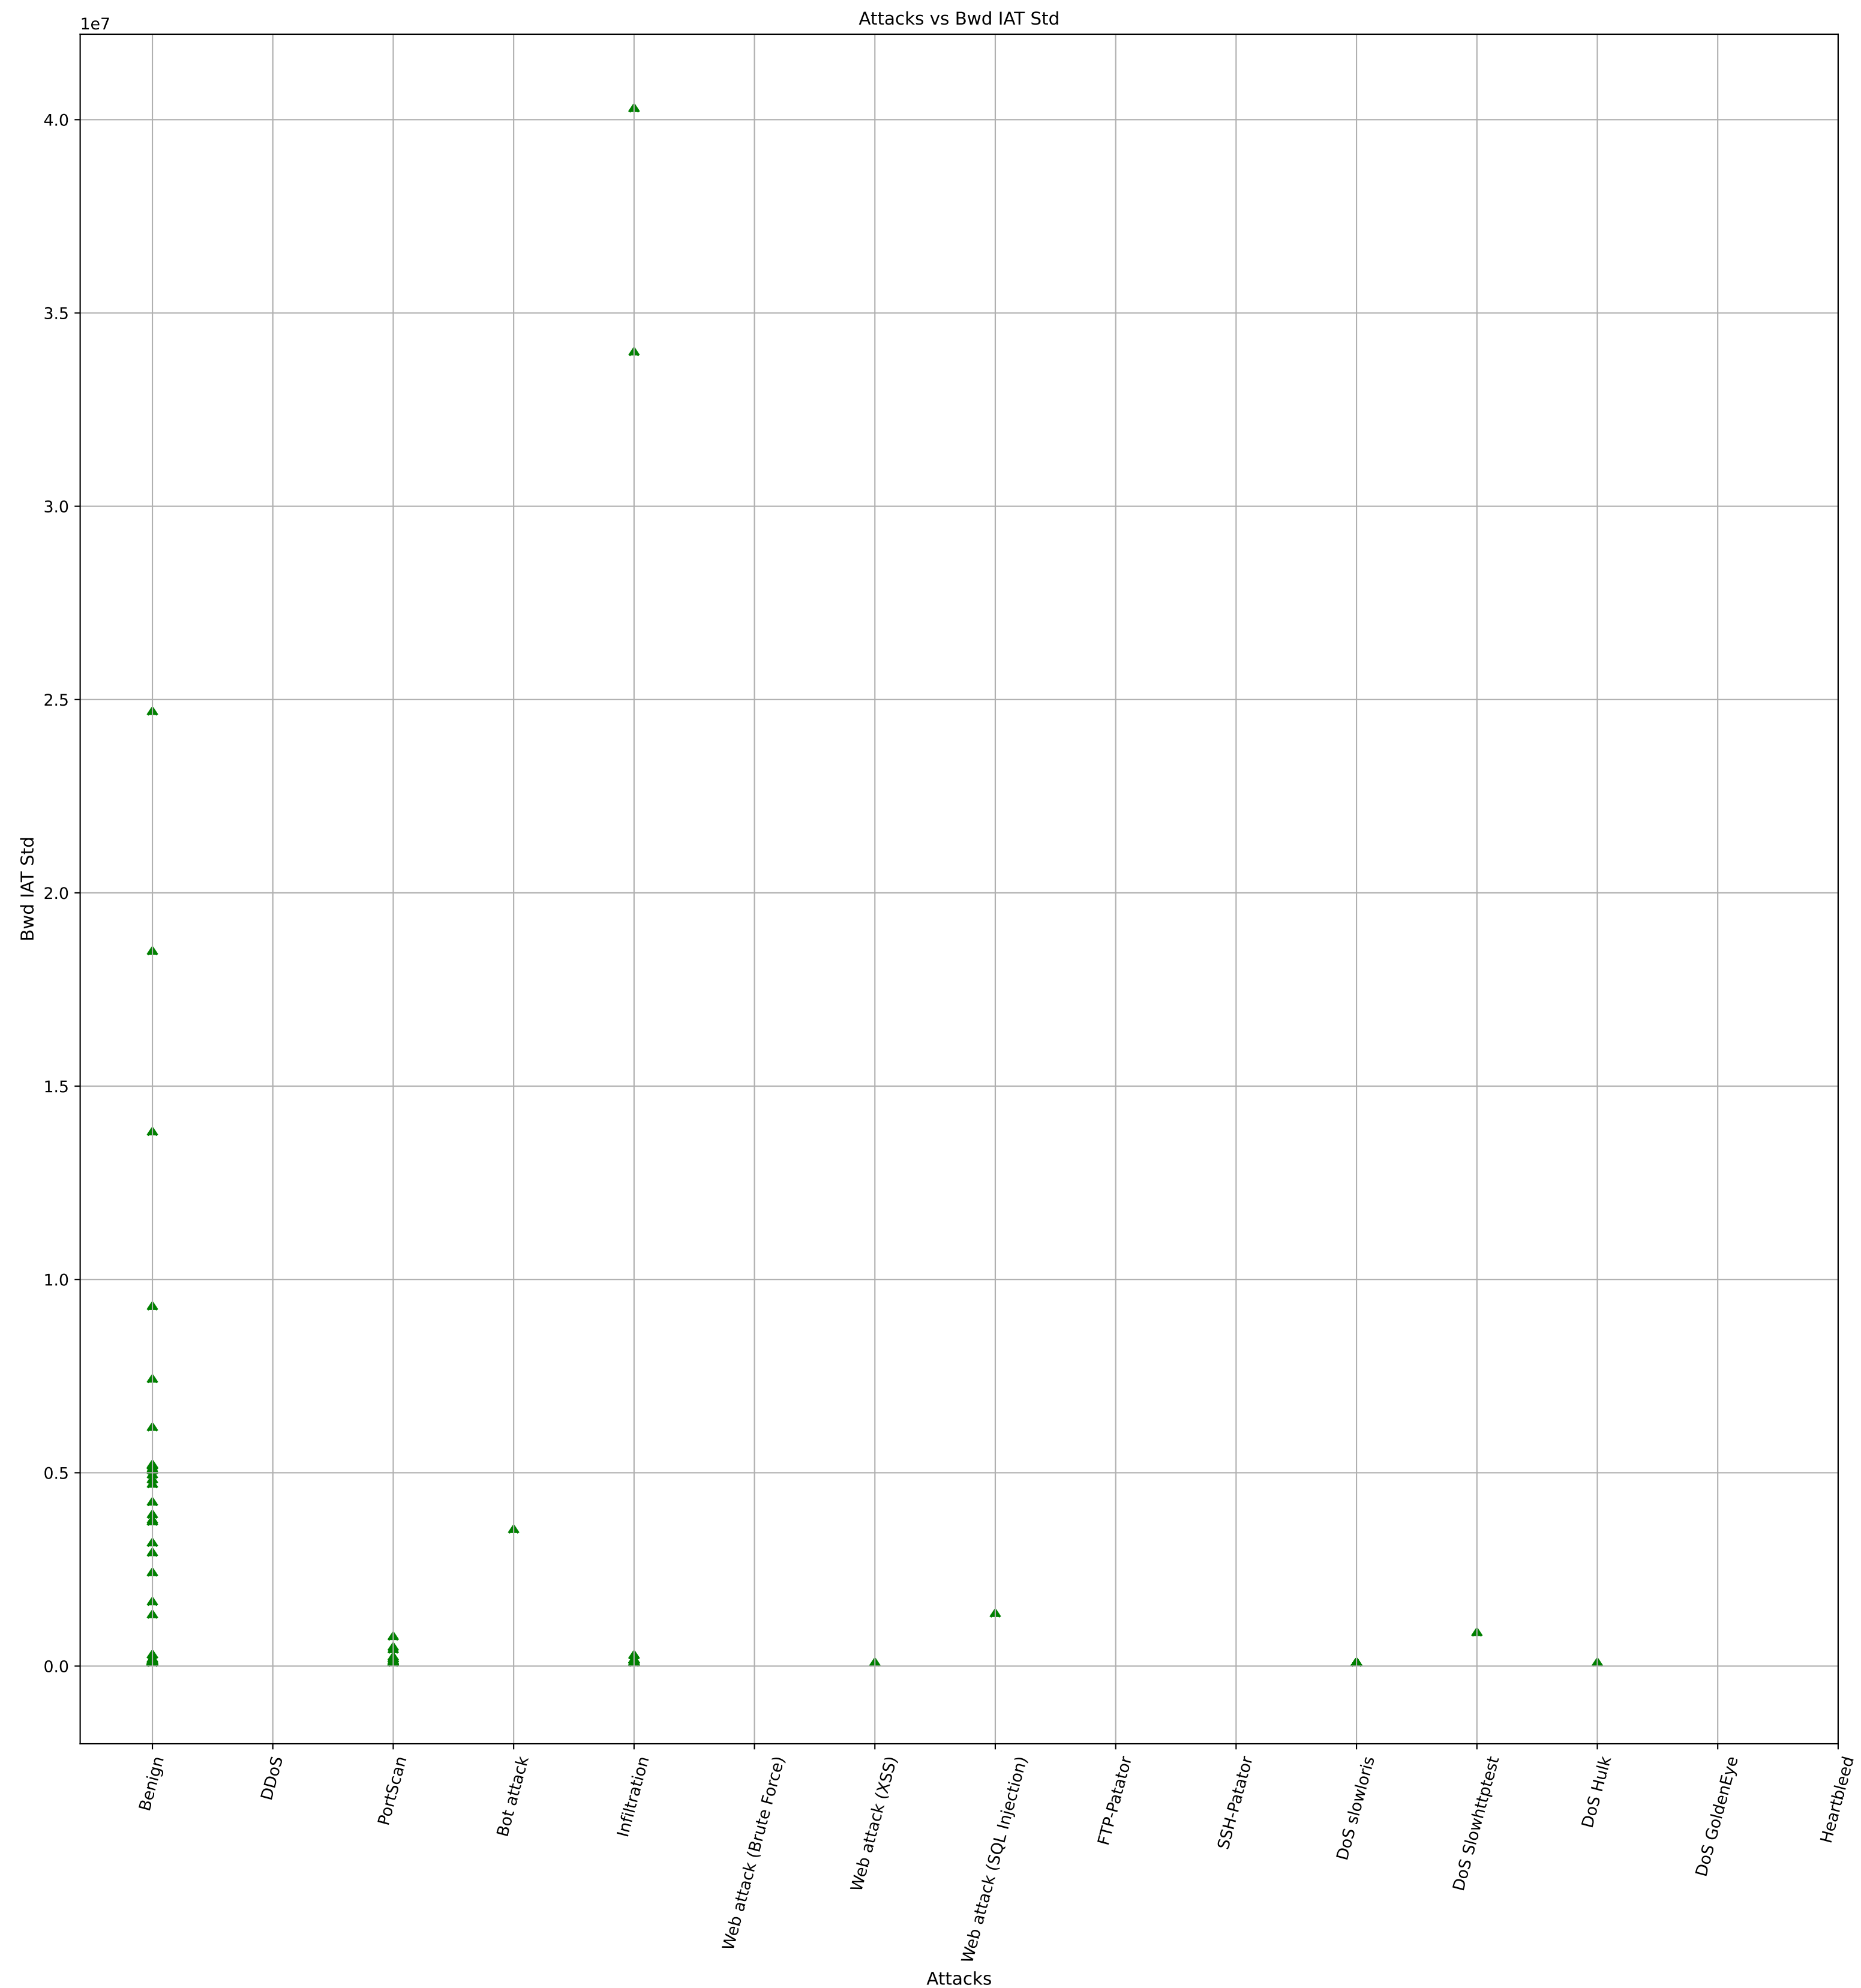


The most common value (mode) of Bwd IAT Max is 0

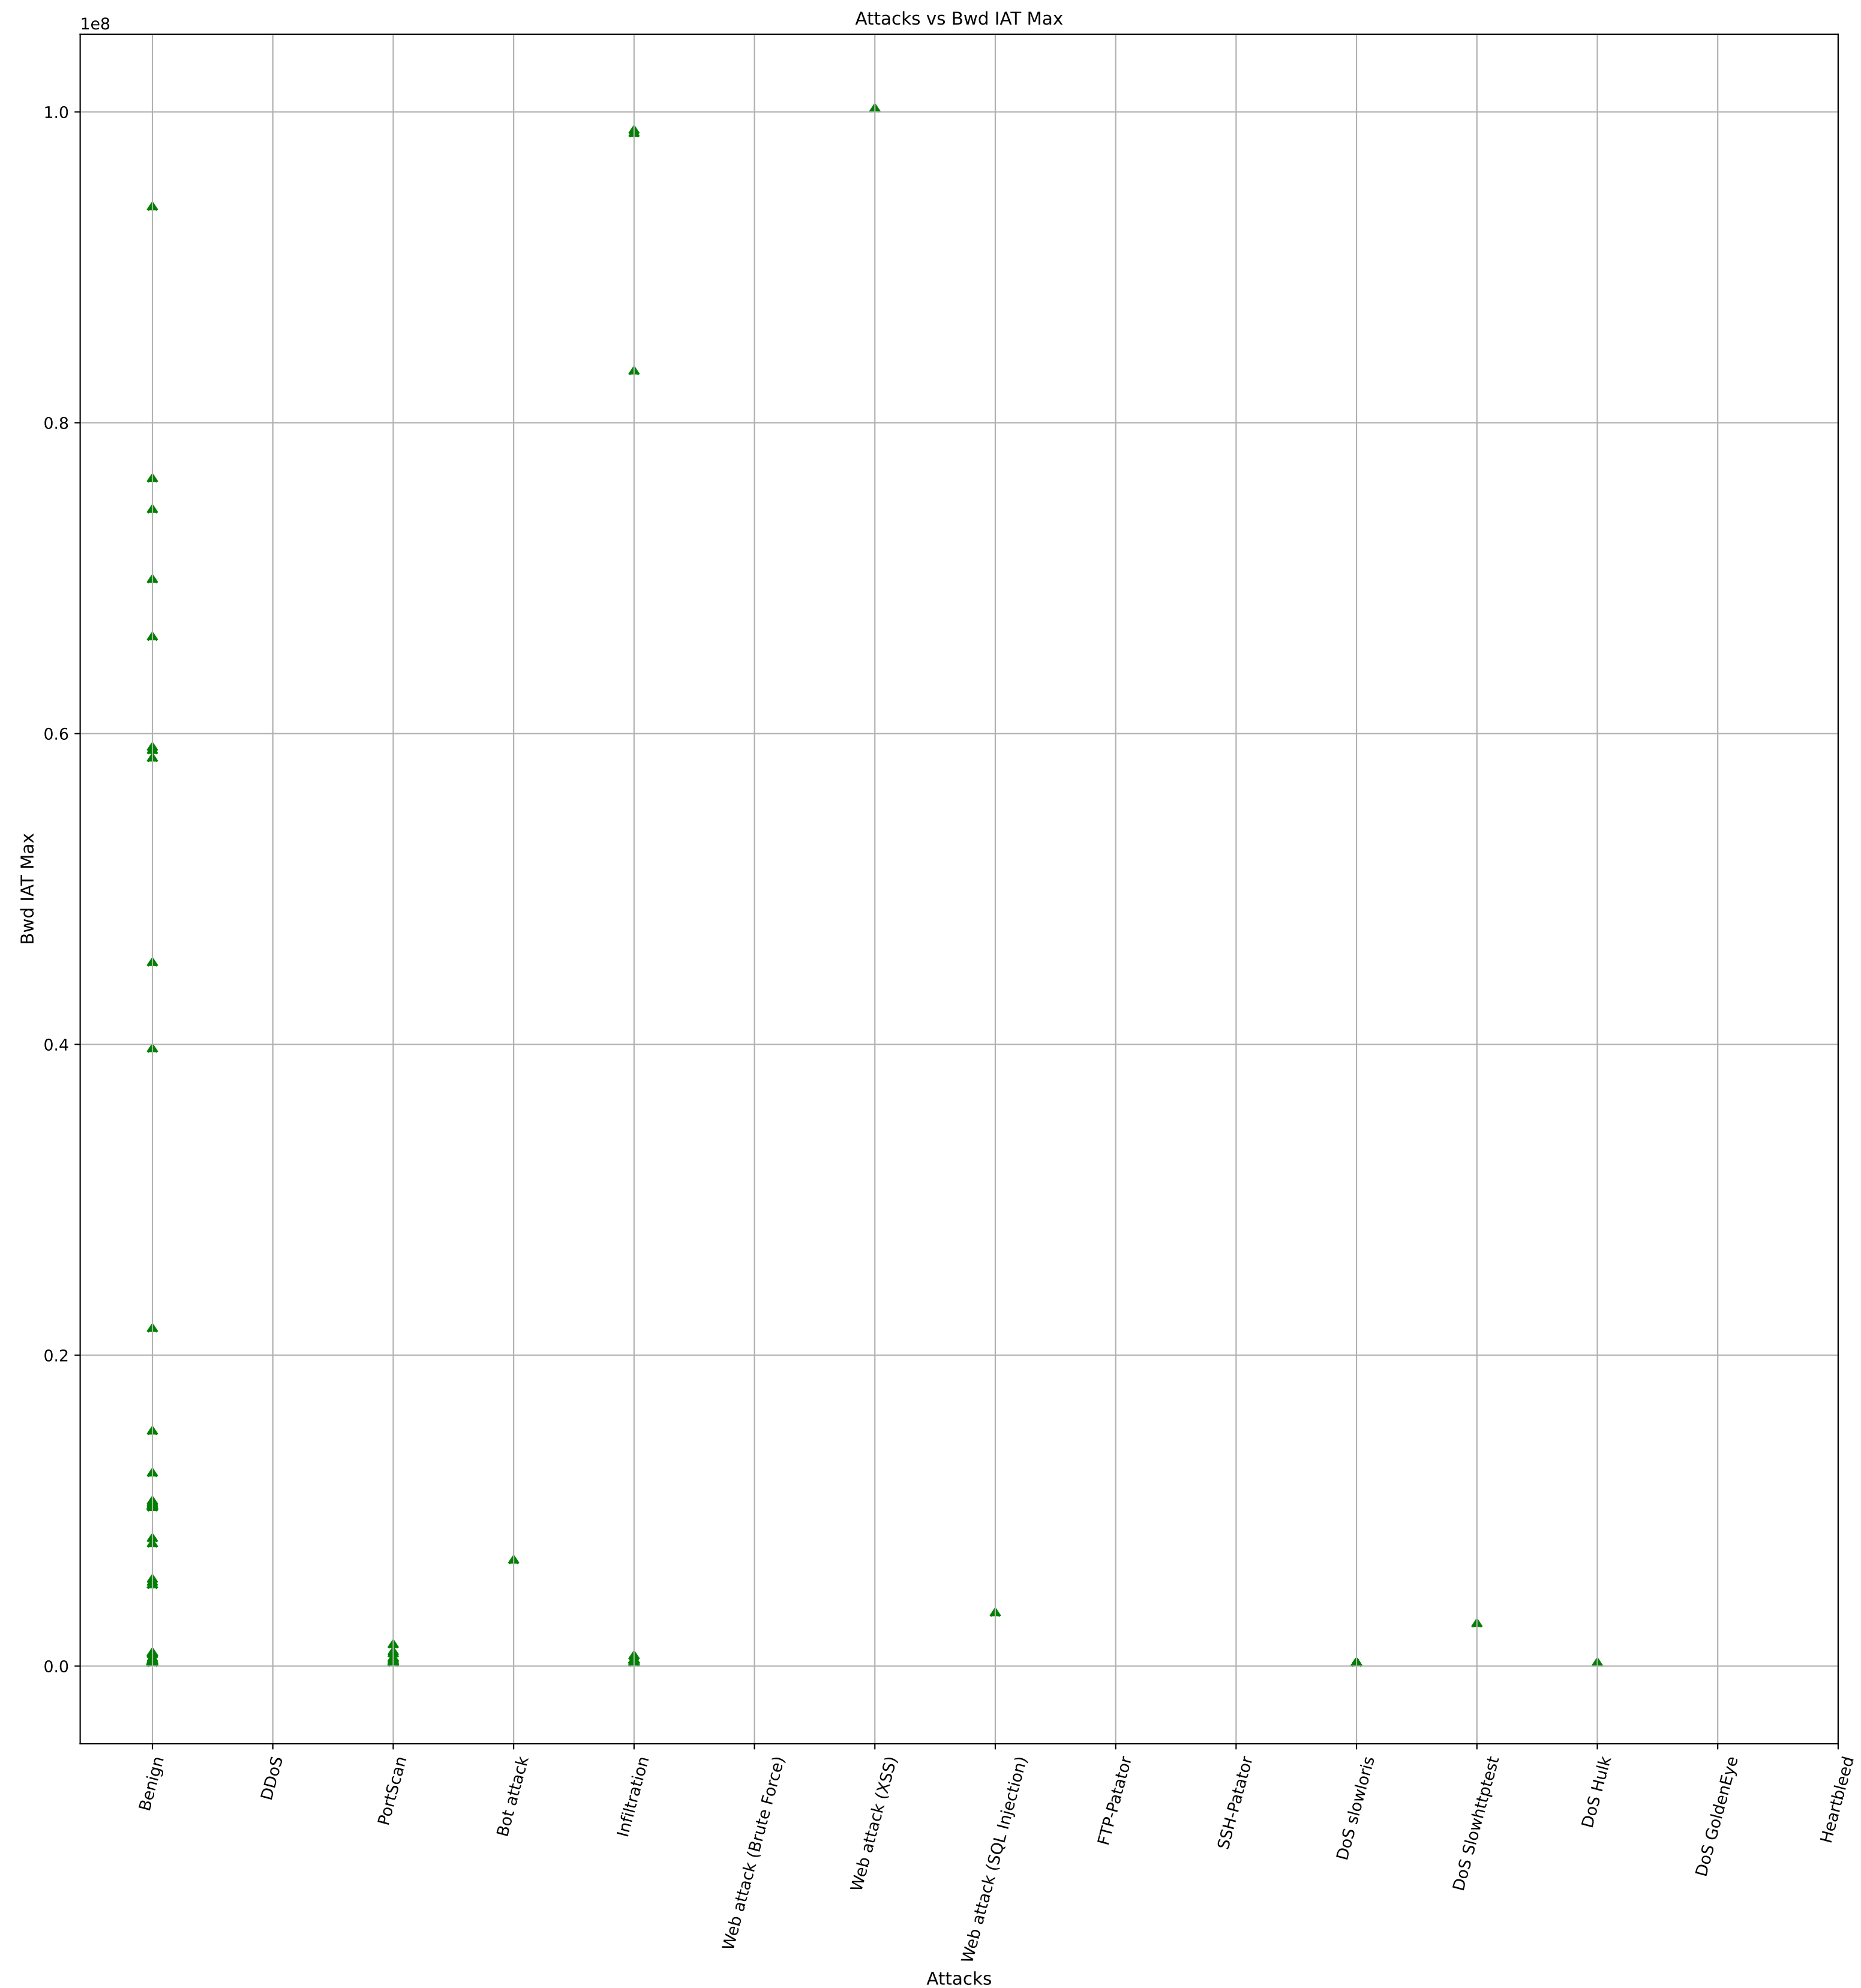


The most common value (mode) of Bwd IAT Min is 0

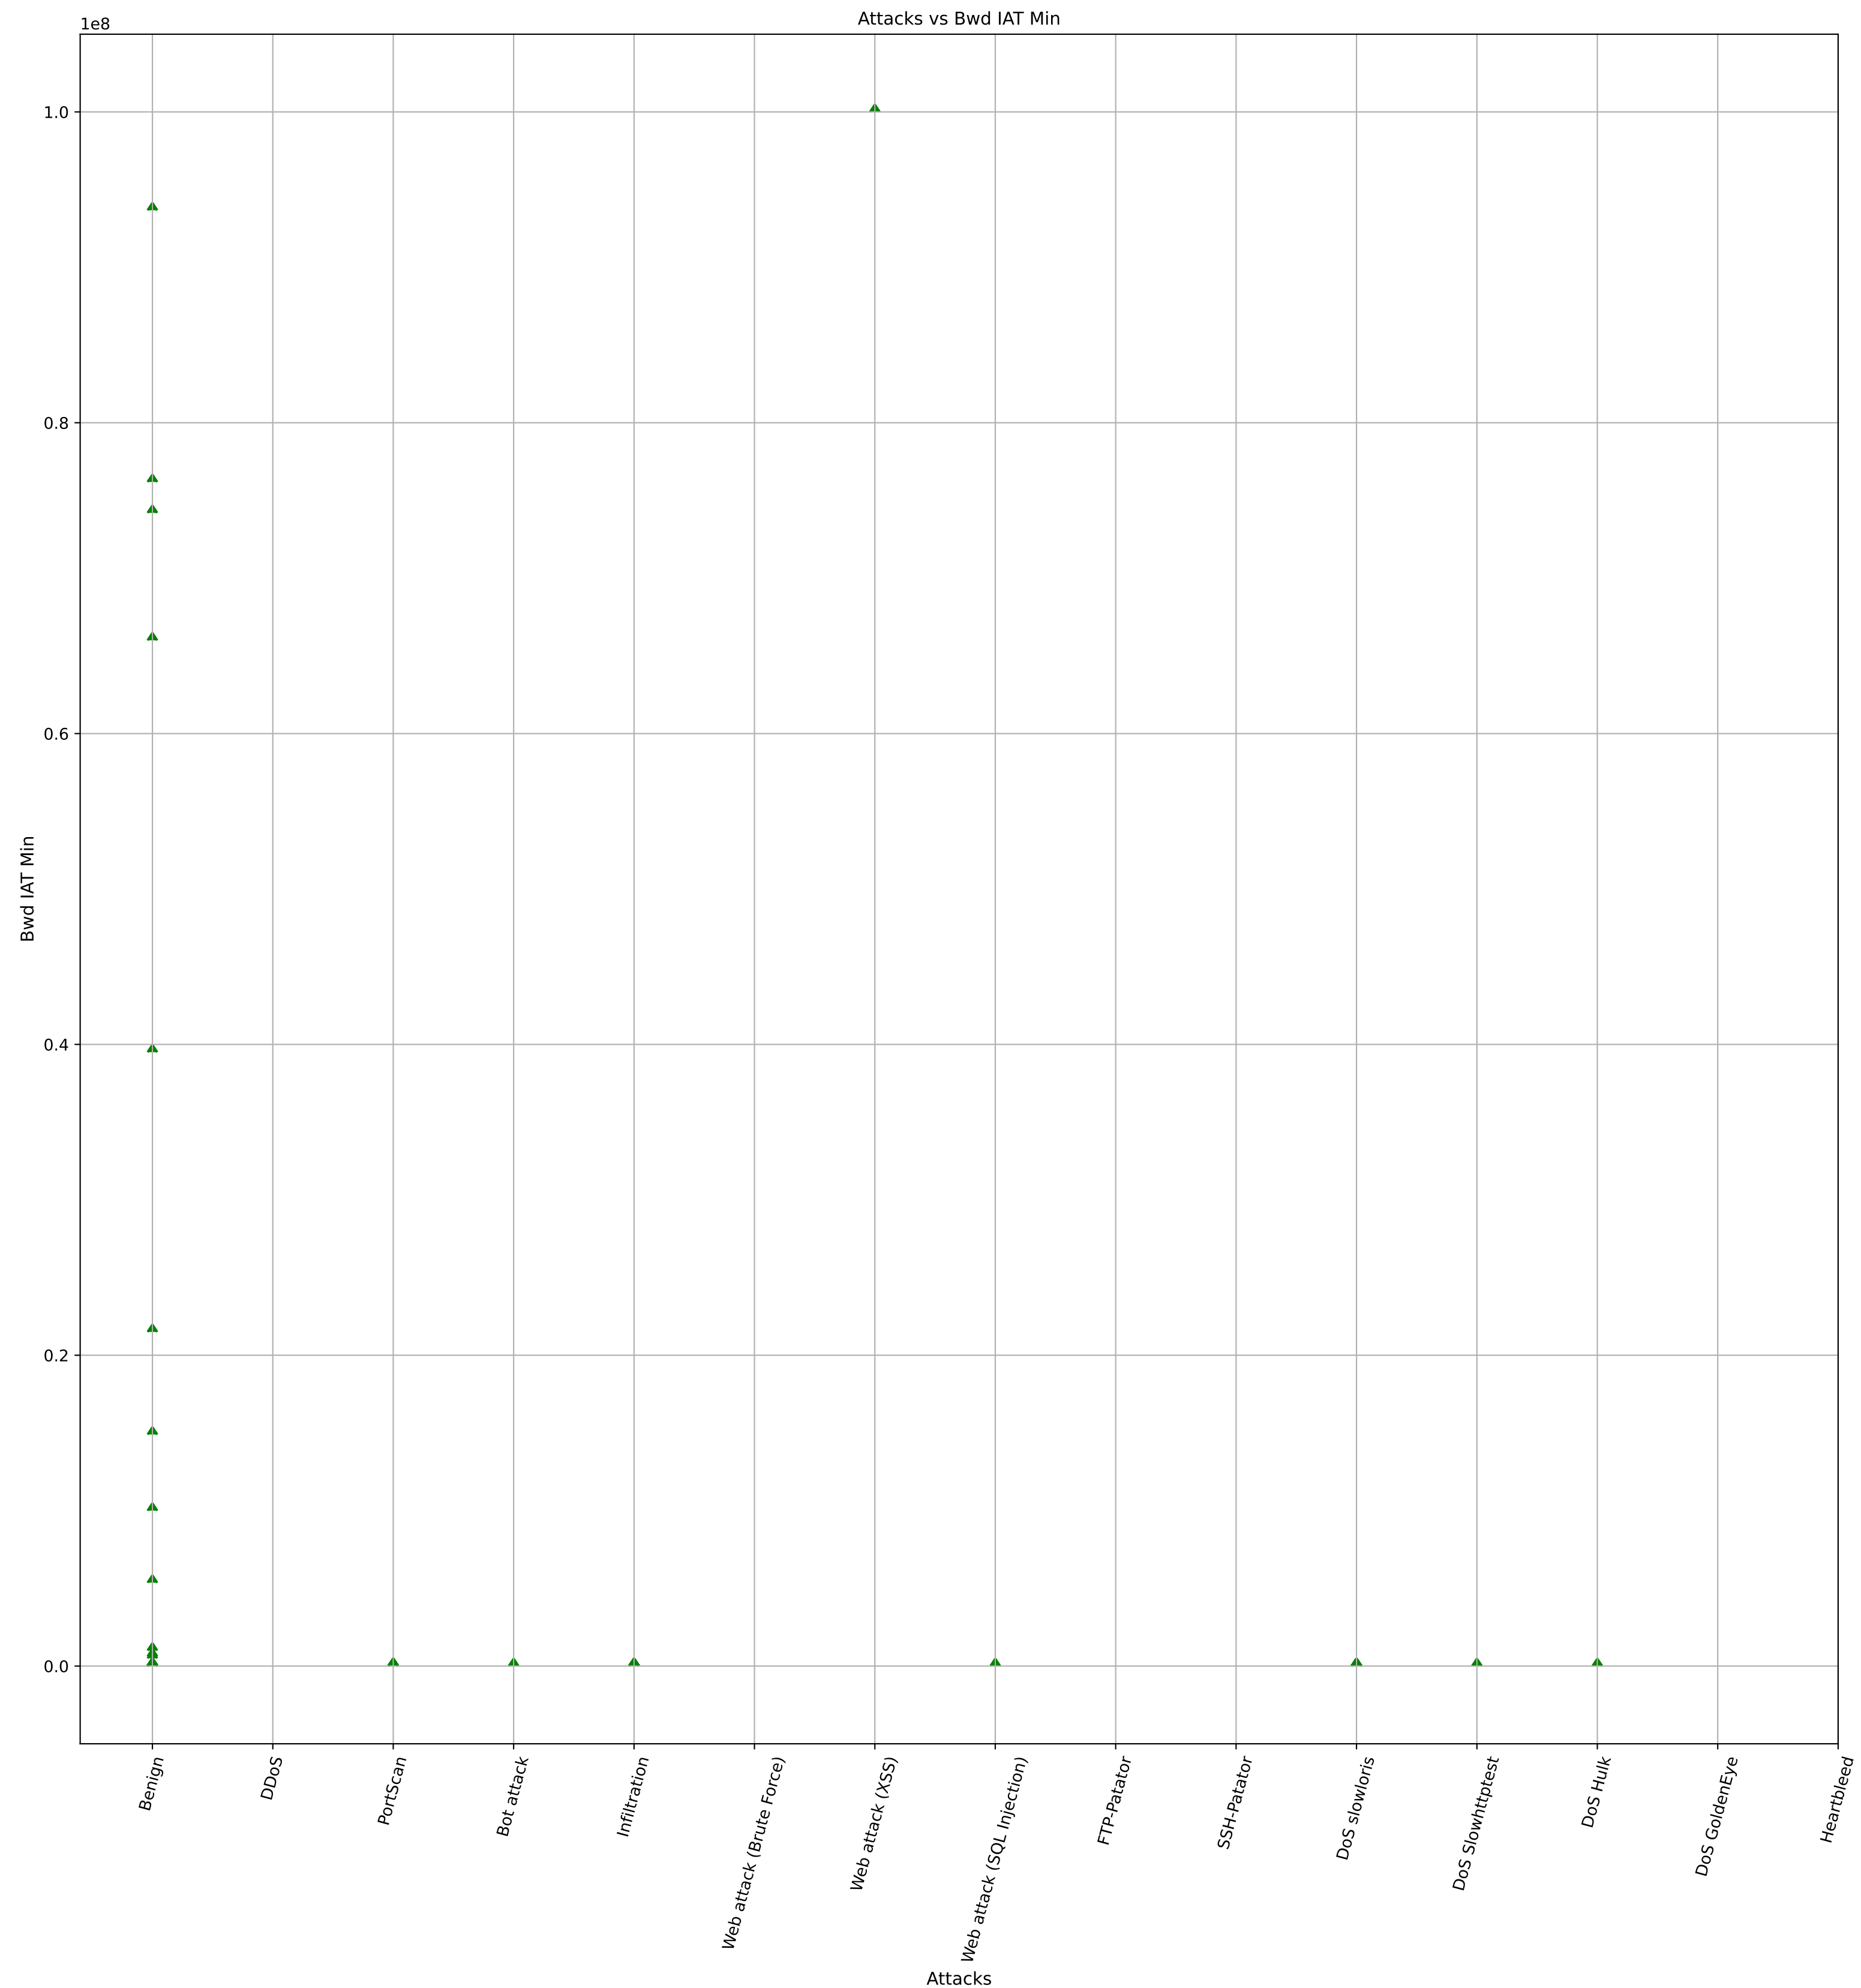


The most common value (mode) of Fwd PSH Flags is 0

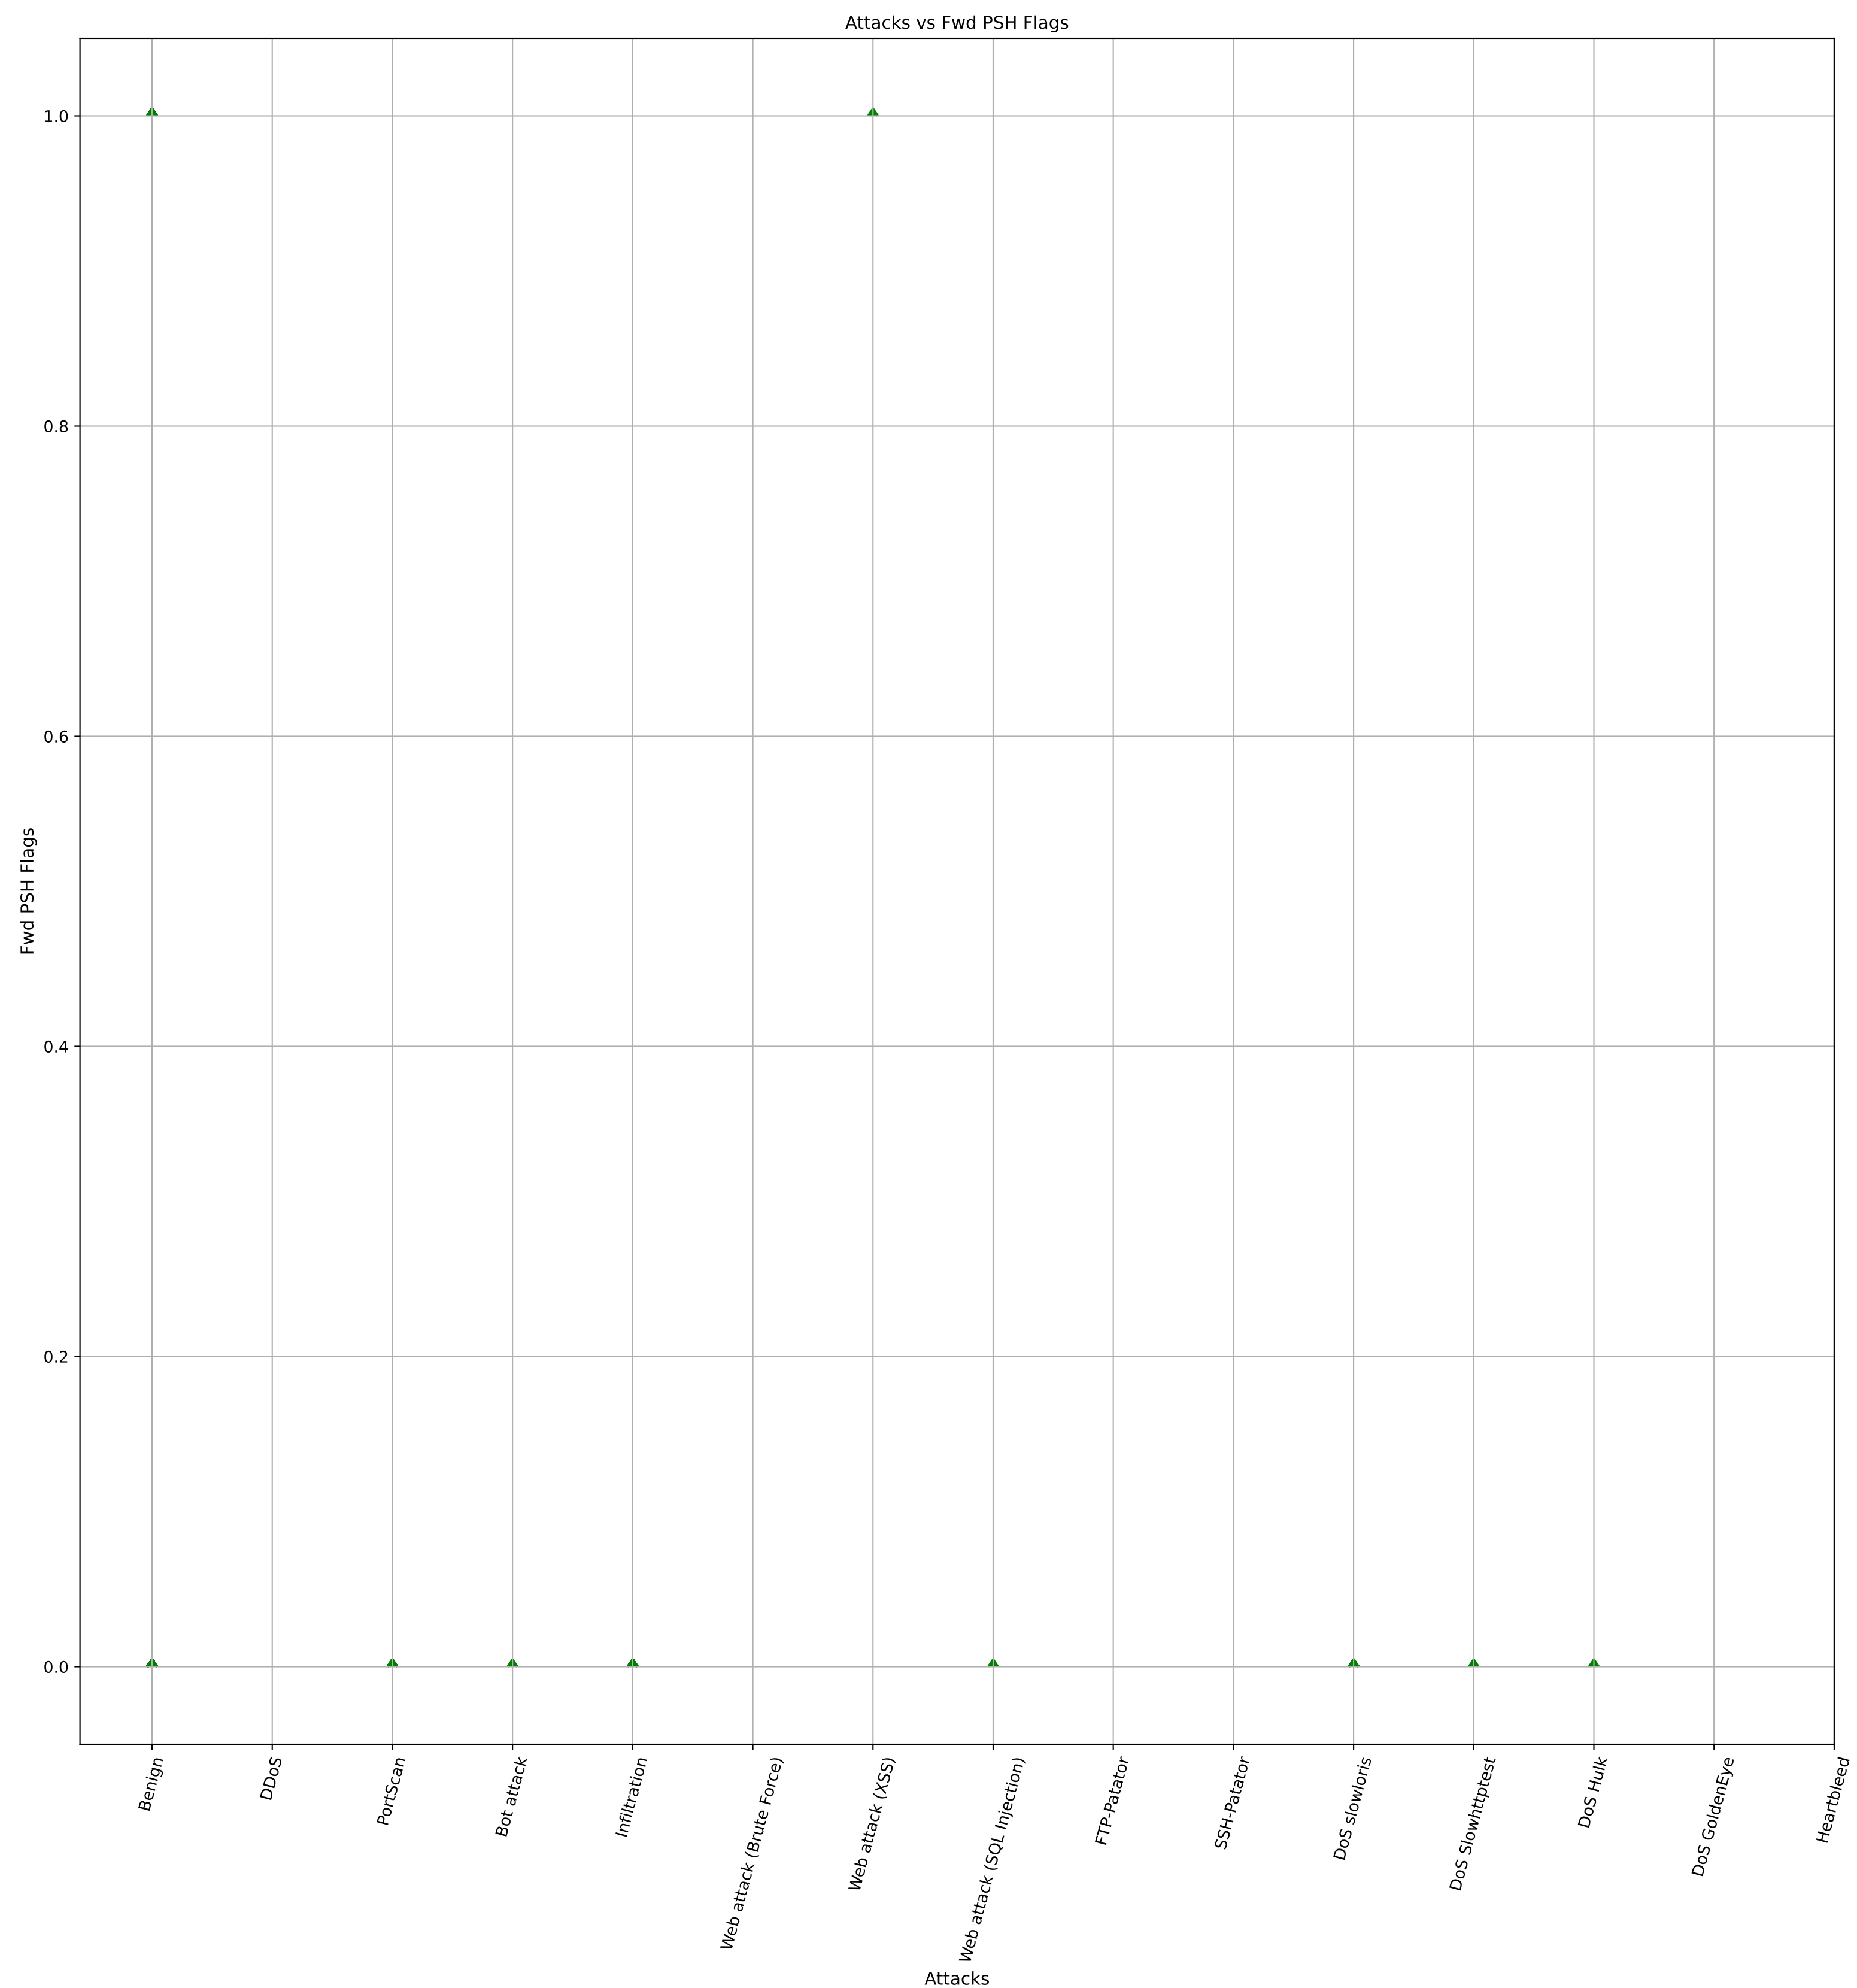


The most common value (mode) of Bwd PSH Flags is 0

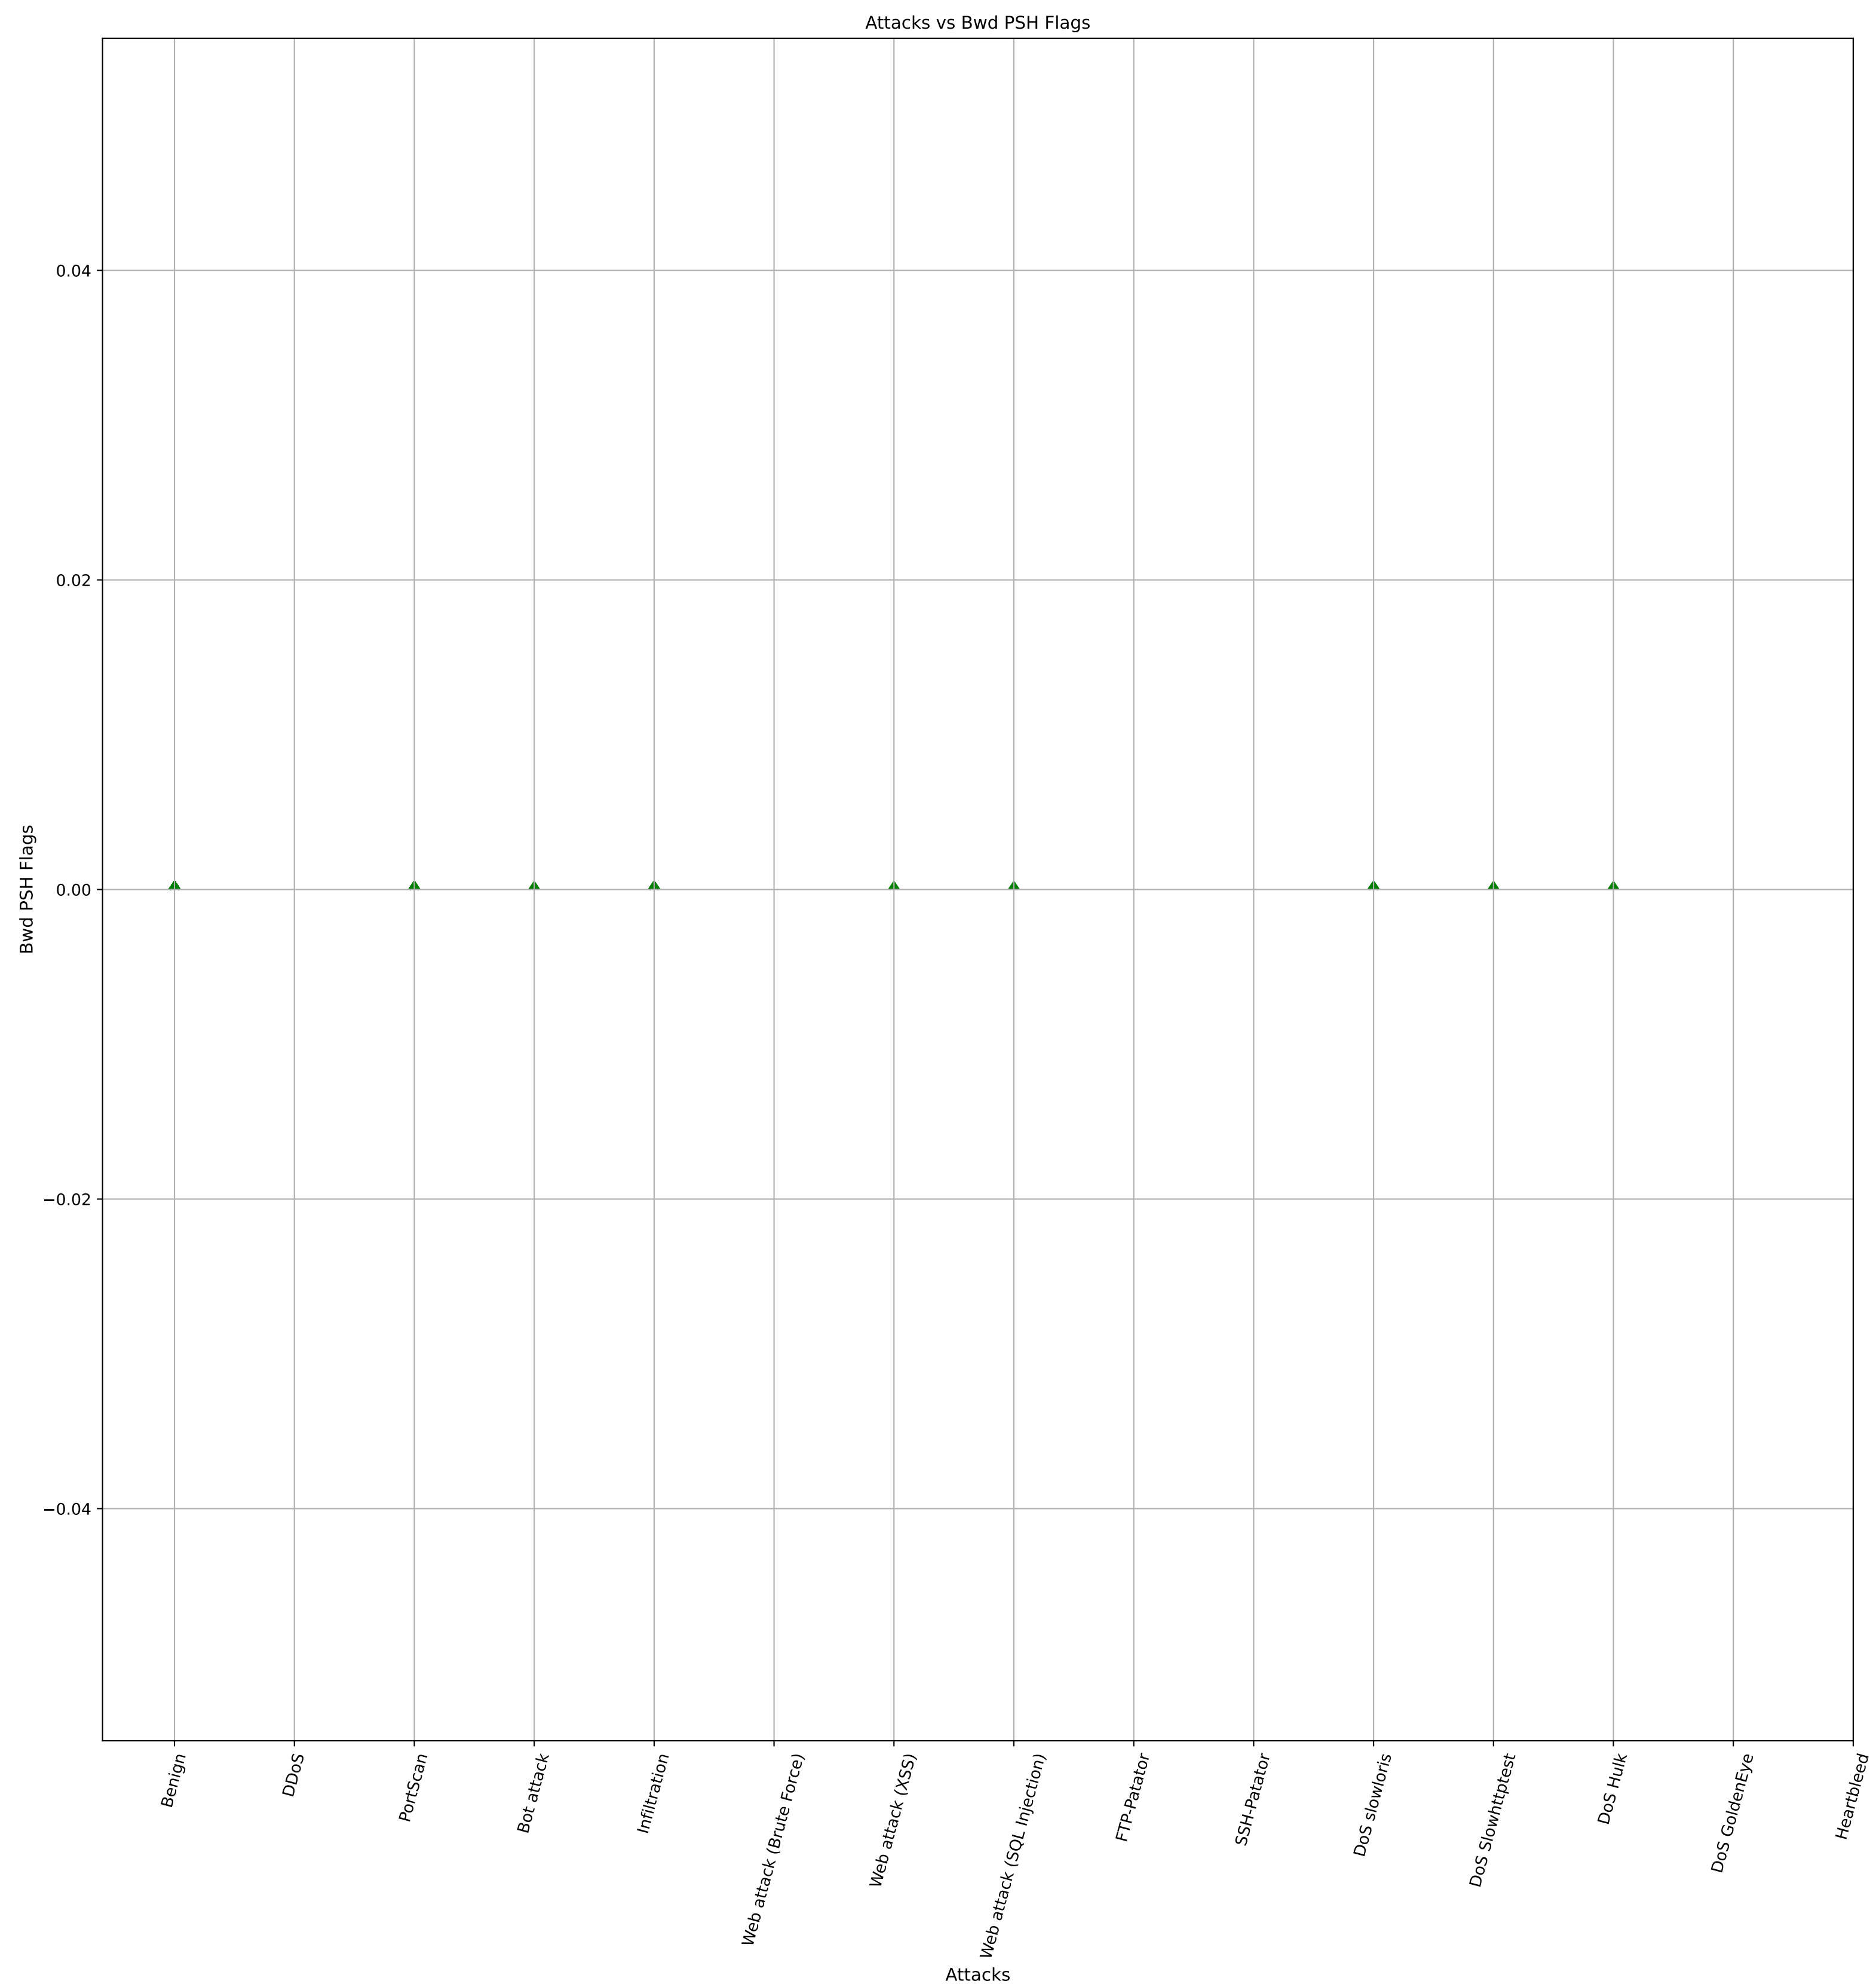


The most common value (mode) of Fwd URG Flags is 0

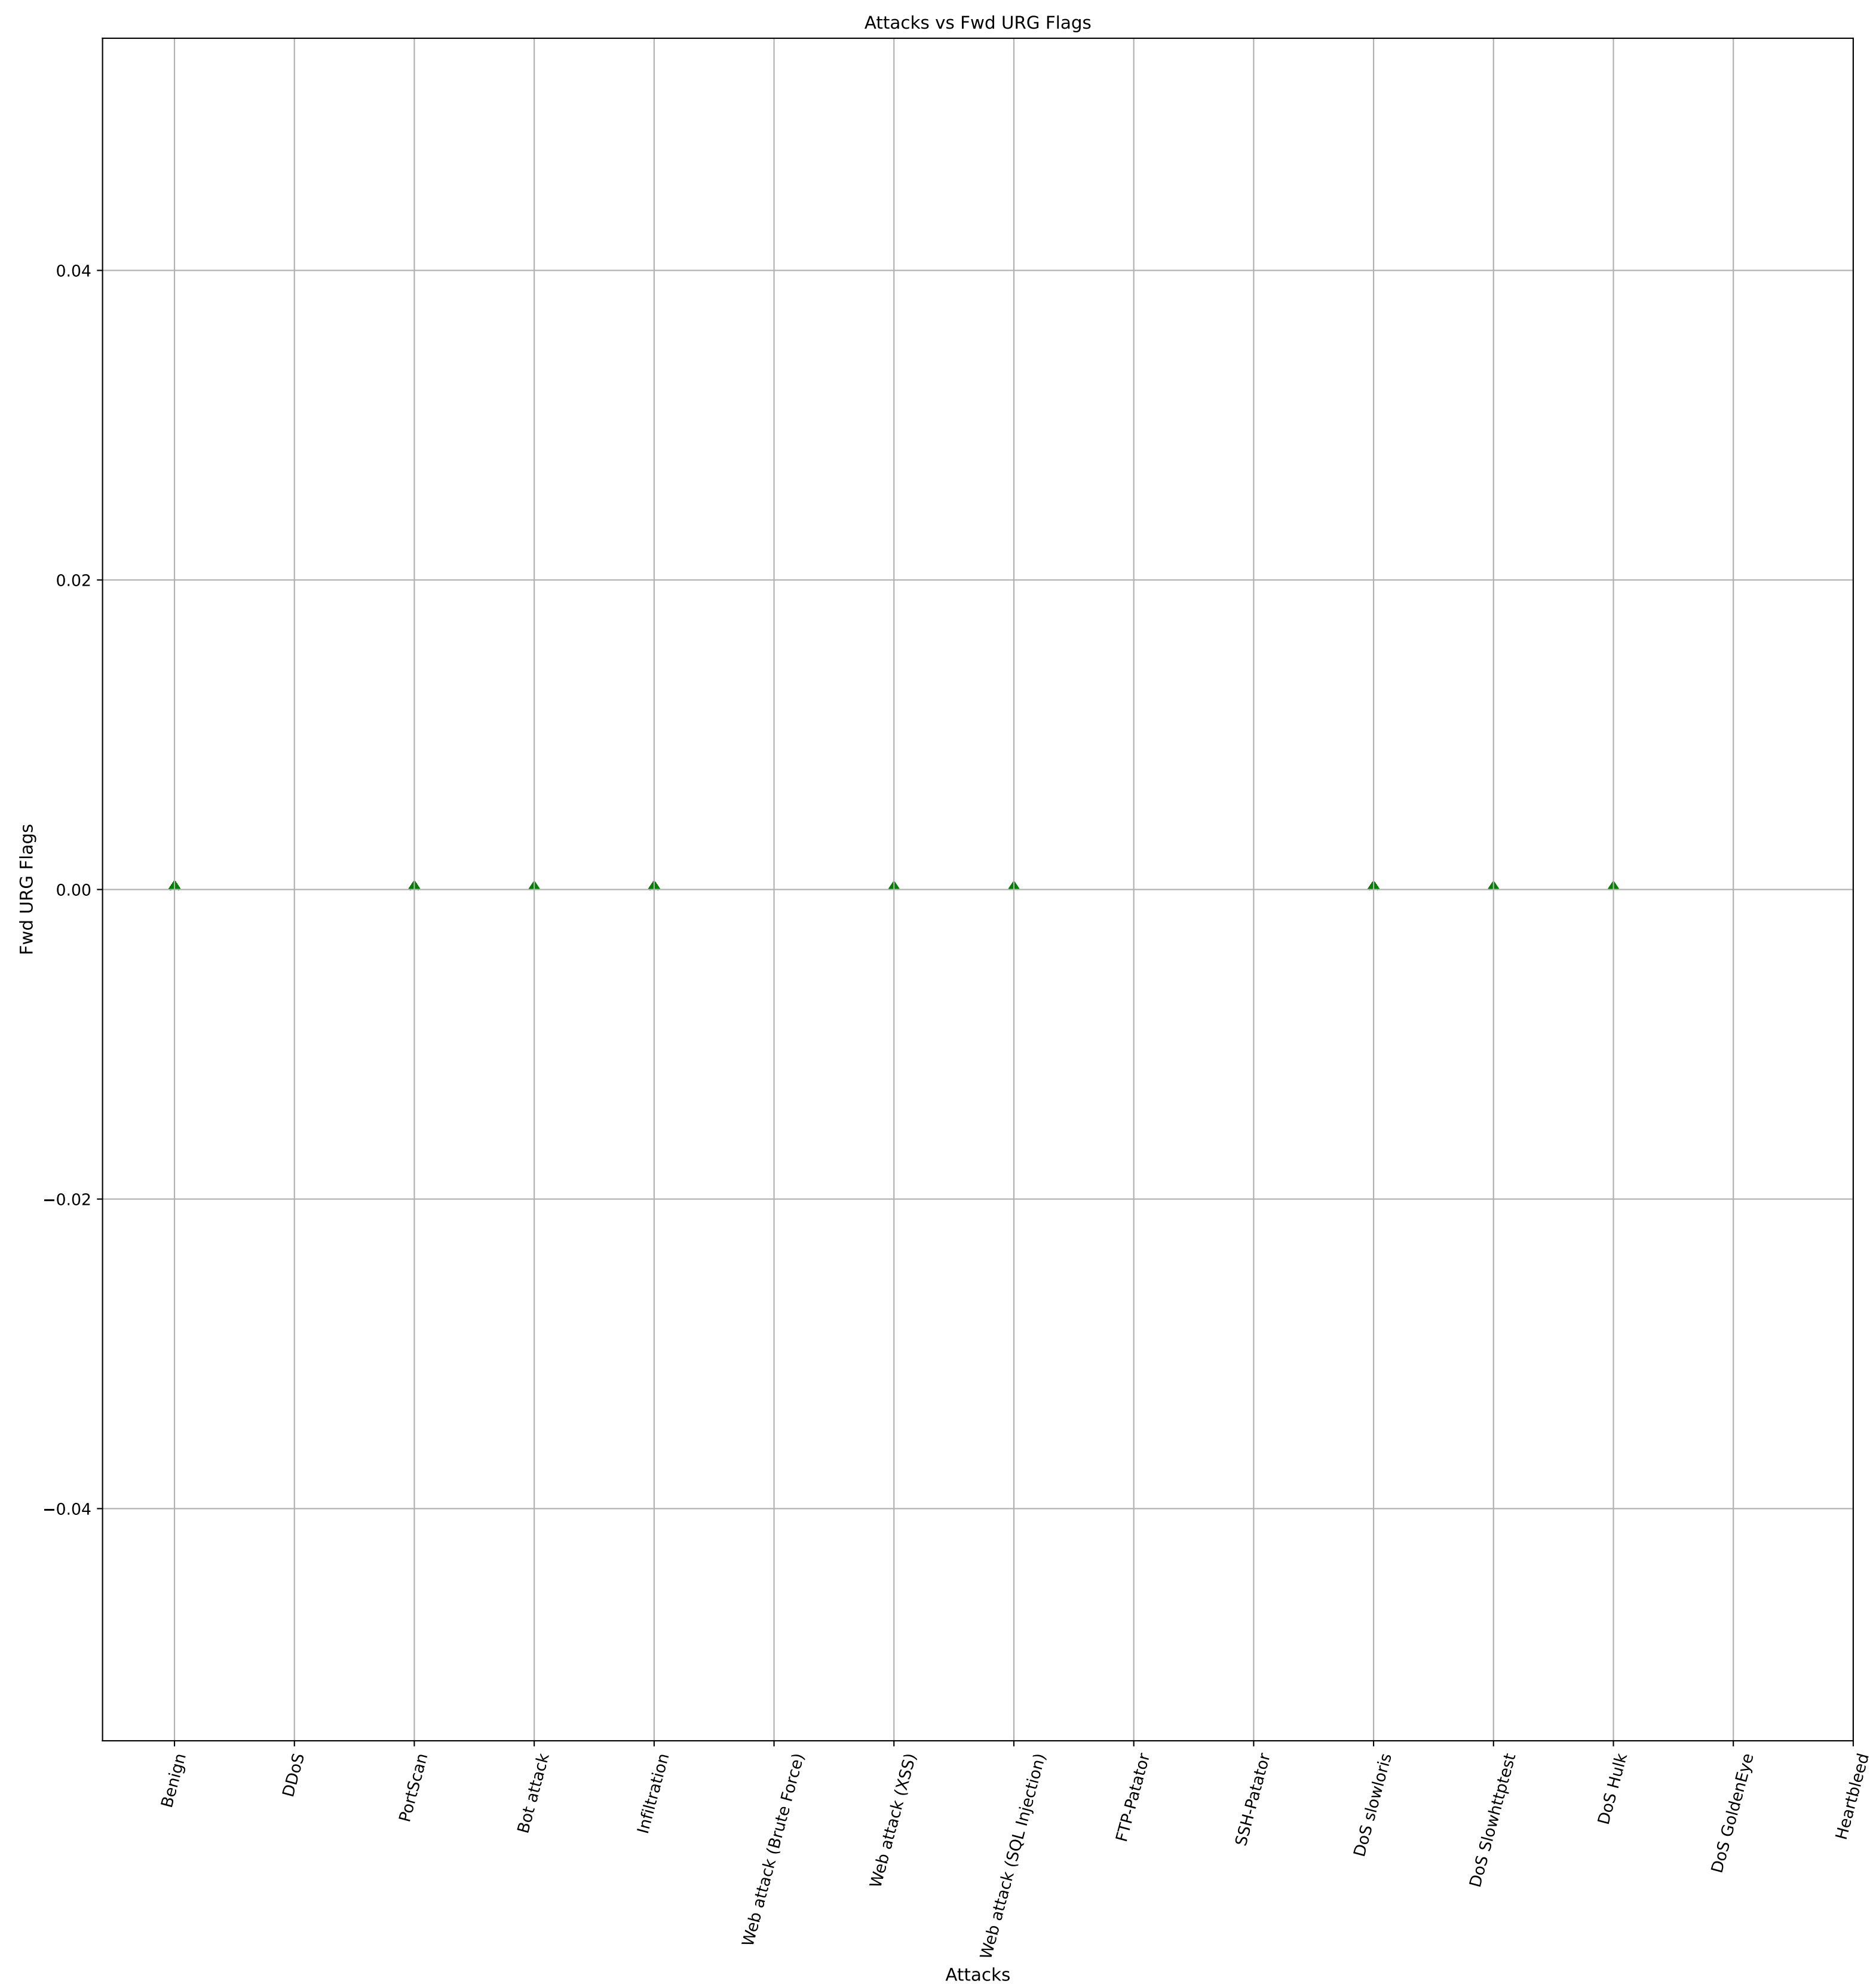


The most common value (mode) of Bwd URG Flags is 0

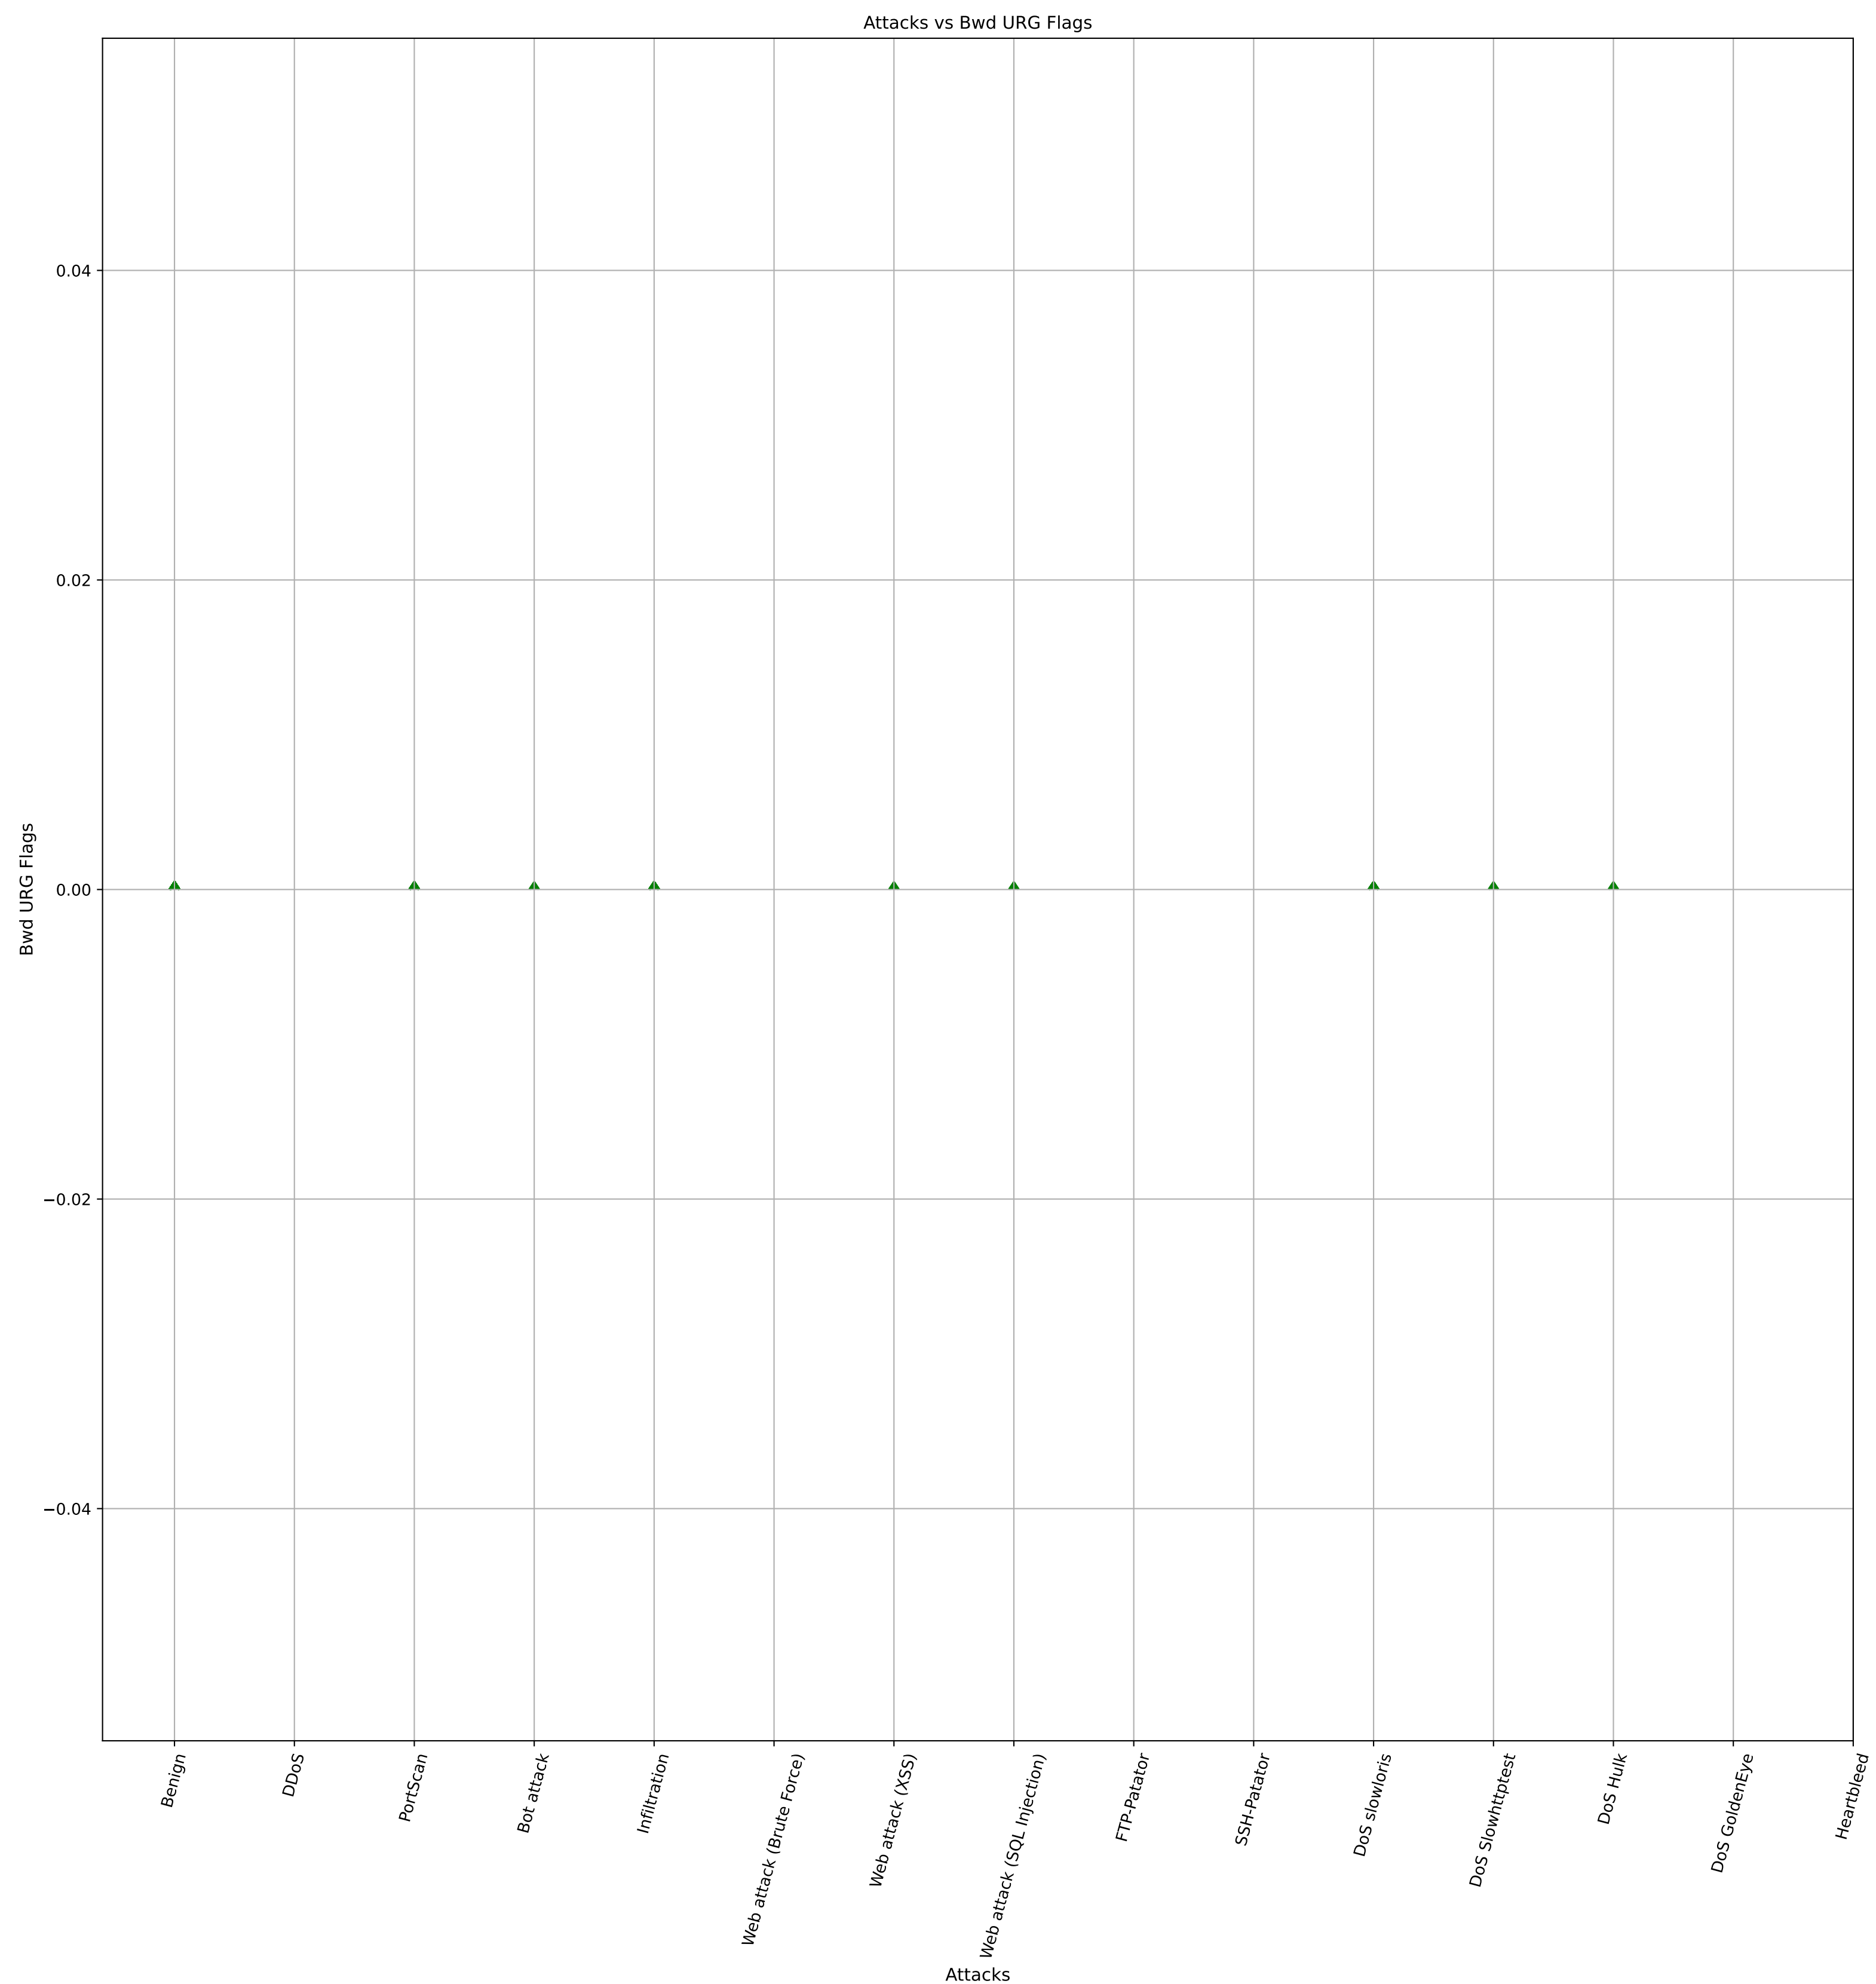


The most common value (mode) of Fwd Header Length is 64

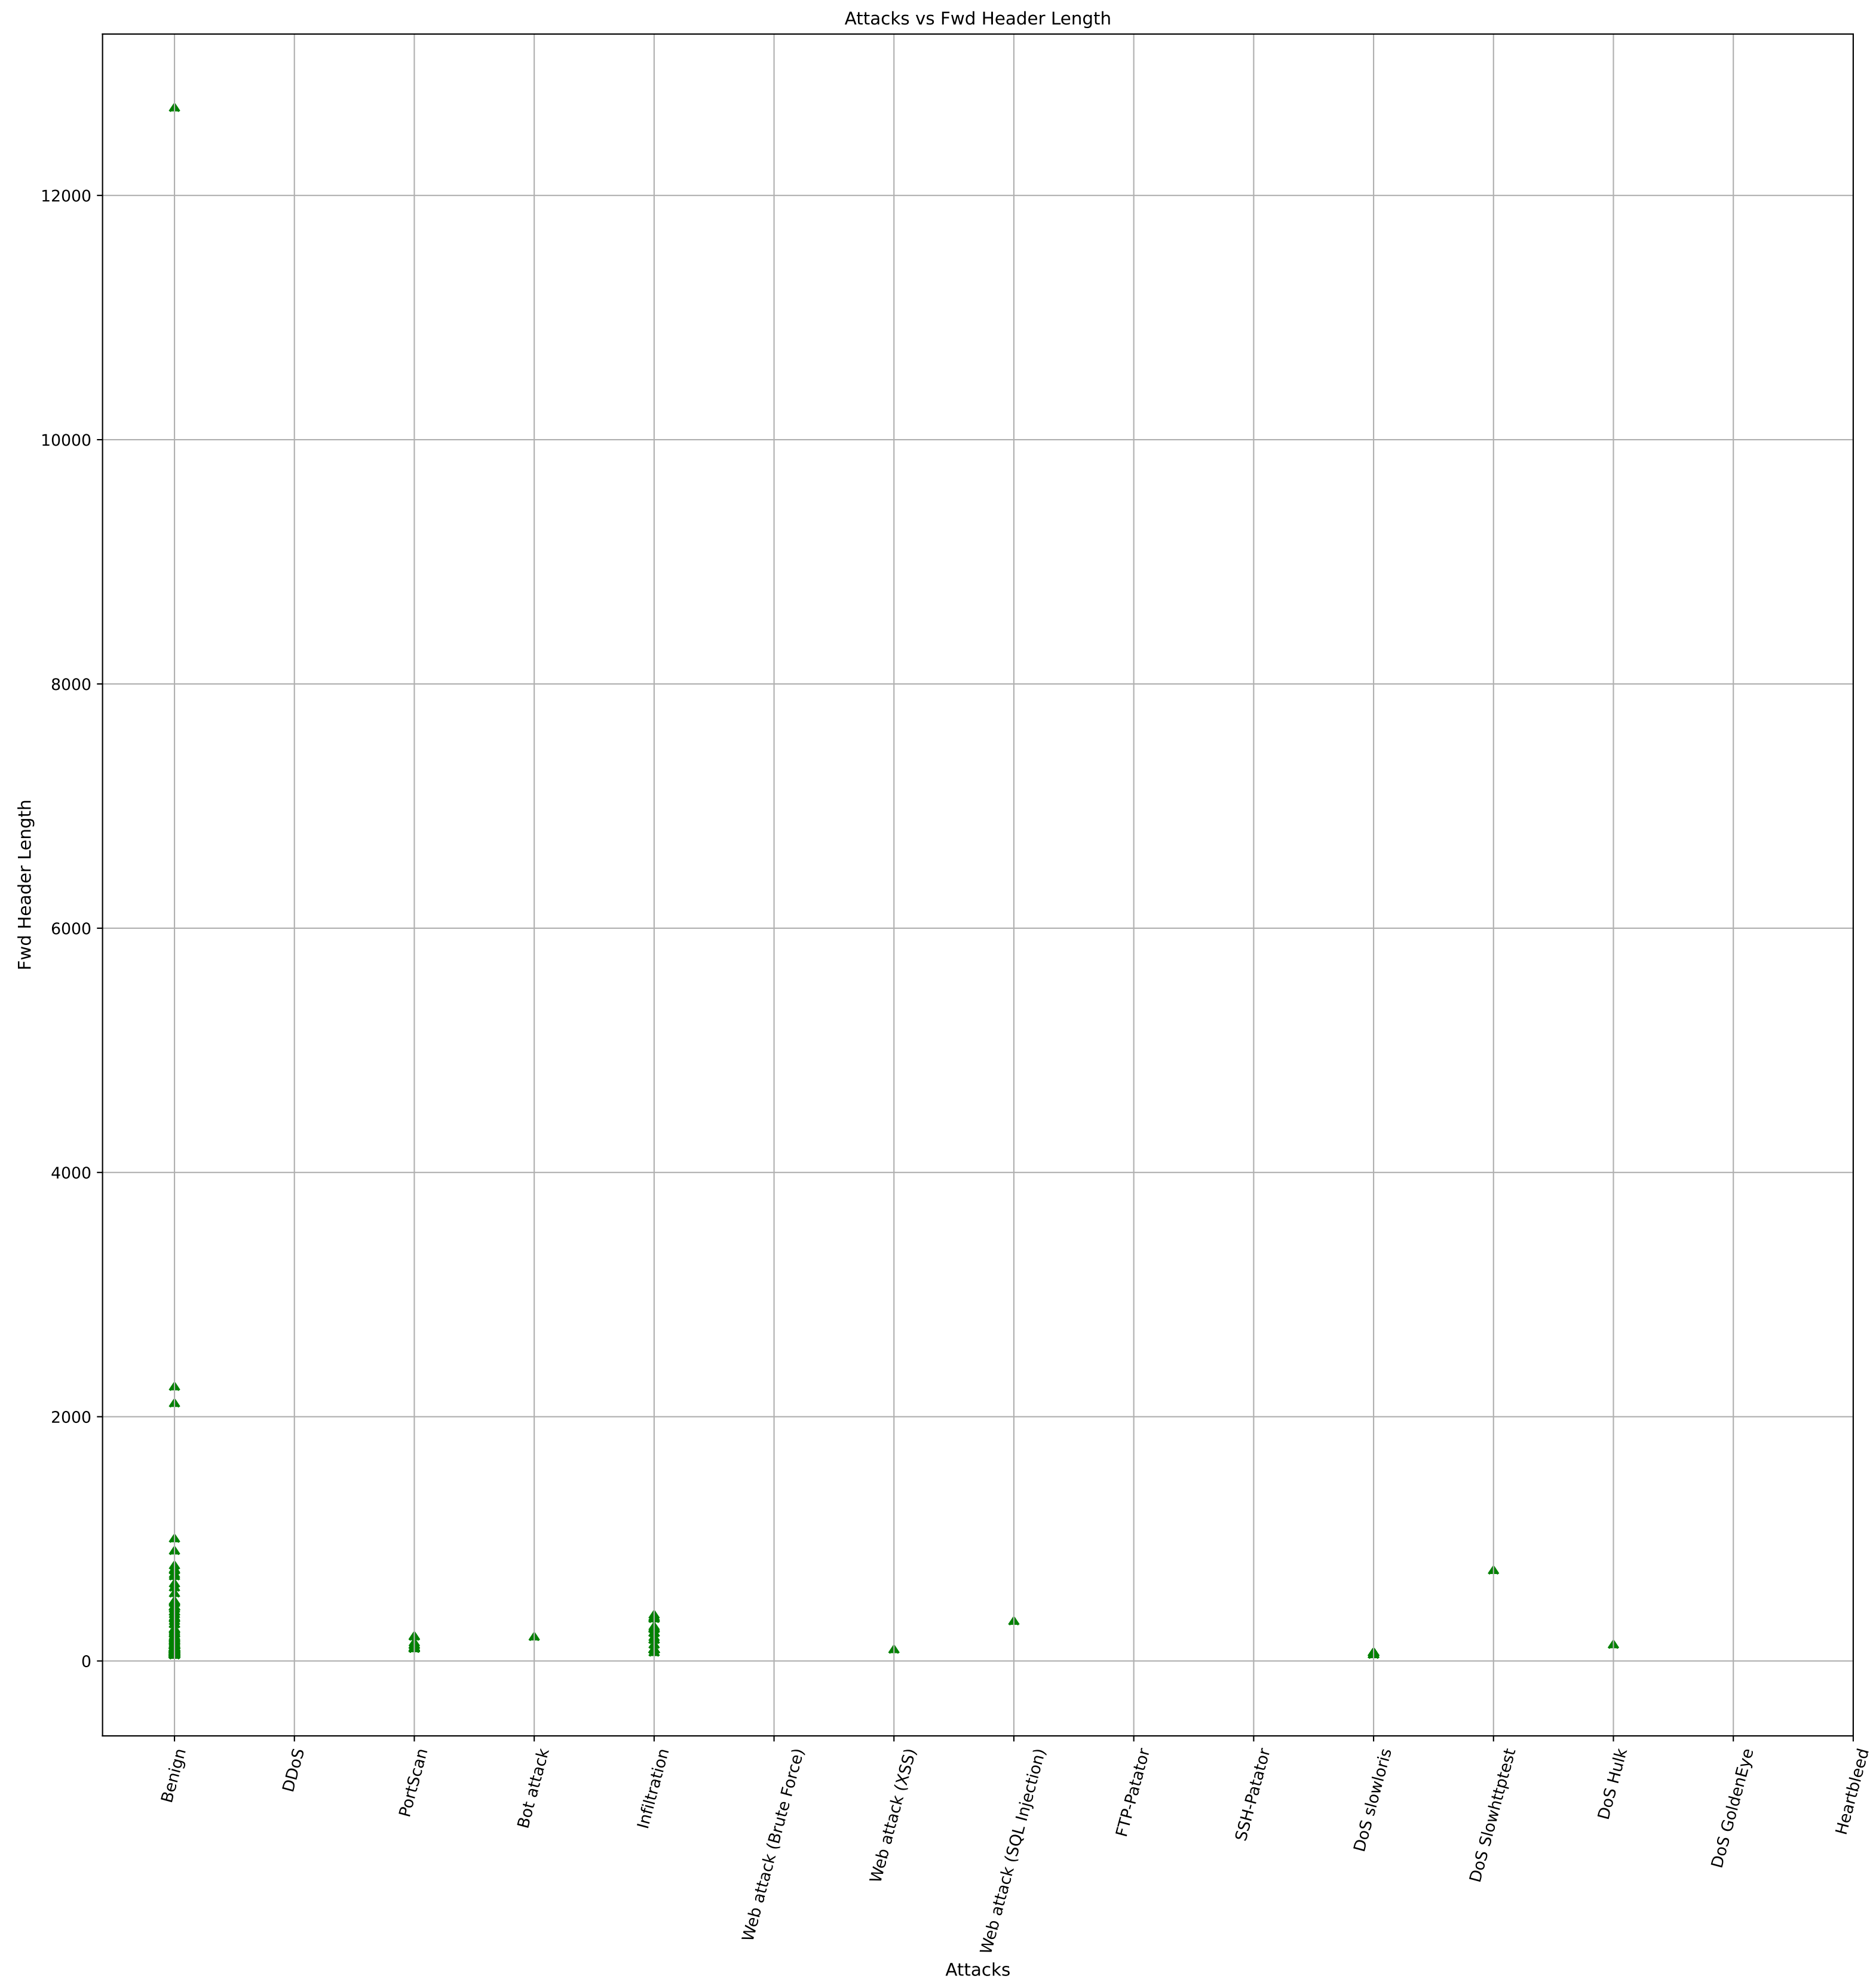


The most common value (mode) of Bwd Header Length is 0

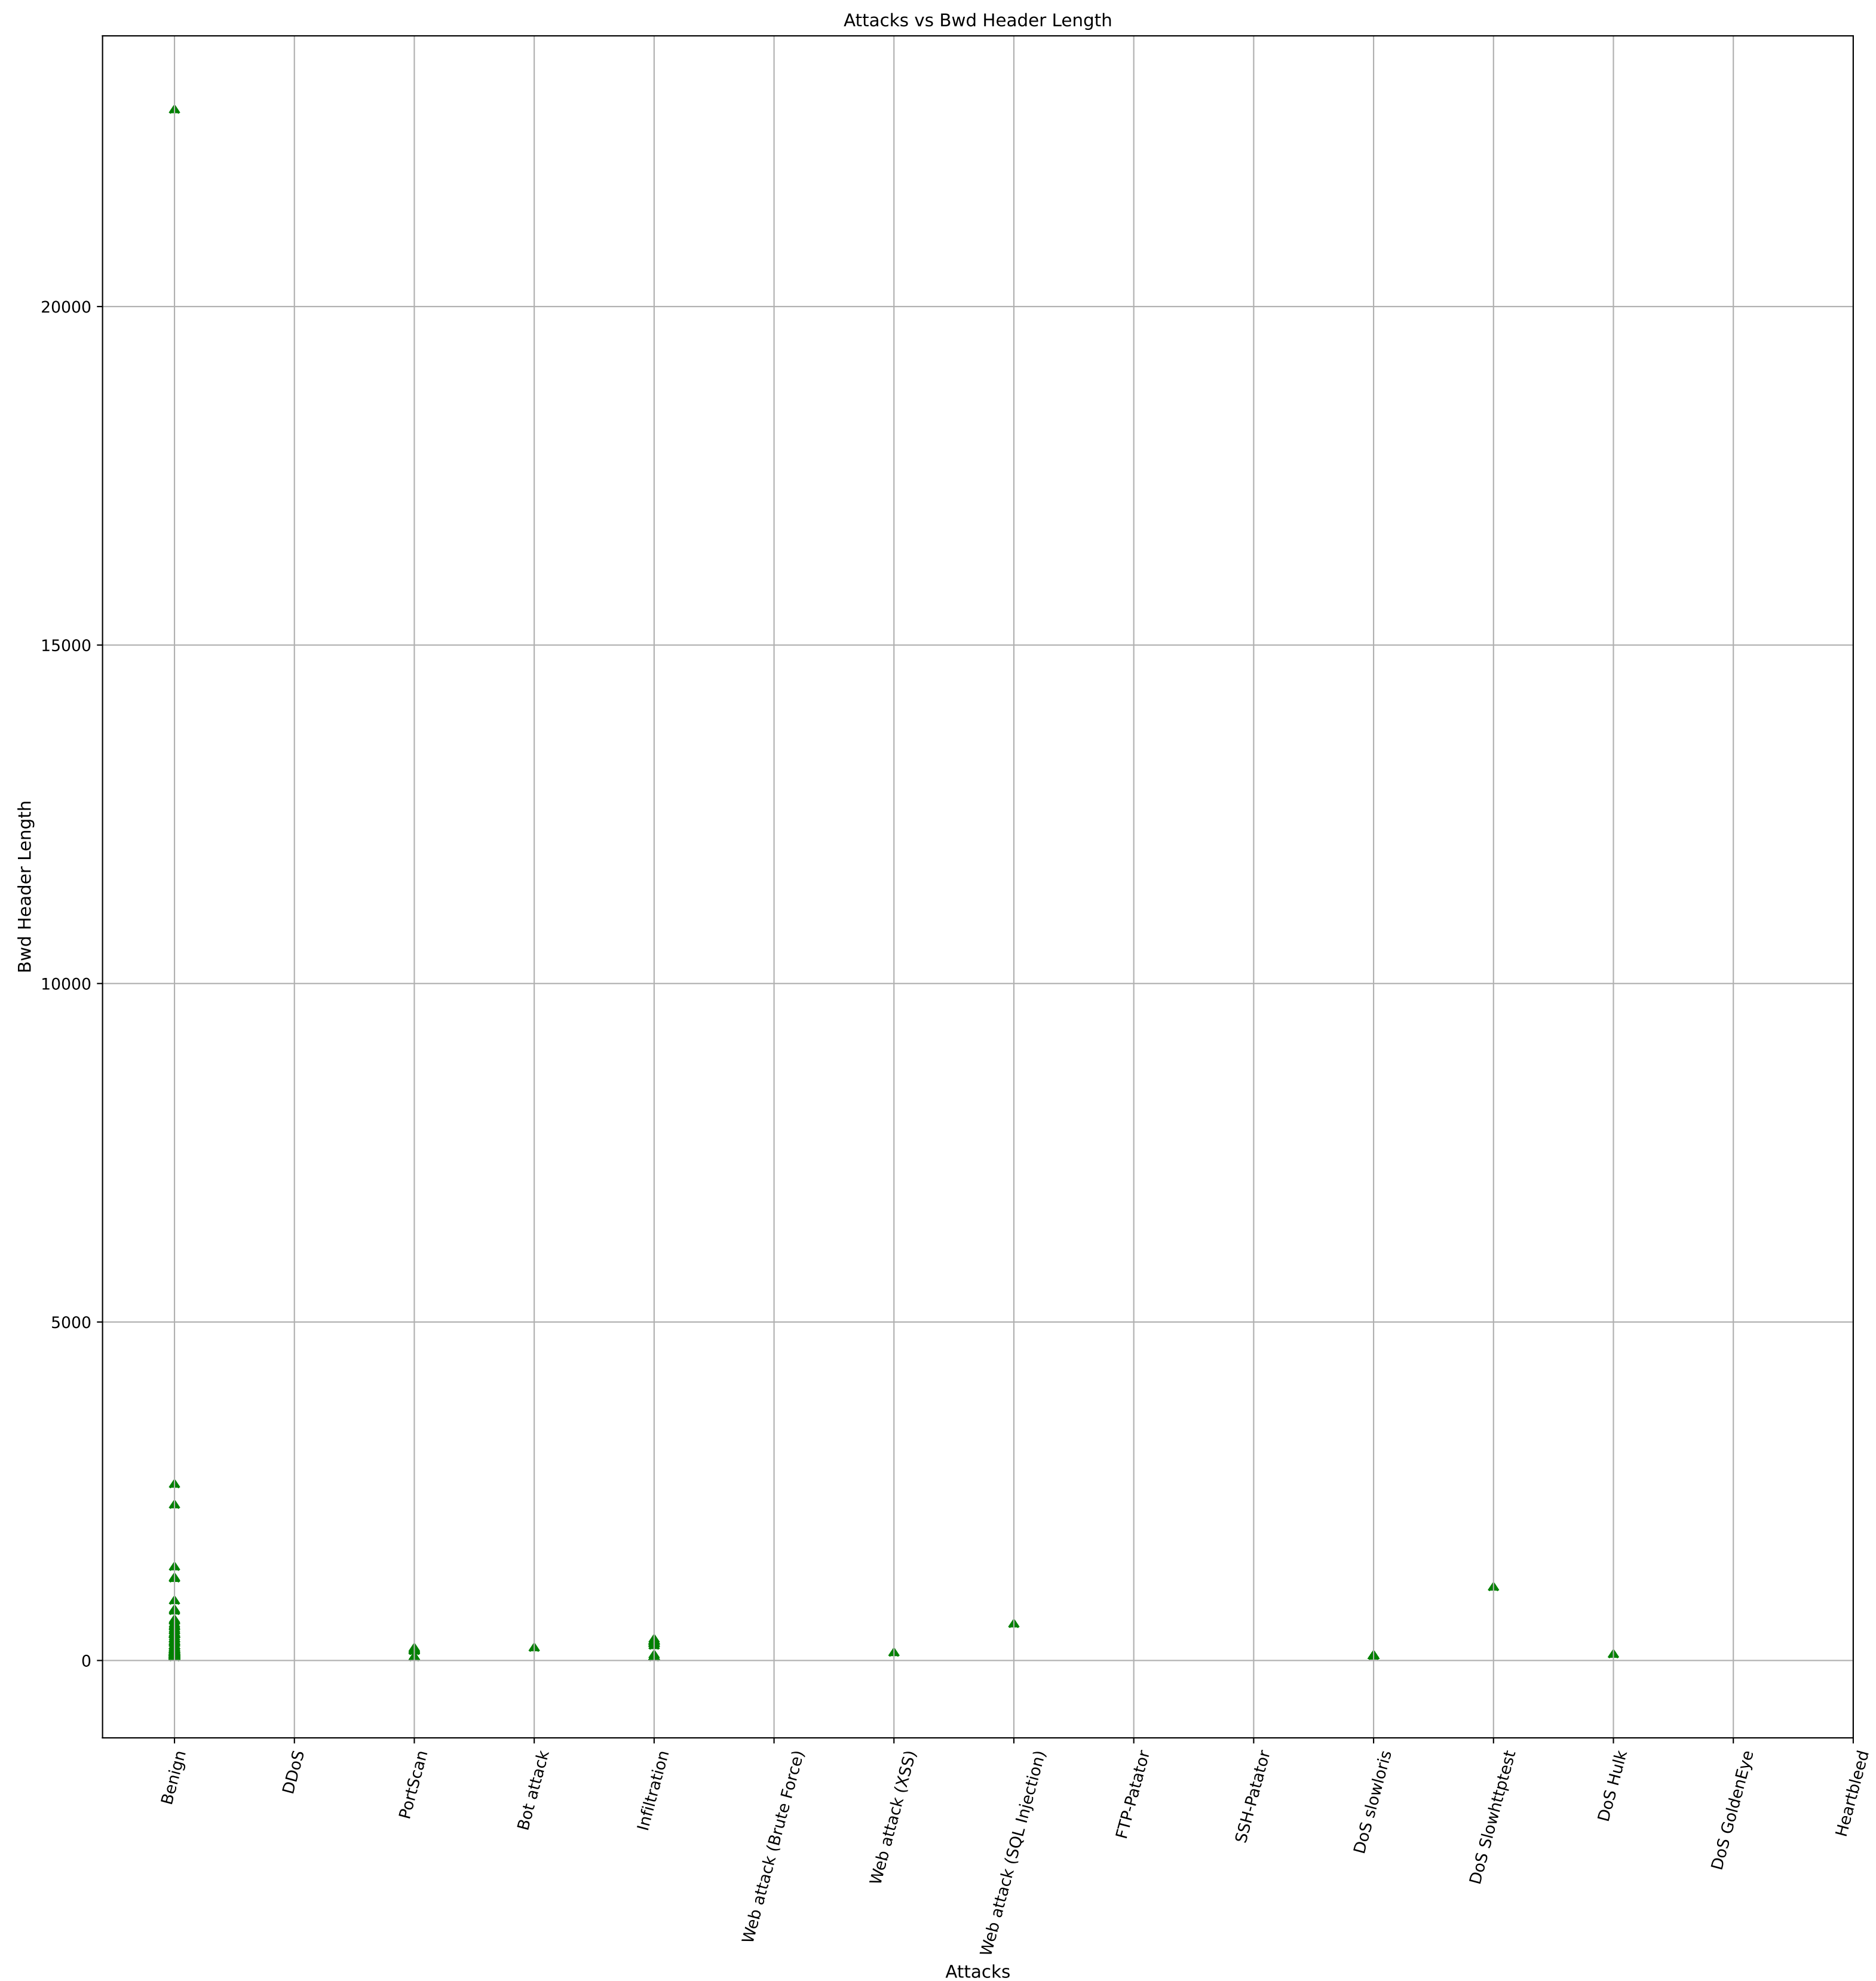


The most common value (mode) of Fwd Packets/s is 666666.6667

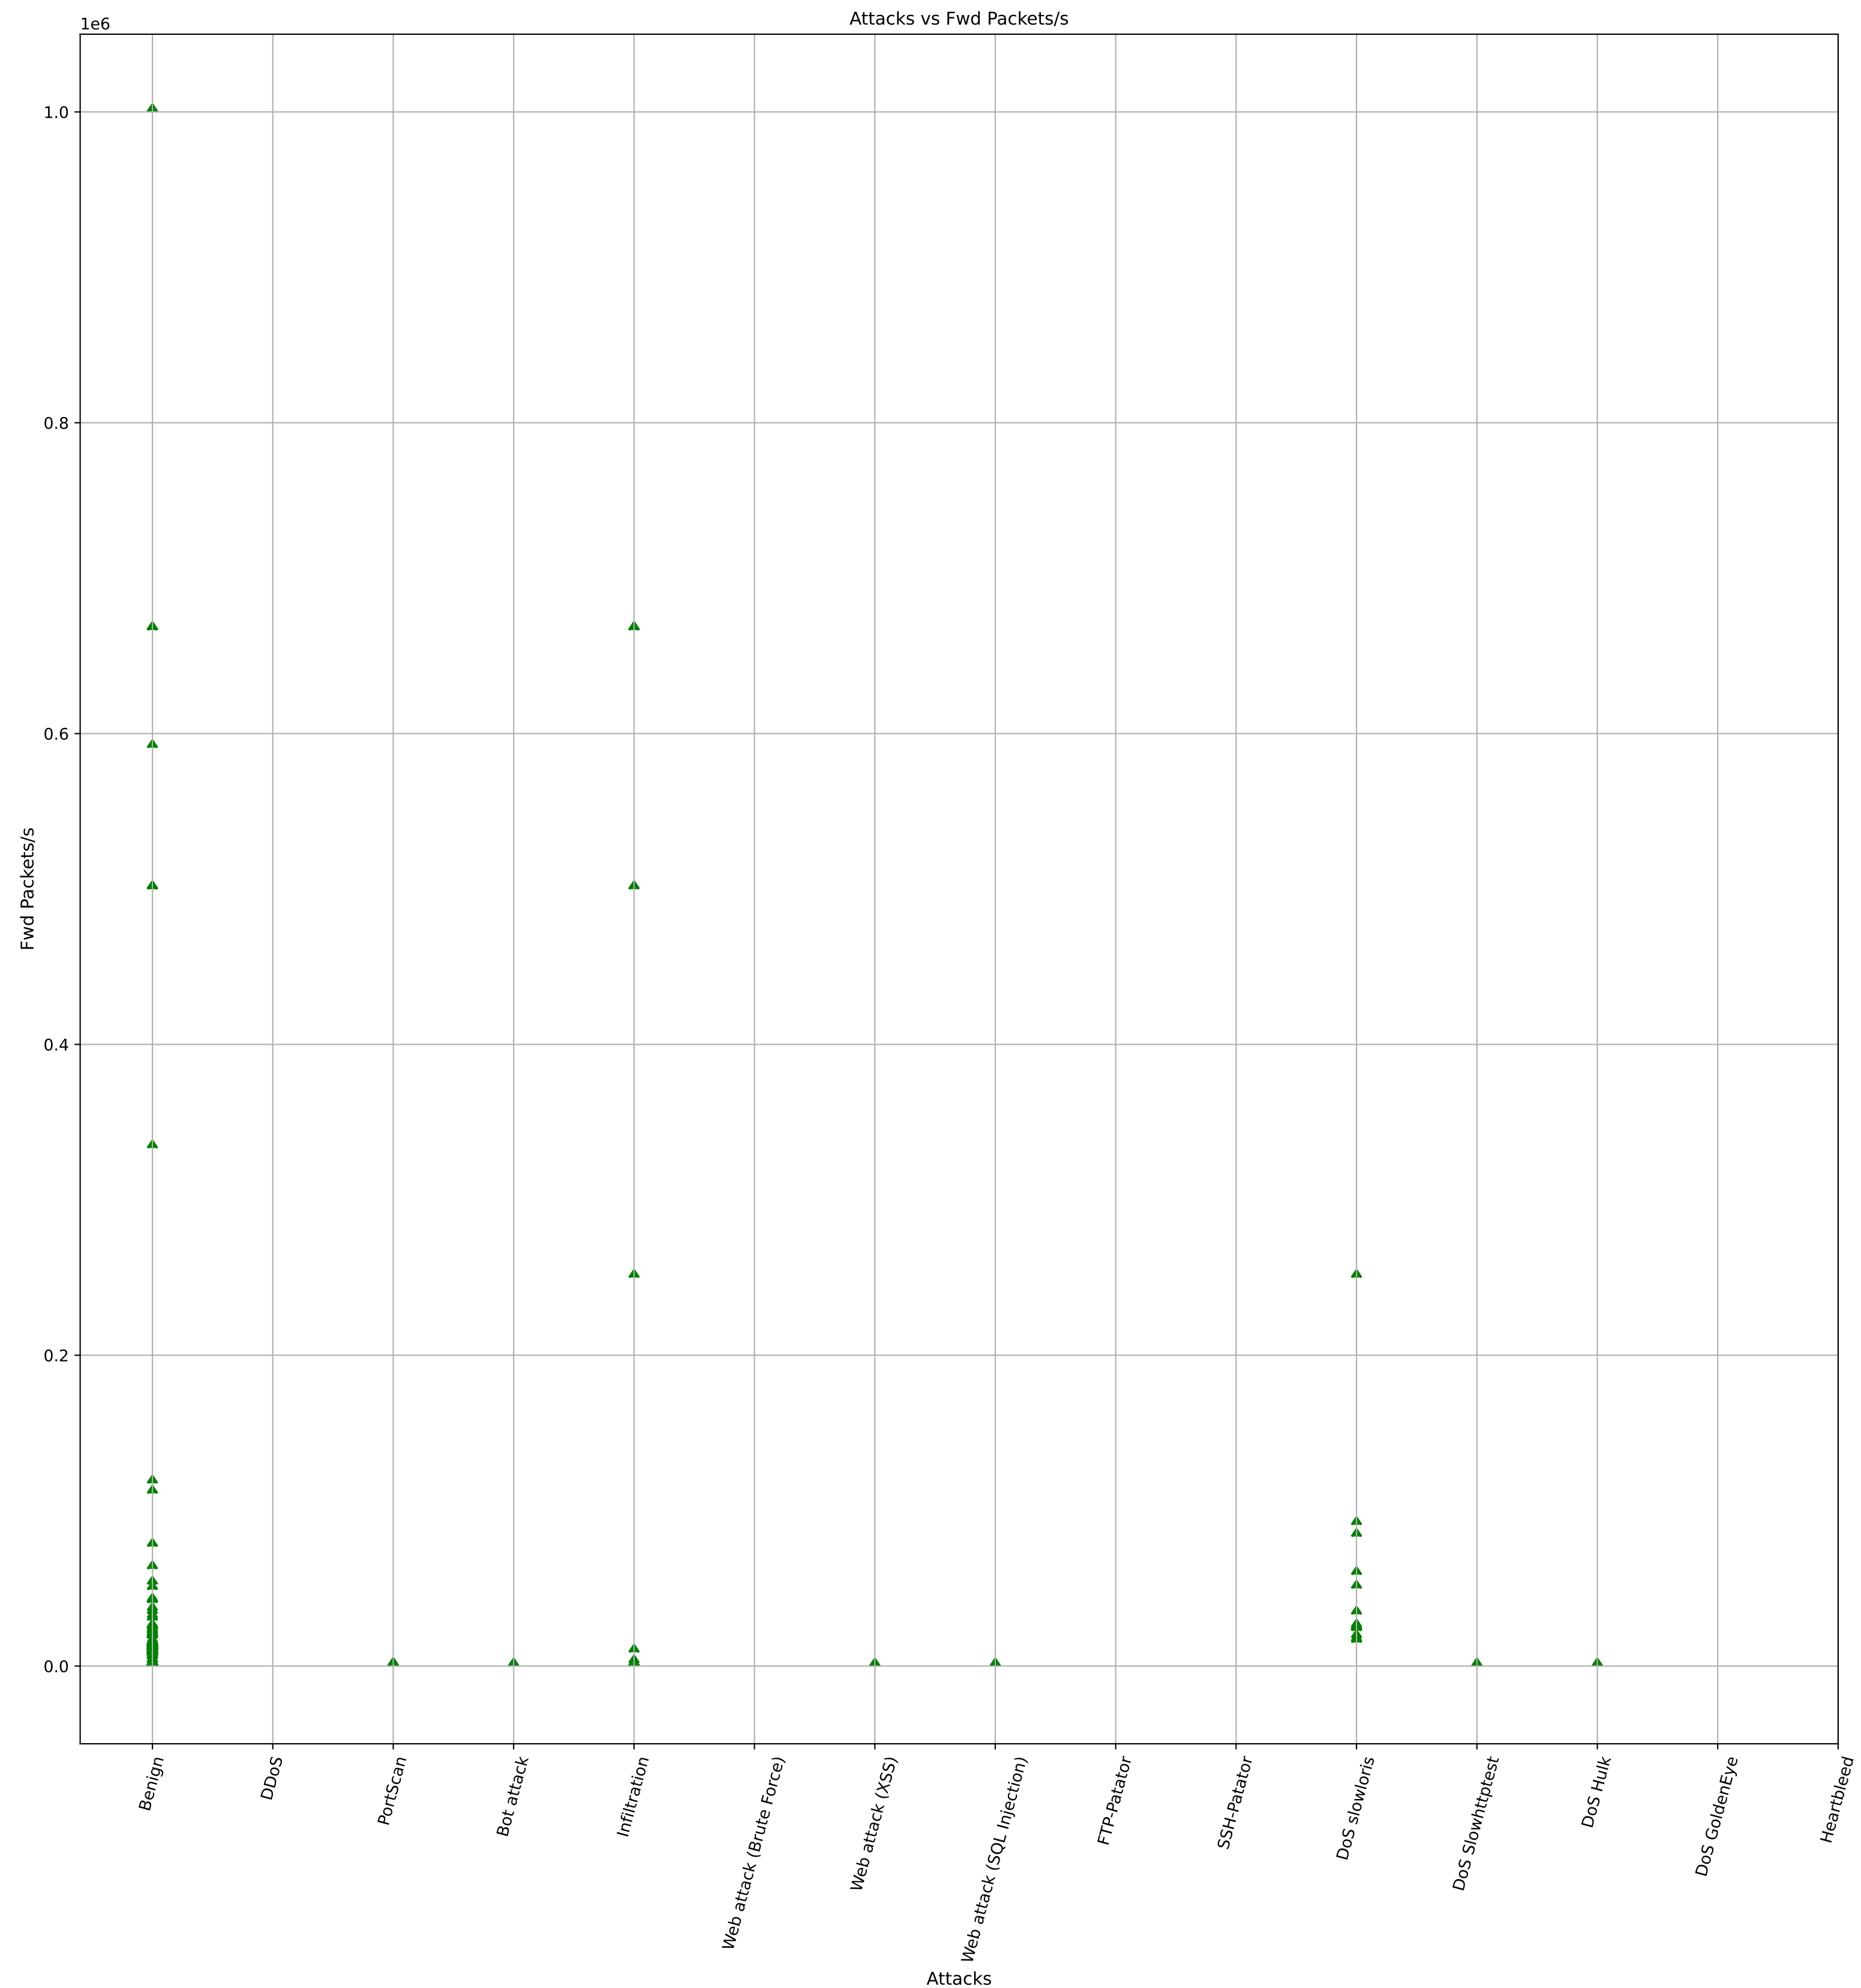


The most common value (mode) of Bwd Packets/s is 0.0

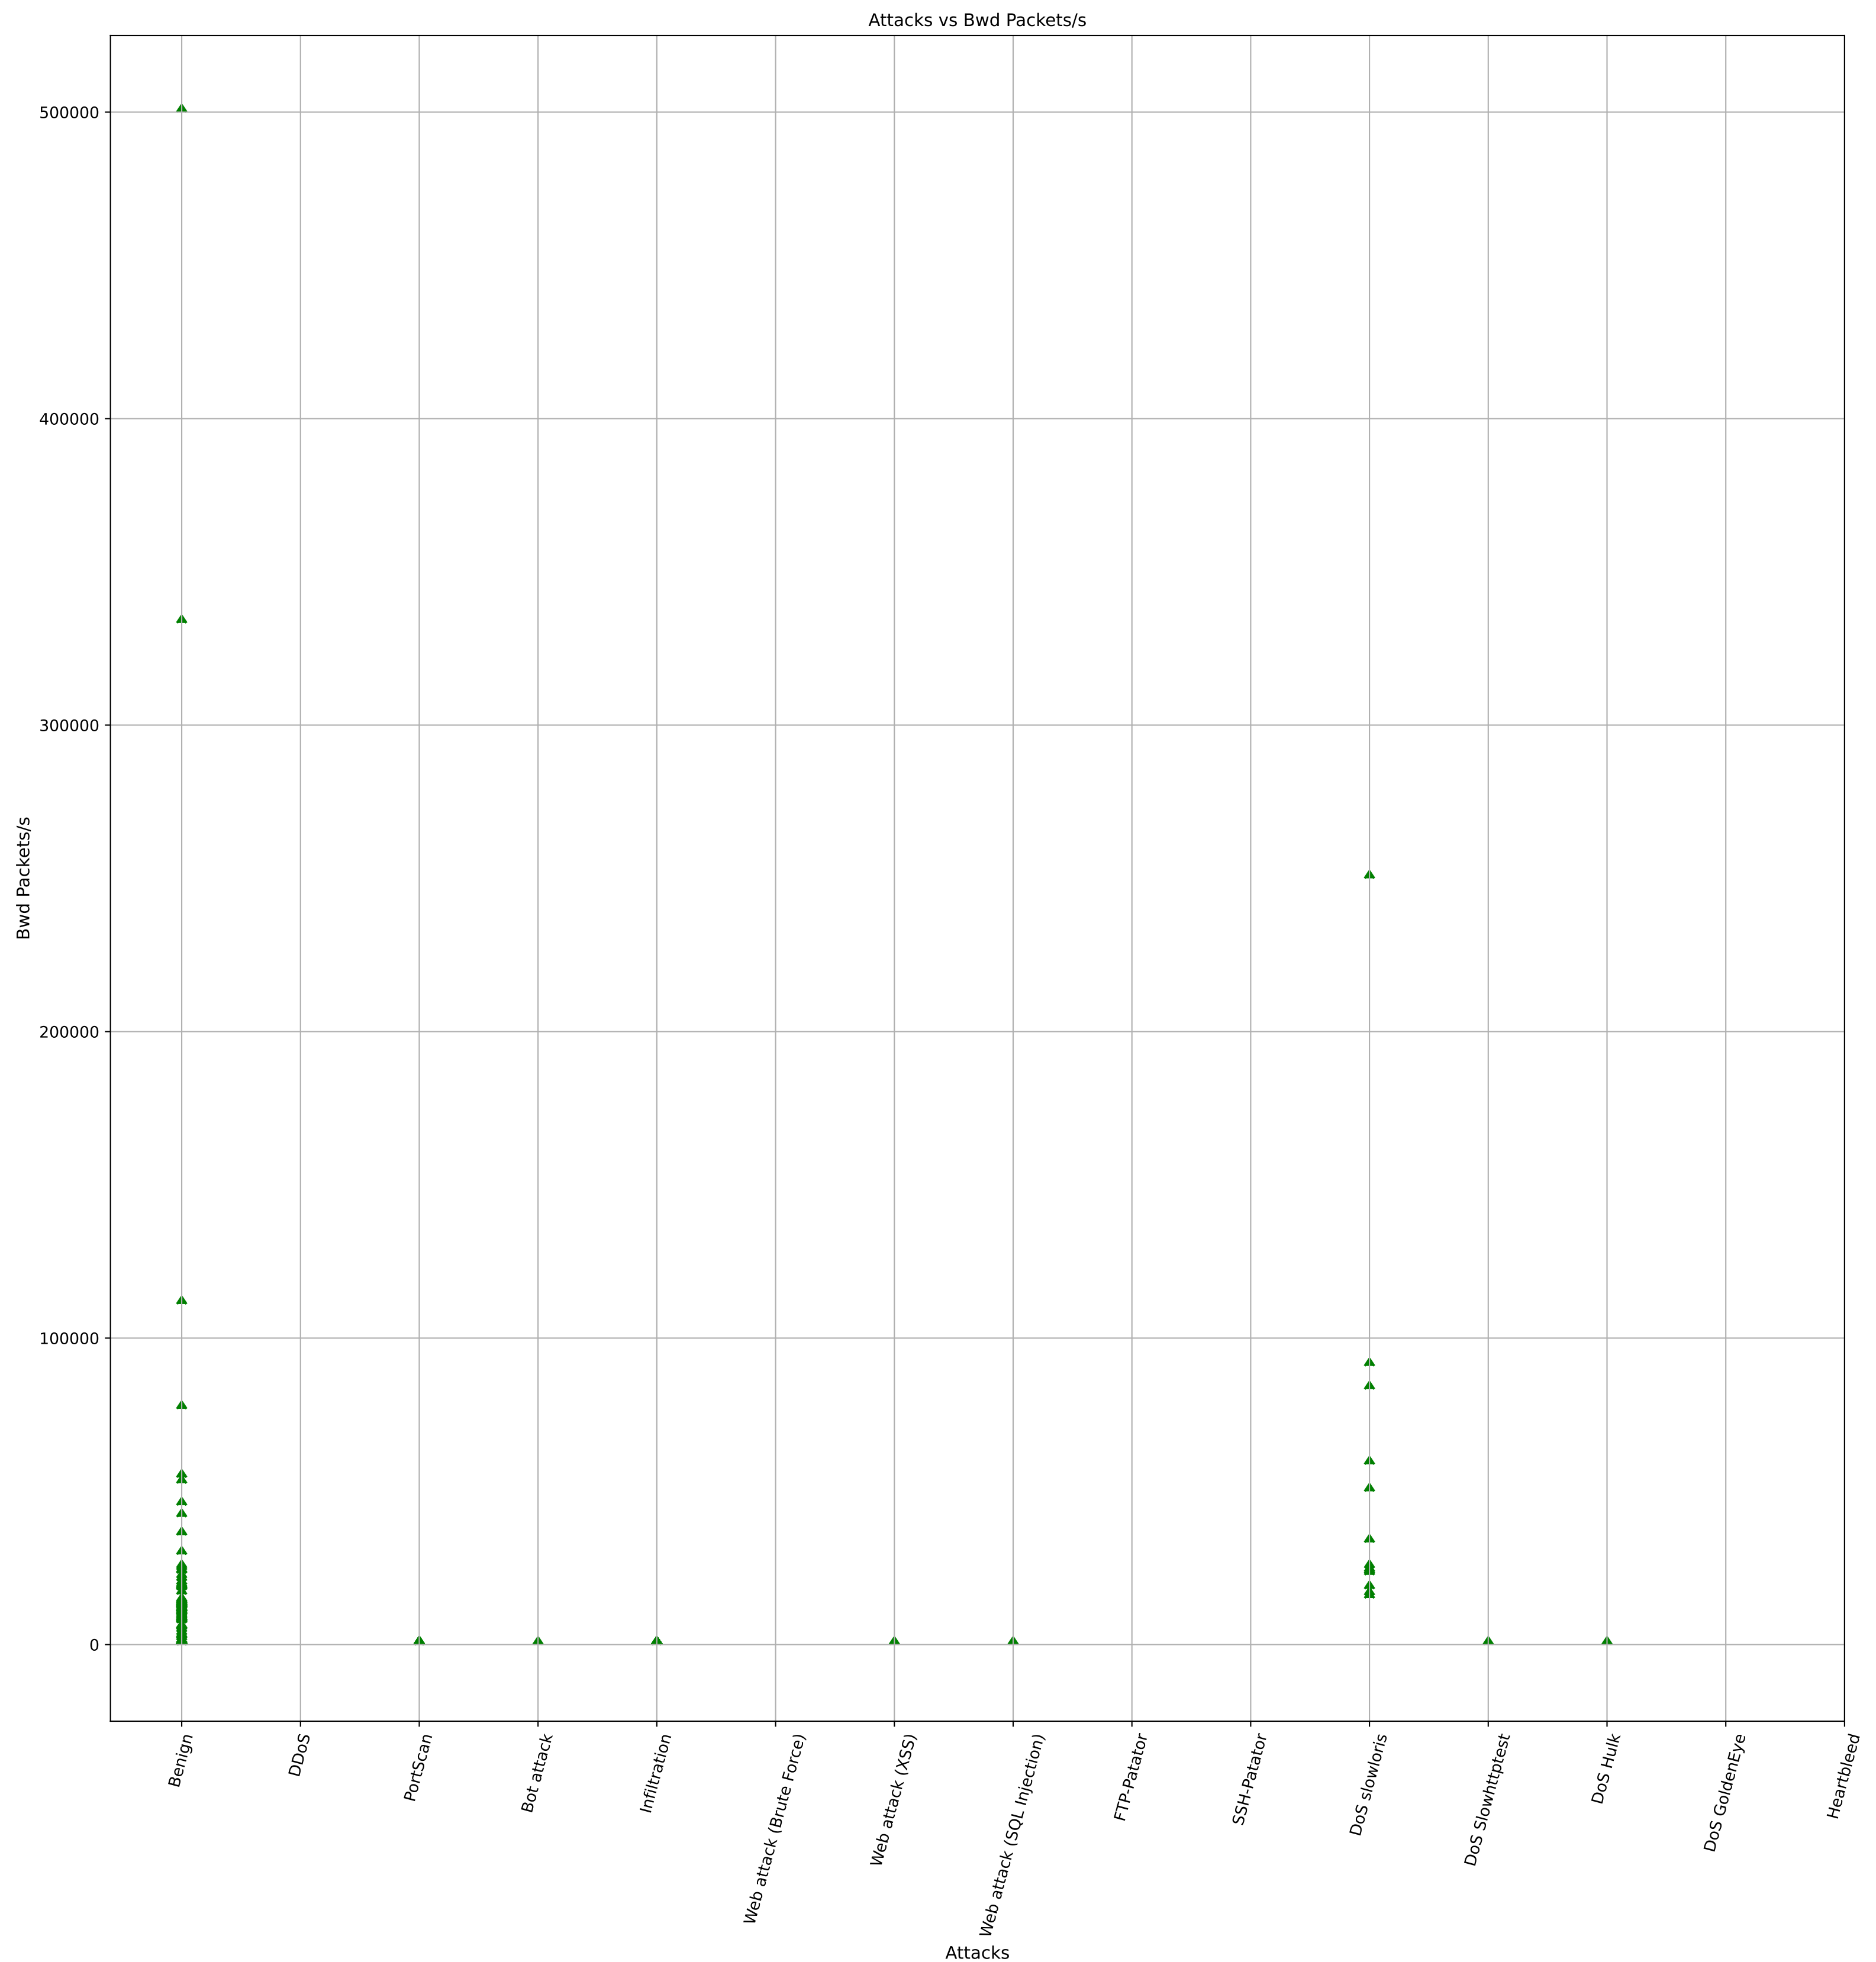


The most common value (mode) of Min Packet Length is 0

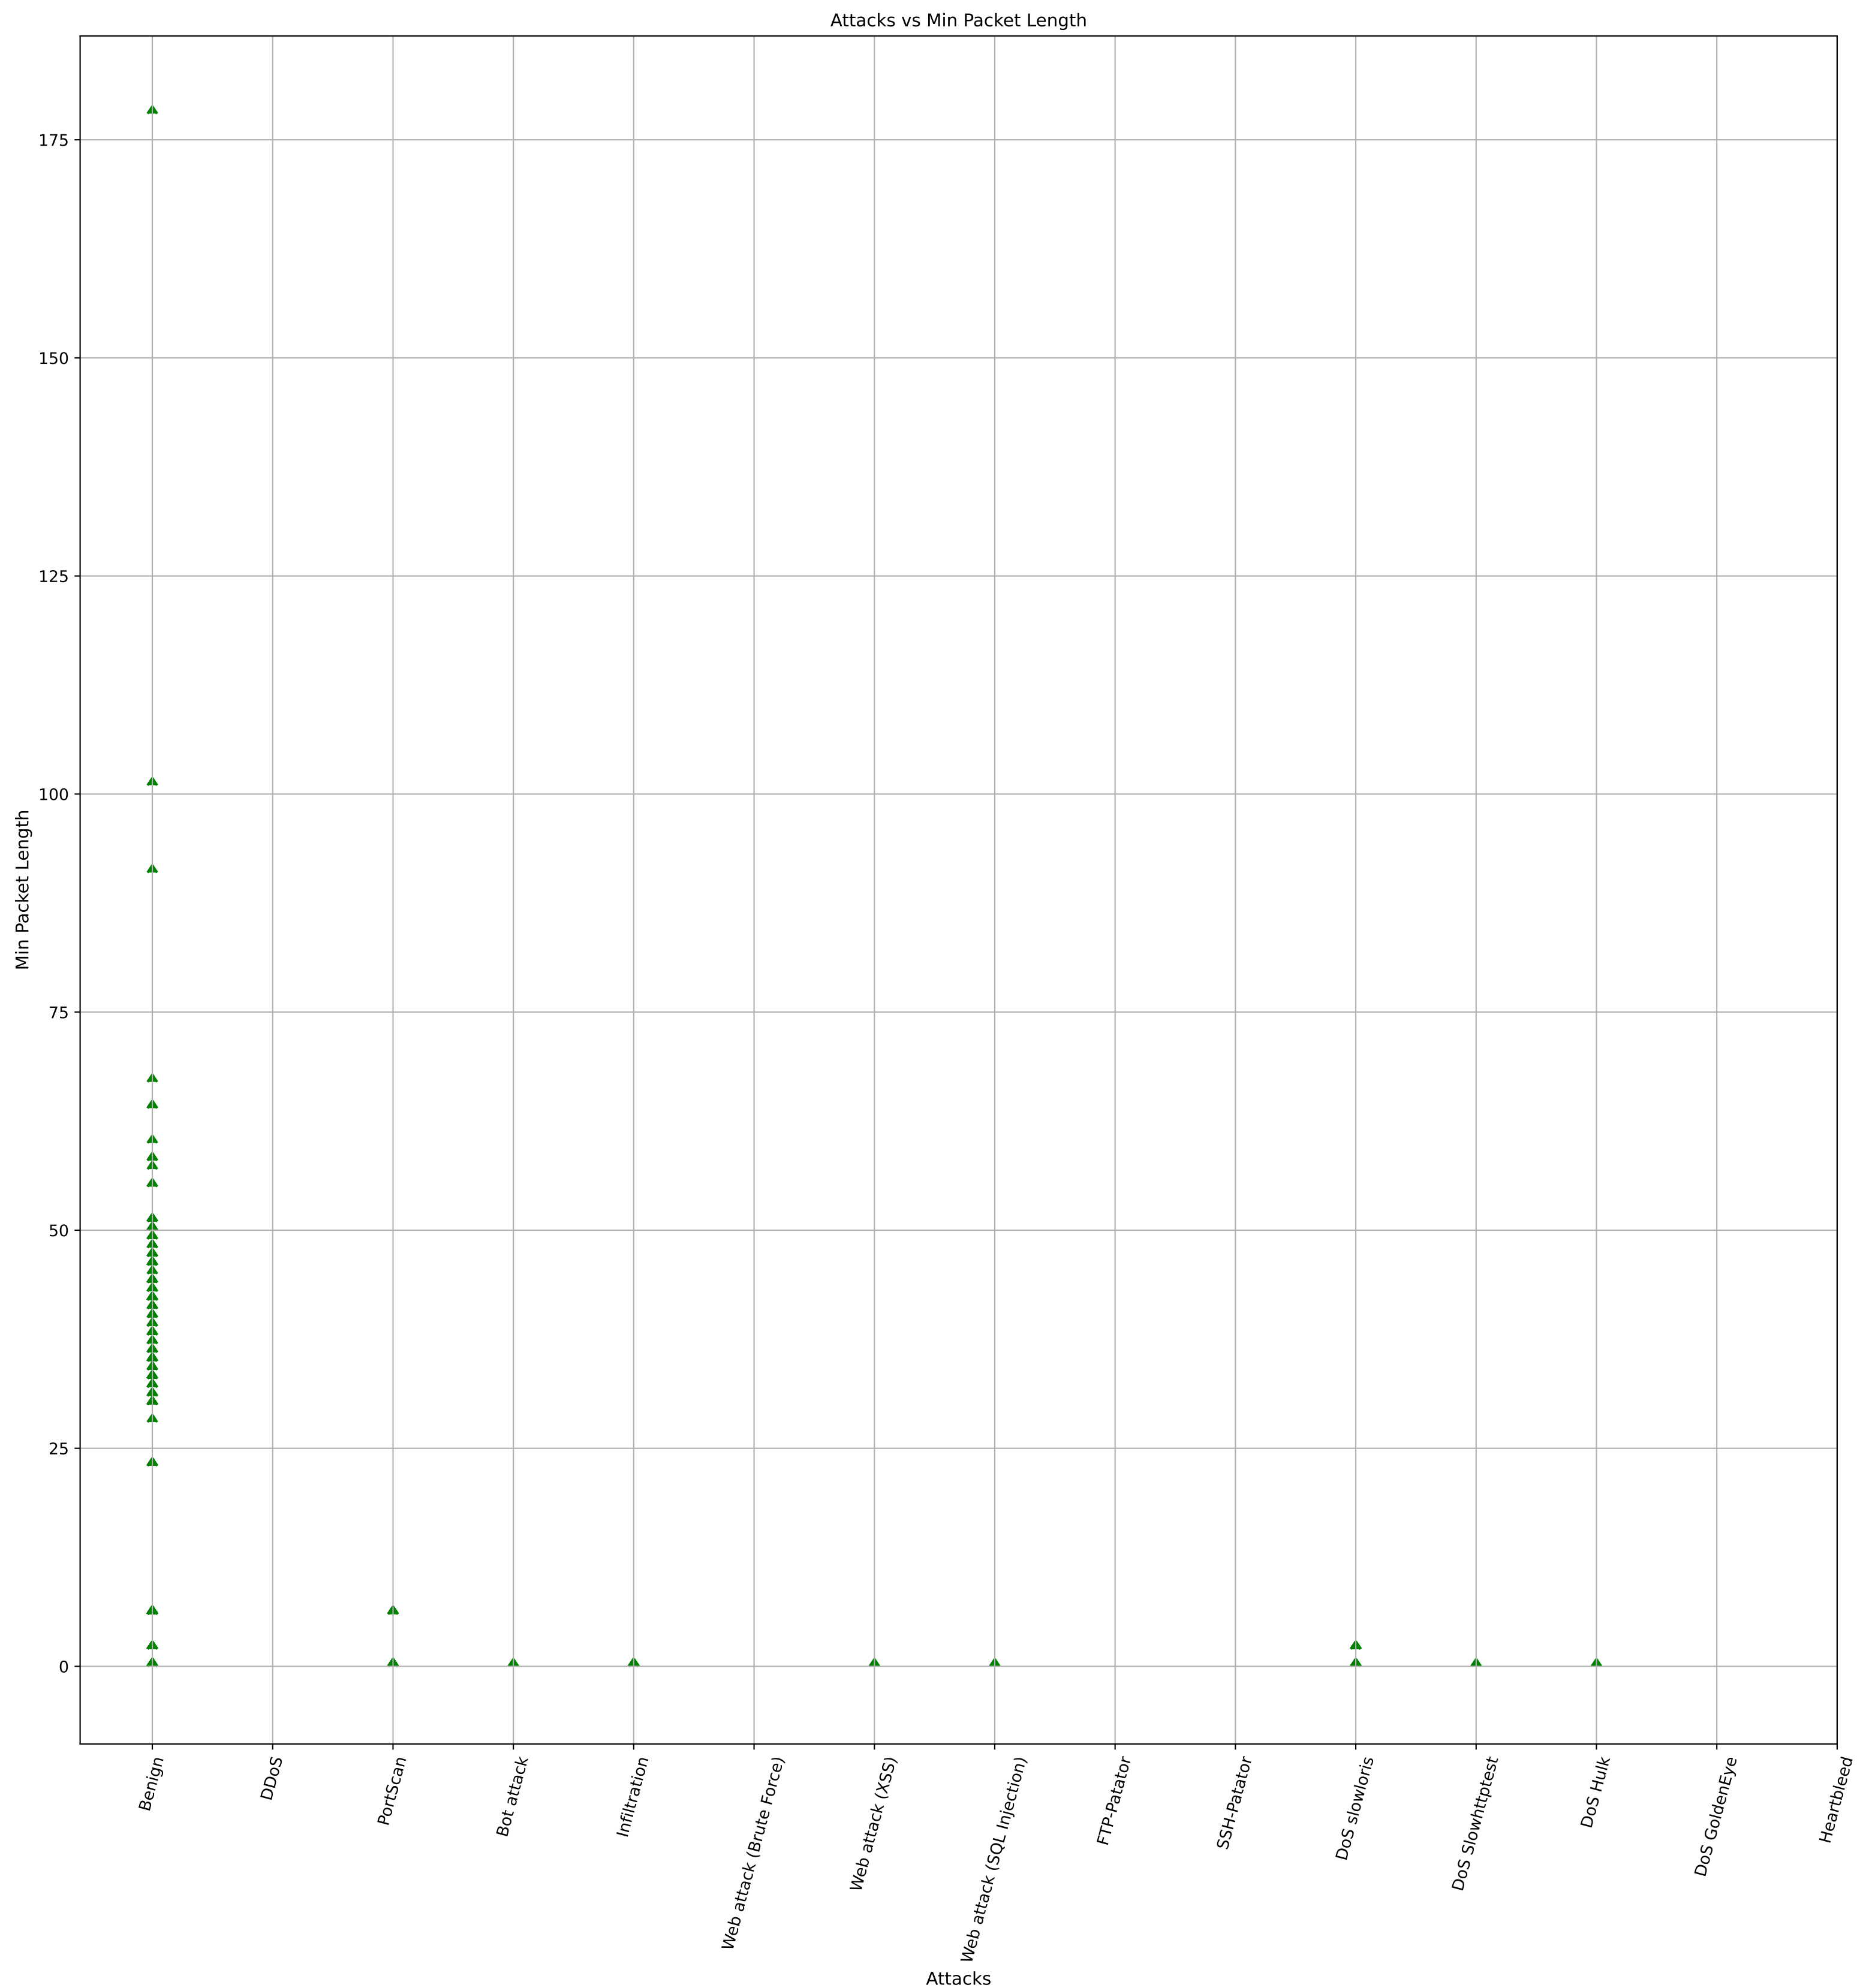


The most common value (mode) of Max Packet Length is 6

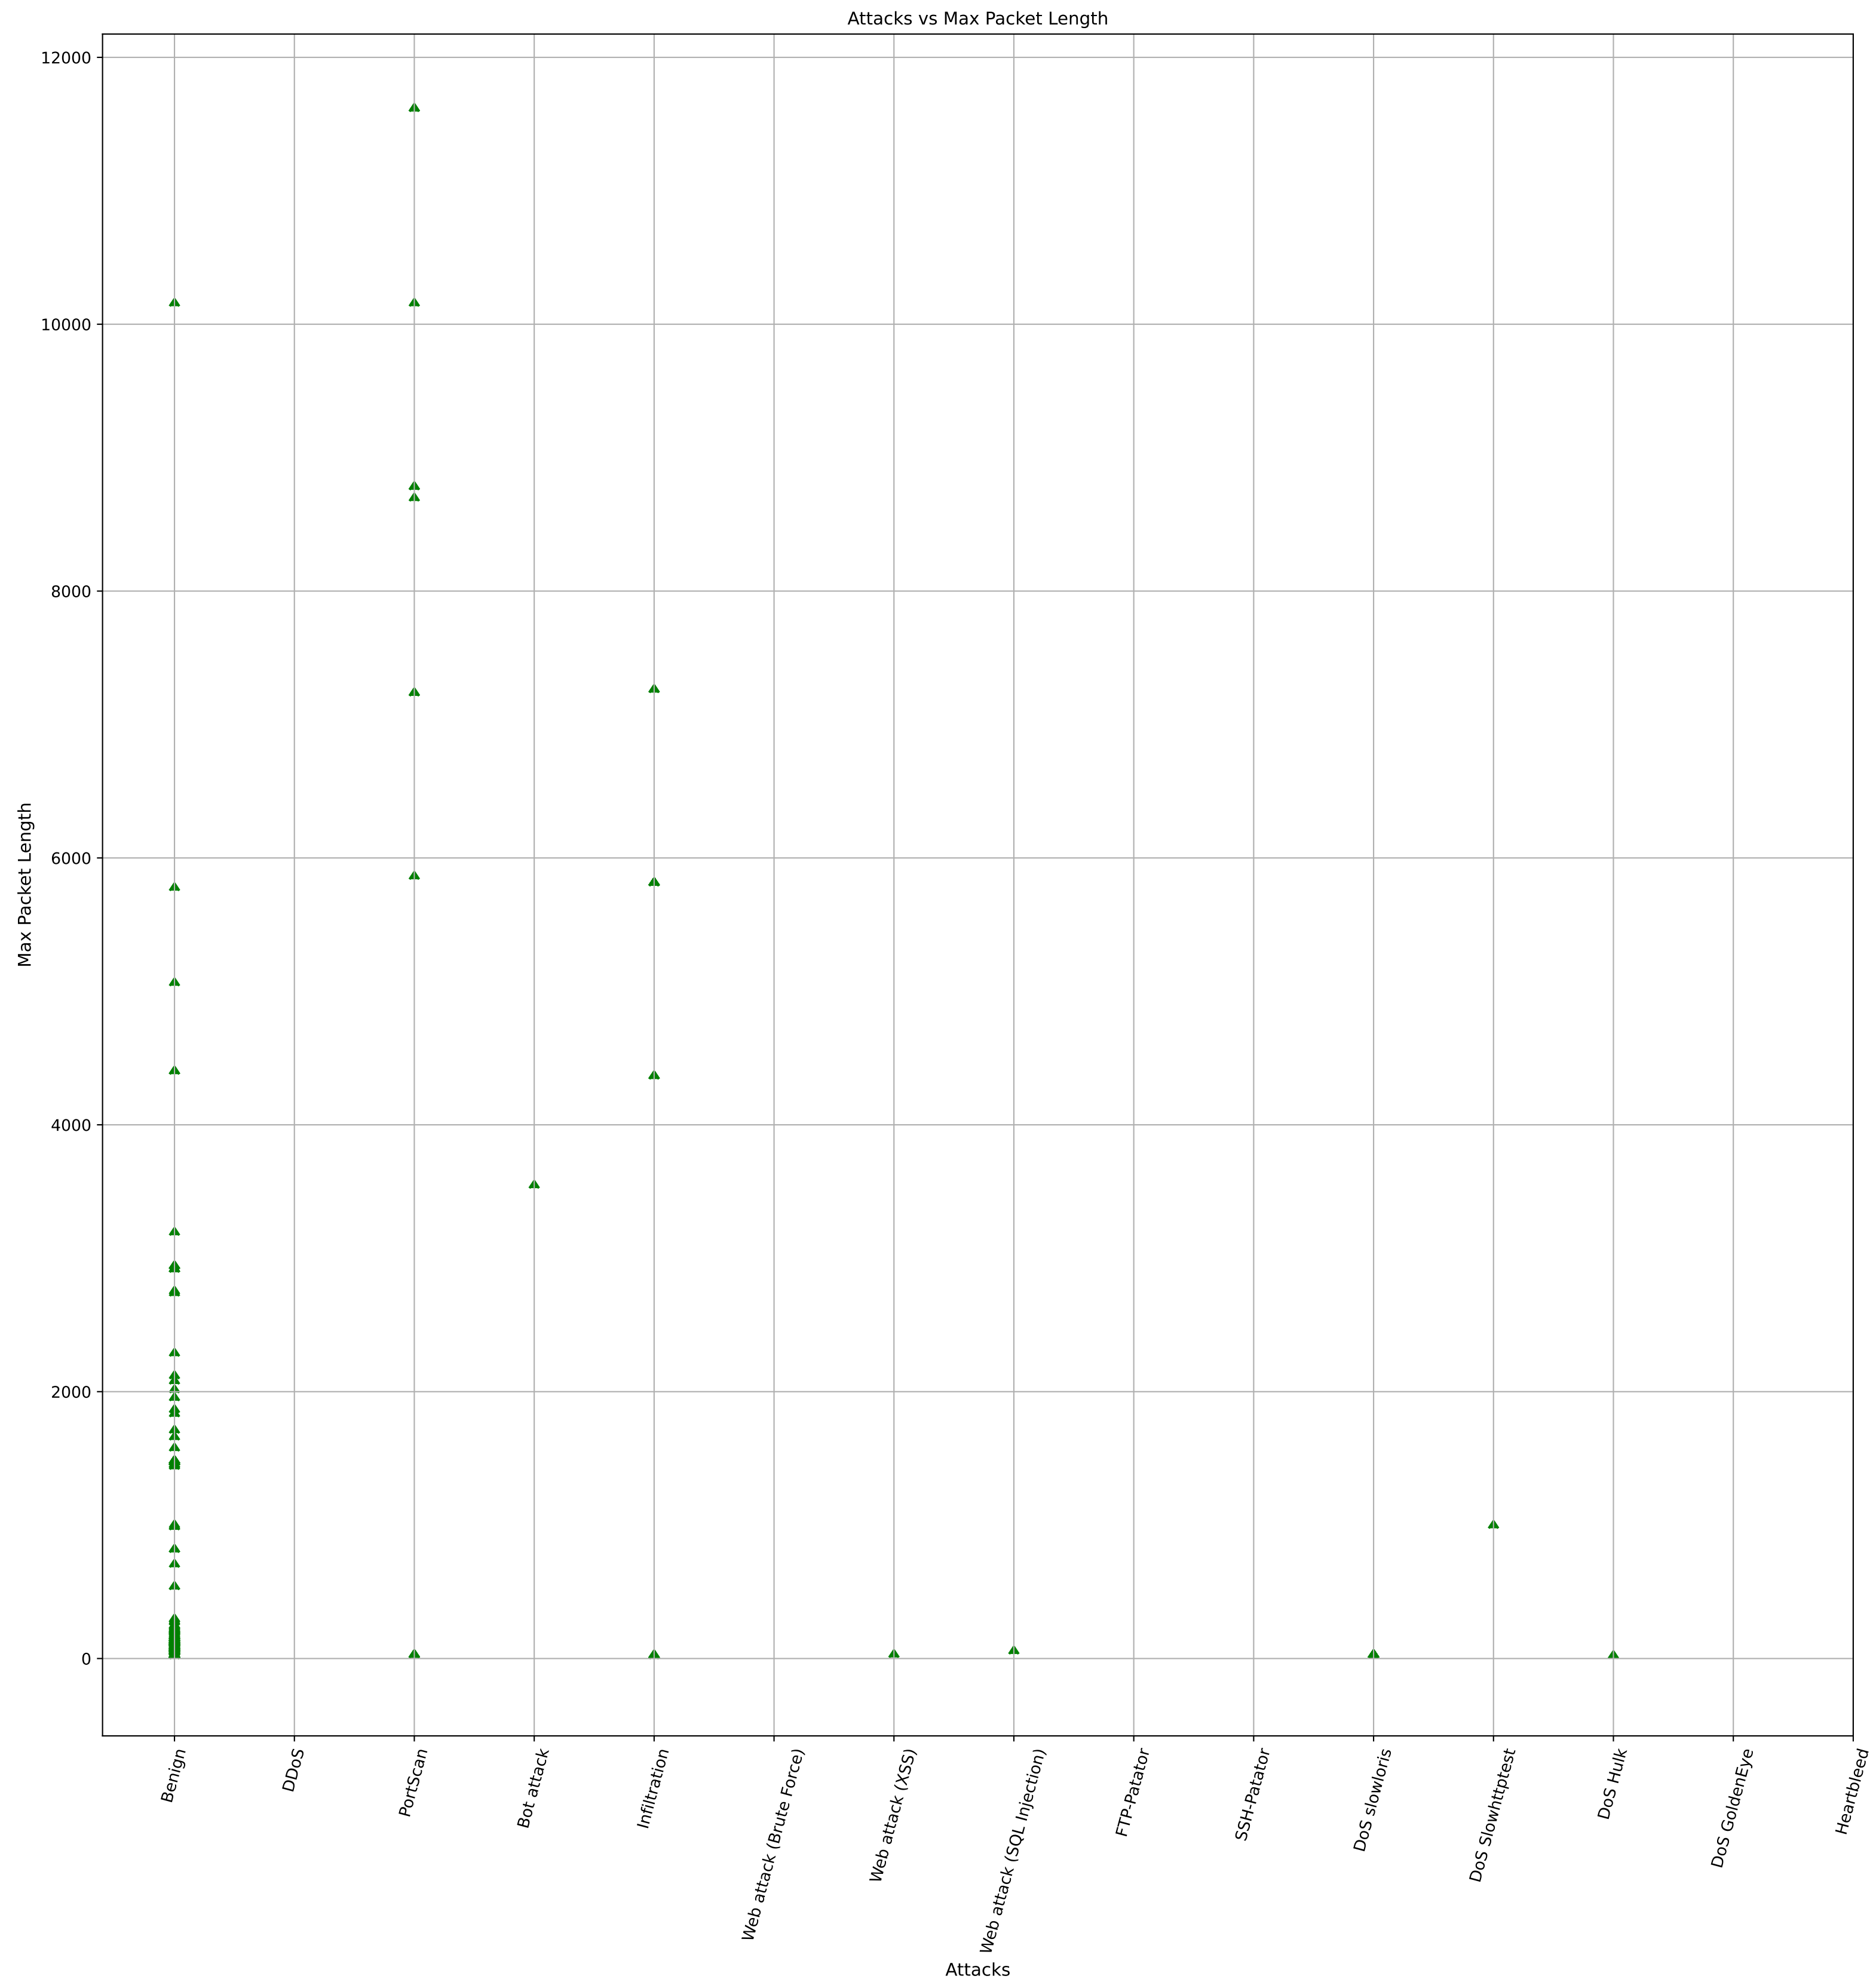


The most common value (mode) of Packet Length Mean is 0.0

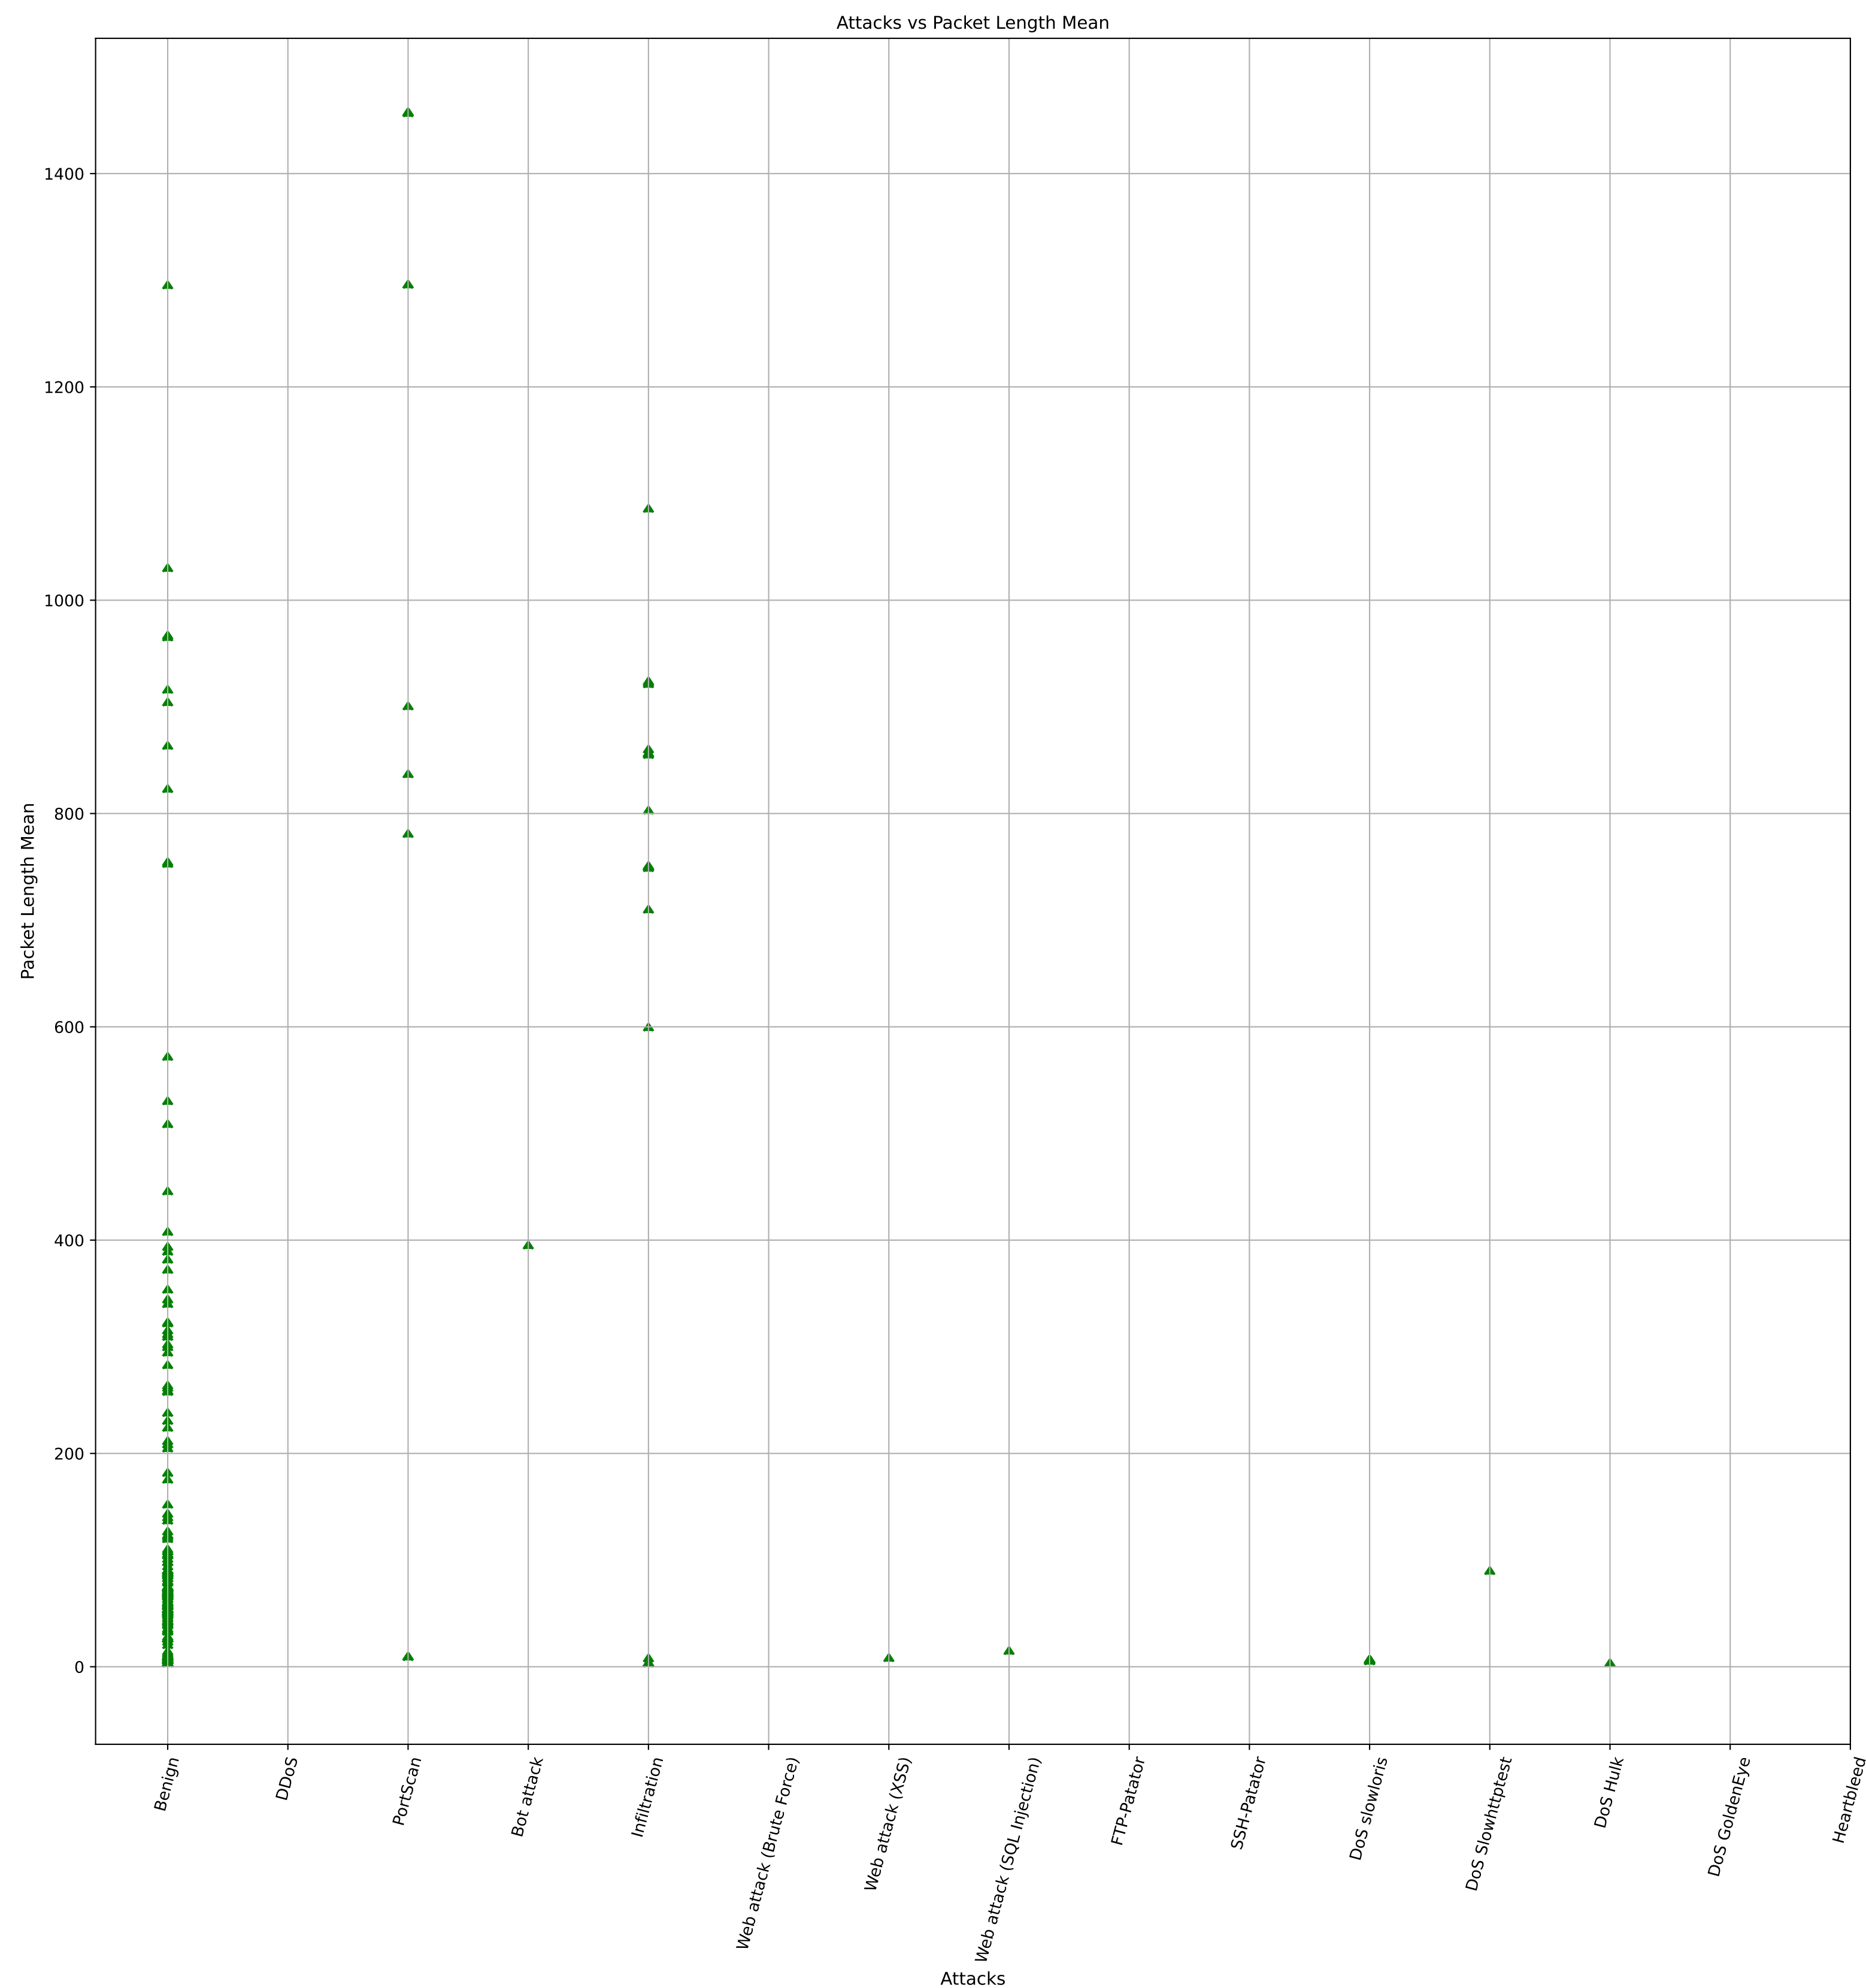


The most common value (mode) of Packet Length Std is 0.0

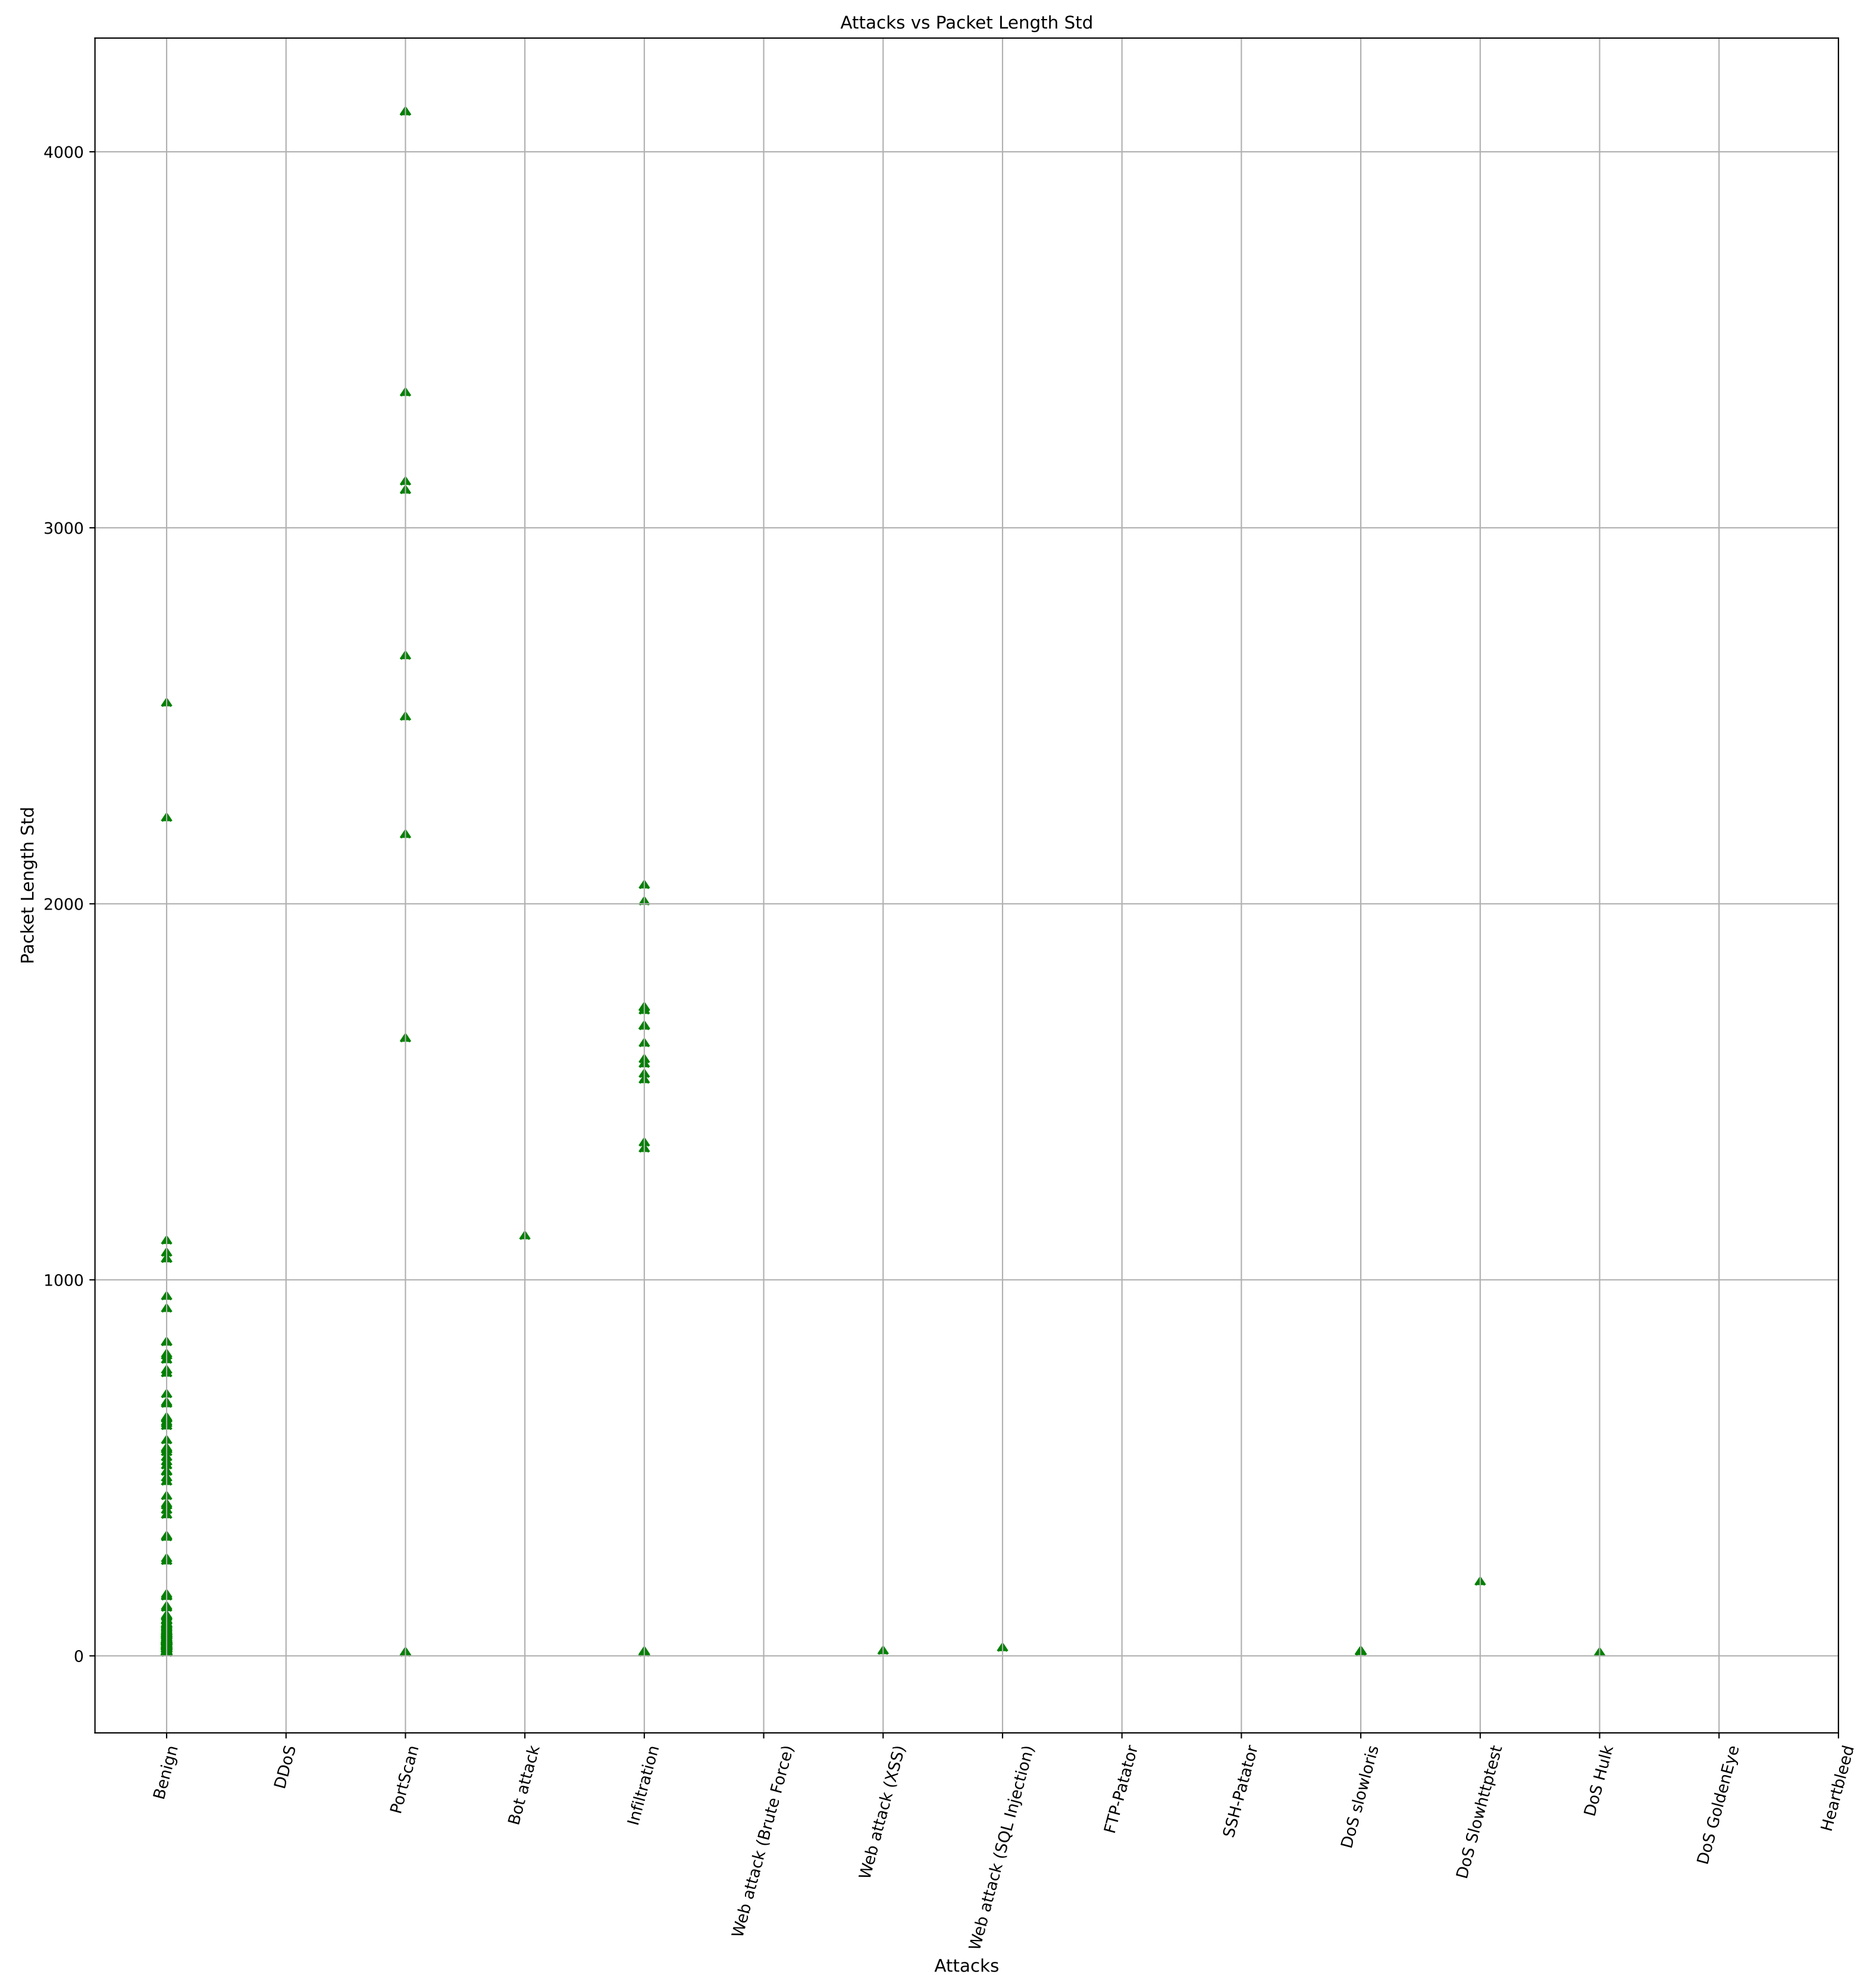


The most common value (mode) of Packet Length Variance is 0.0

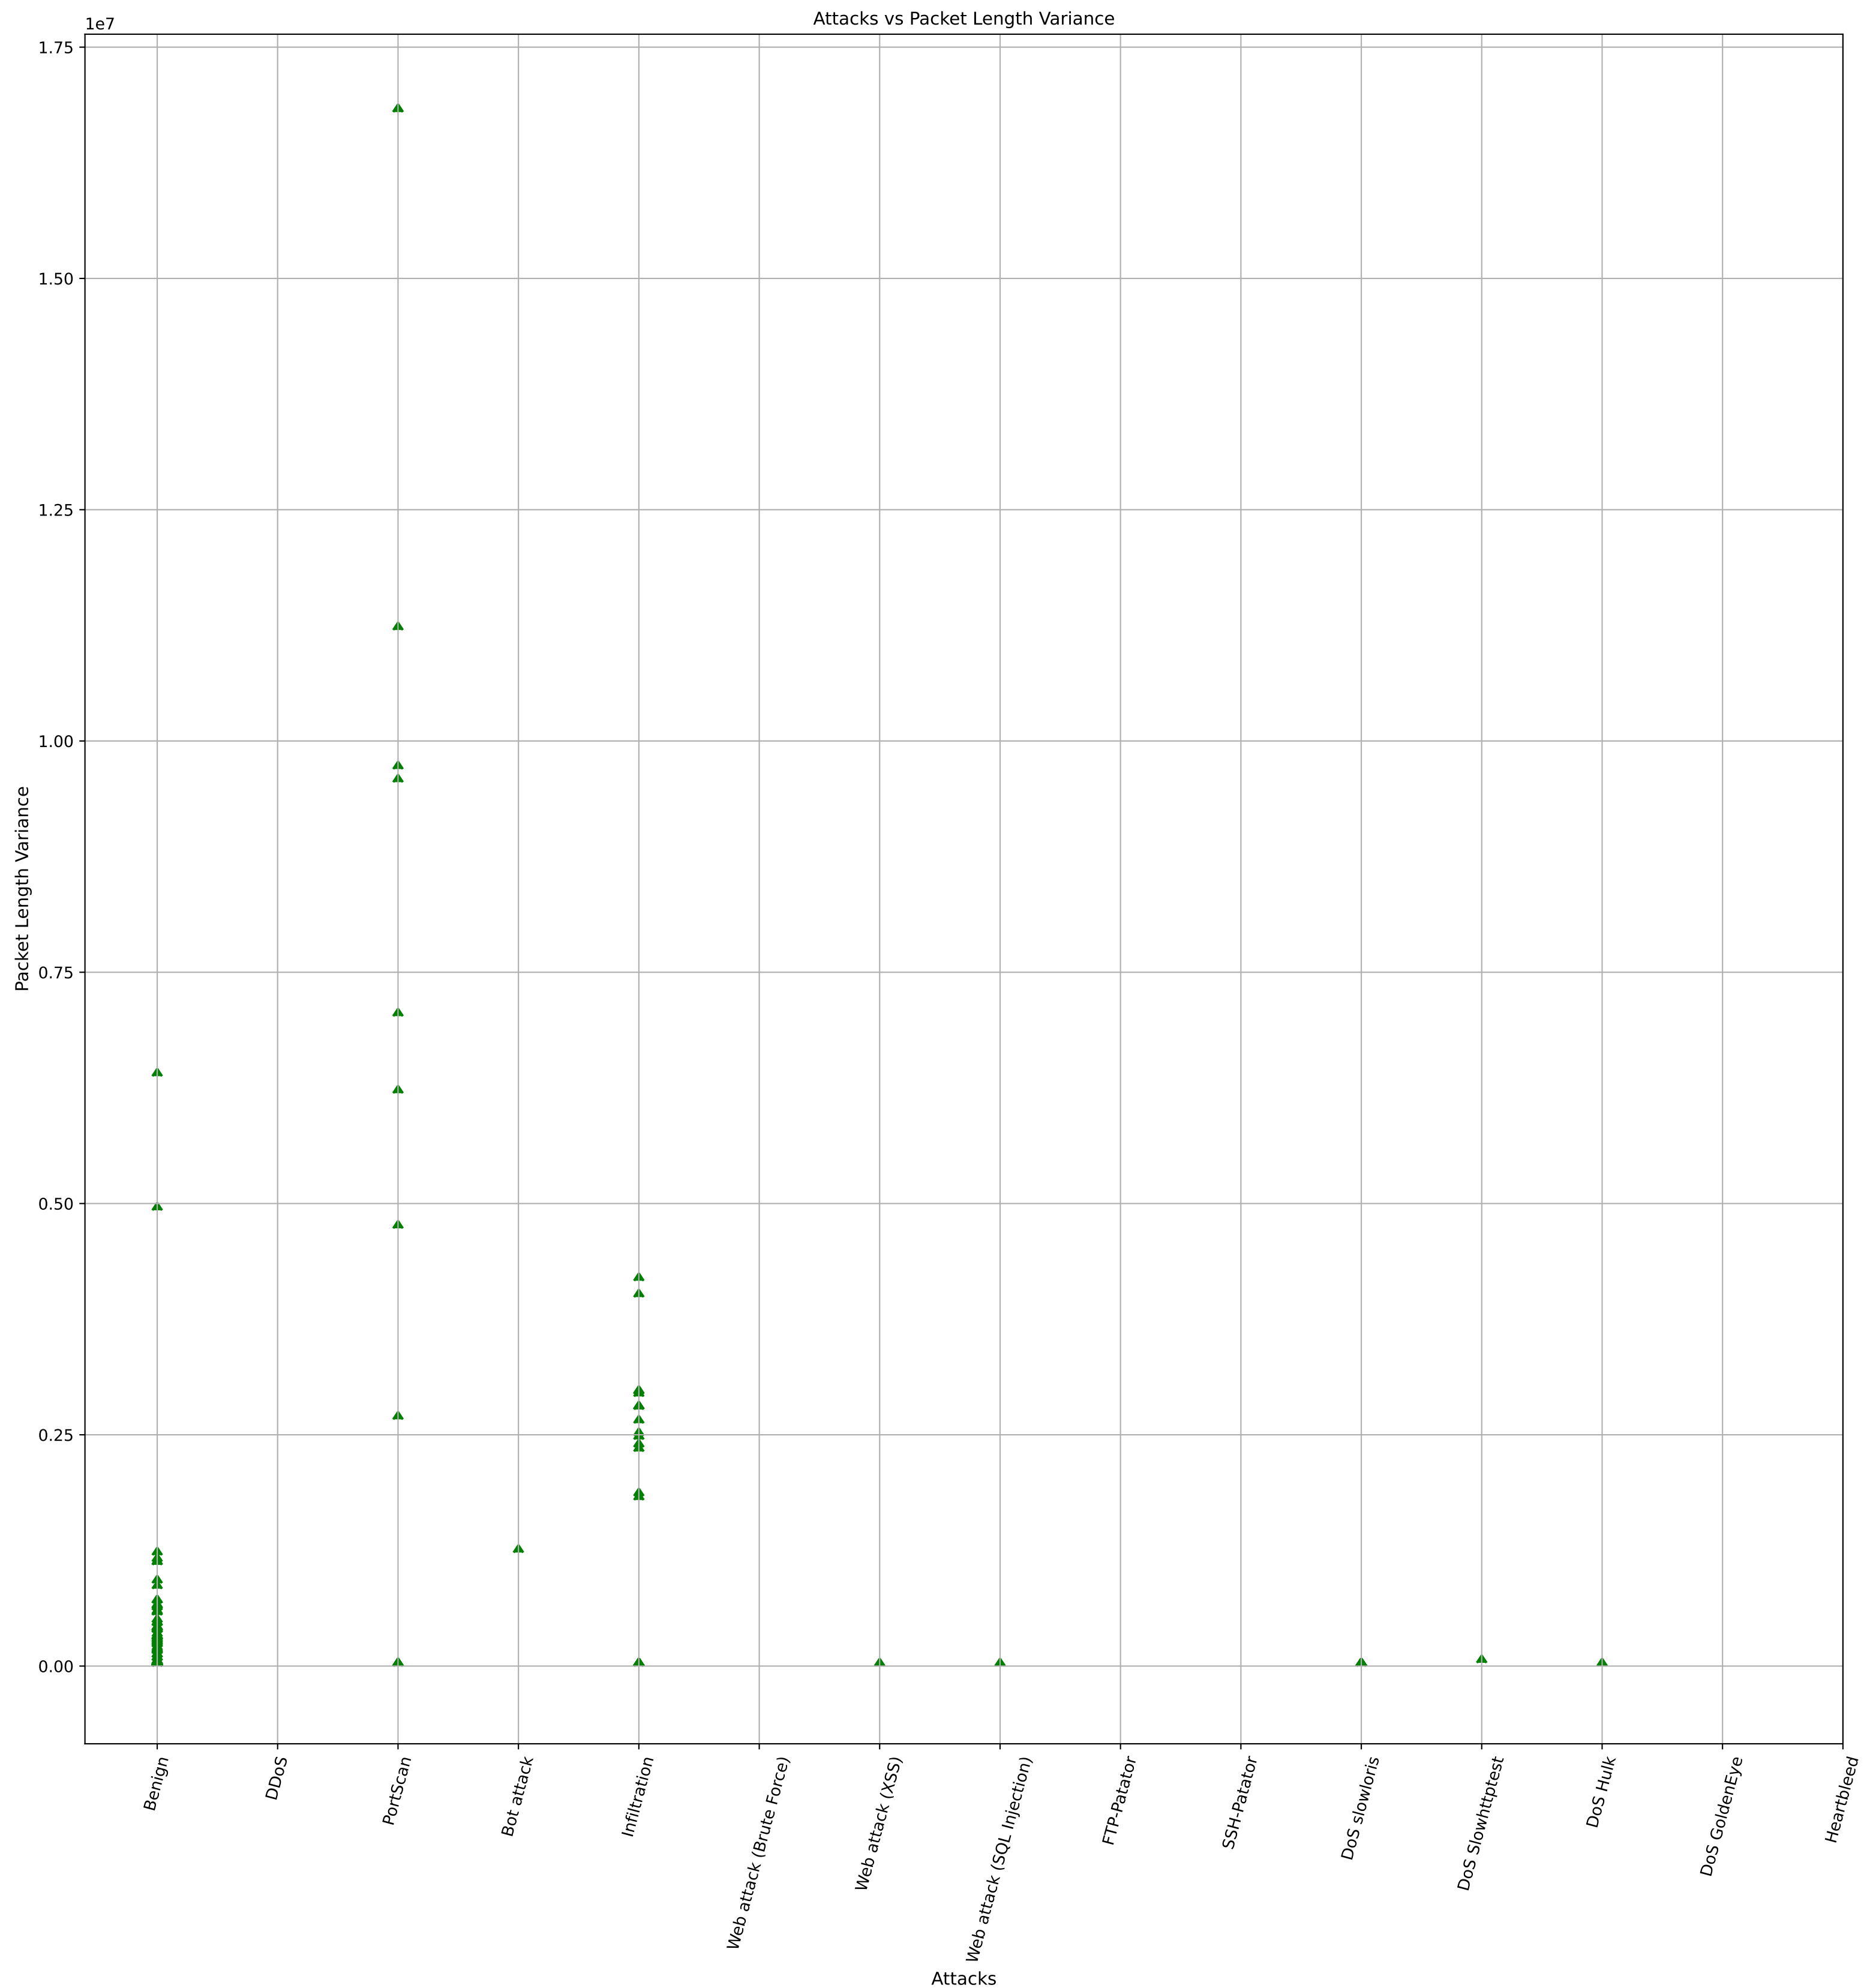


The most common value (mode) of FIN Flag Count is 0

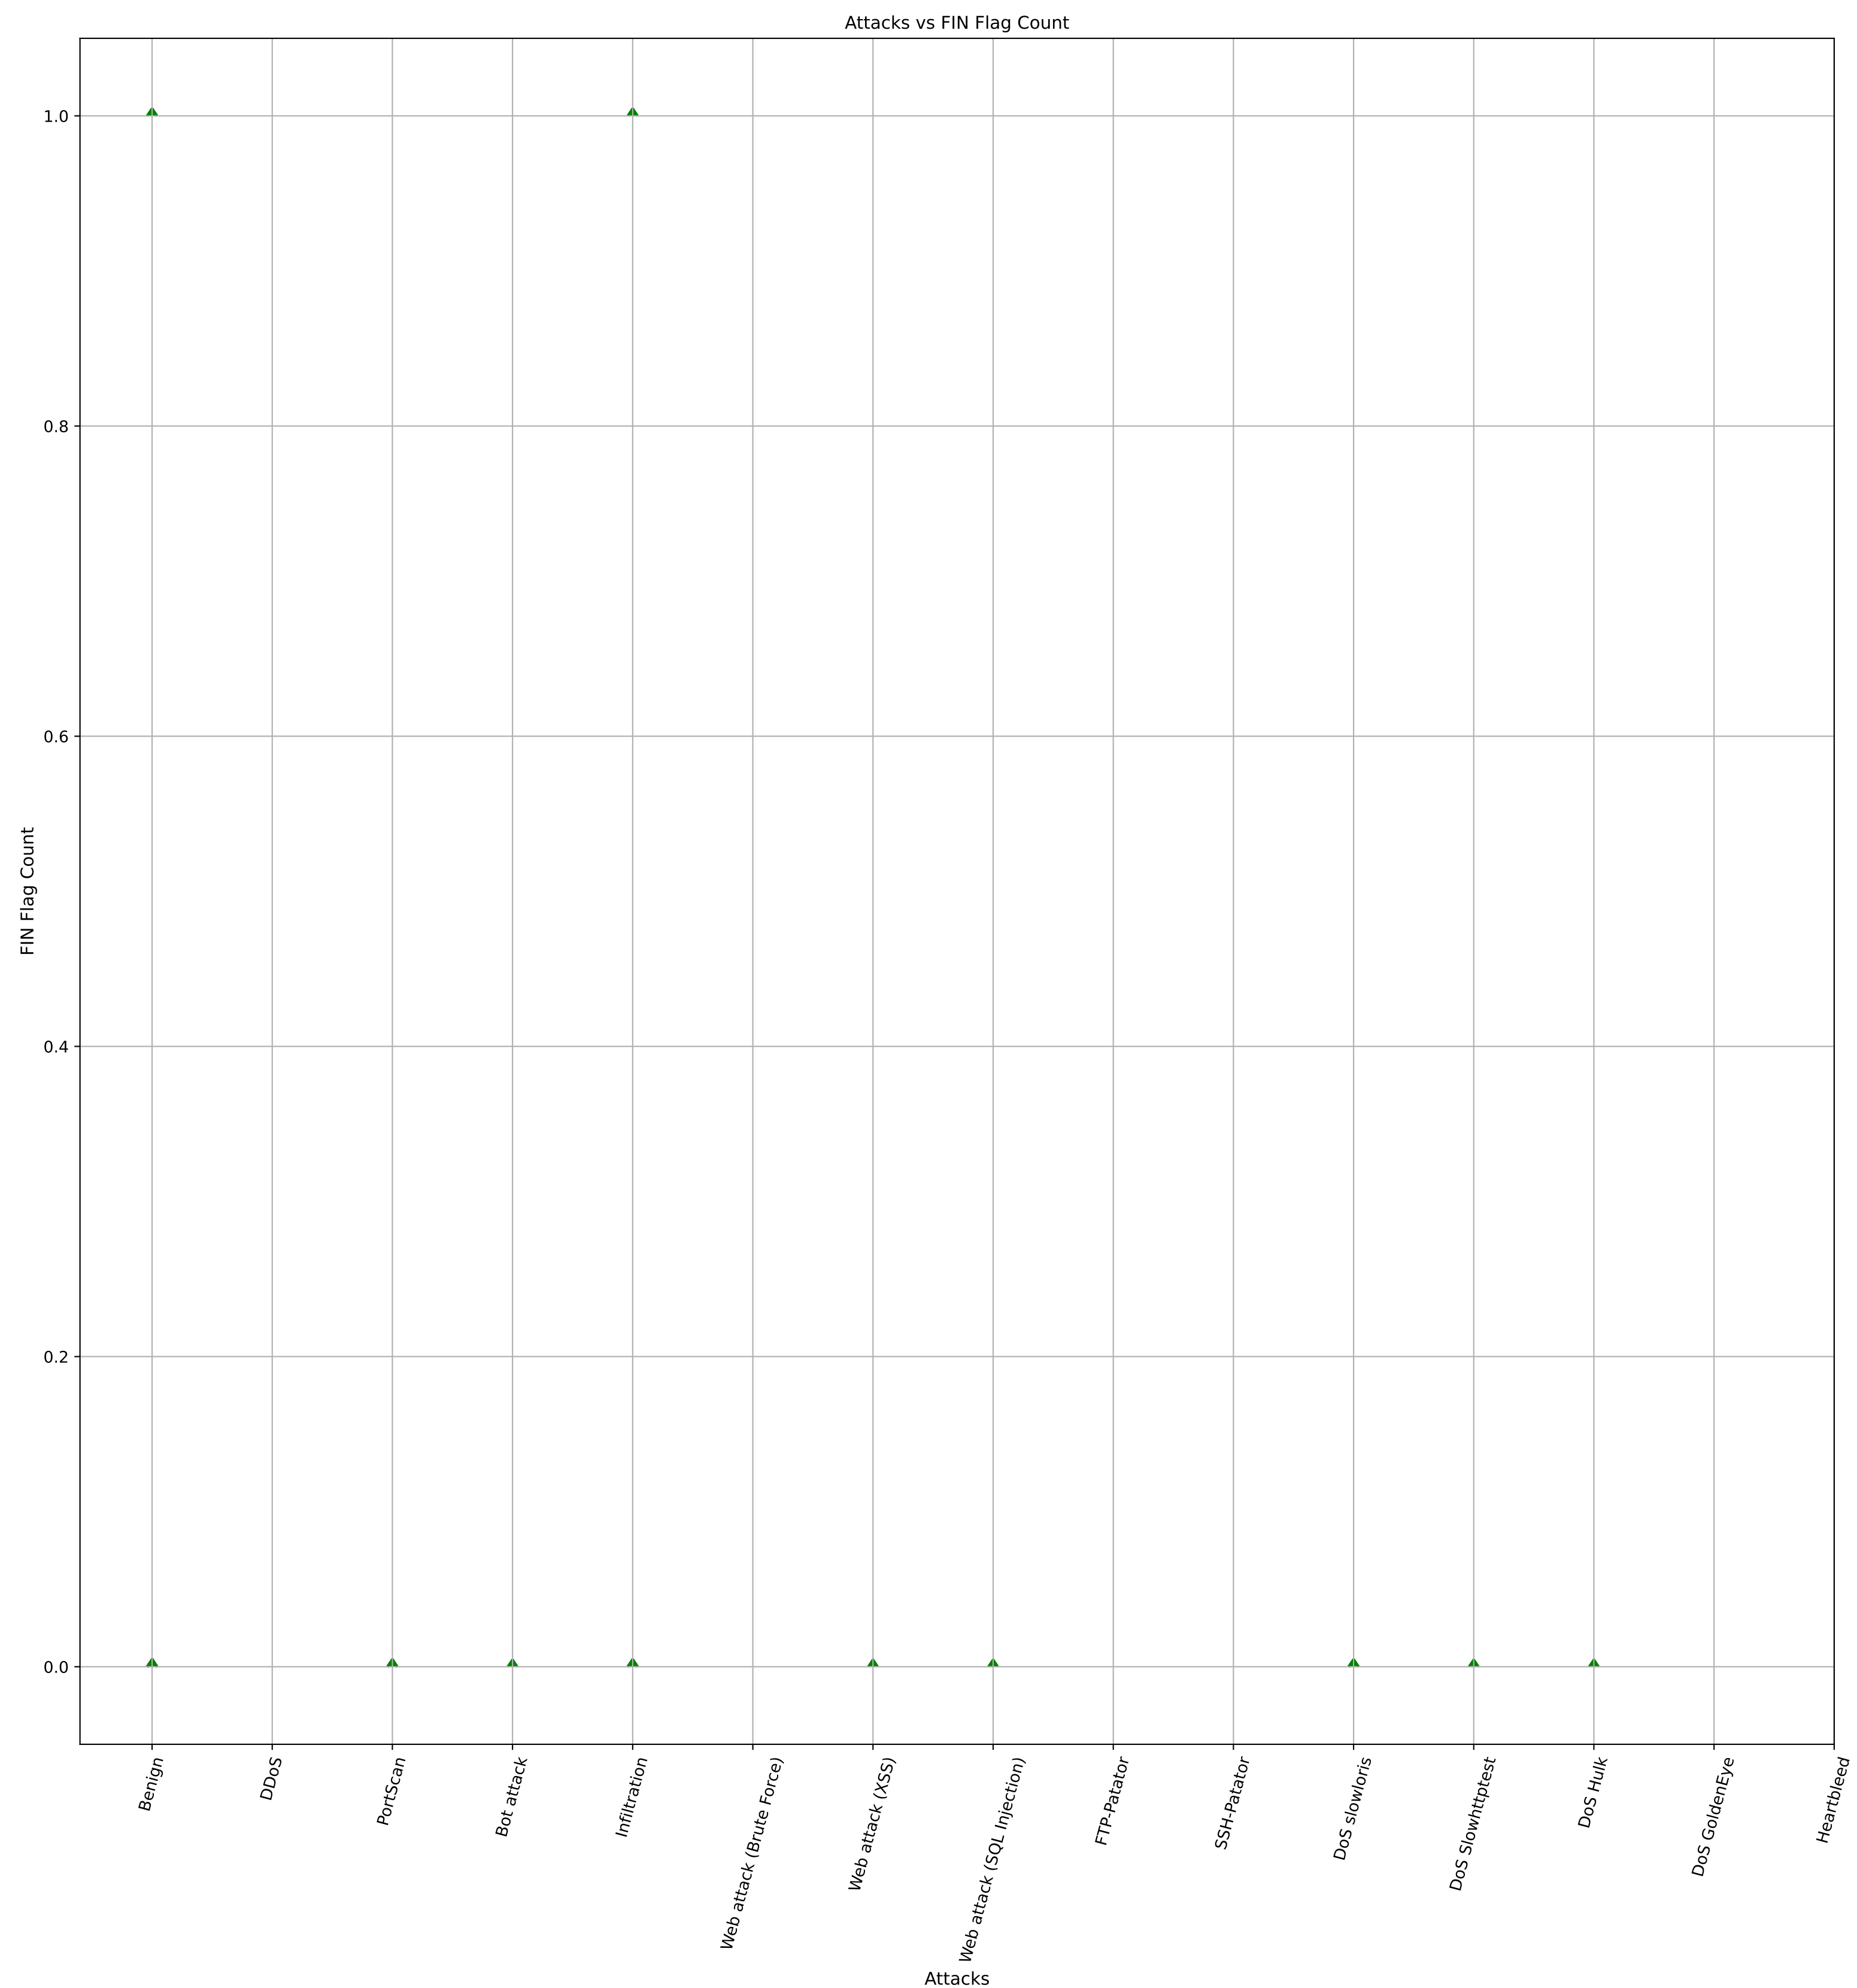


The most common value (mode) of SYN Flag Count is 0

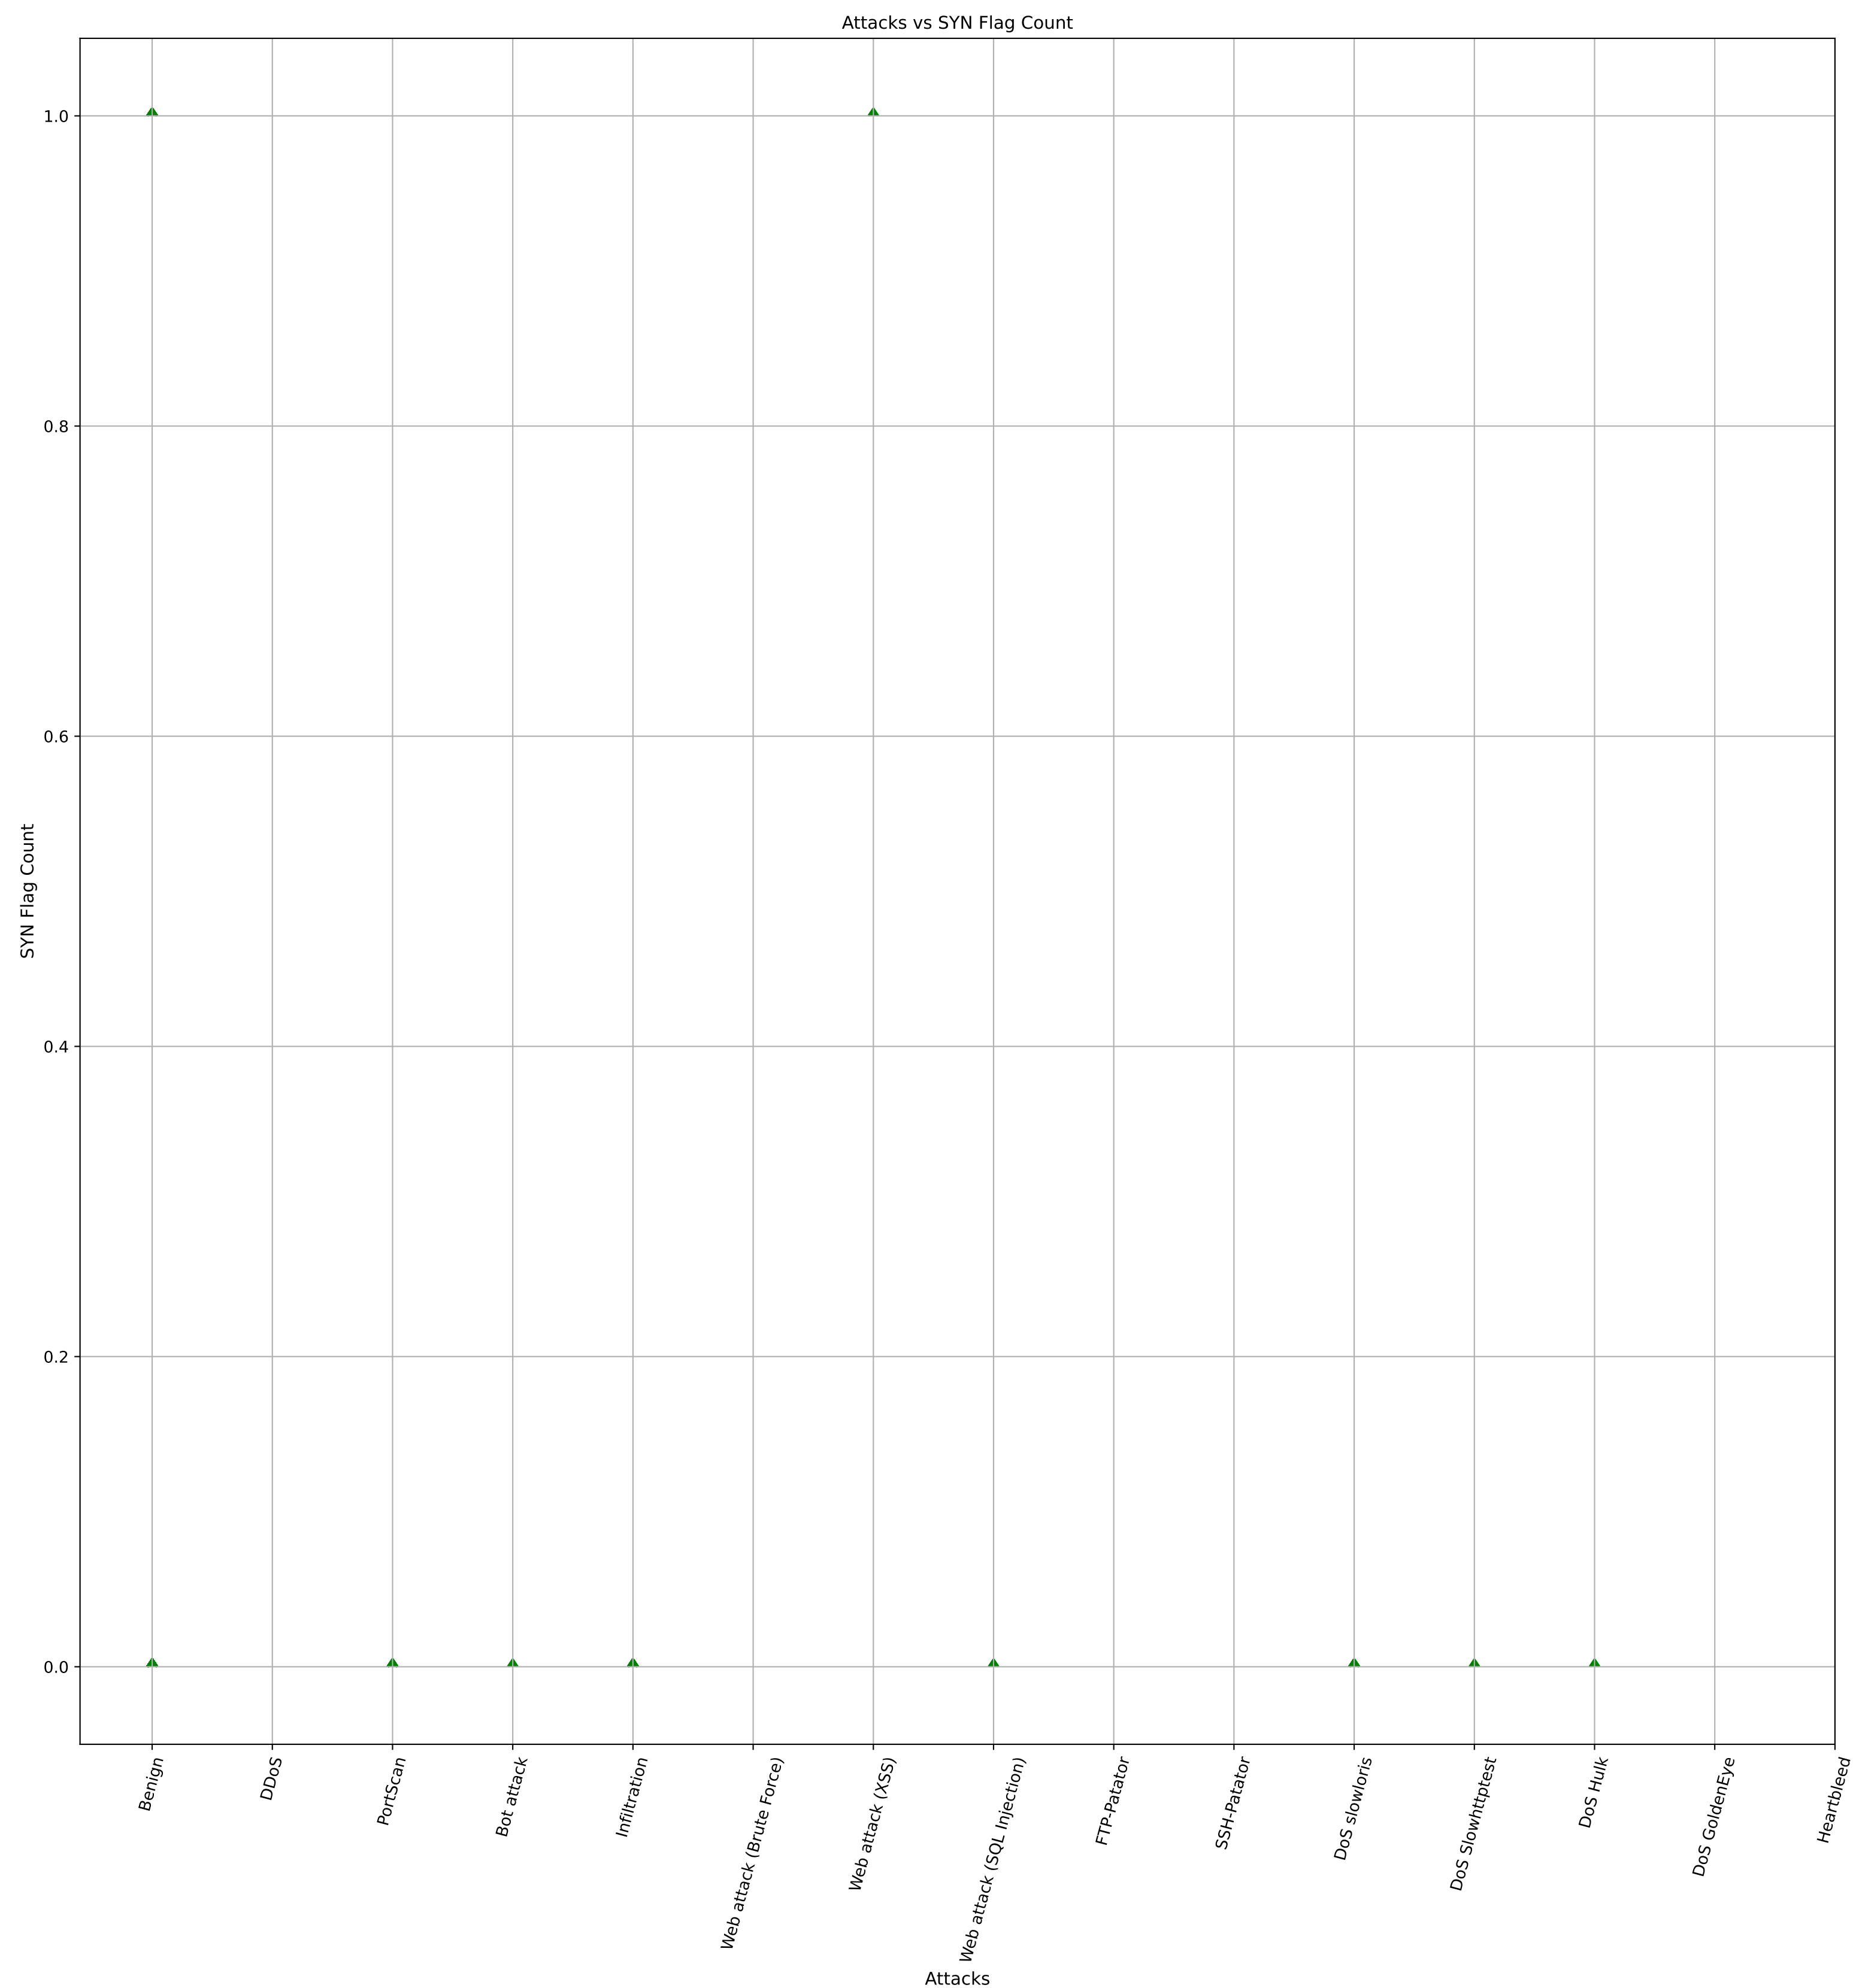


The most common value (mode) of RST Flag Count is 0

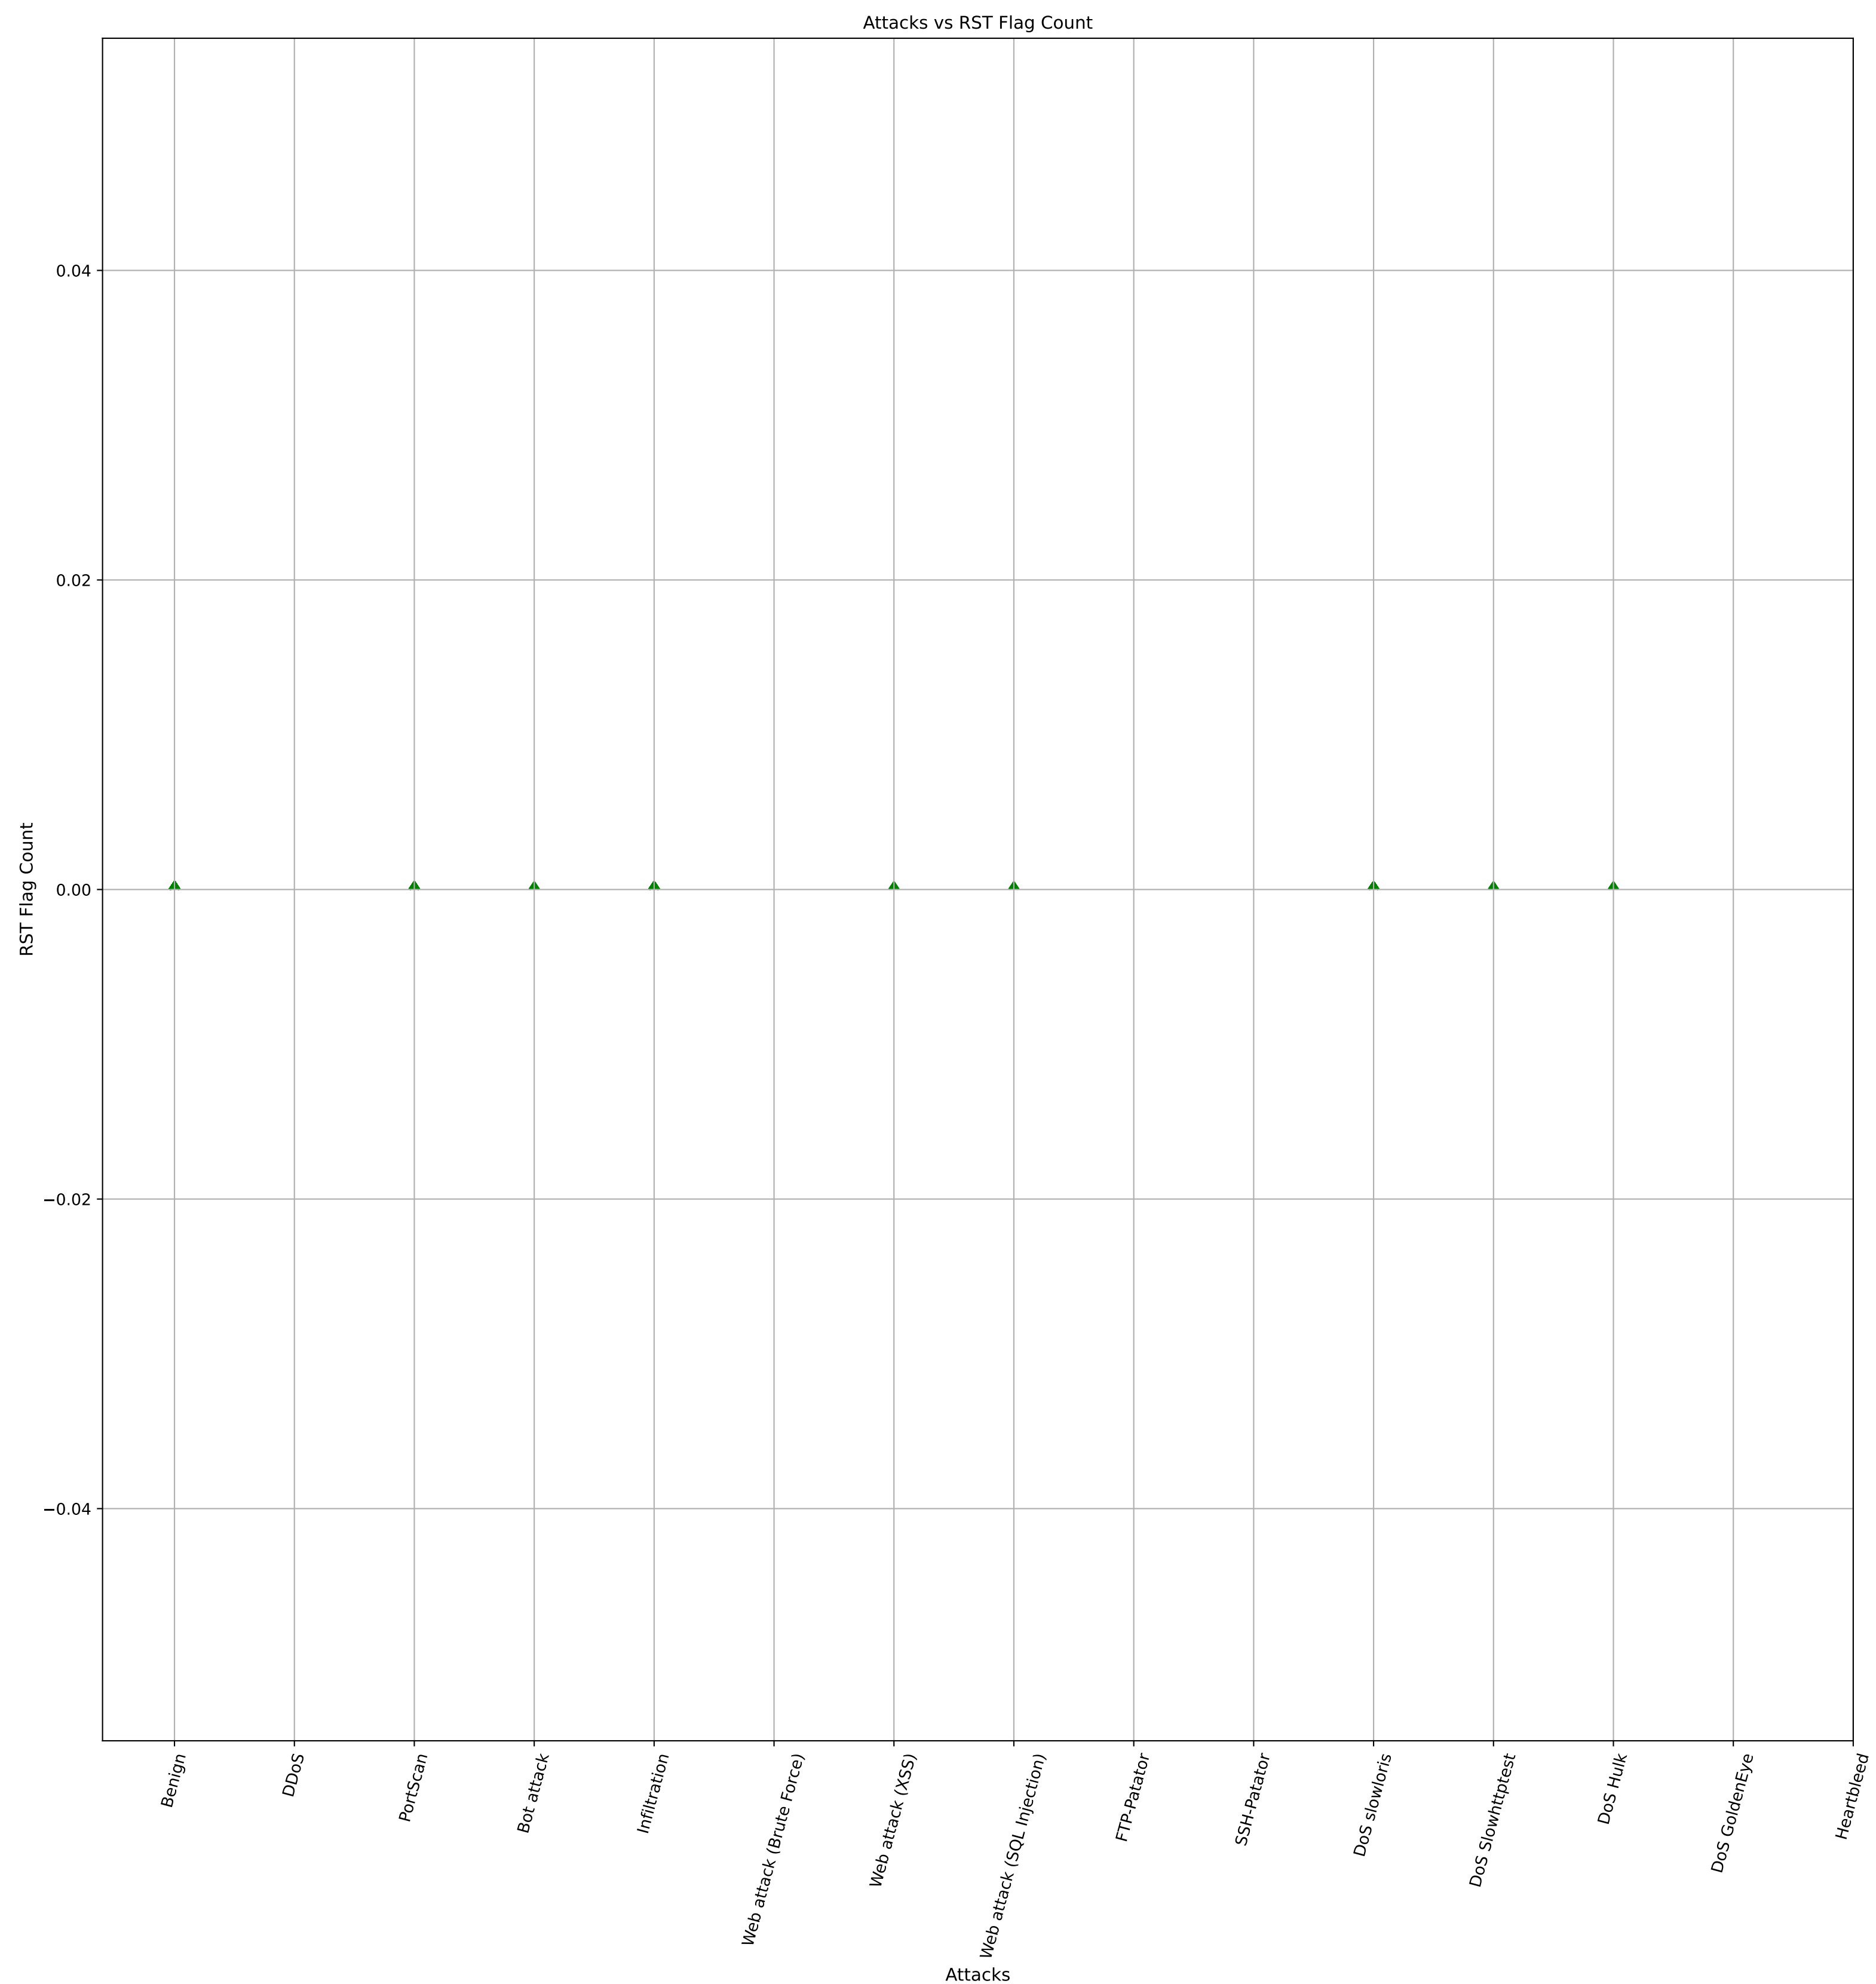


The most common value (mode) of PSH Flag Count is 0

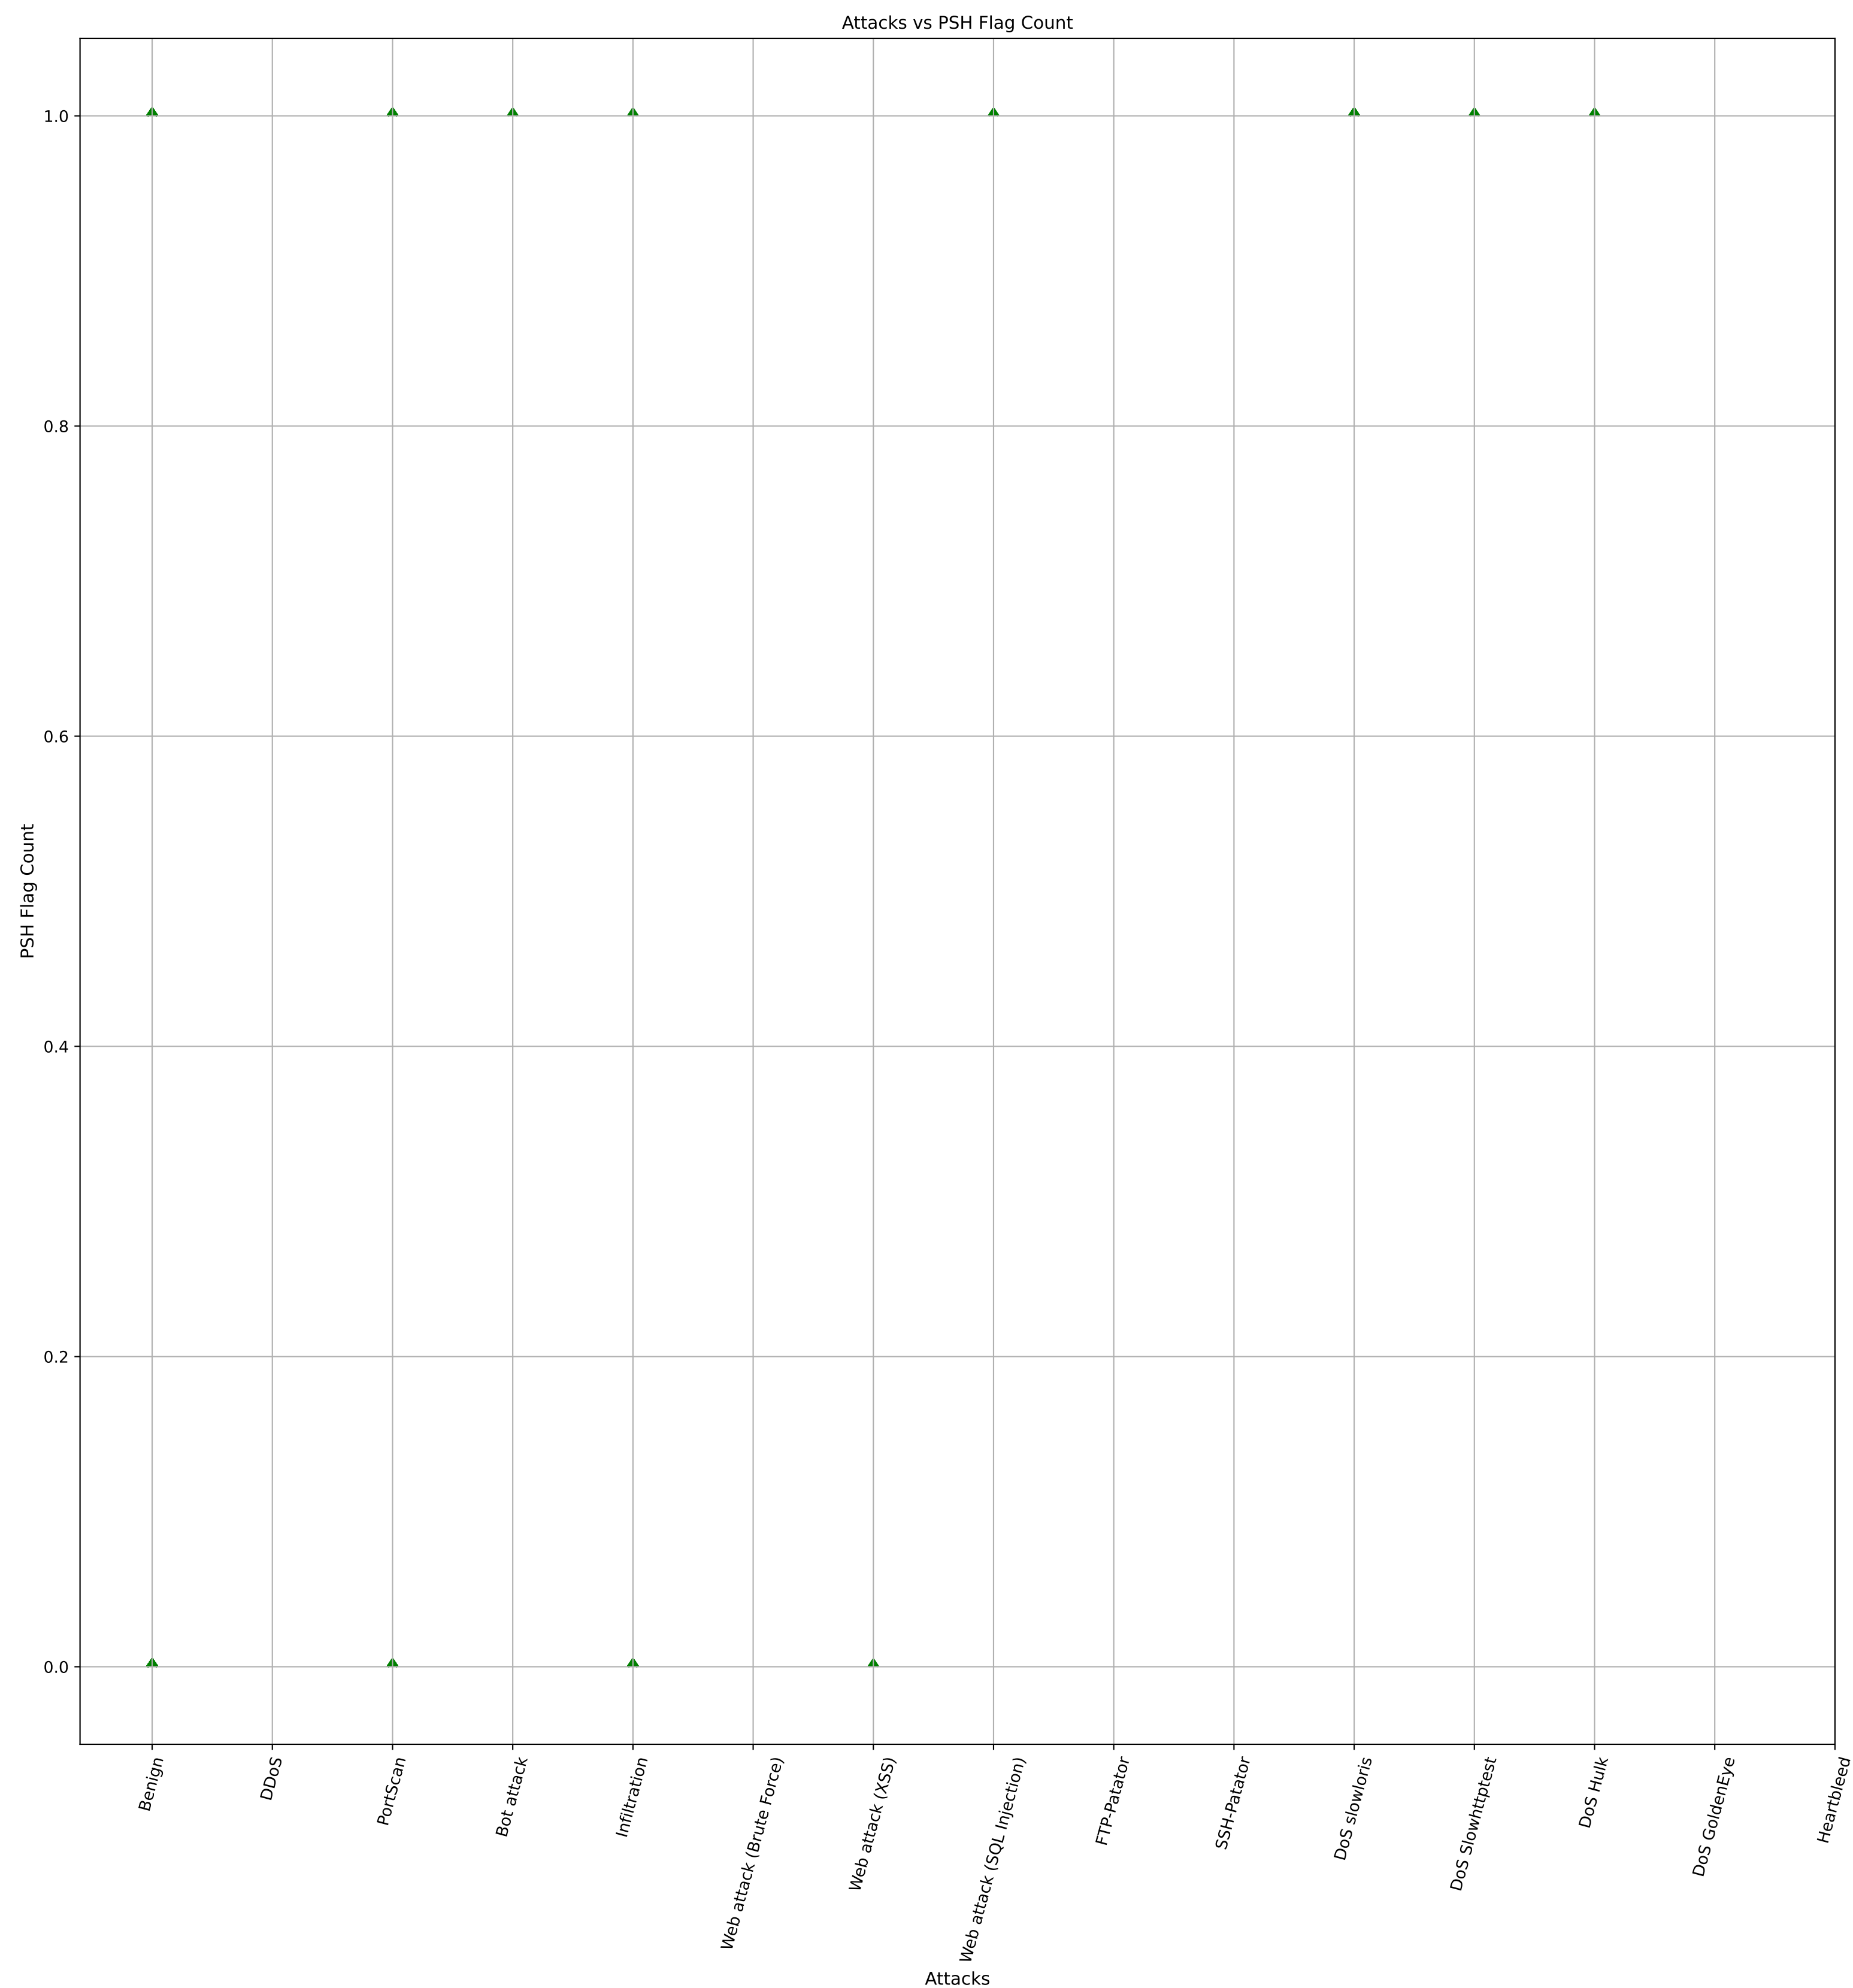


The most common value (mode) of ACK Flag Count is 0

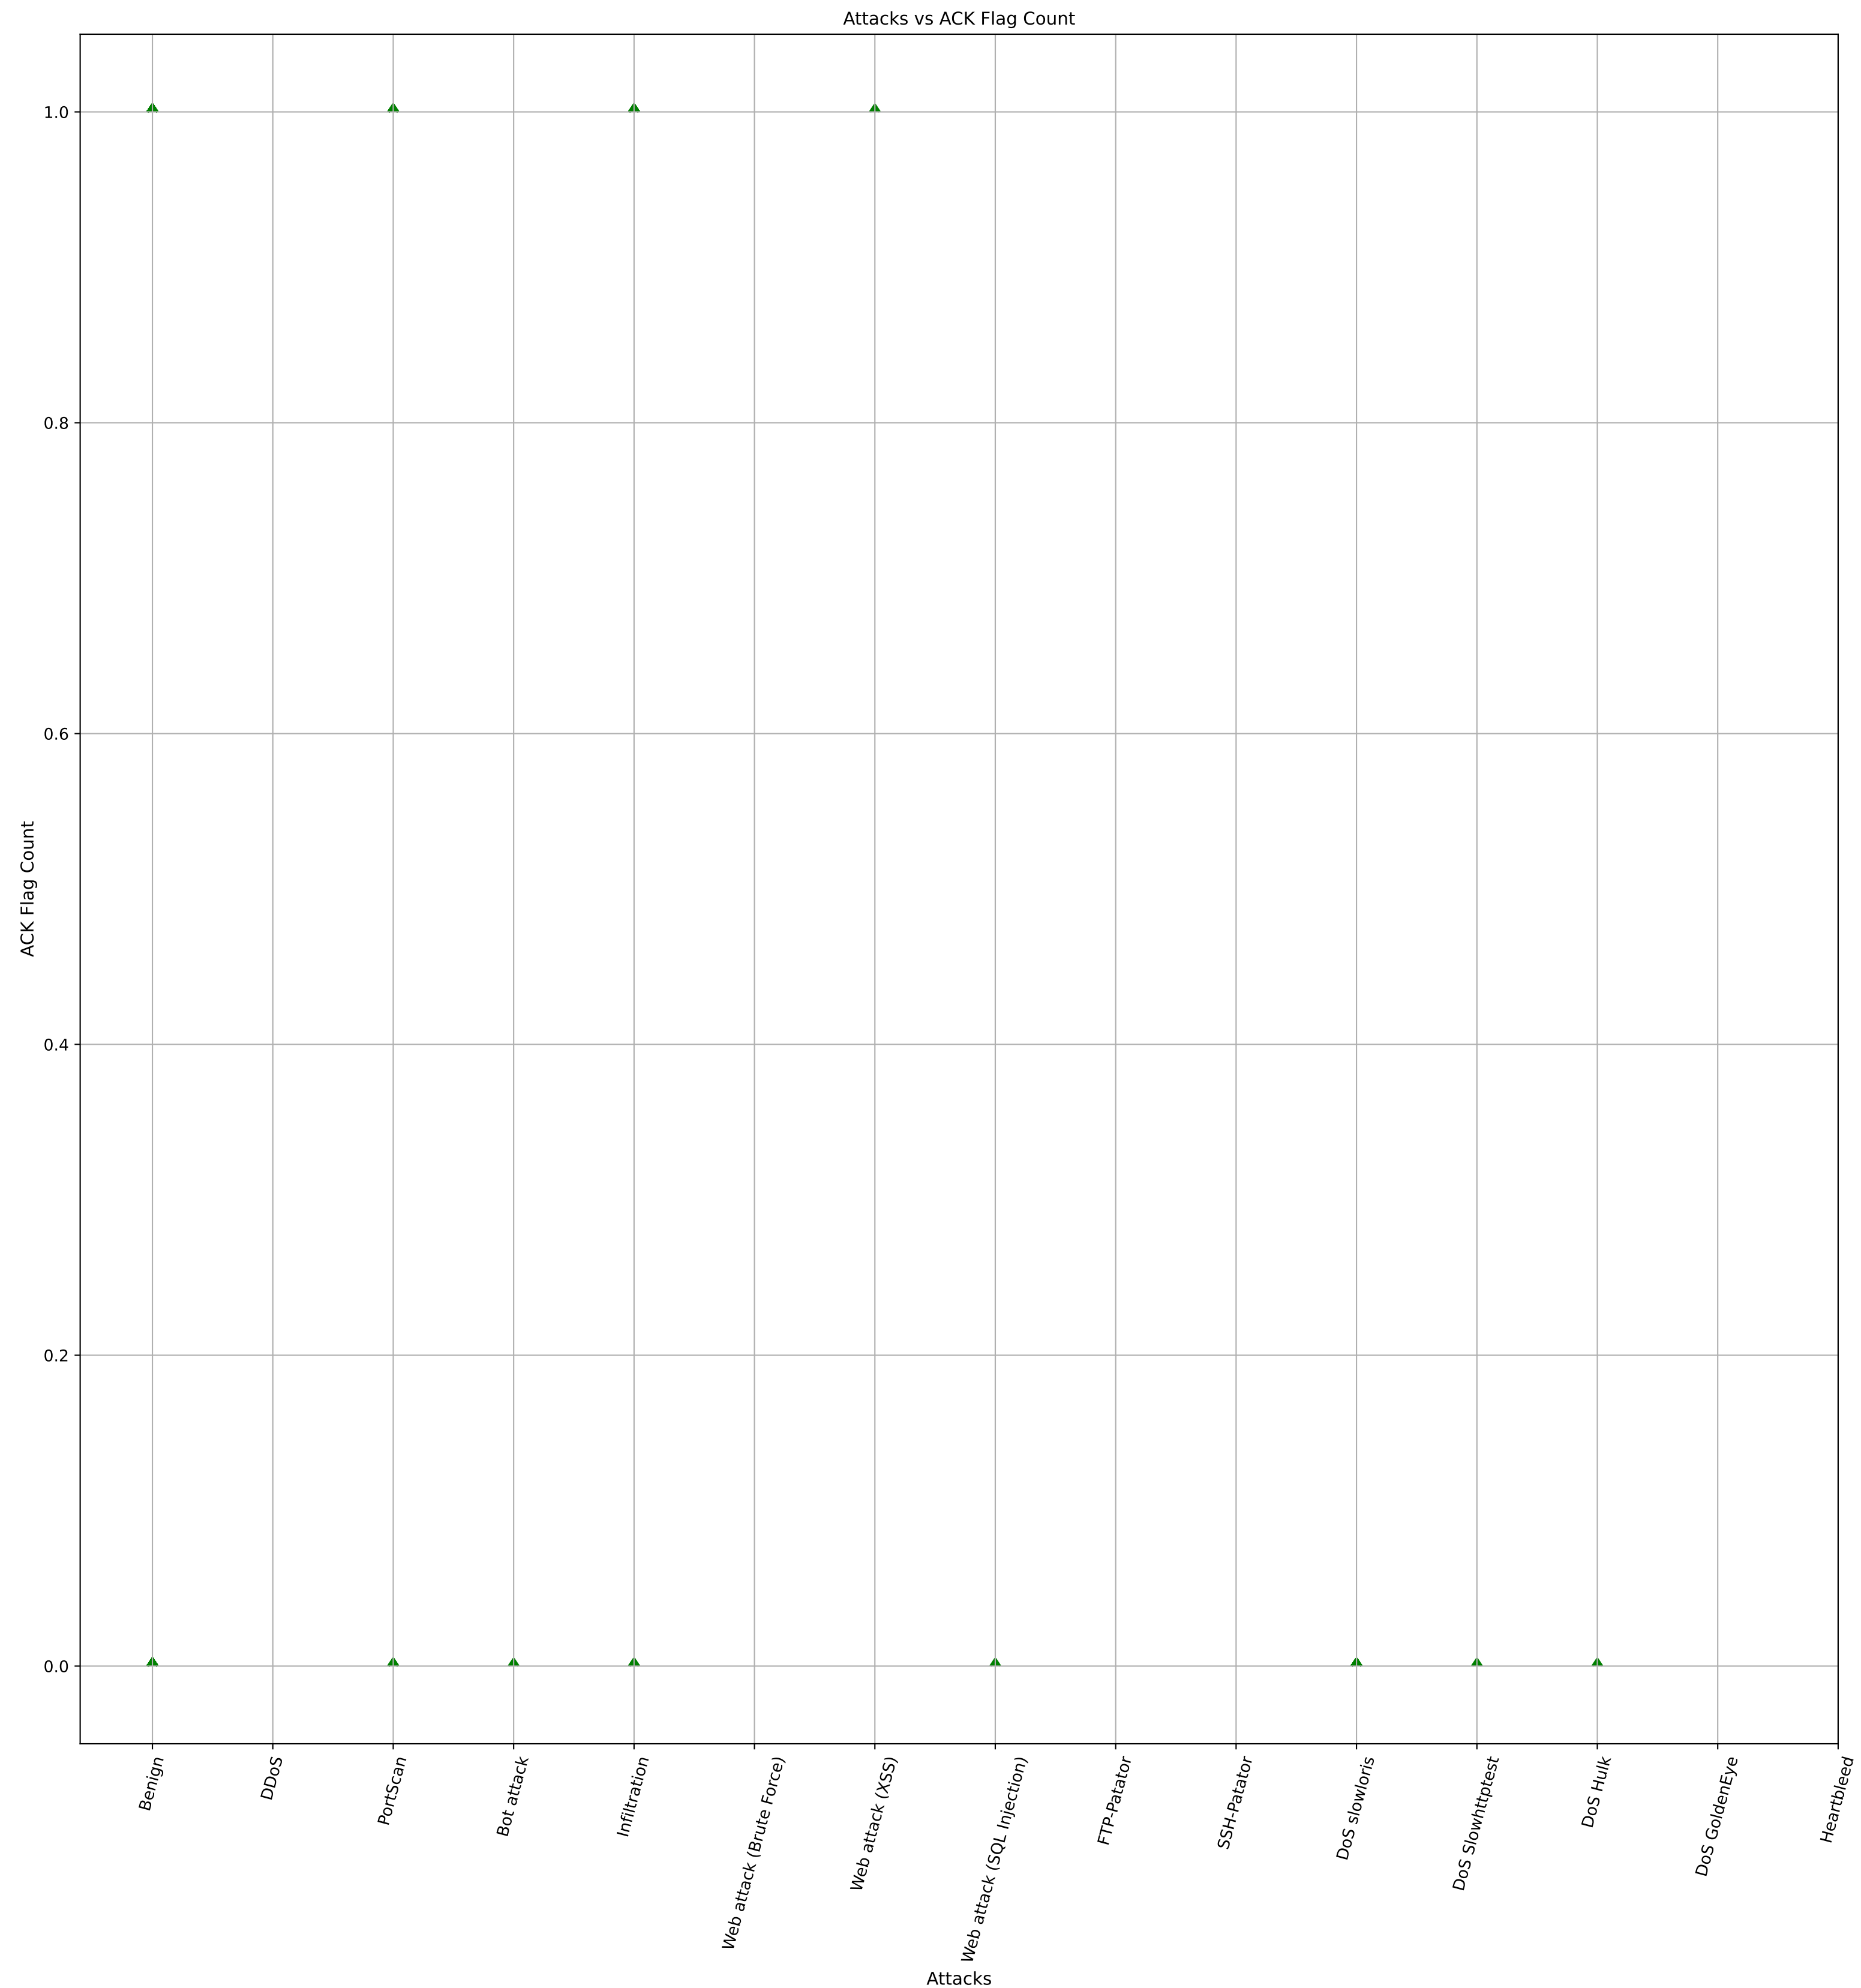


The most common value (mode) of URG Flag Count is 0

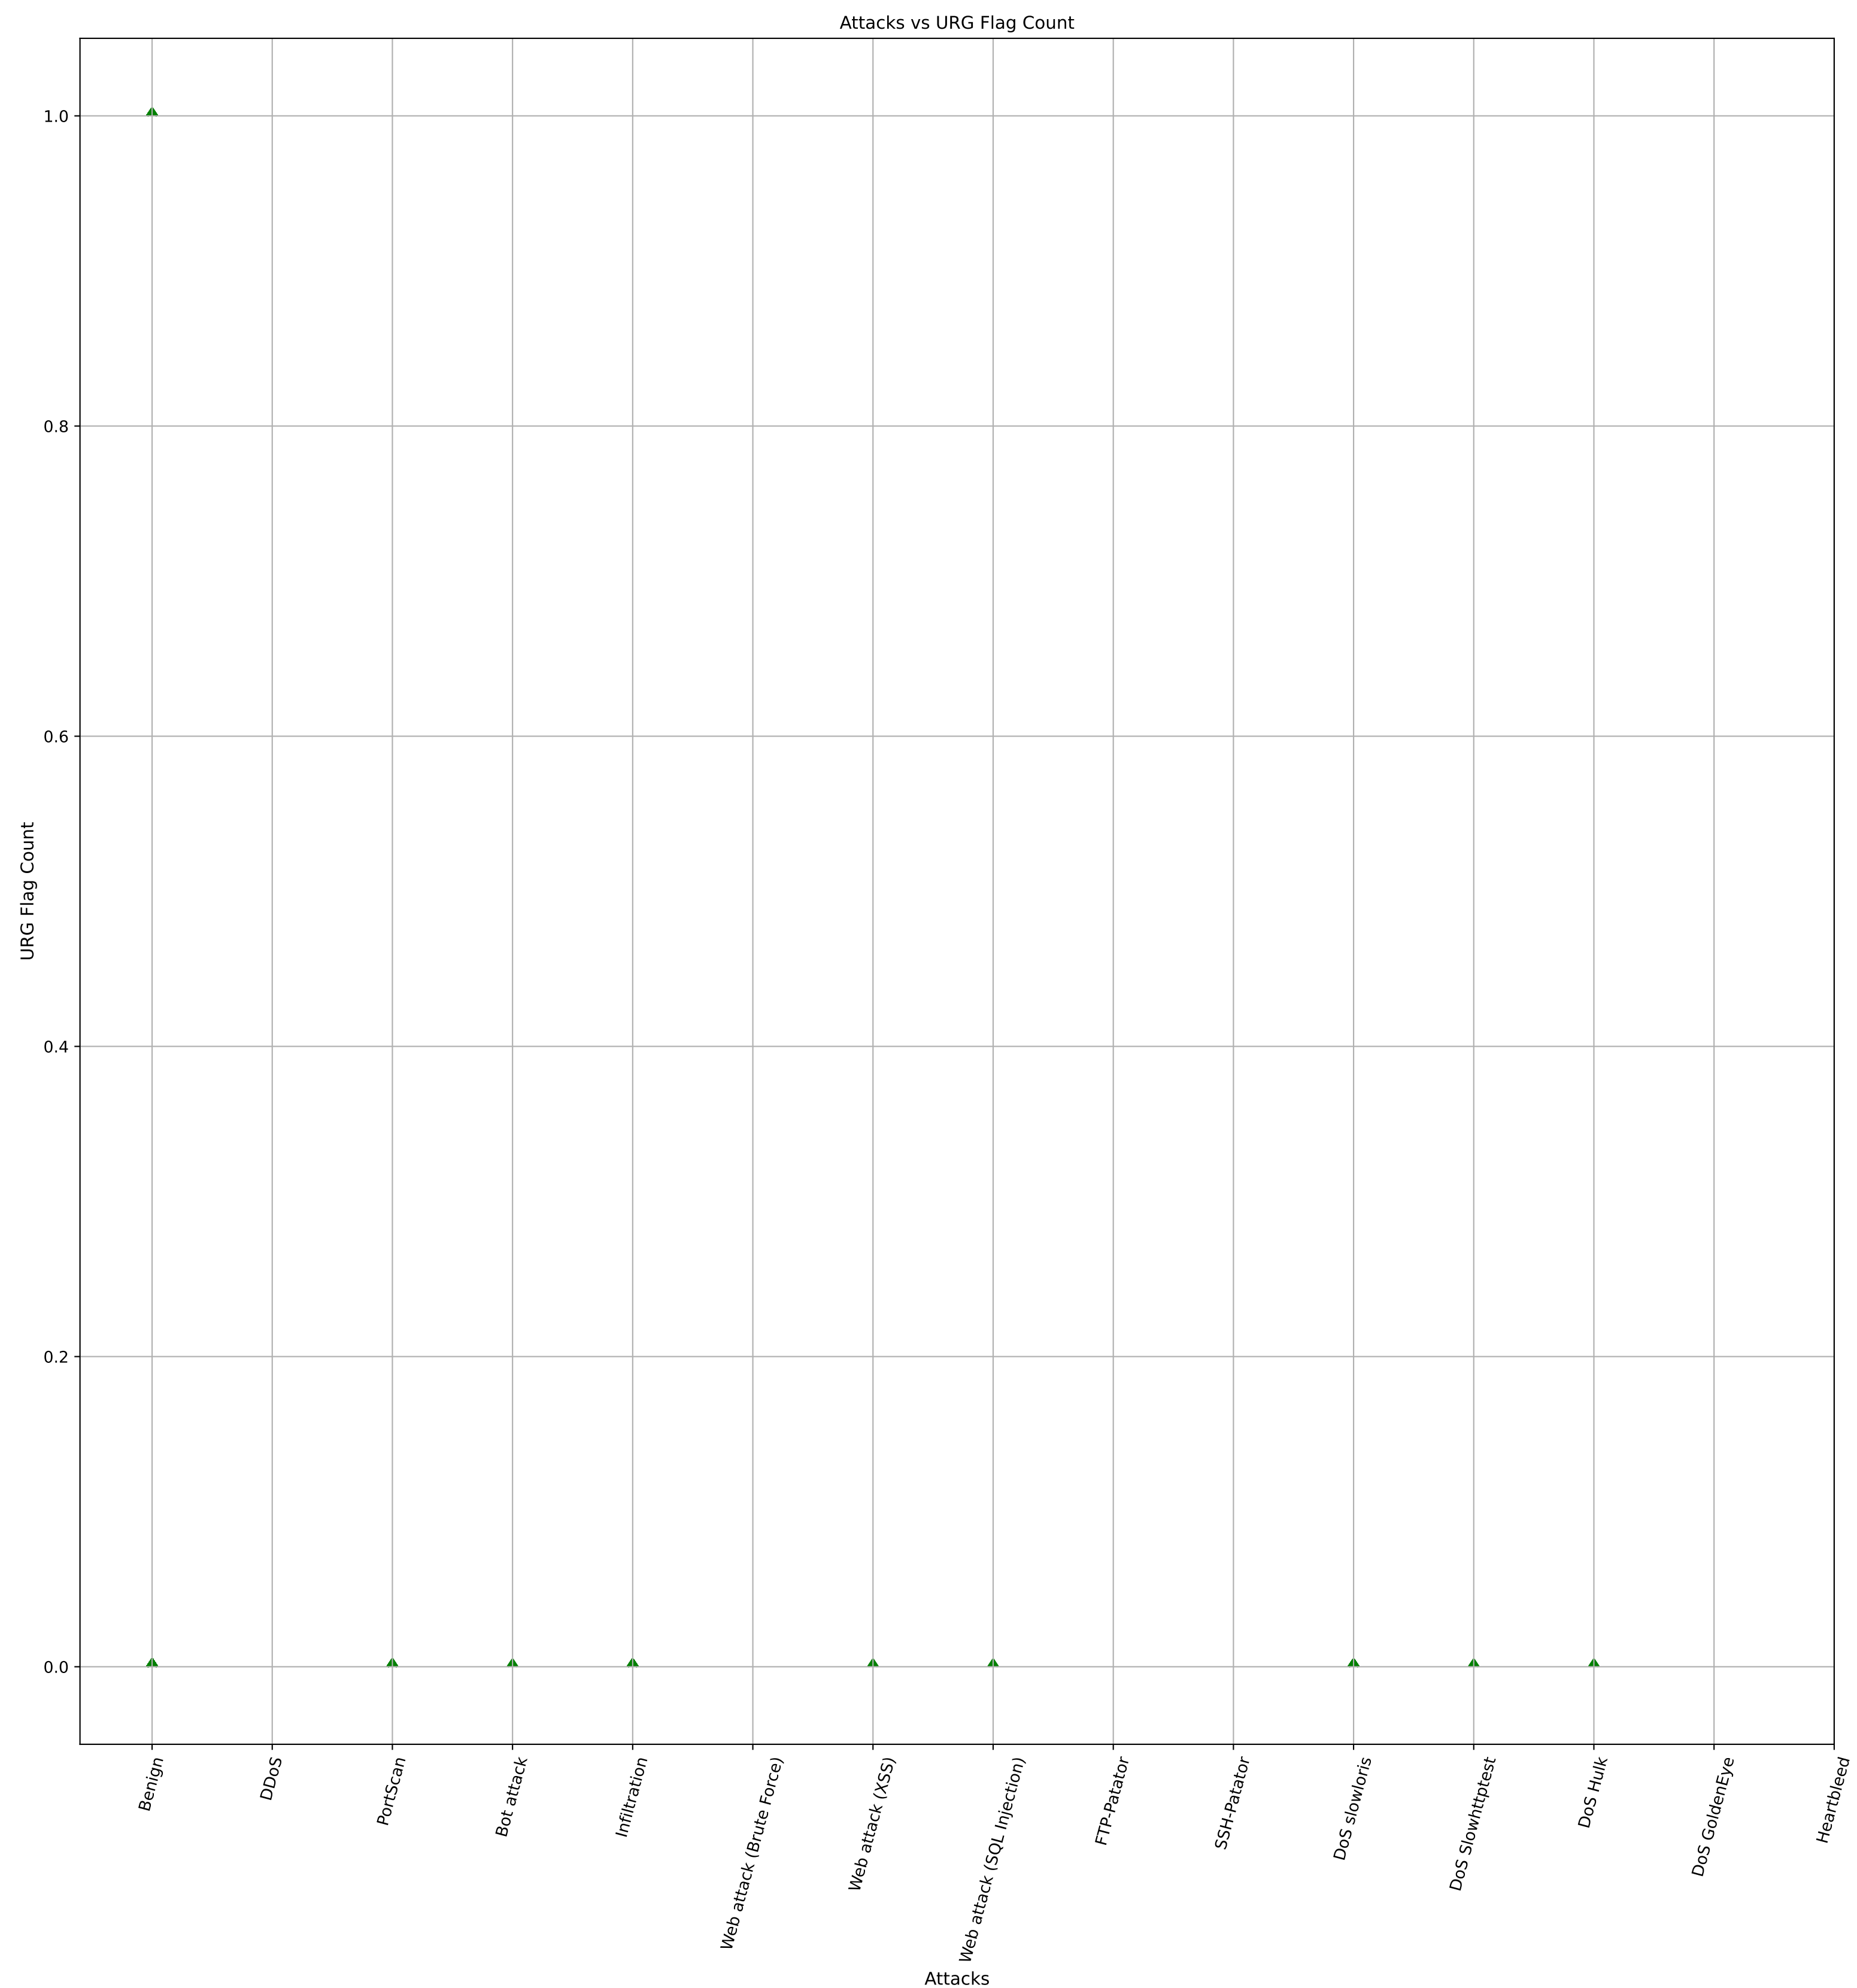


The most common value (mode) of CWE Flag Count is 0

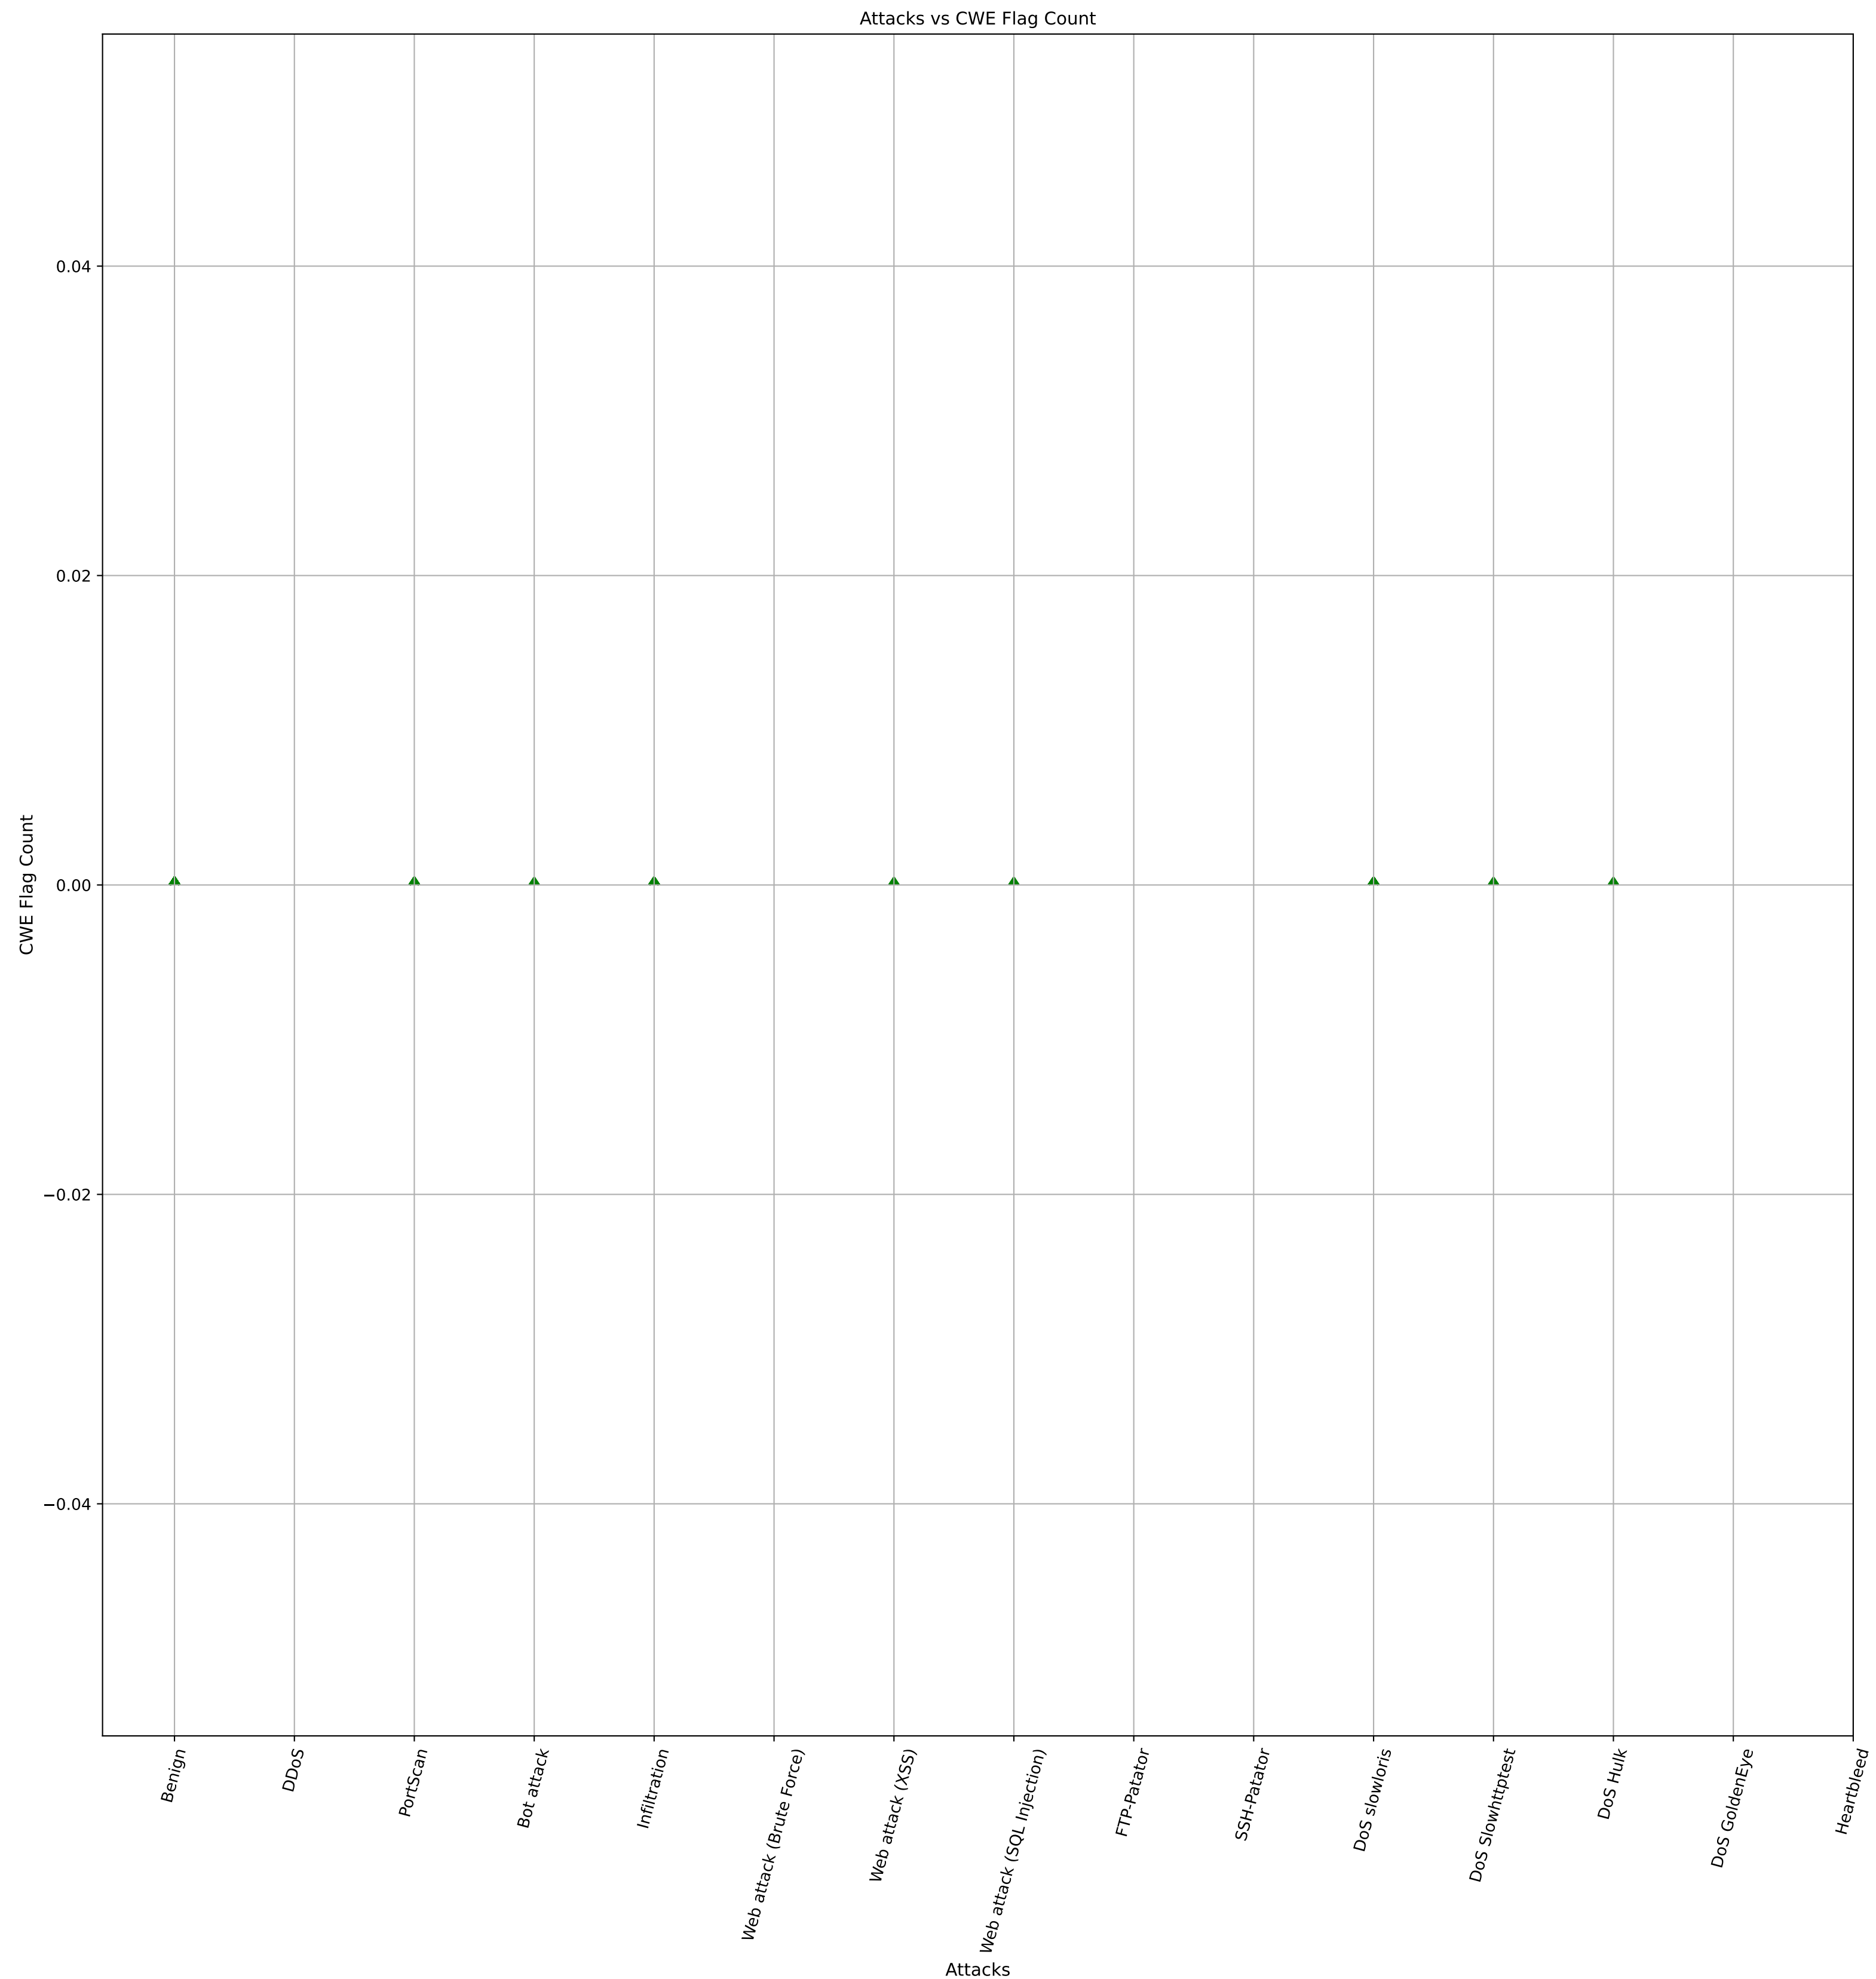


The most common value (mode) of ECE Flag Count is 0

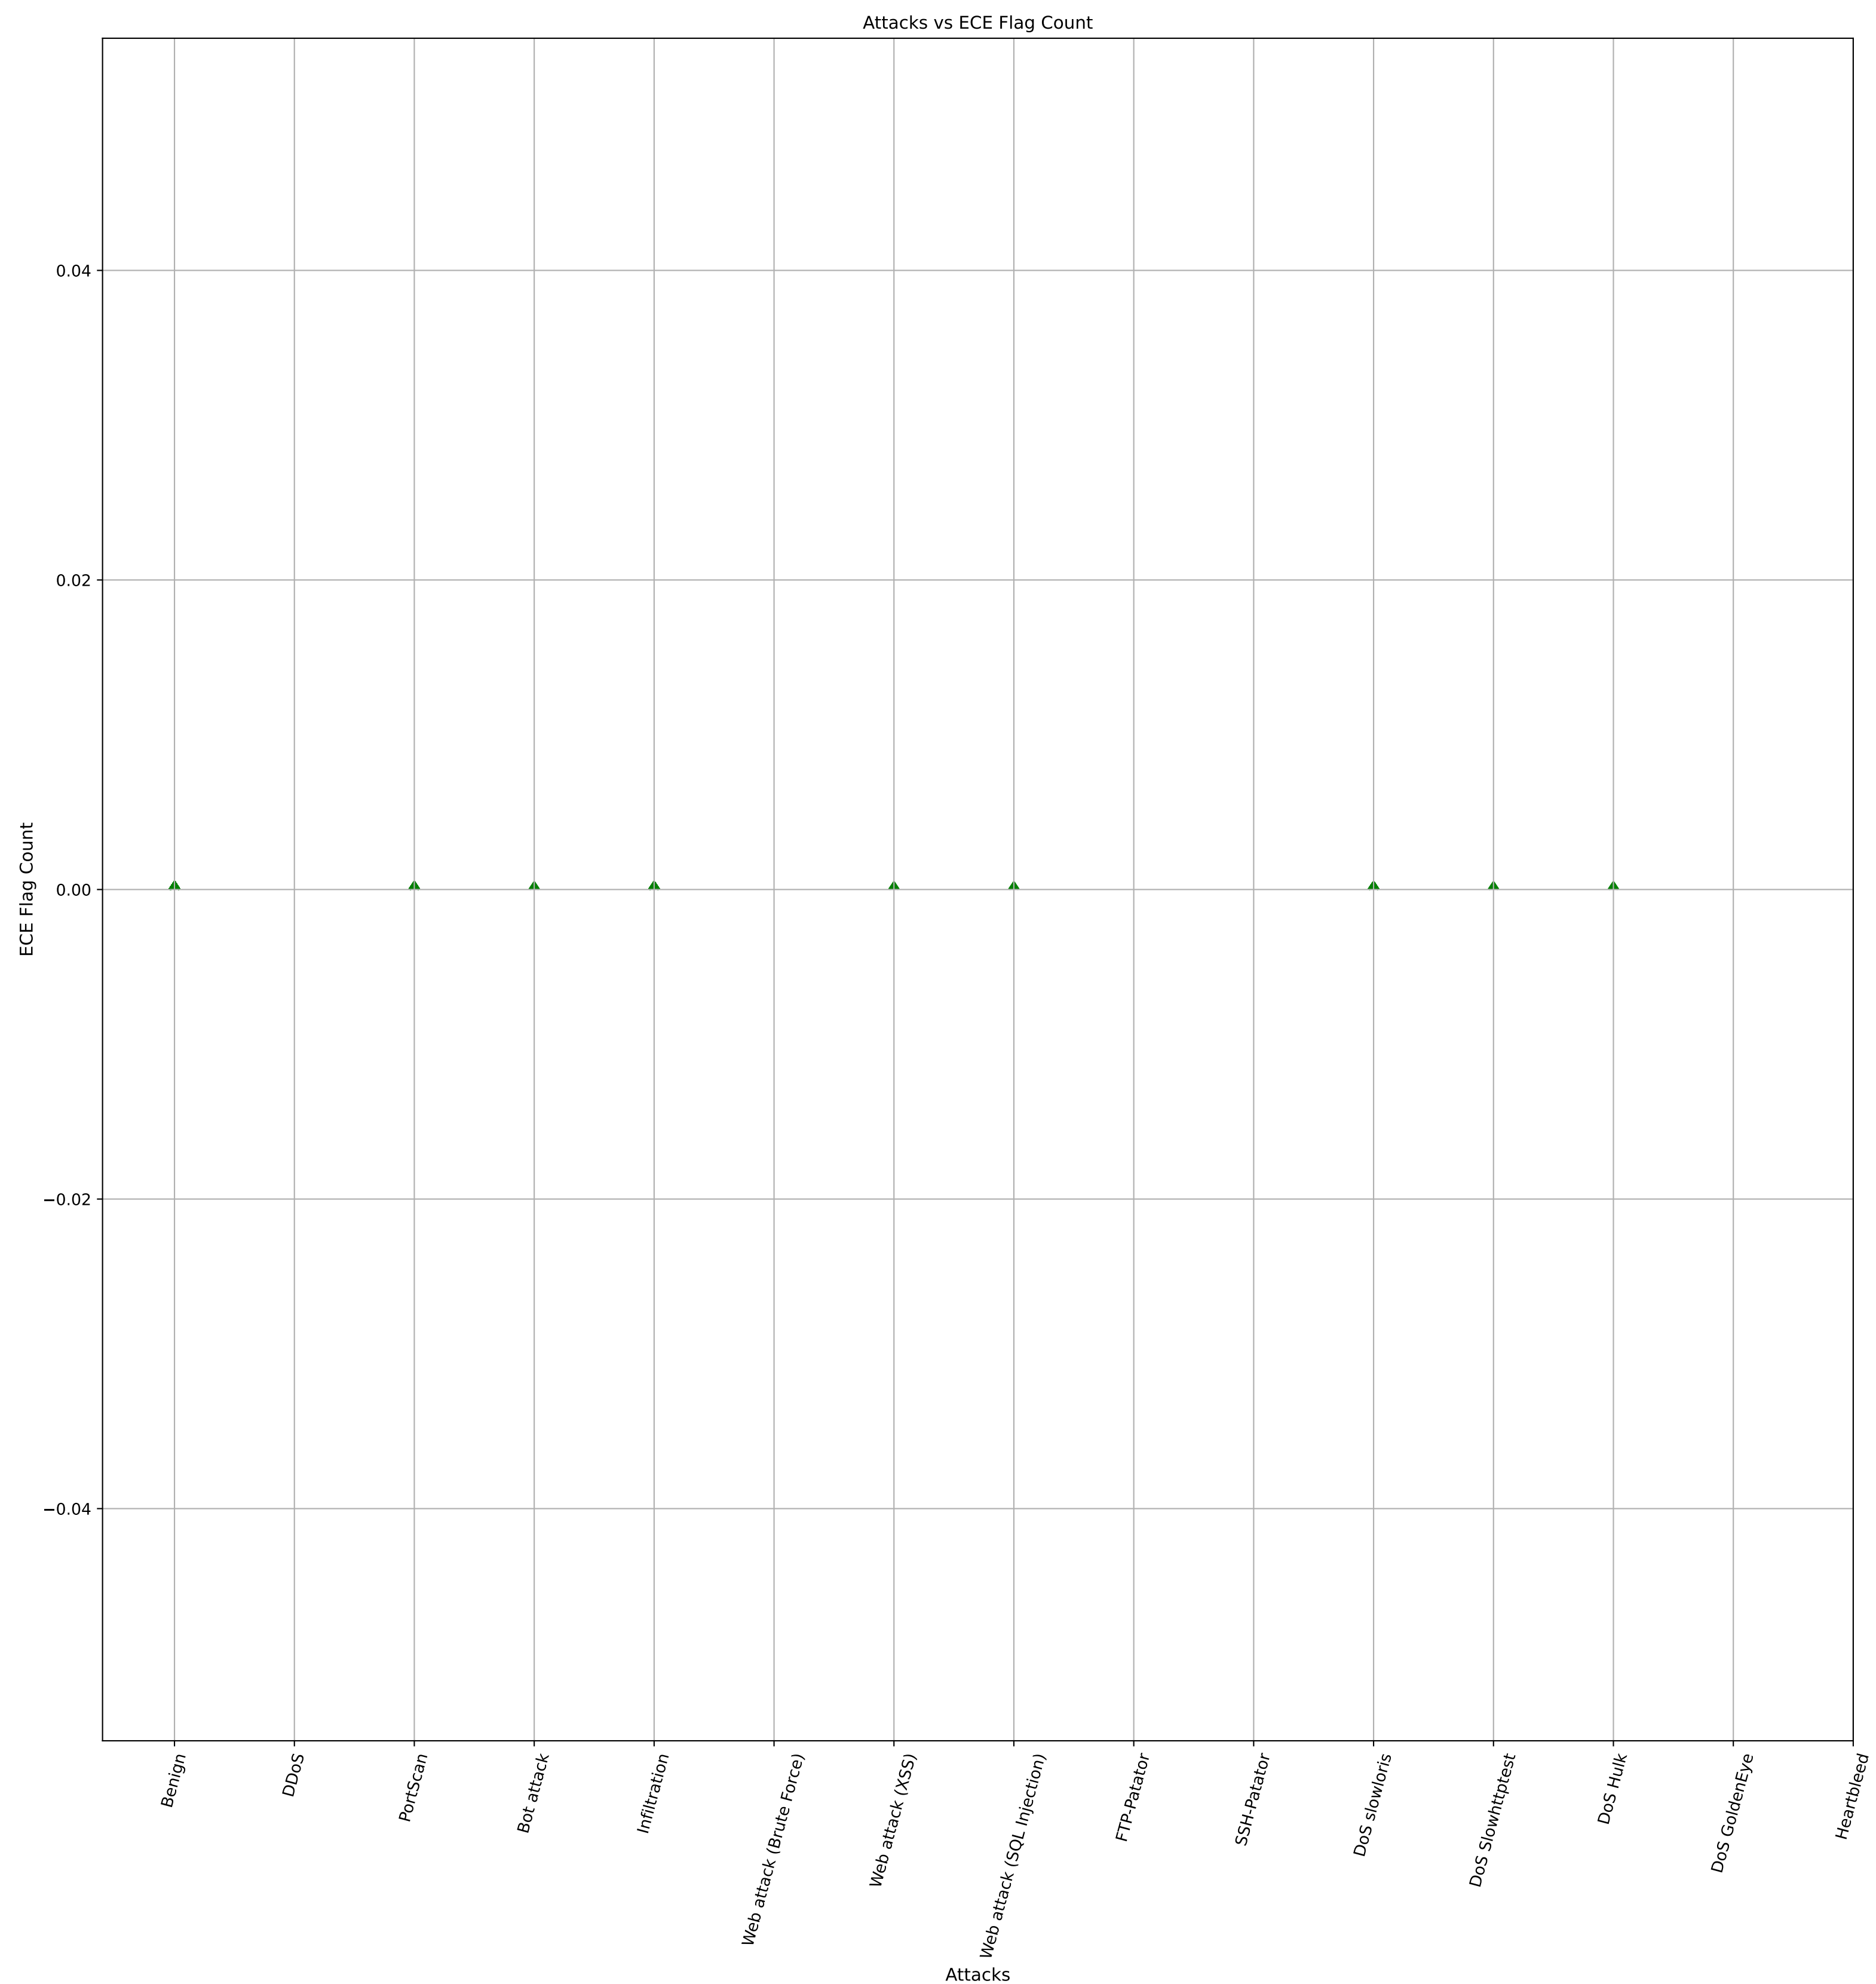


The most common value (mode) of Down/Up Ratio is 1

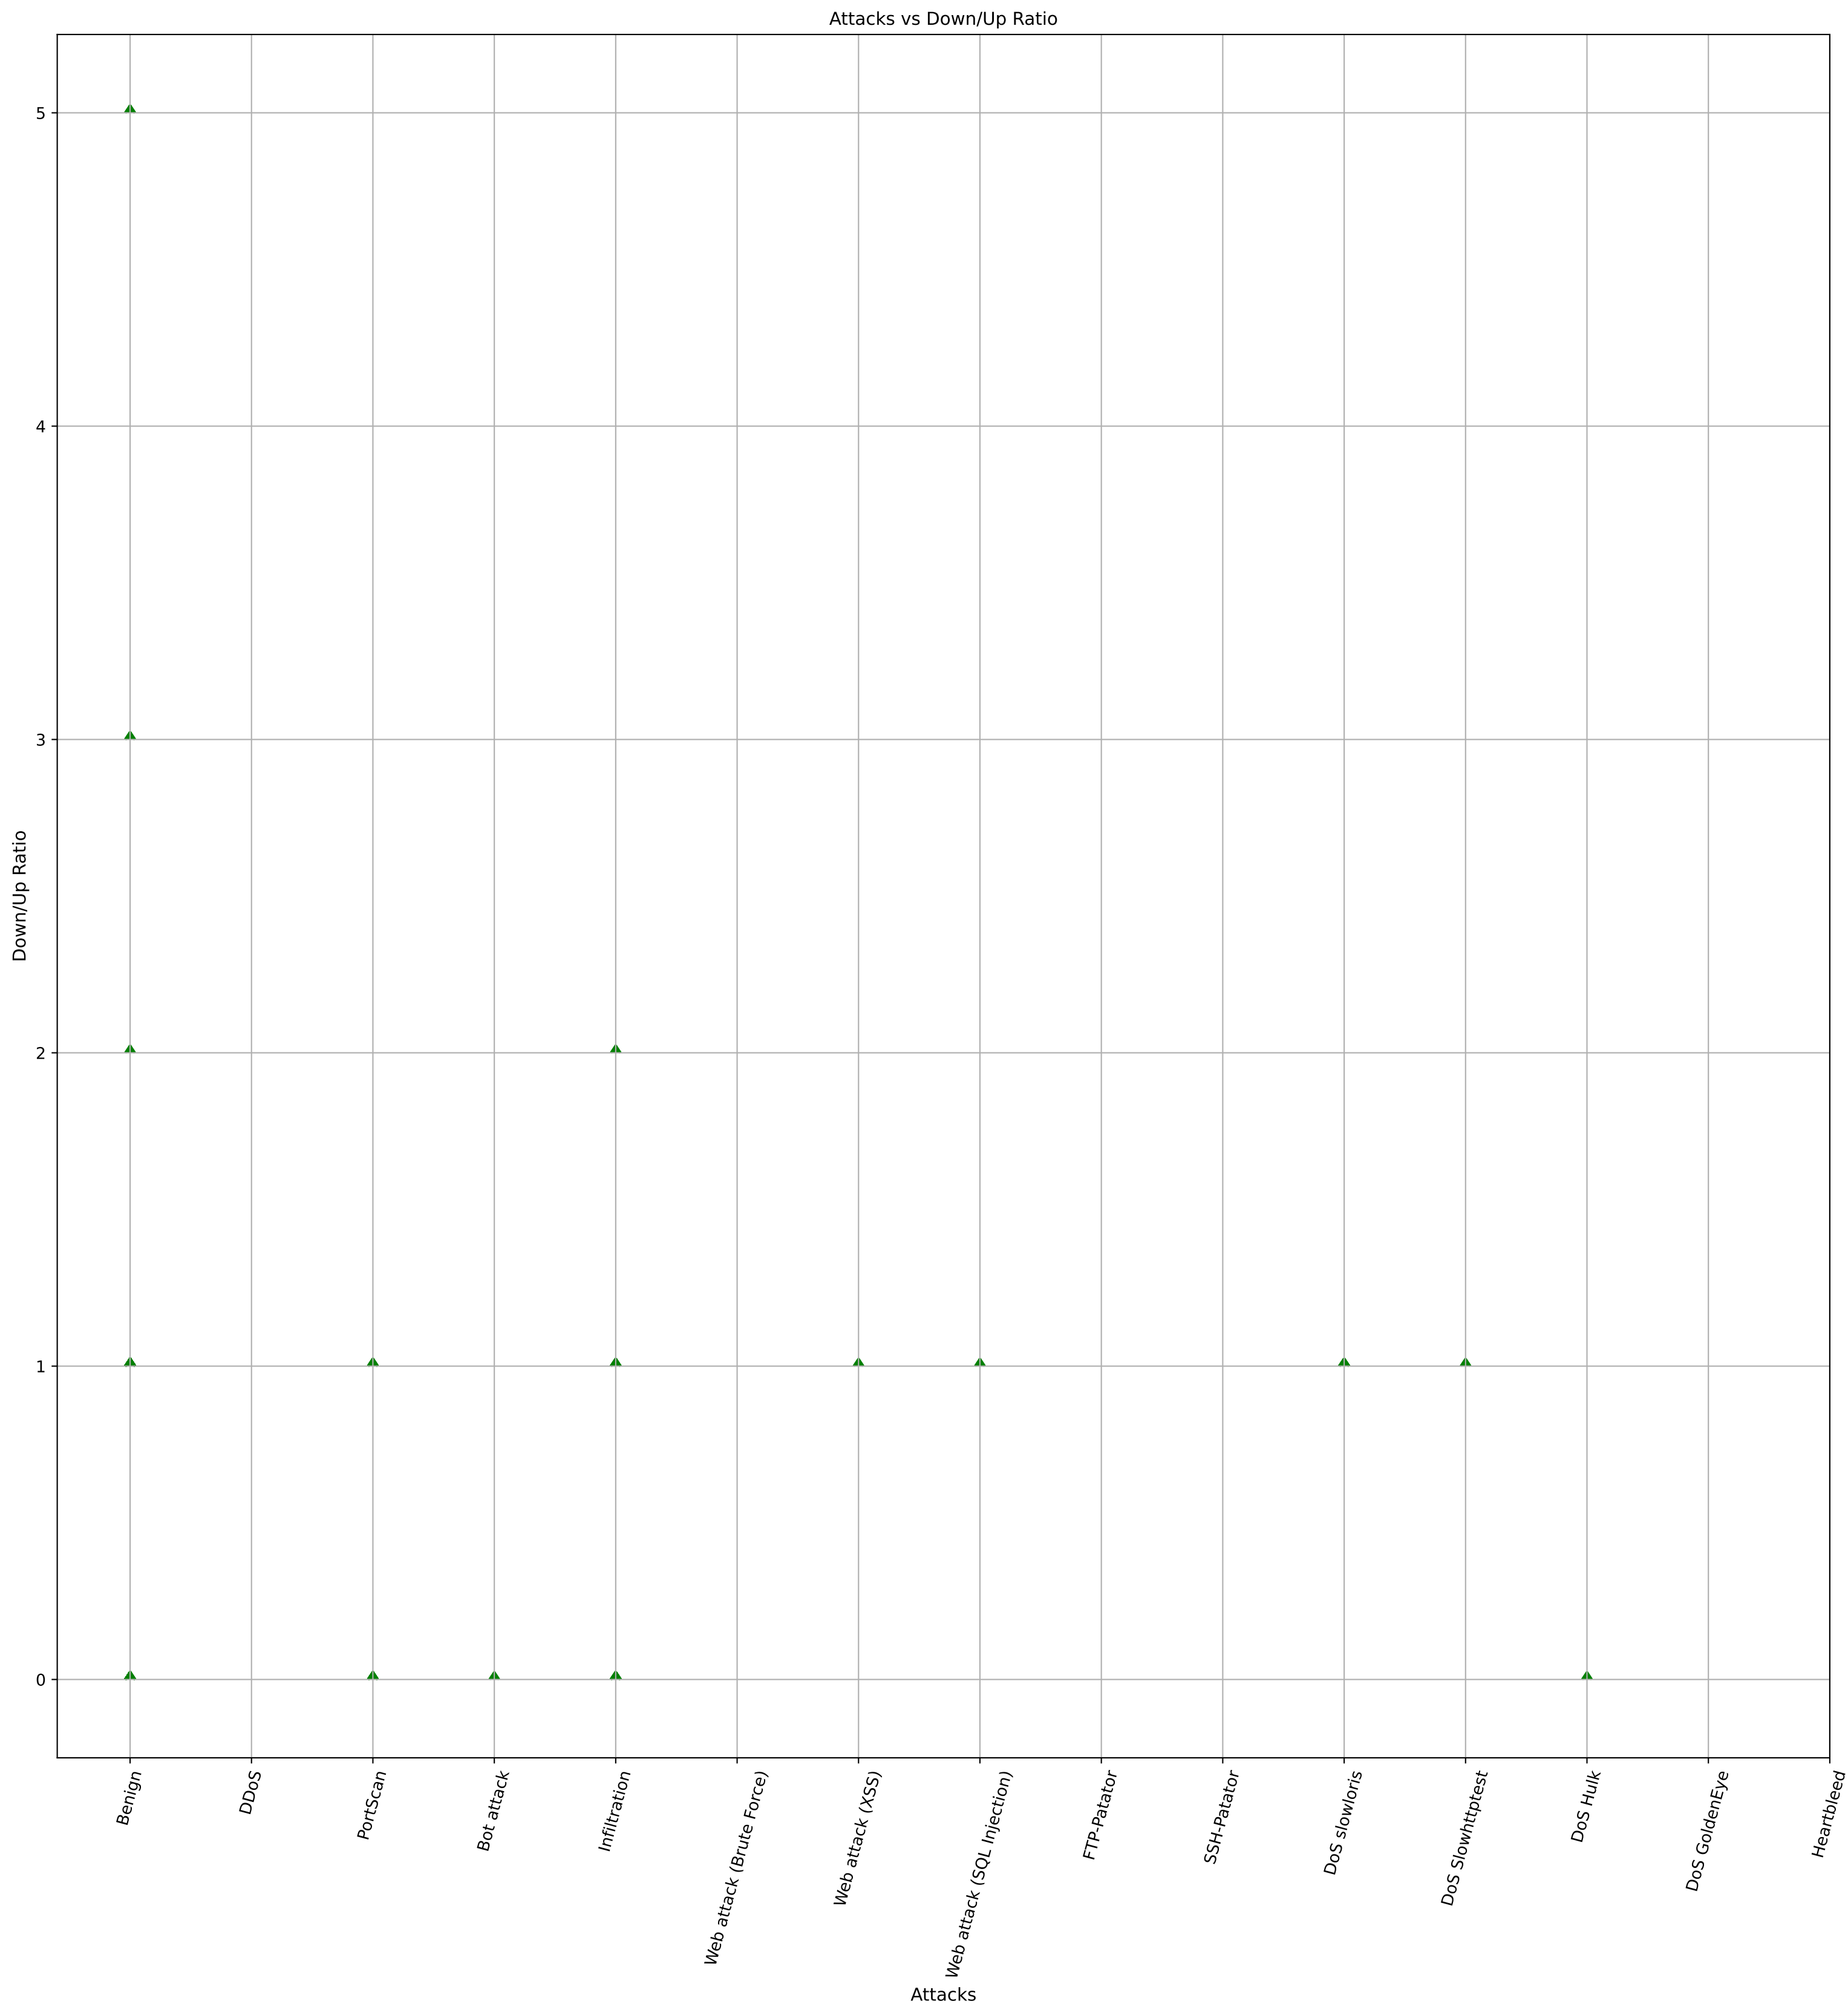


The most common value (mode) of Average Packet Size is 0.0

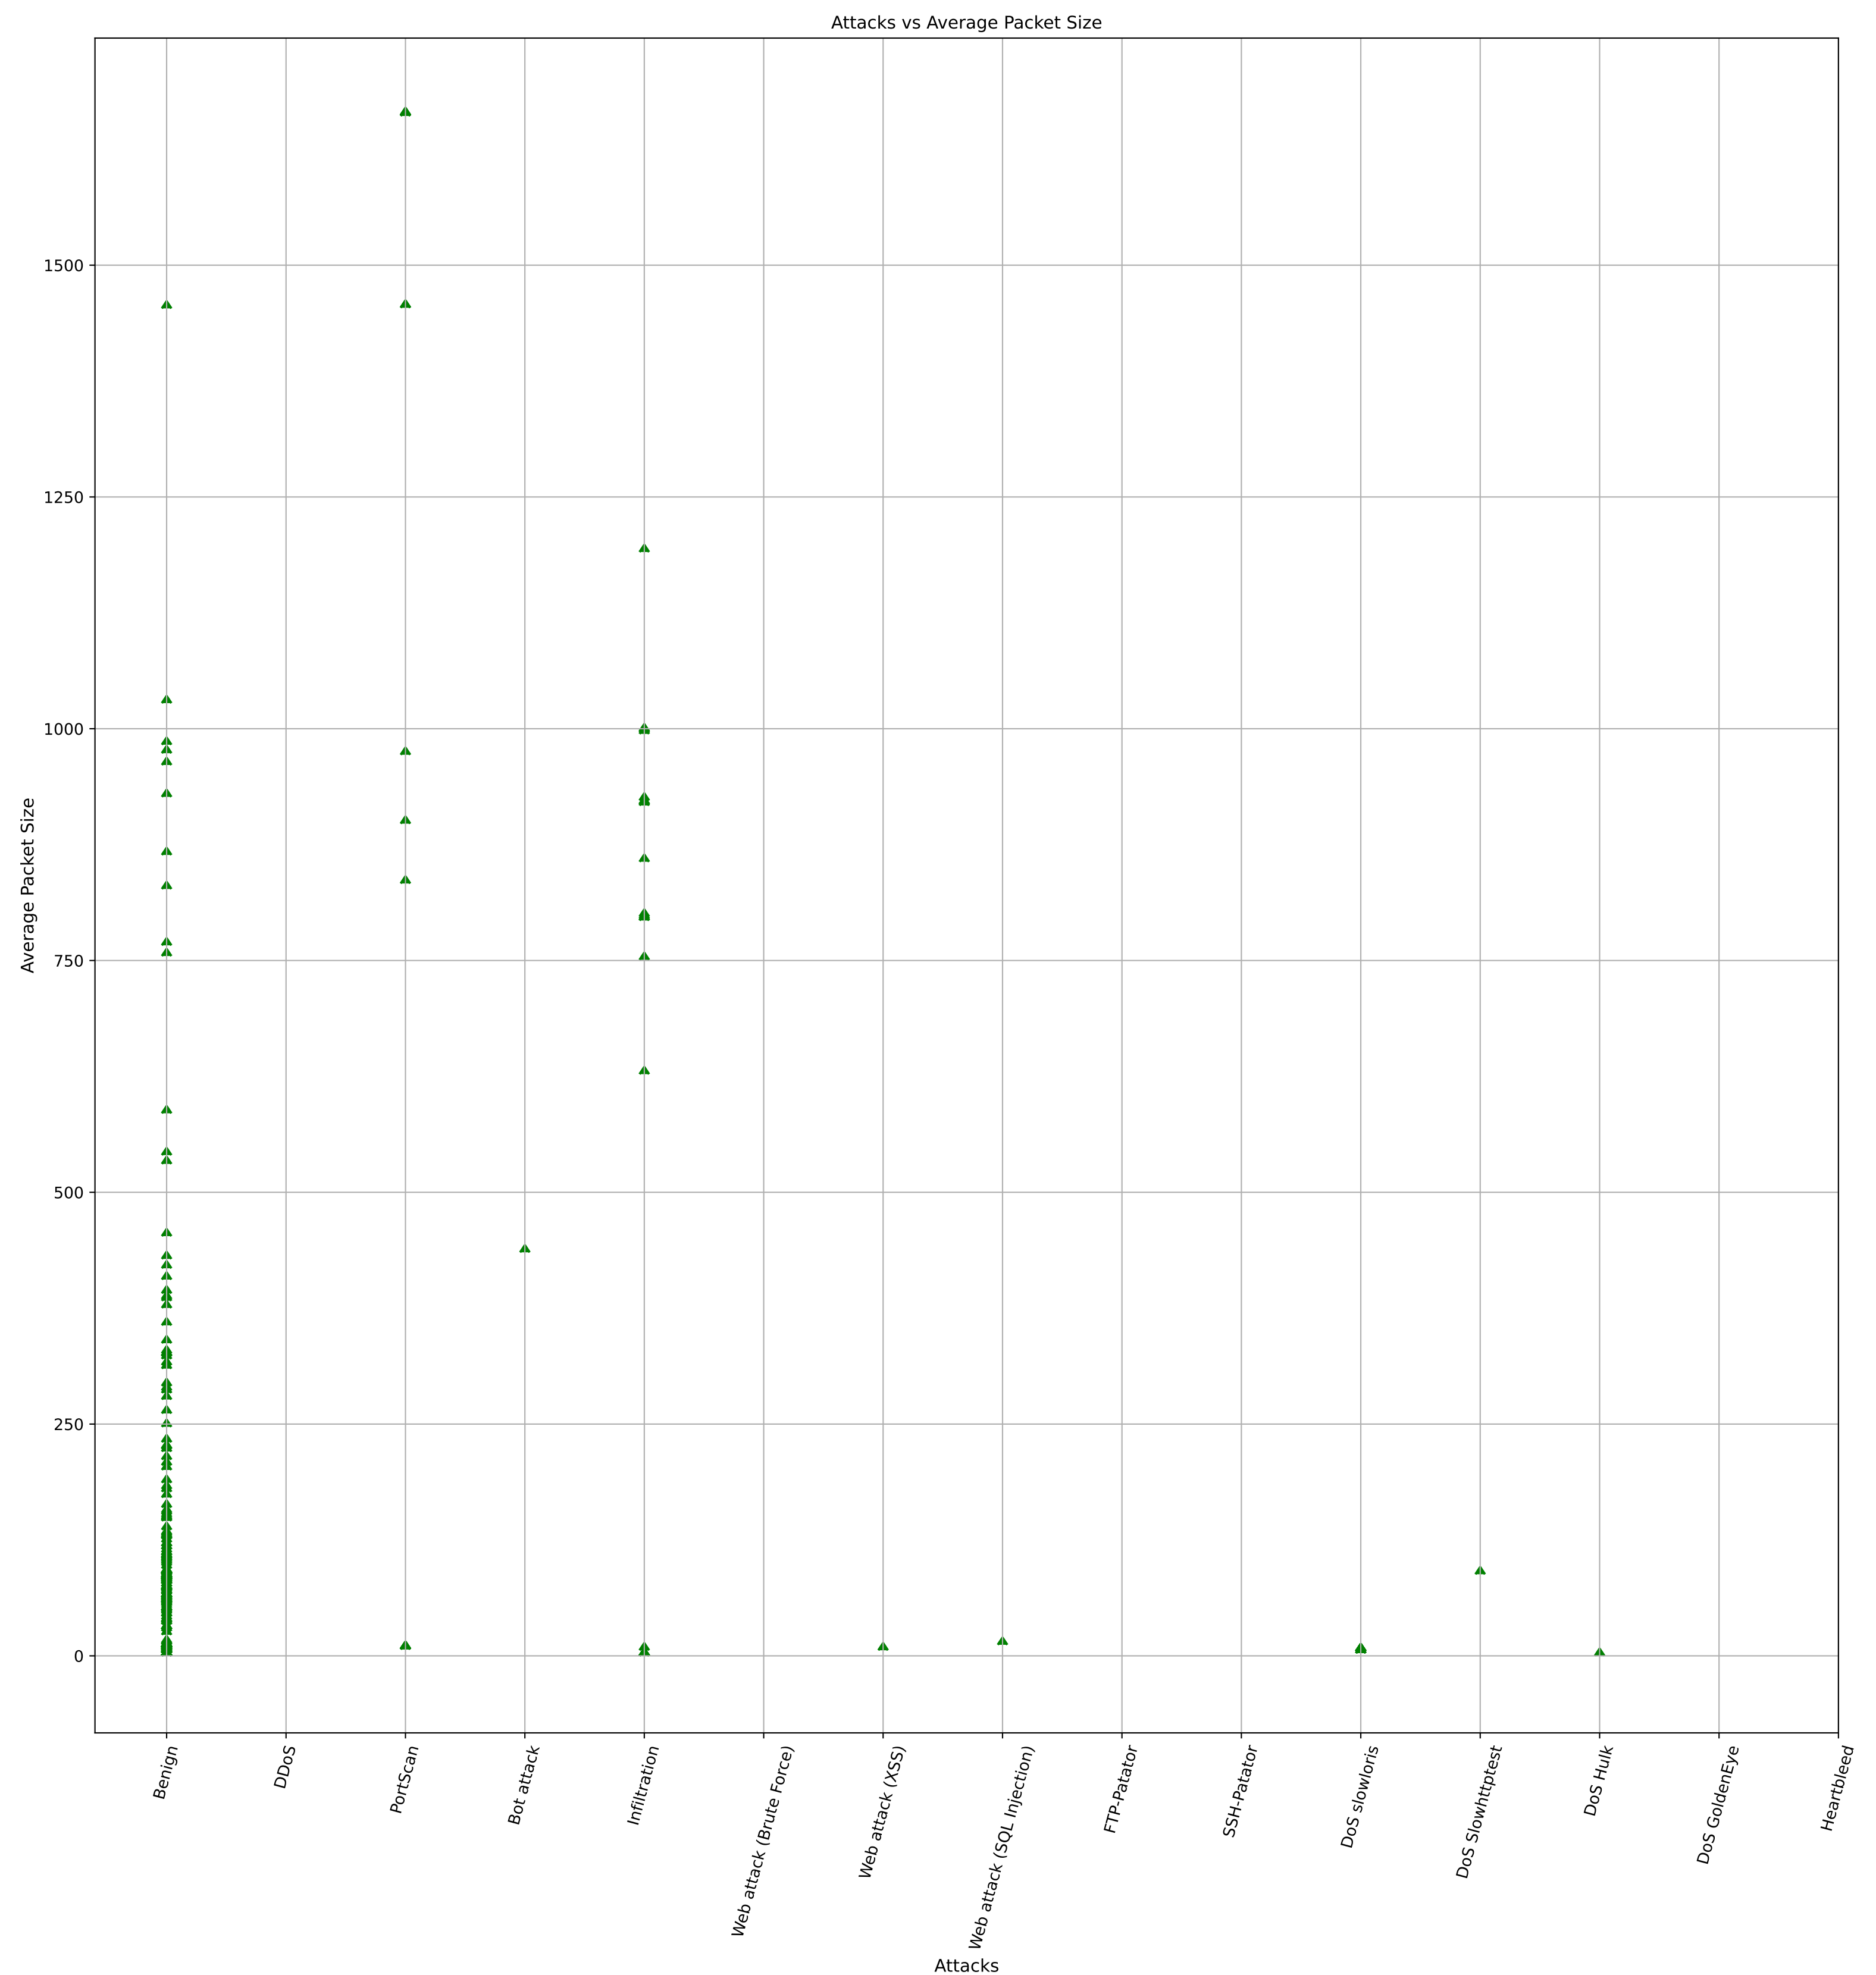


The most common value (mode) of Avg Fwd Segment Size is 0.0

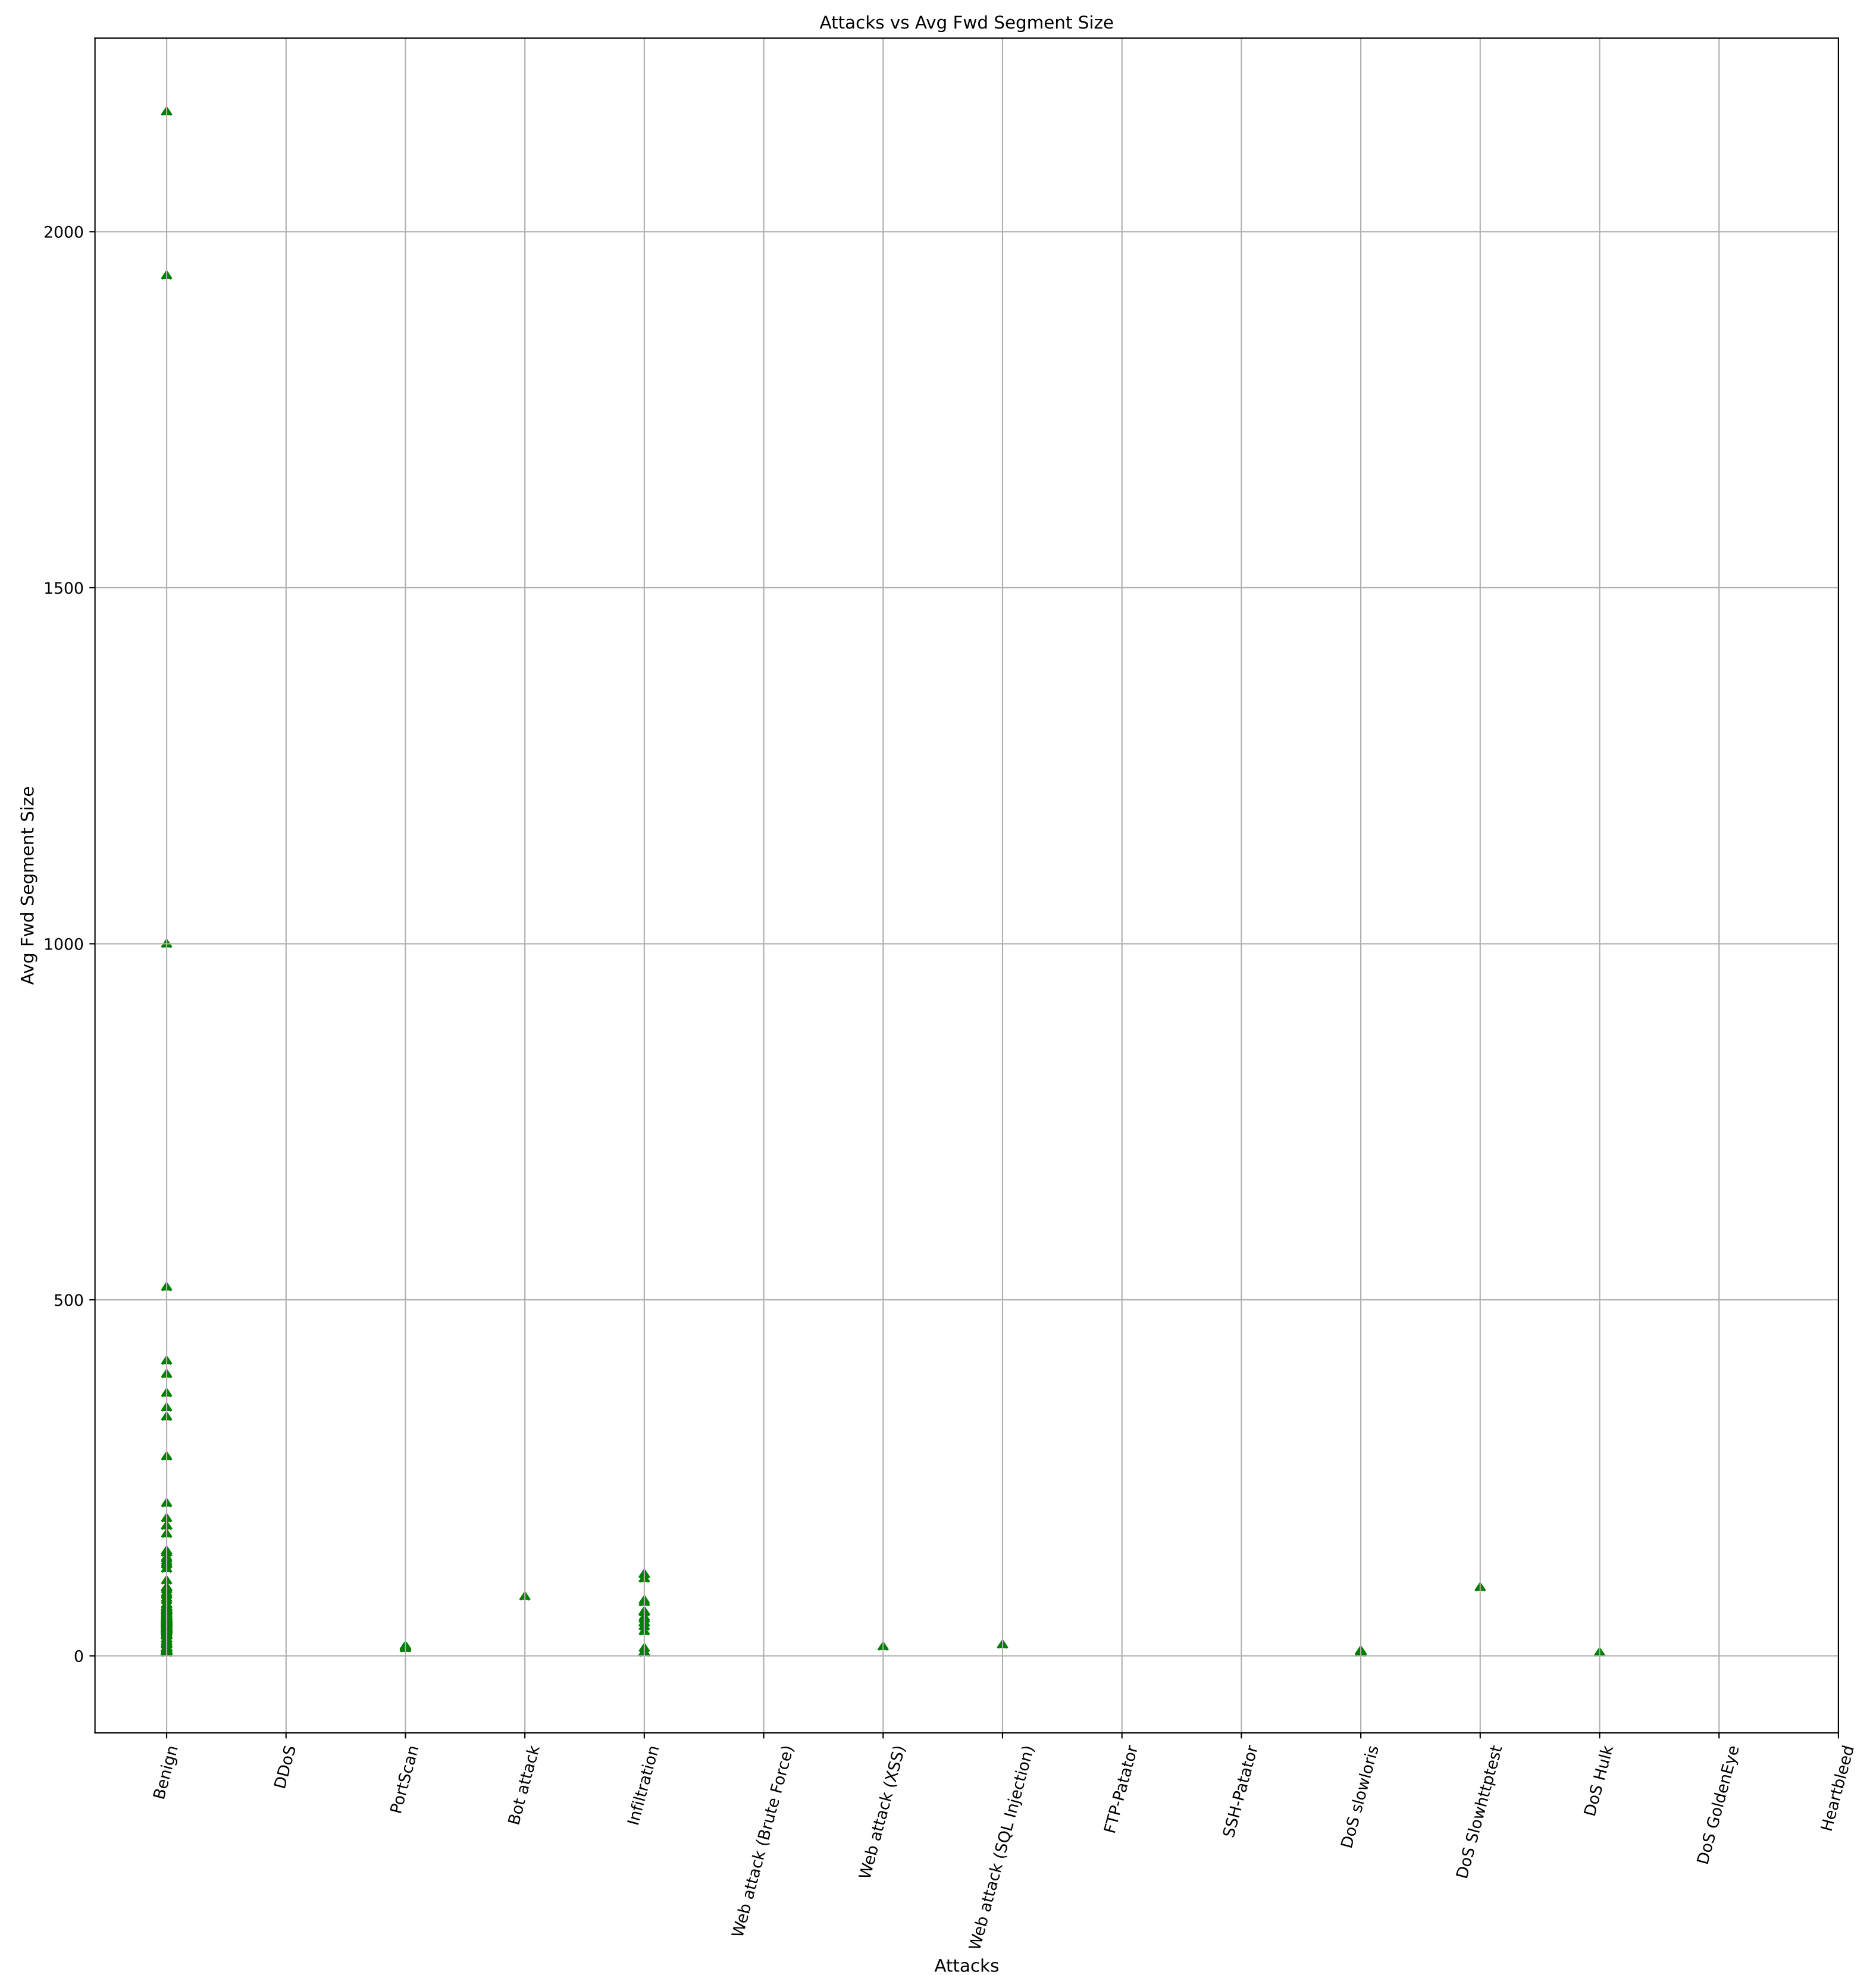


The most common value (mode) of Avg Bwd Segment Size is 0.0

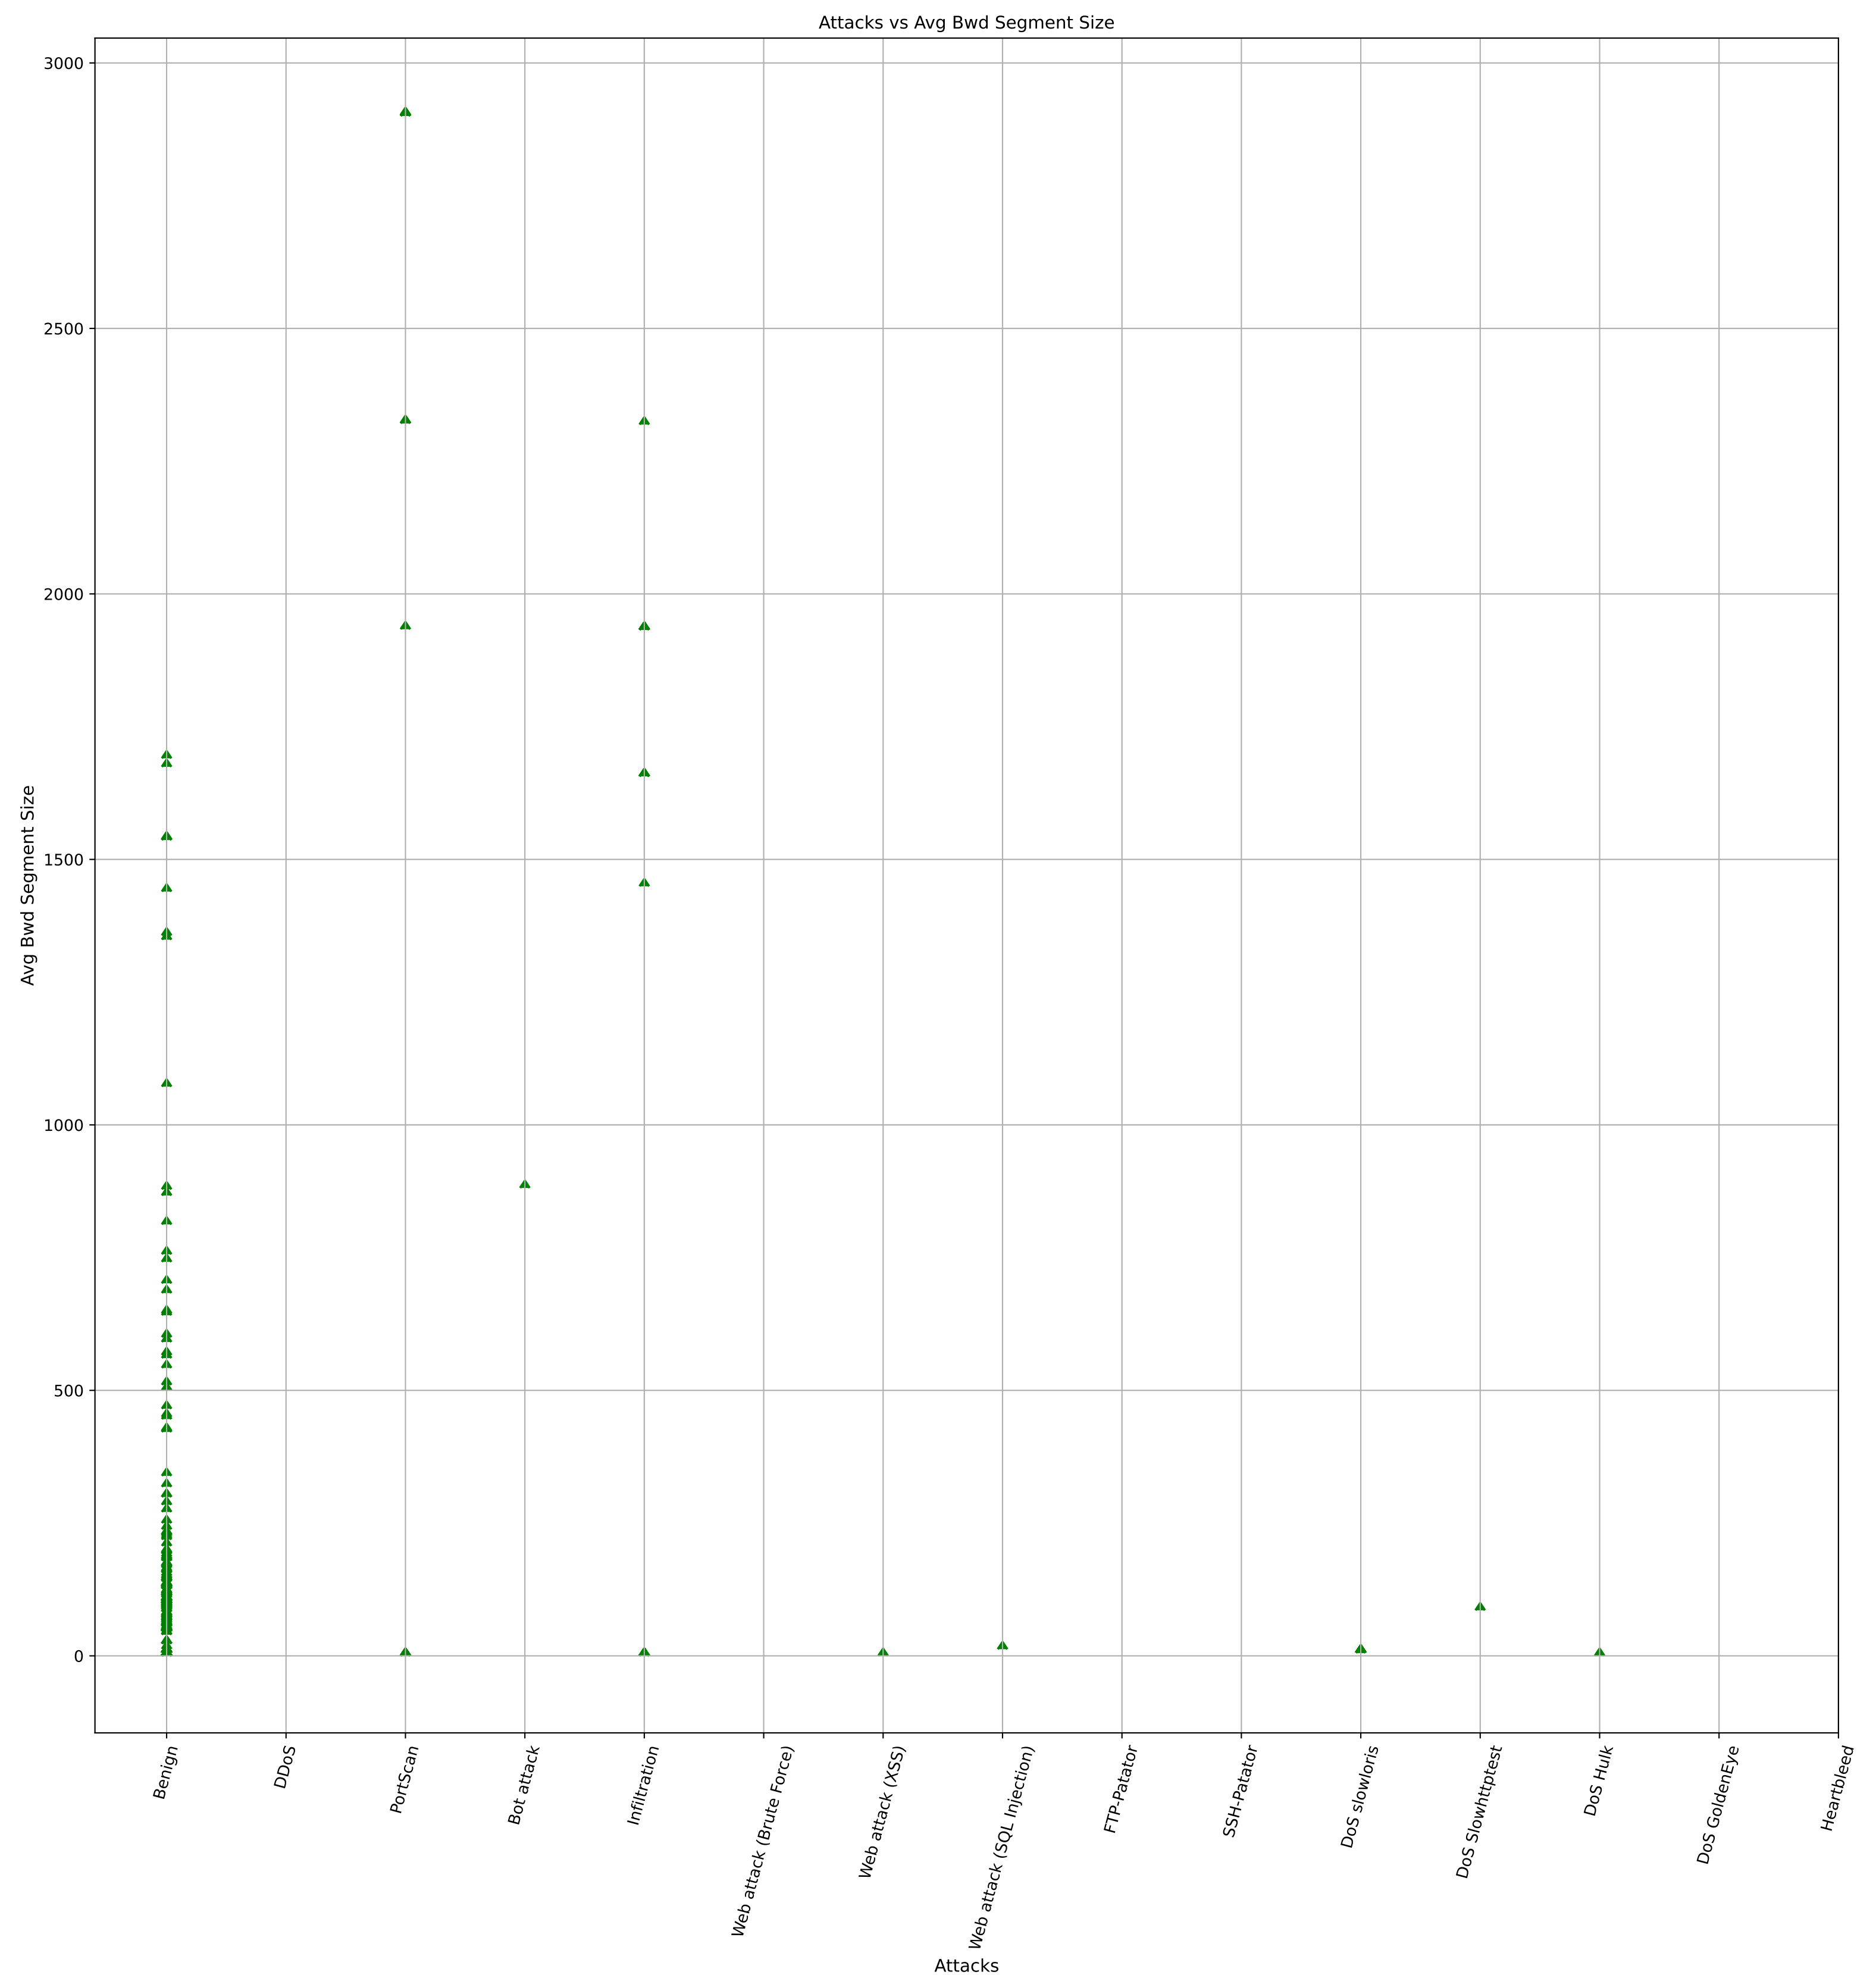


The most common value (mode) of Fwd Header Length.1 is 64

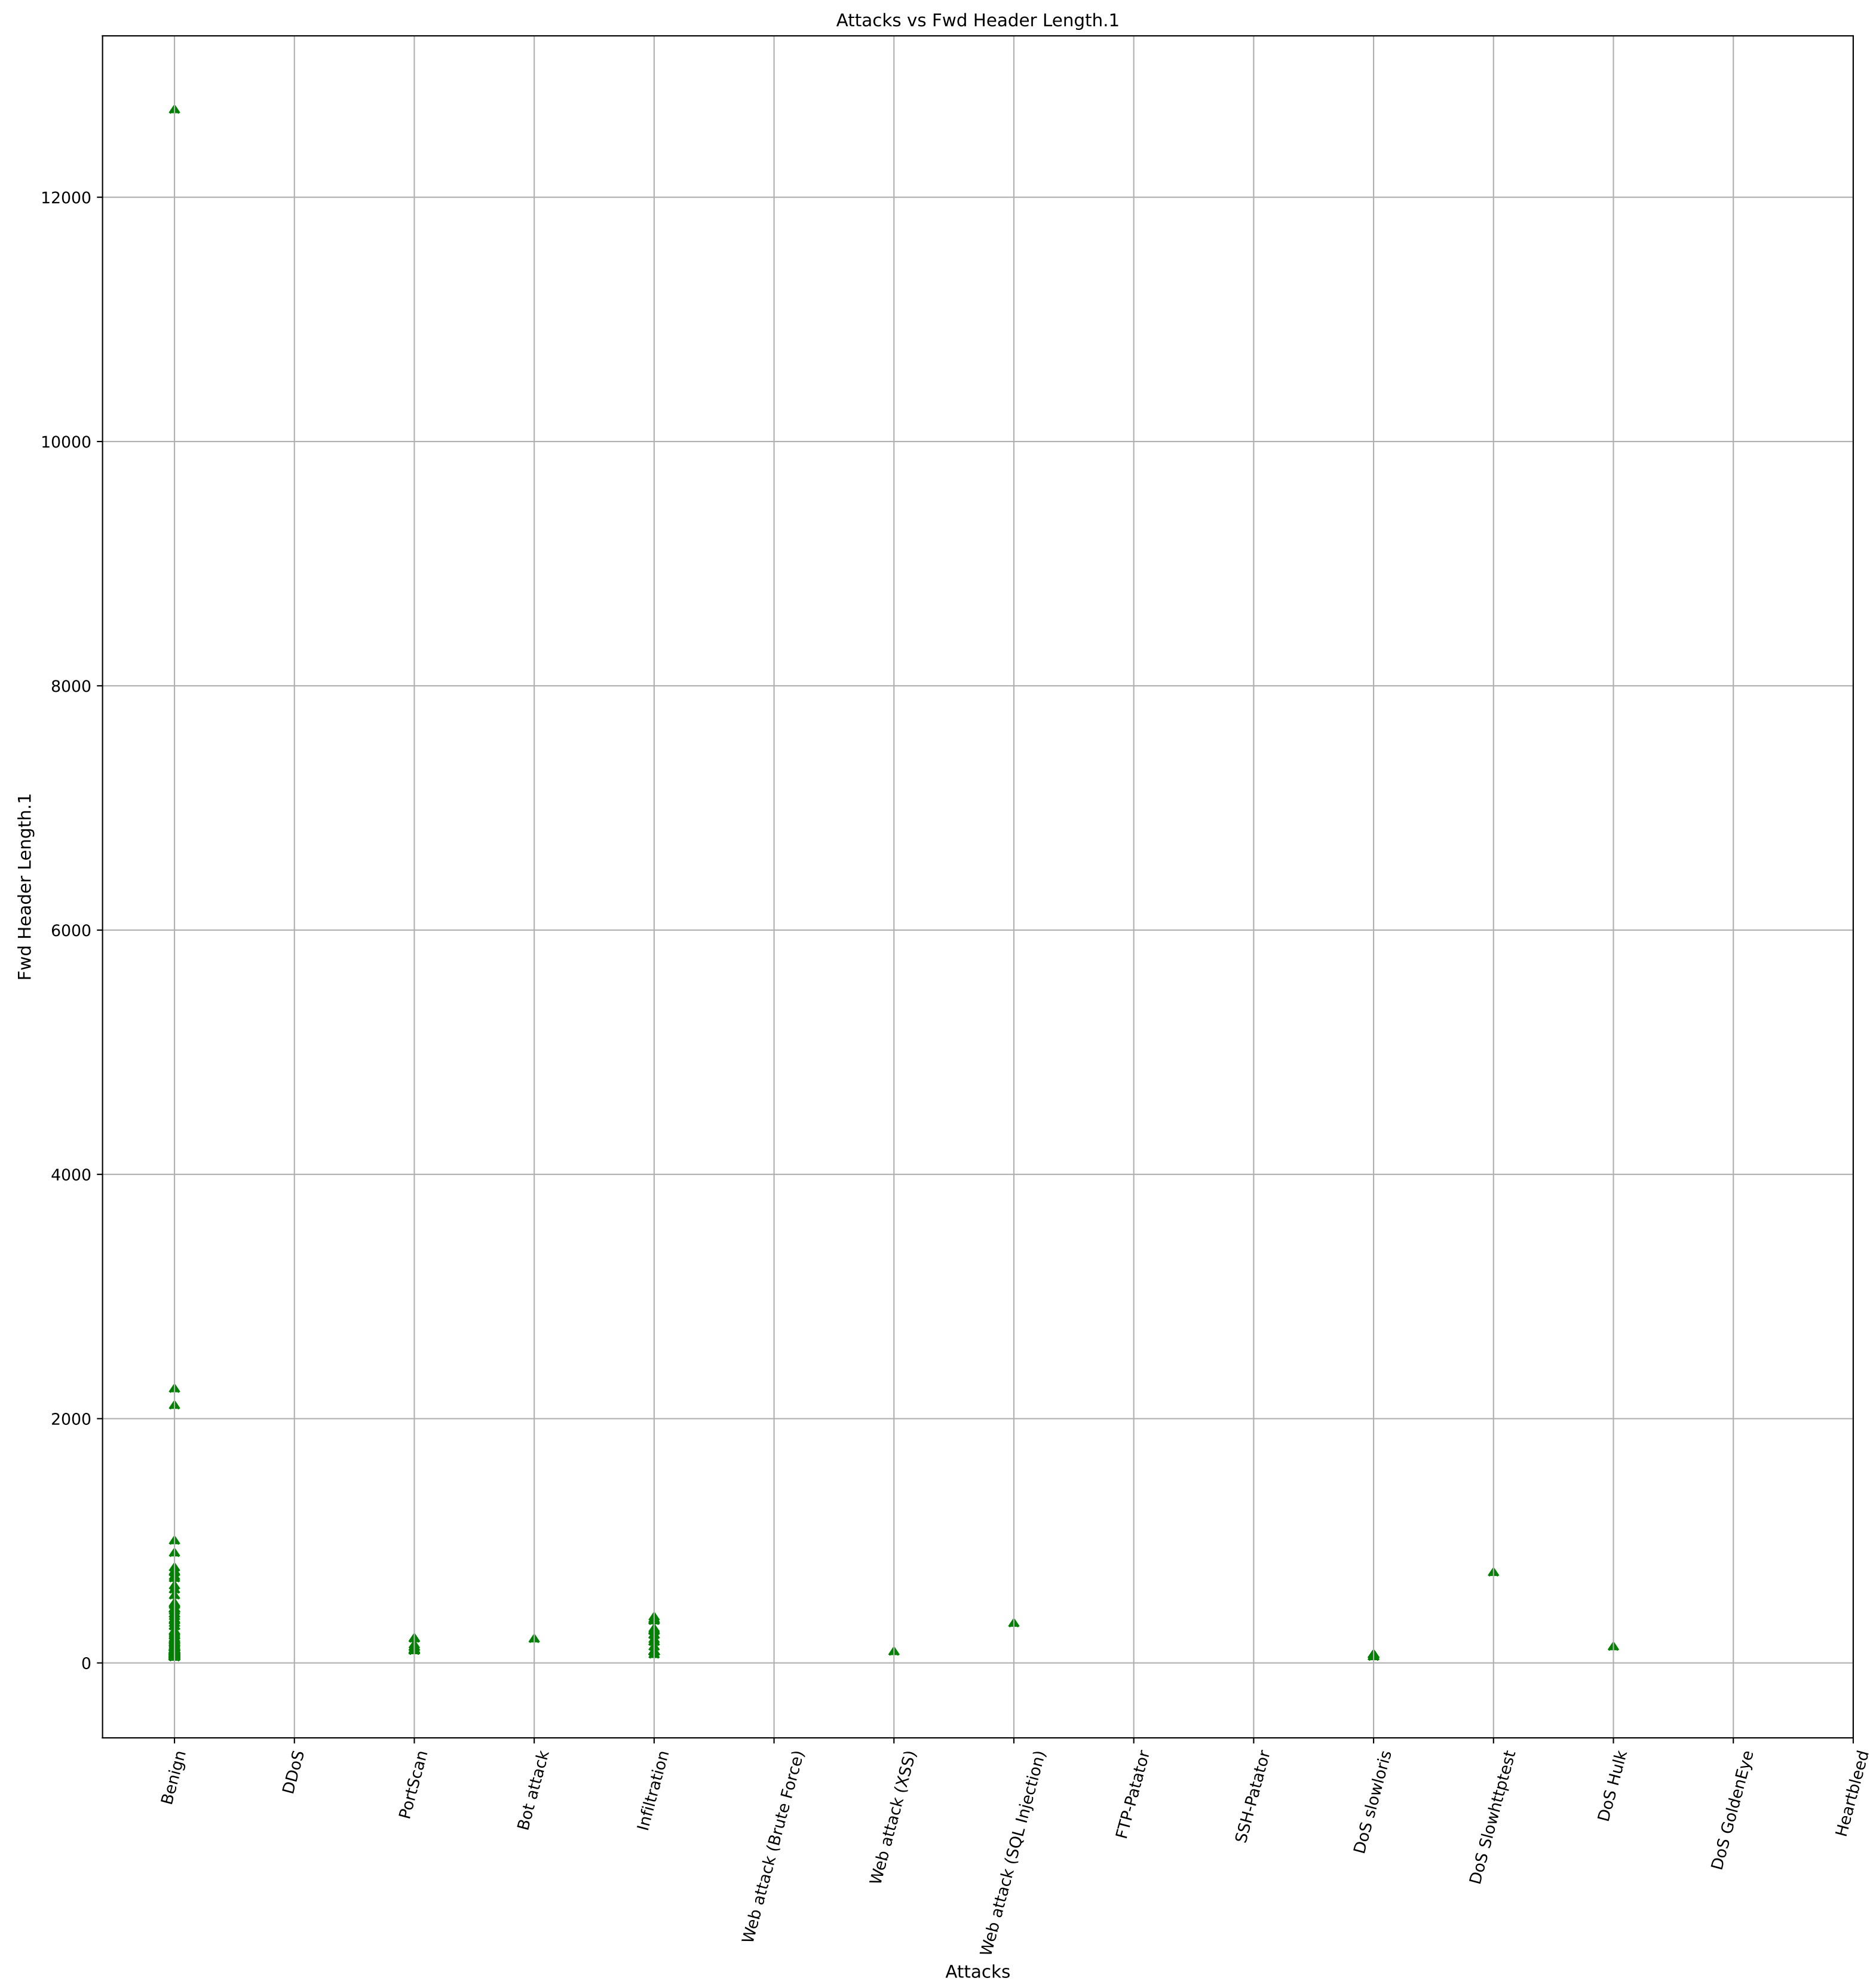


The most common value (mode) of Fwd Avg Bytes/Bulk is 0

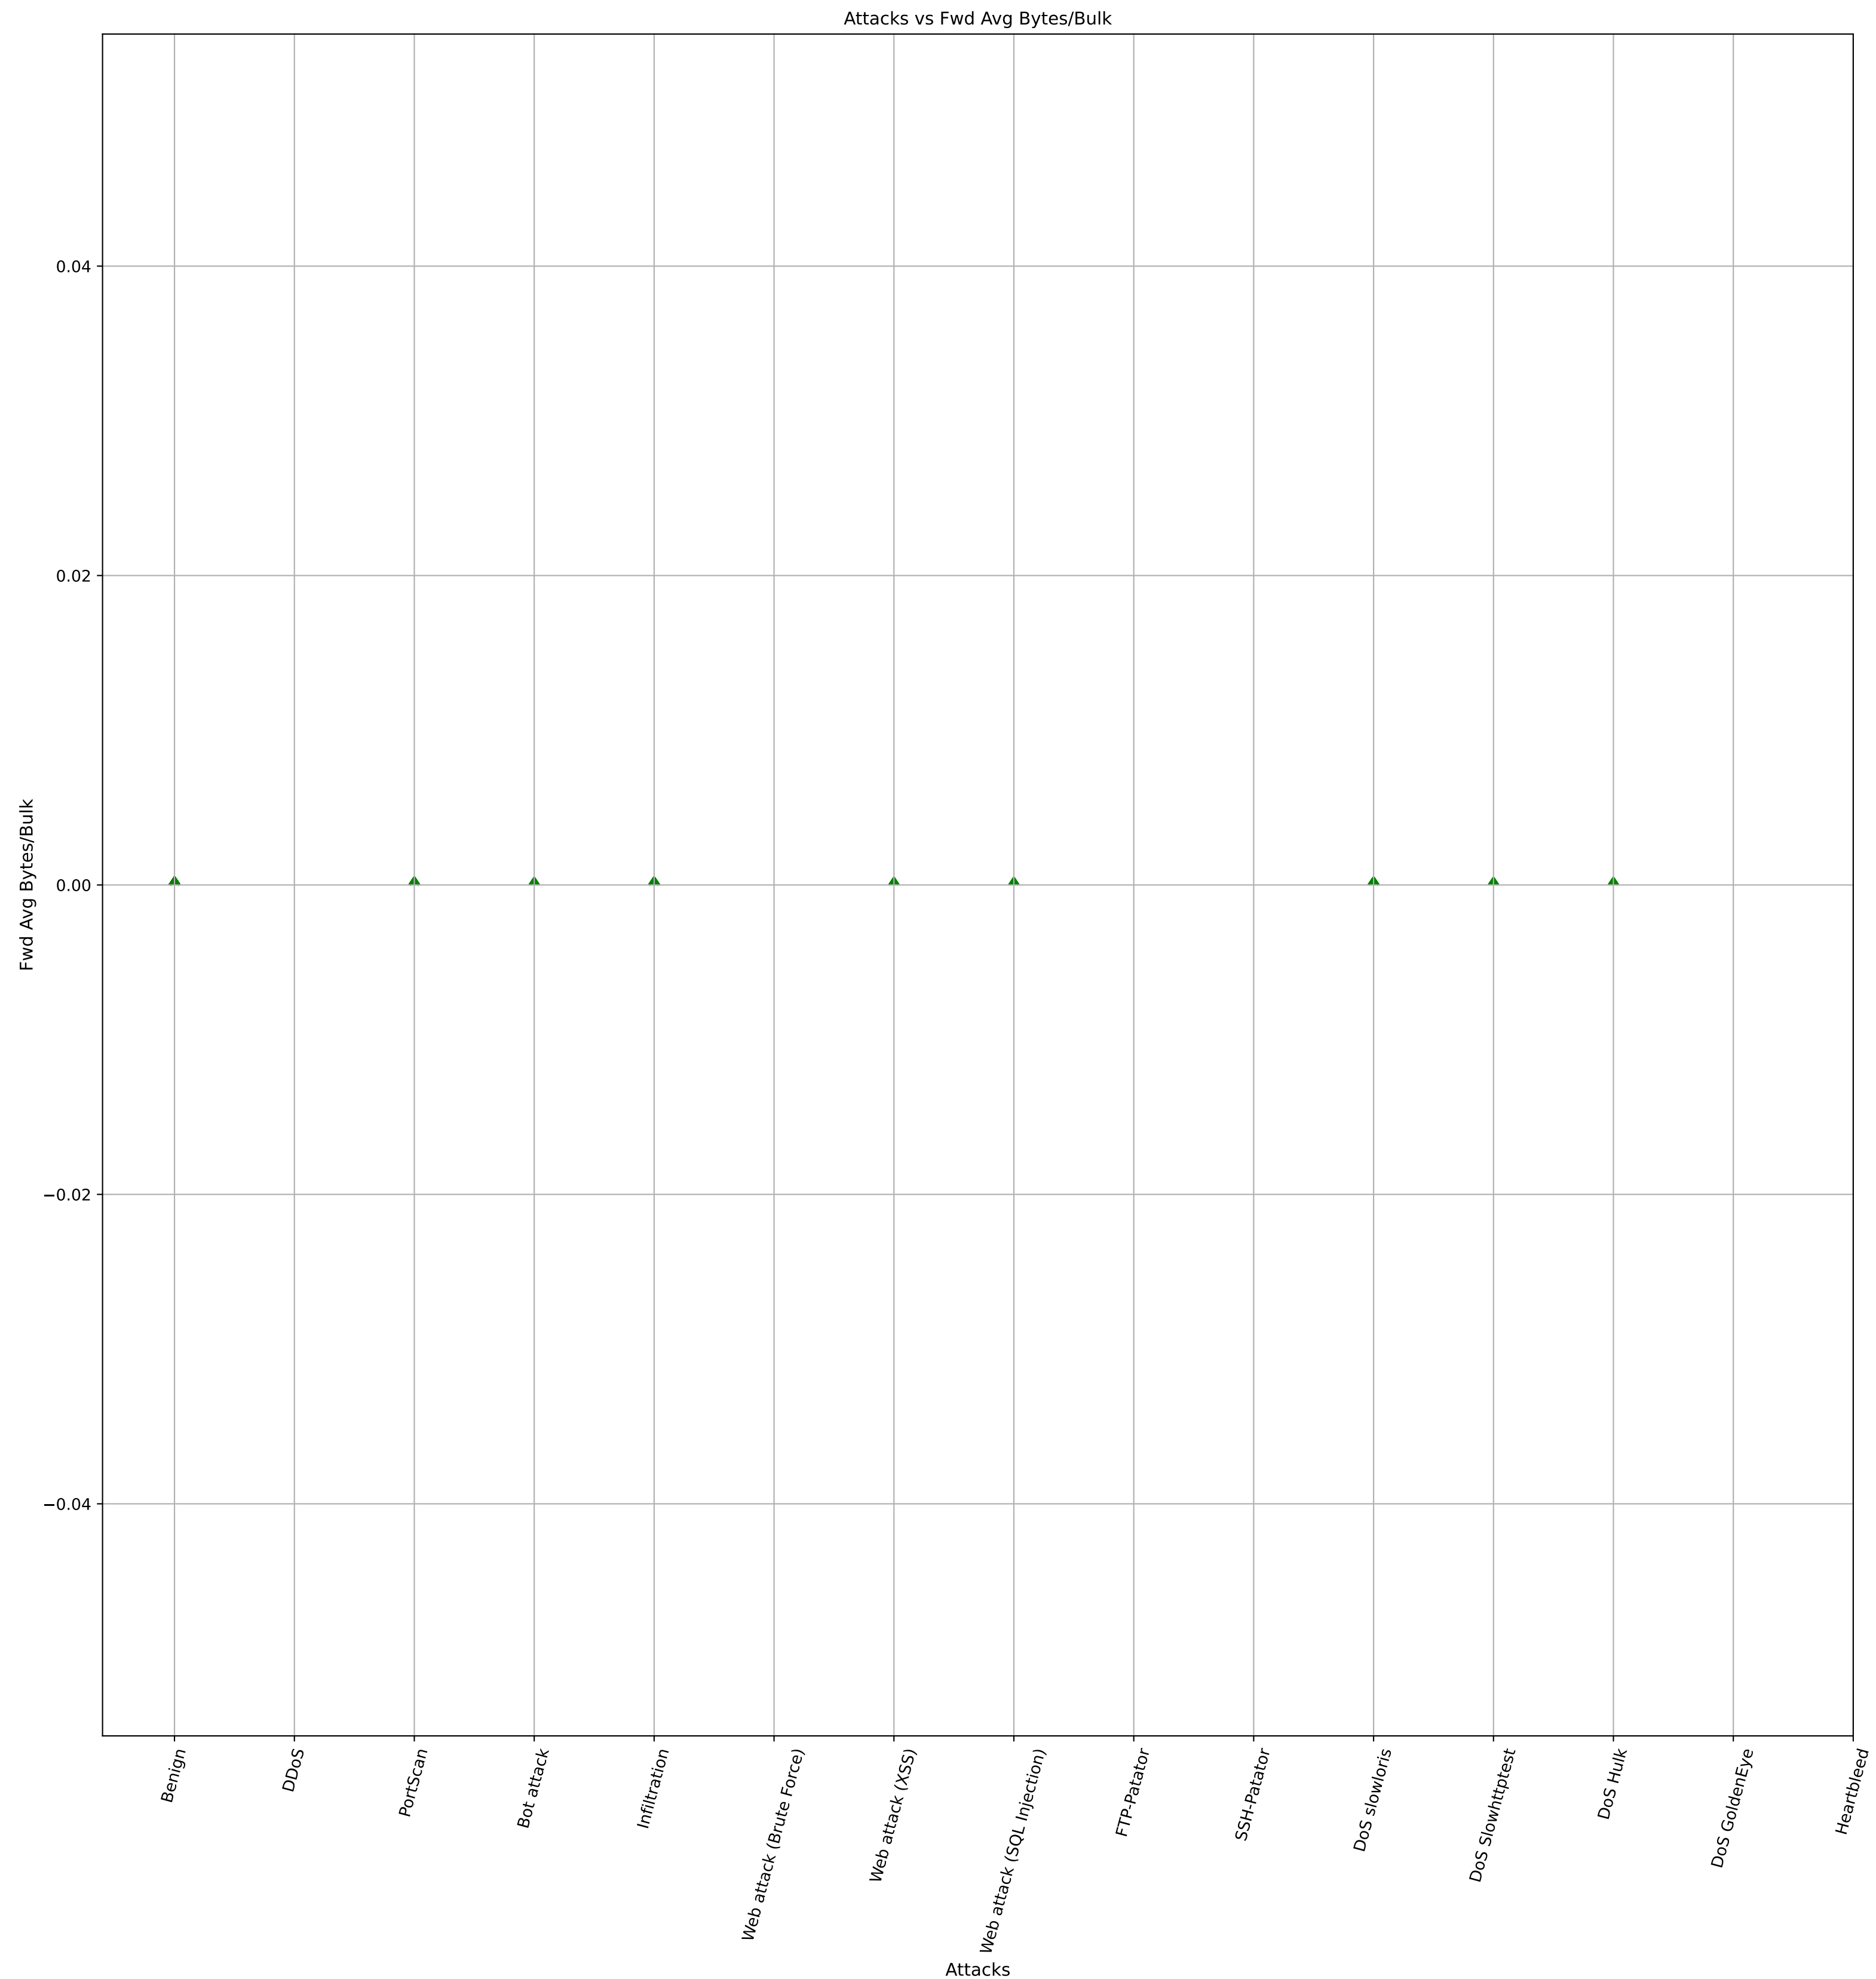


The most common value (mode) of Fwd Avg Packets/Bulk is 0

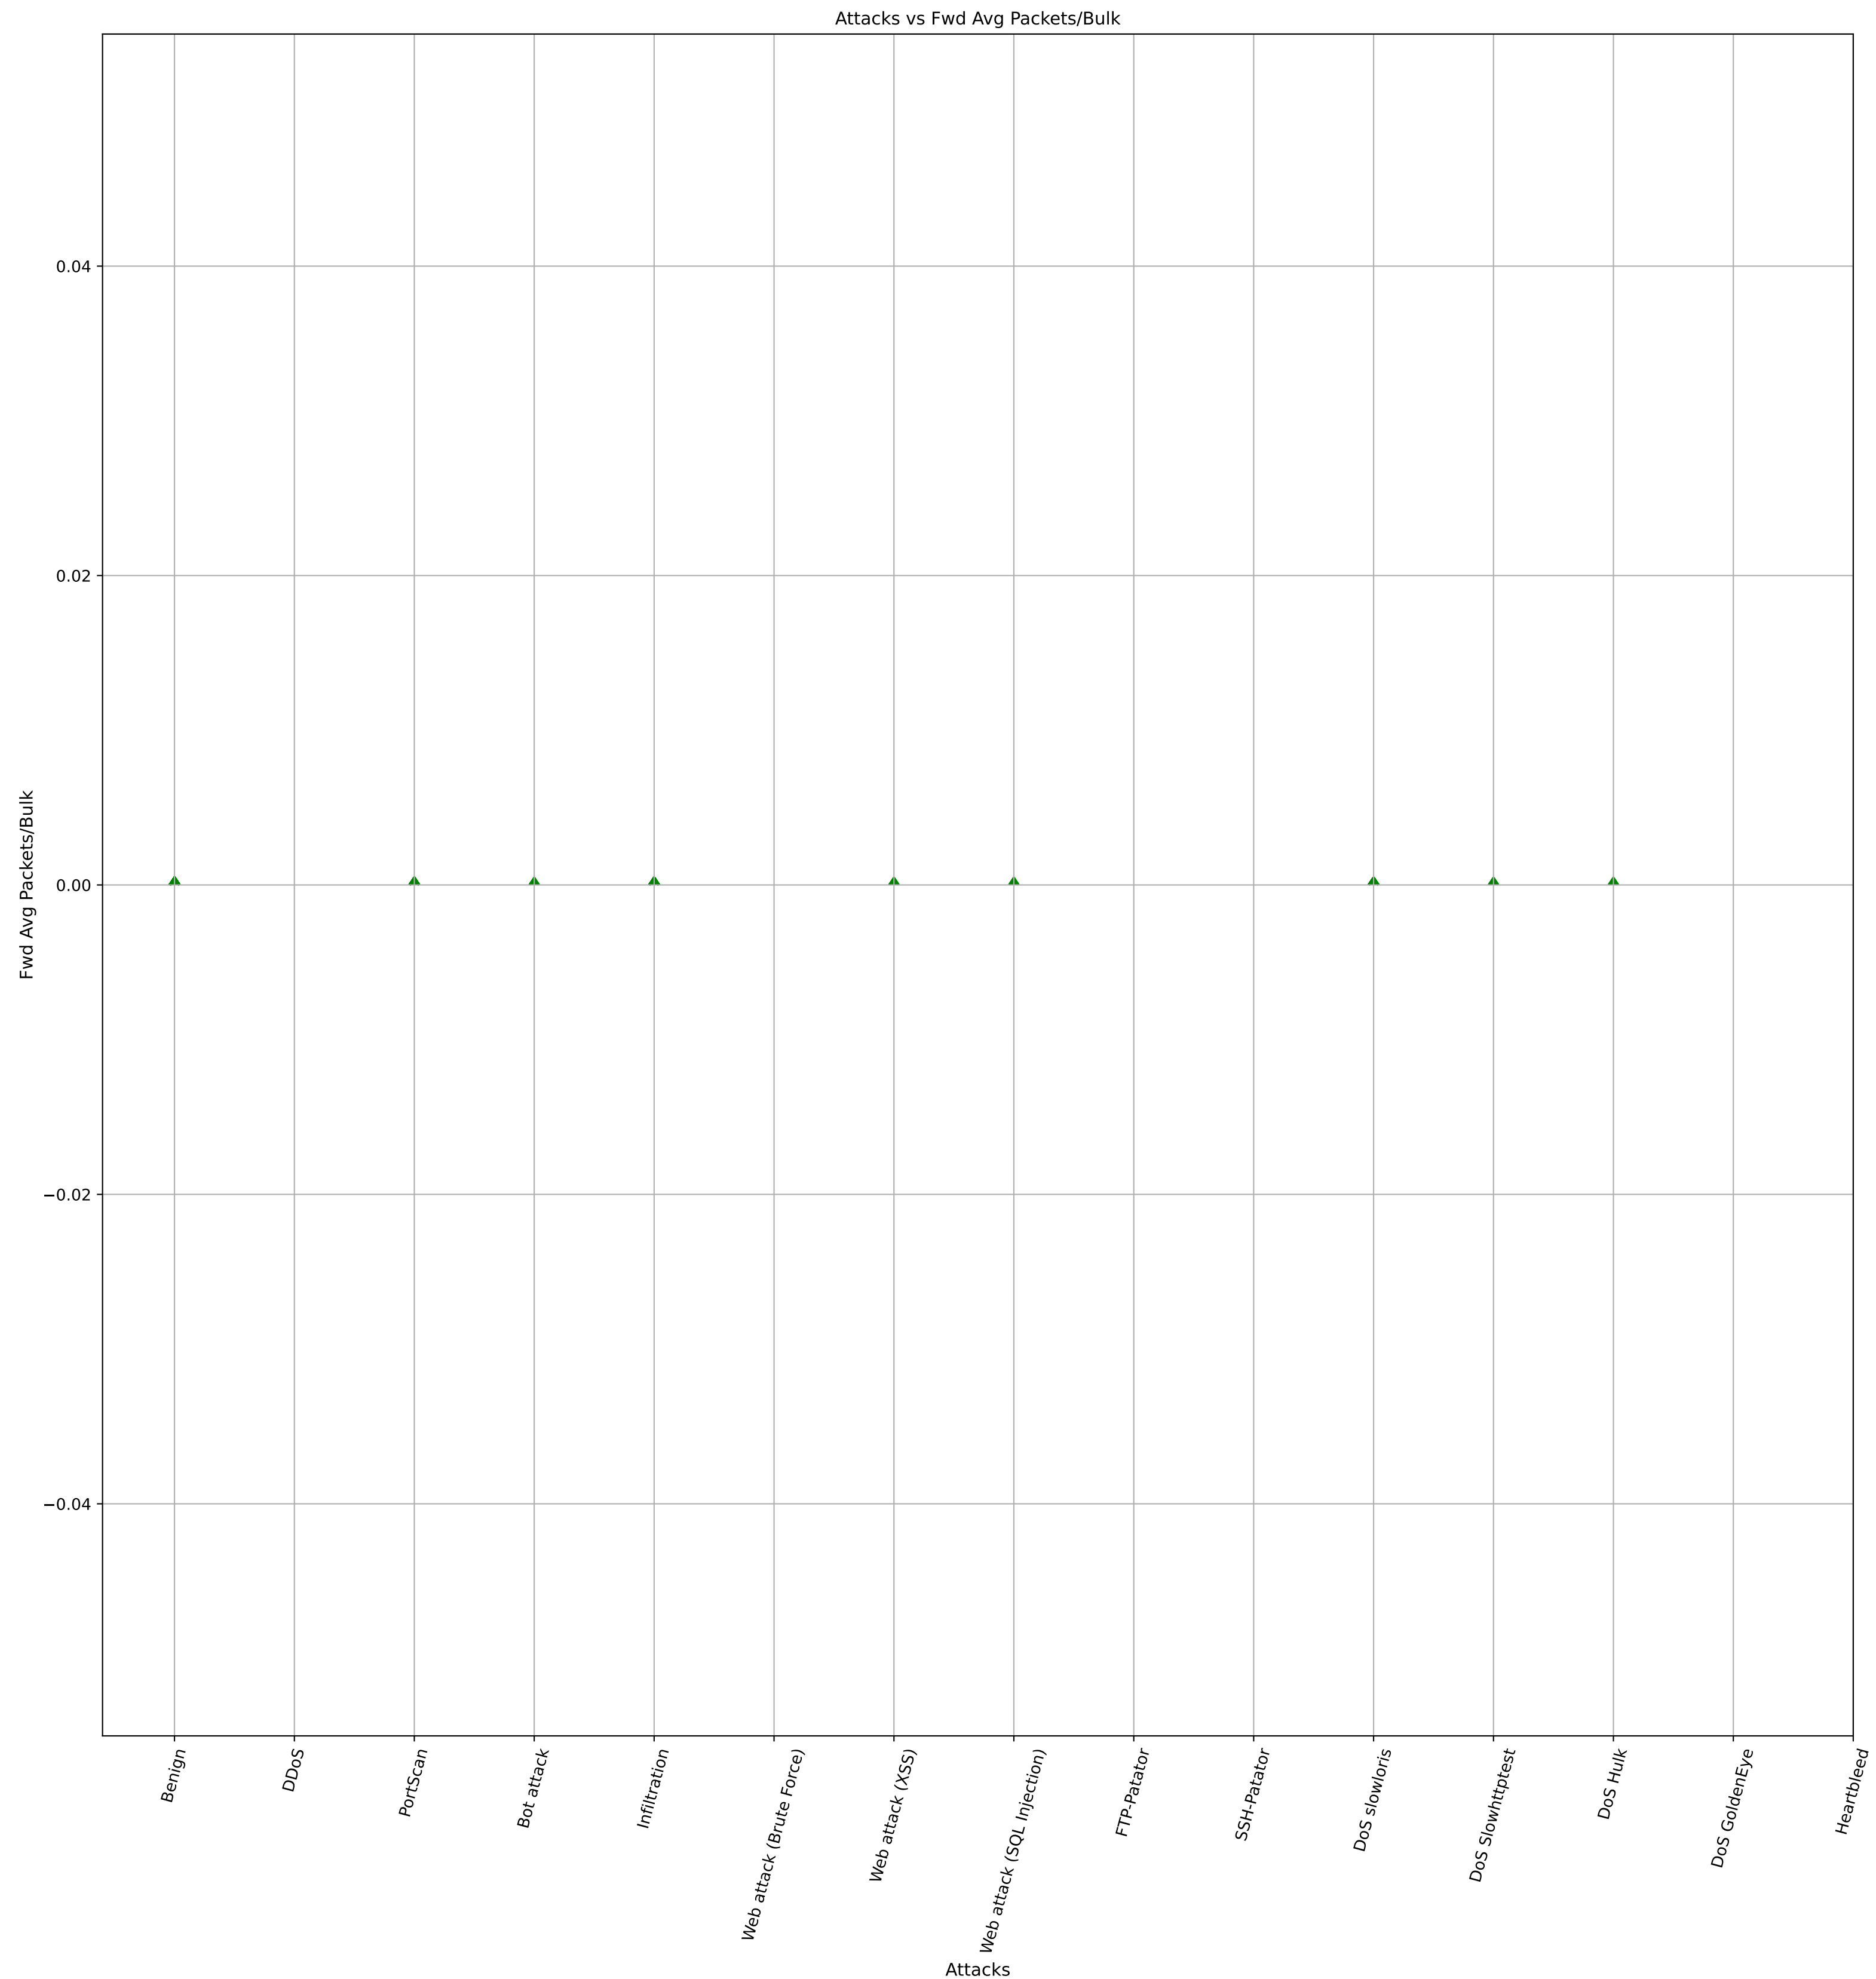


The most common value (mode) of Fwd Avg Bulk Rate is 0

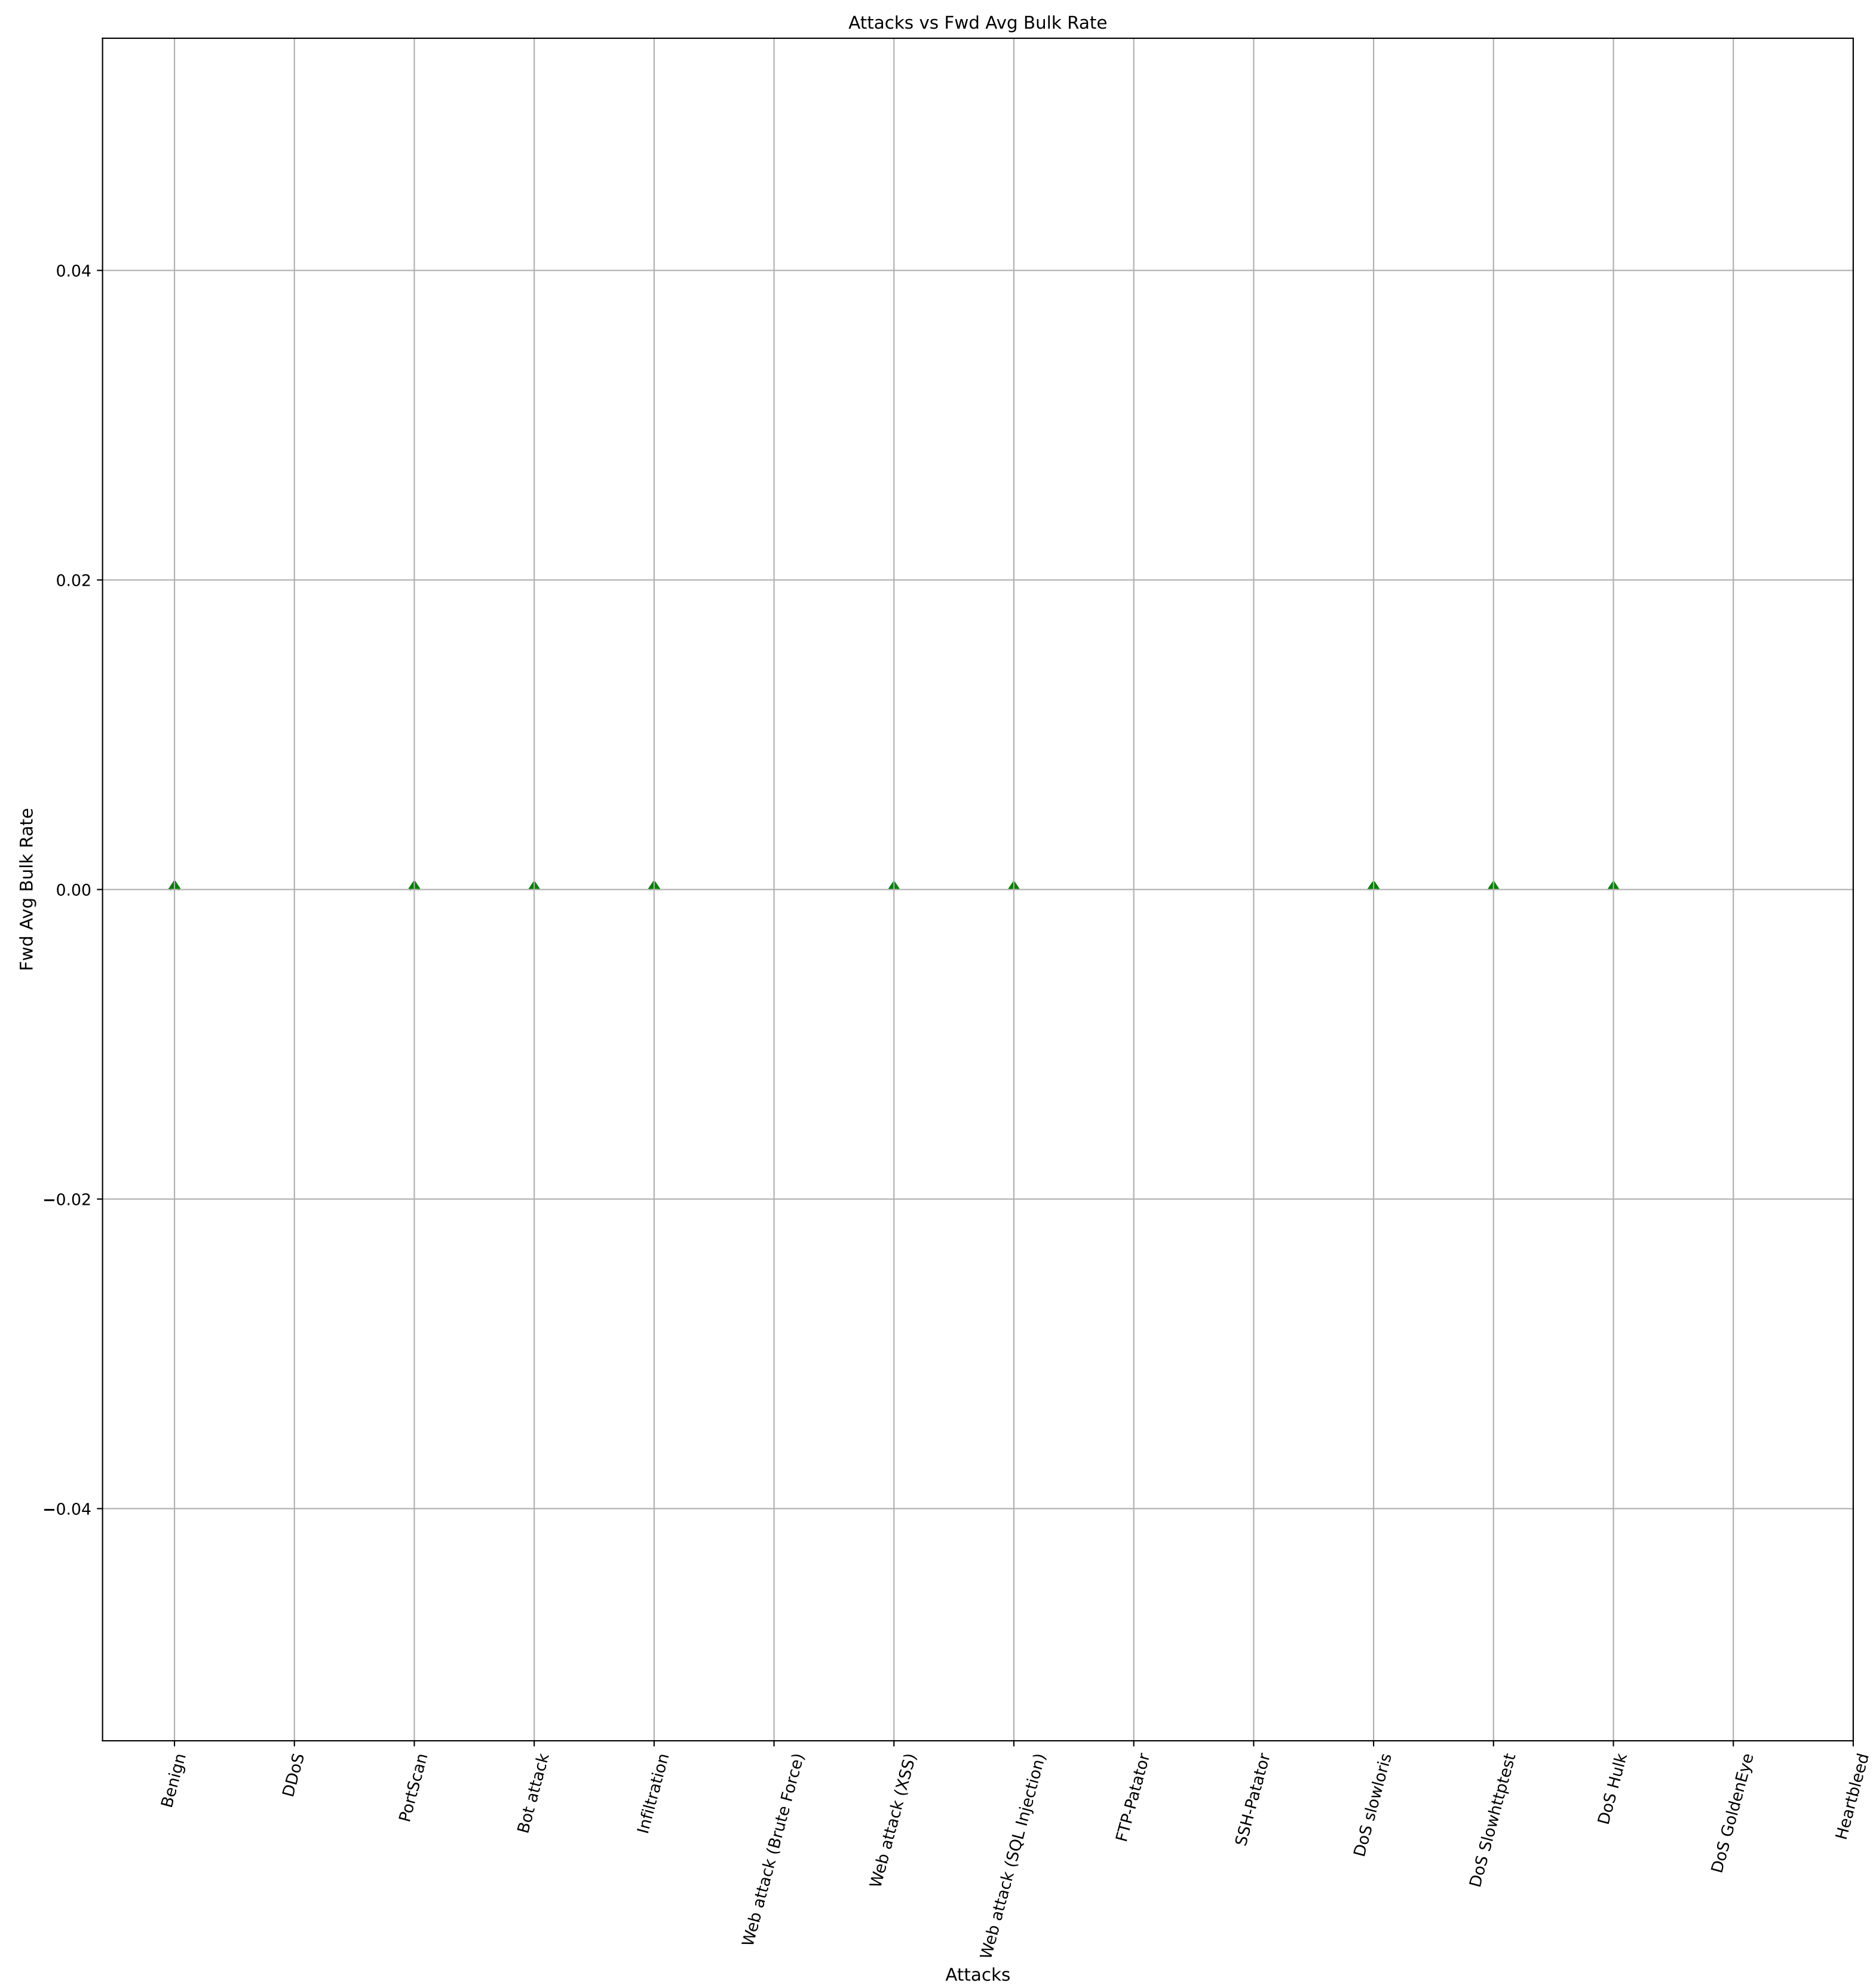


The most common value (mode) of Bwd Avg Bytes/Bulk is 0

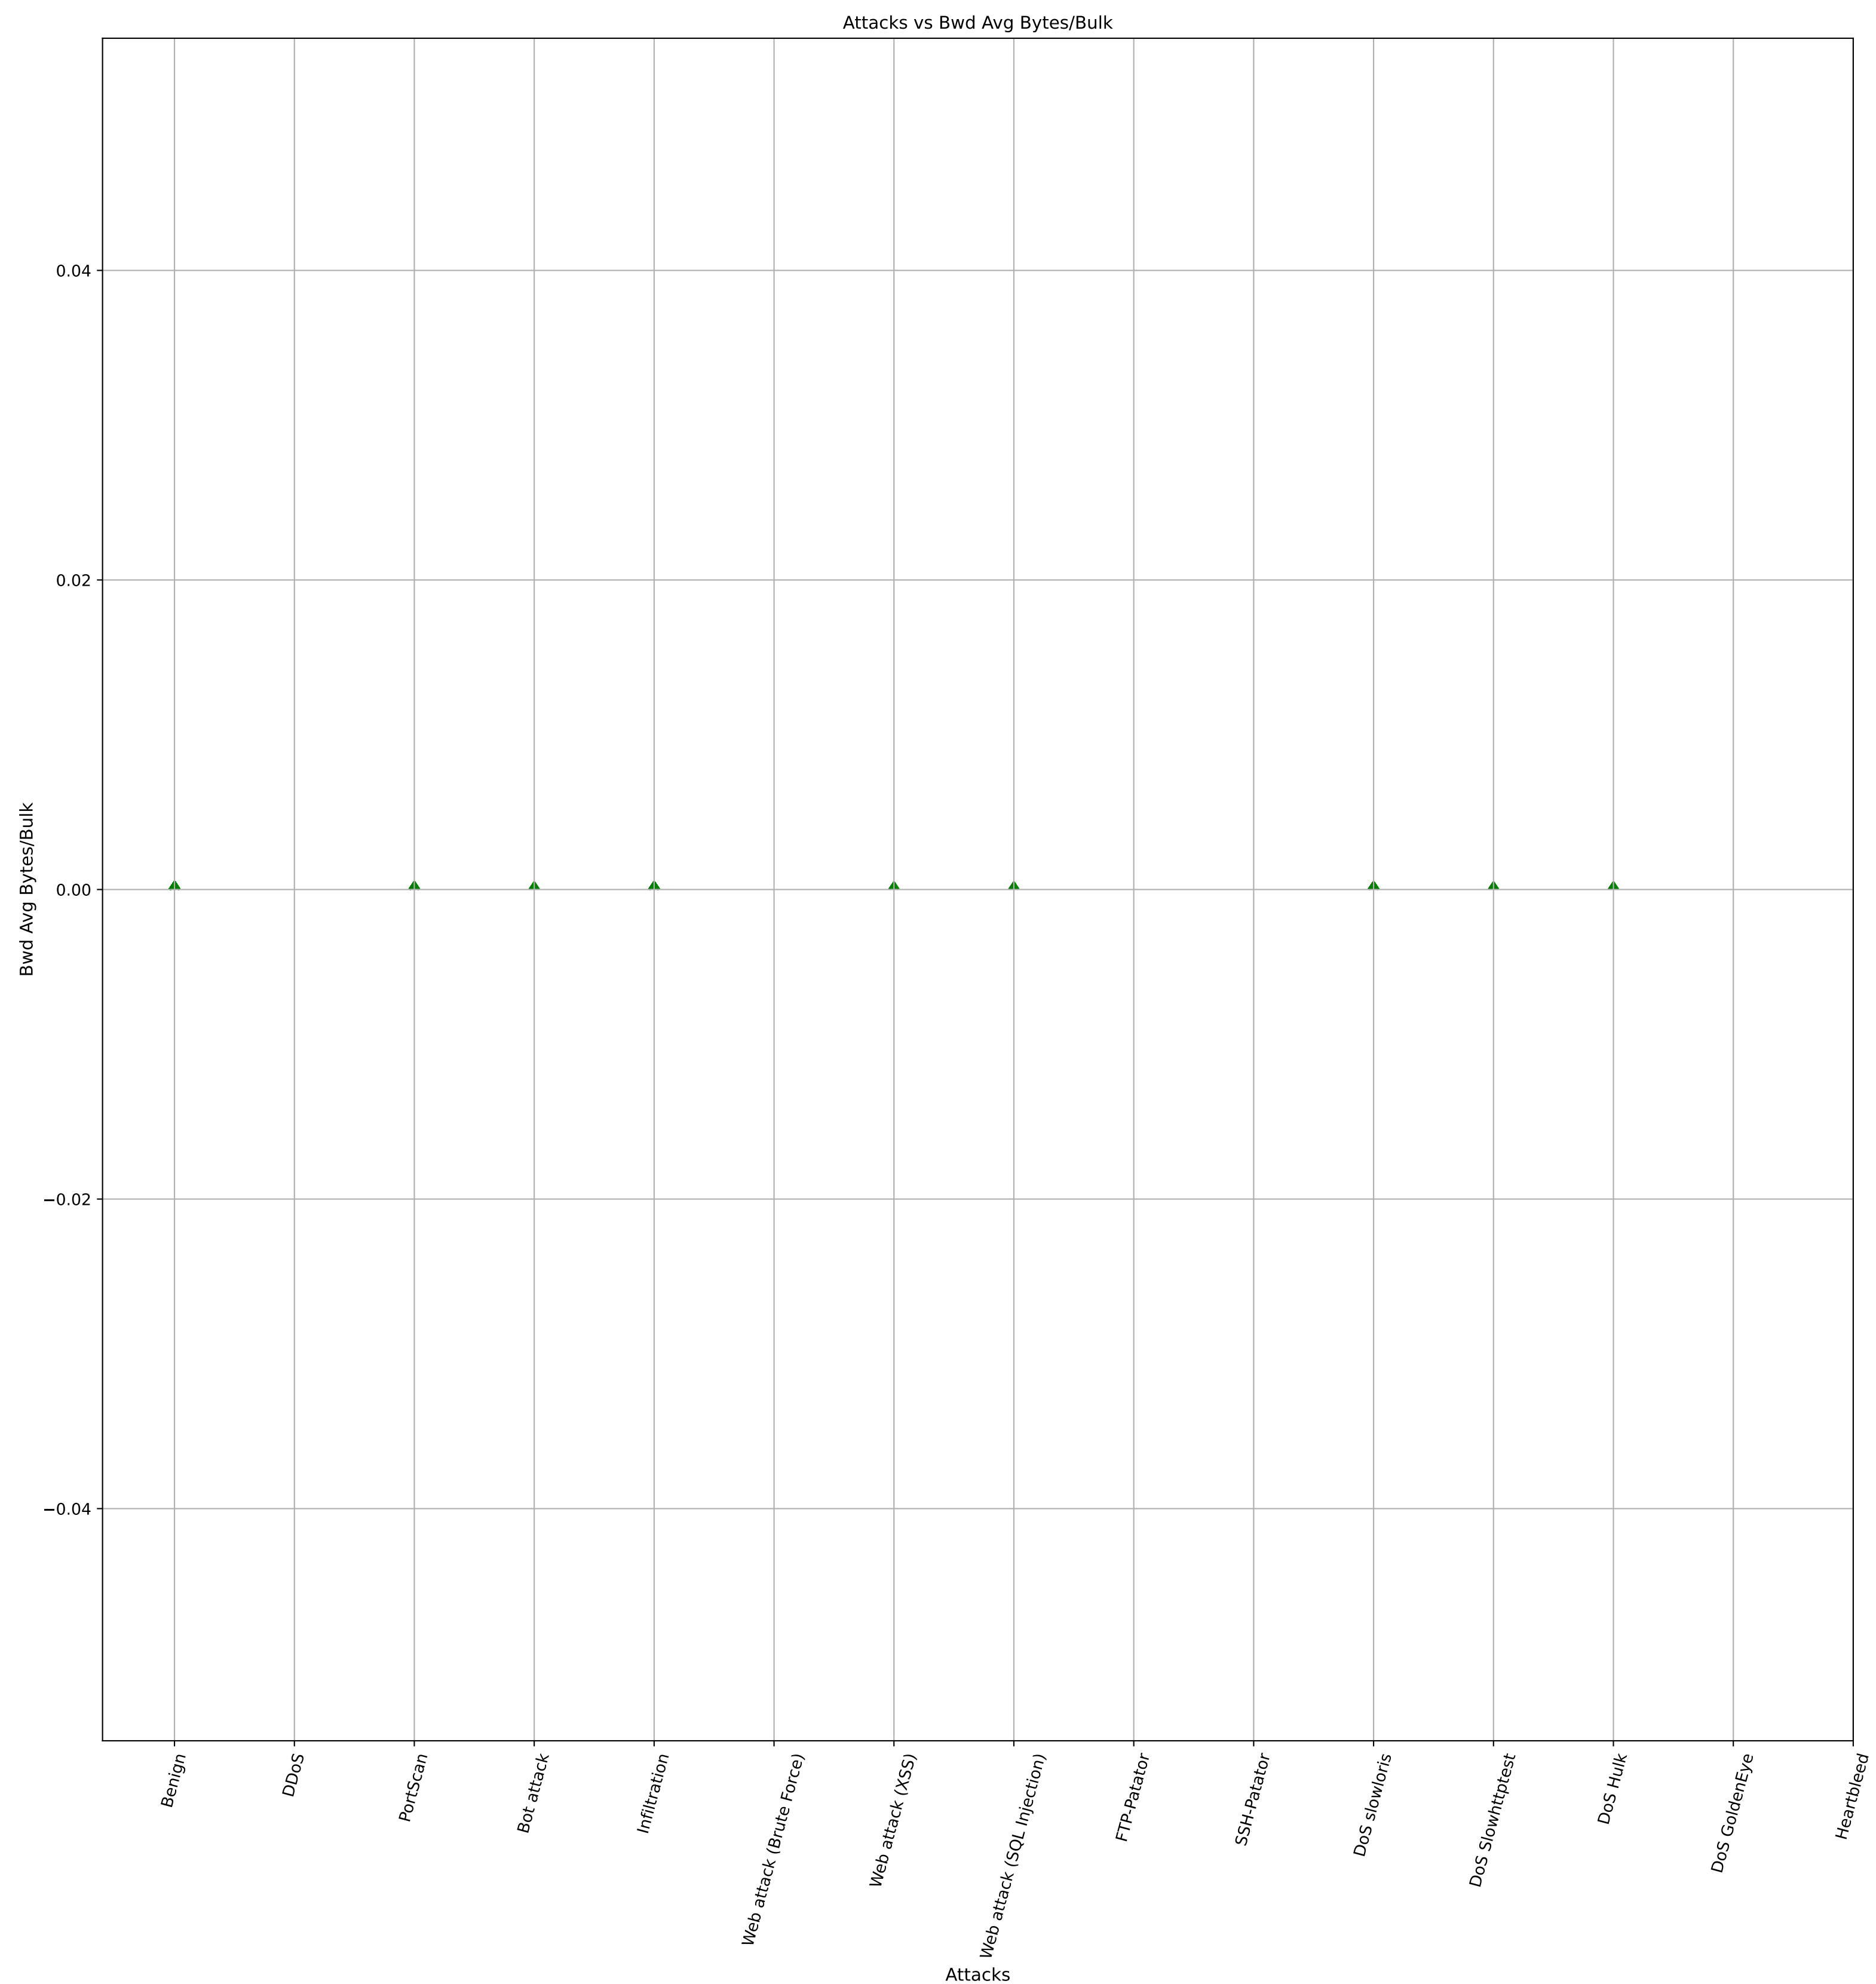


The most common value (mode) of Bwd Avg Packets/Bulk is 0

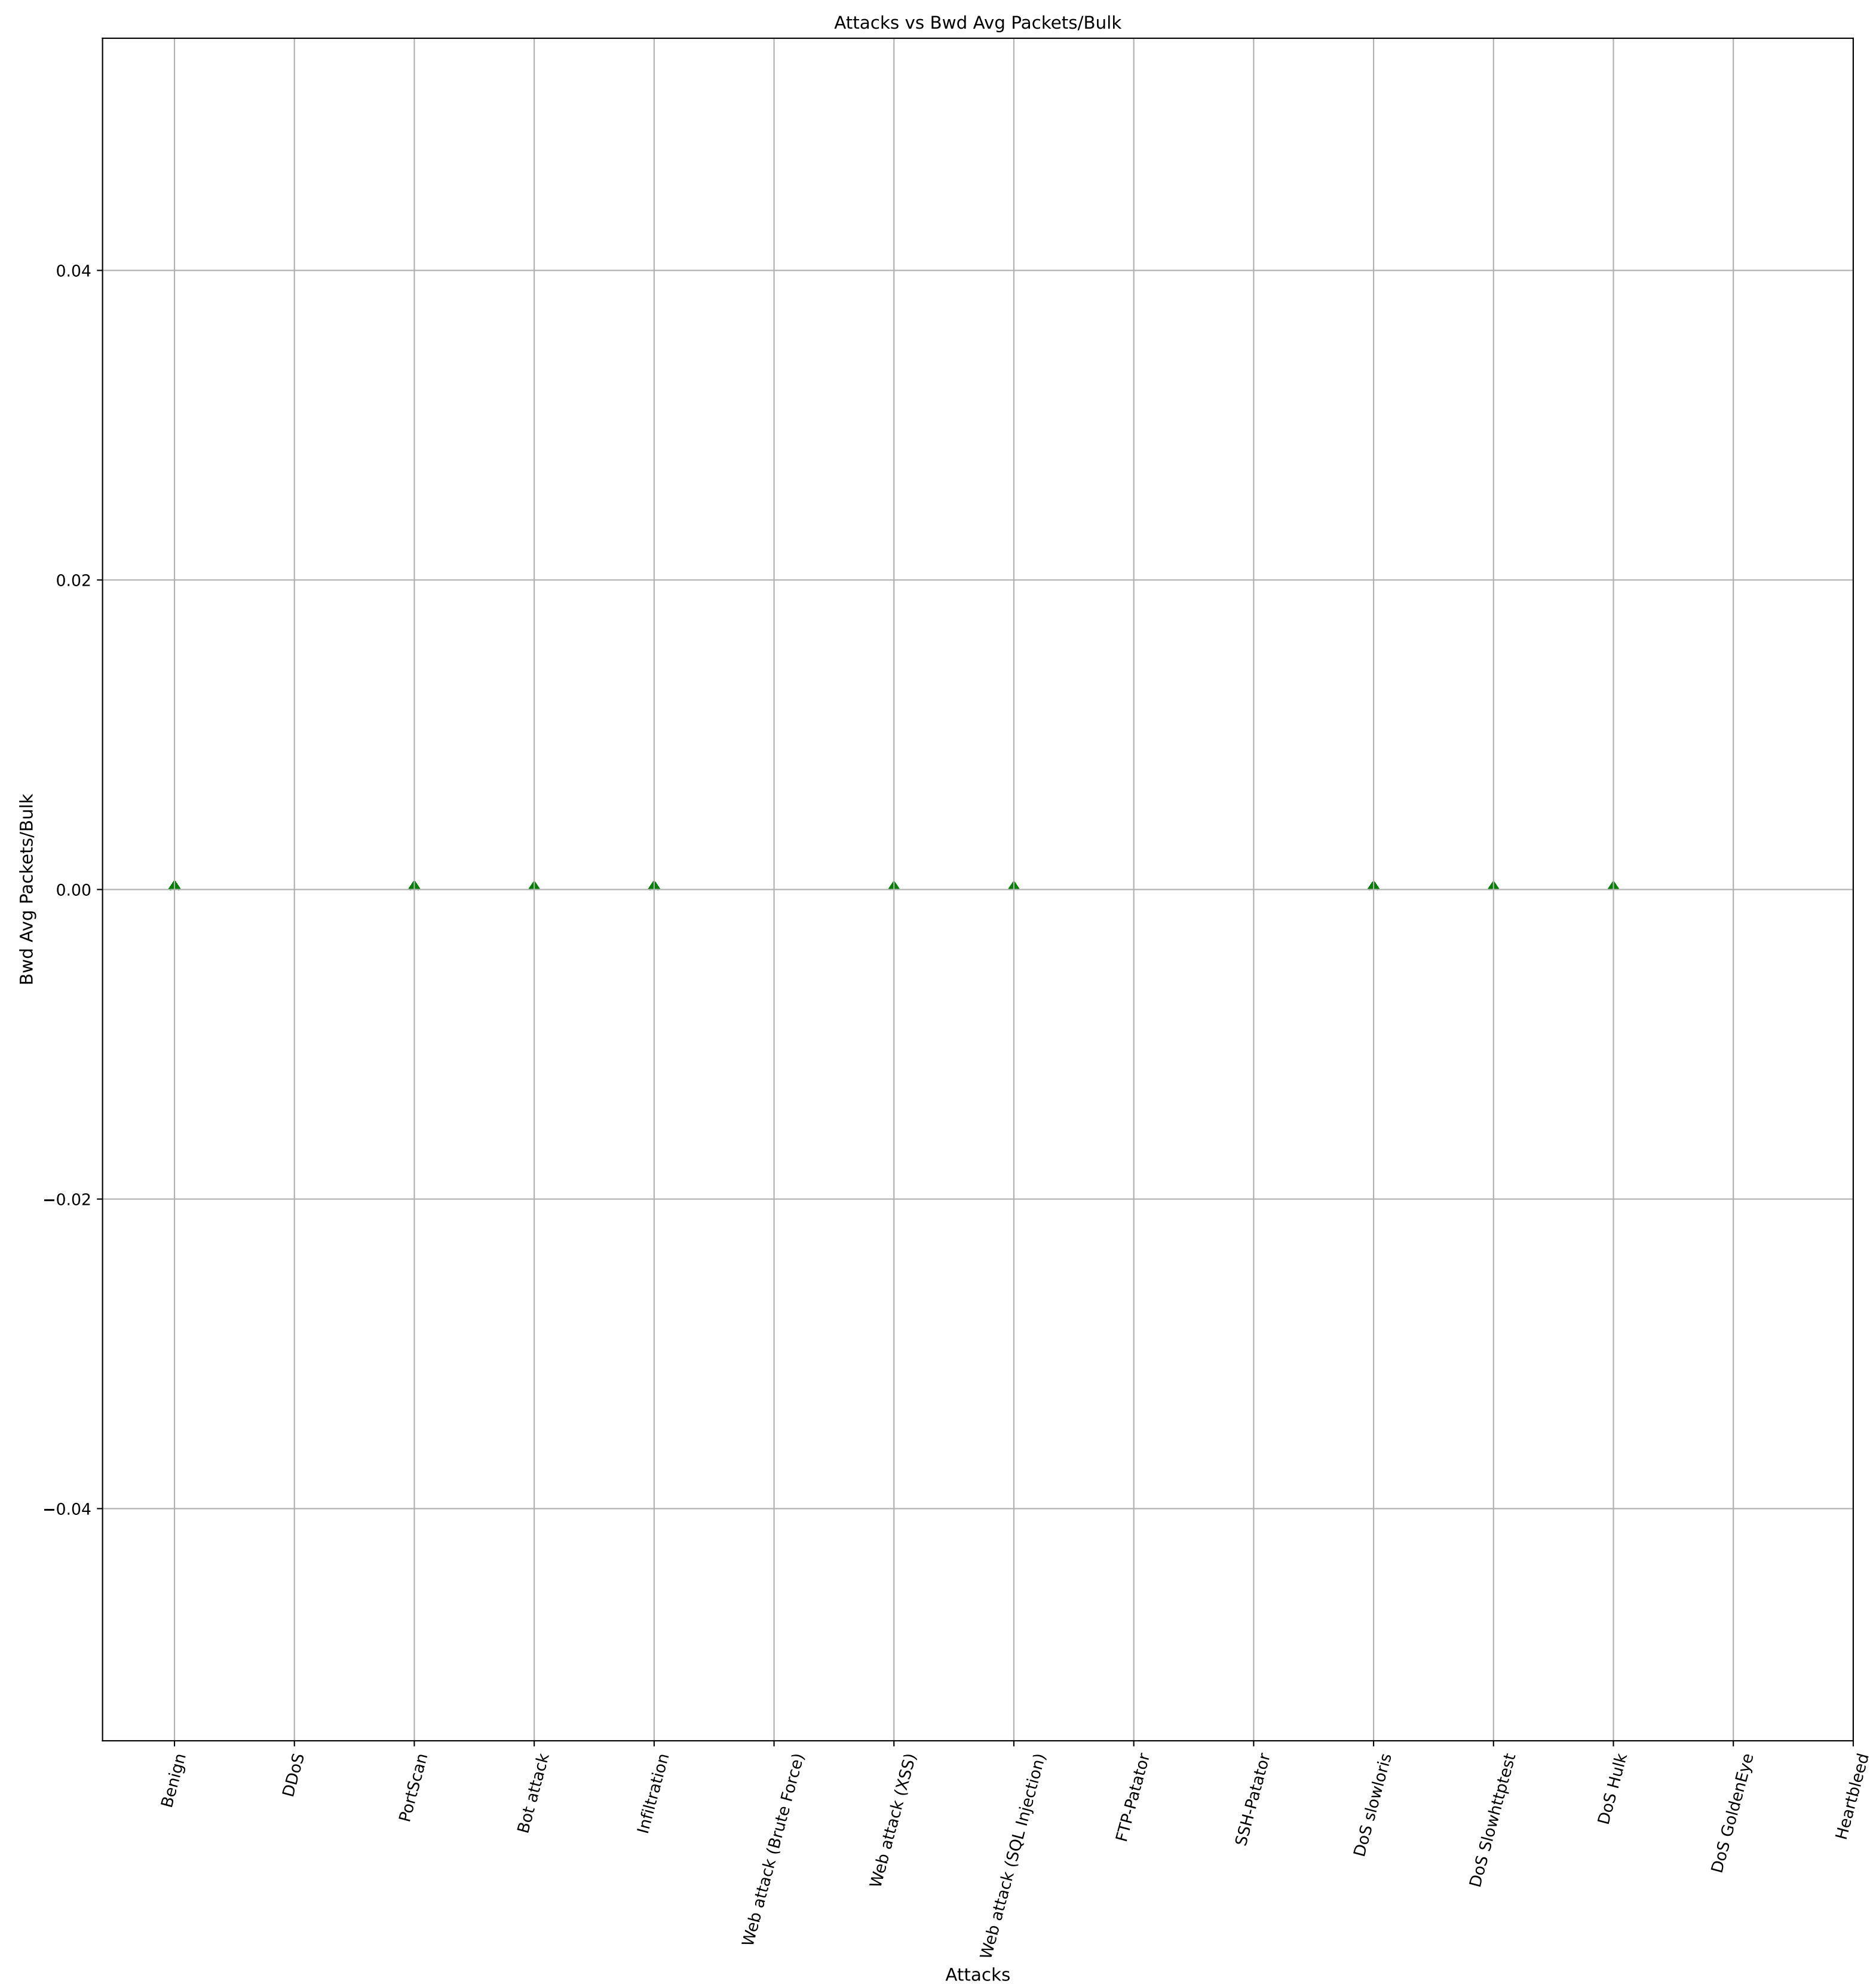


The most common value (mode) of Bwd Avg Bulk Rate is 0

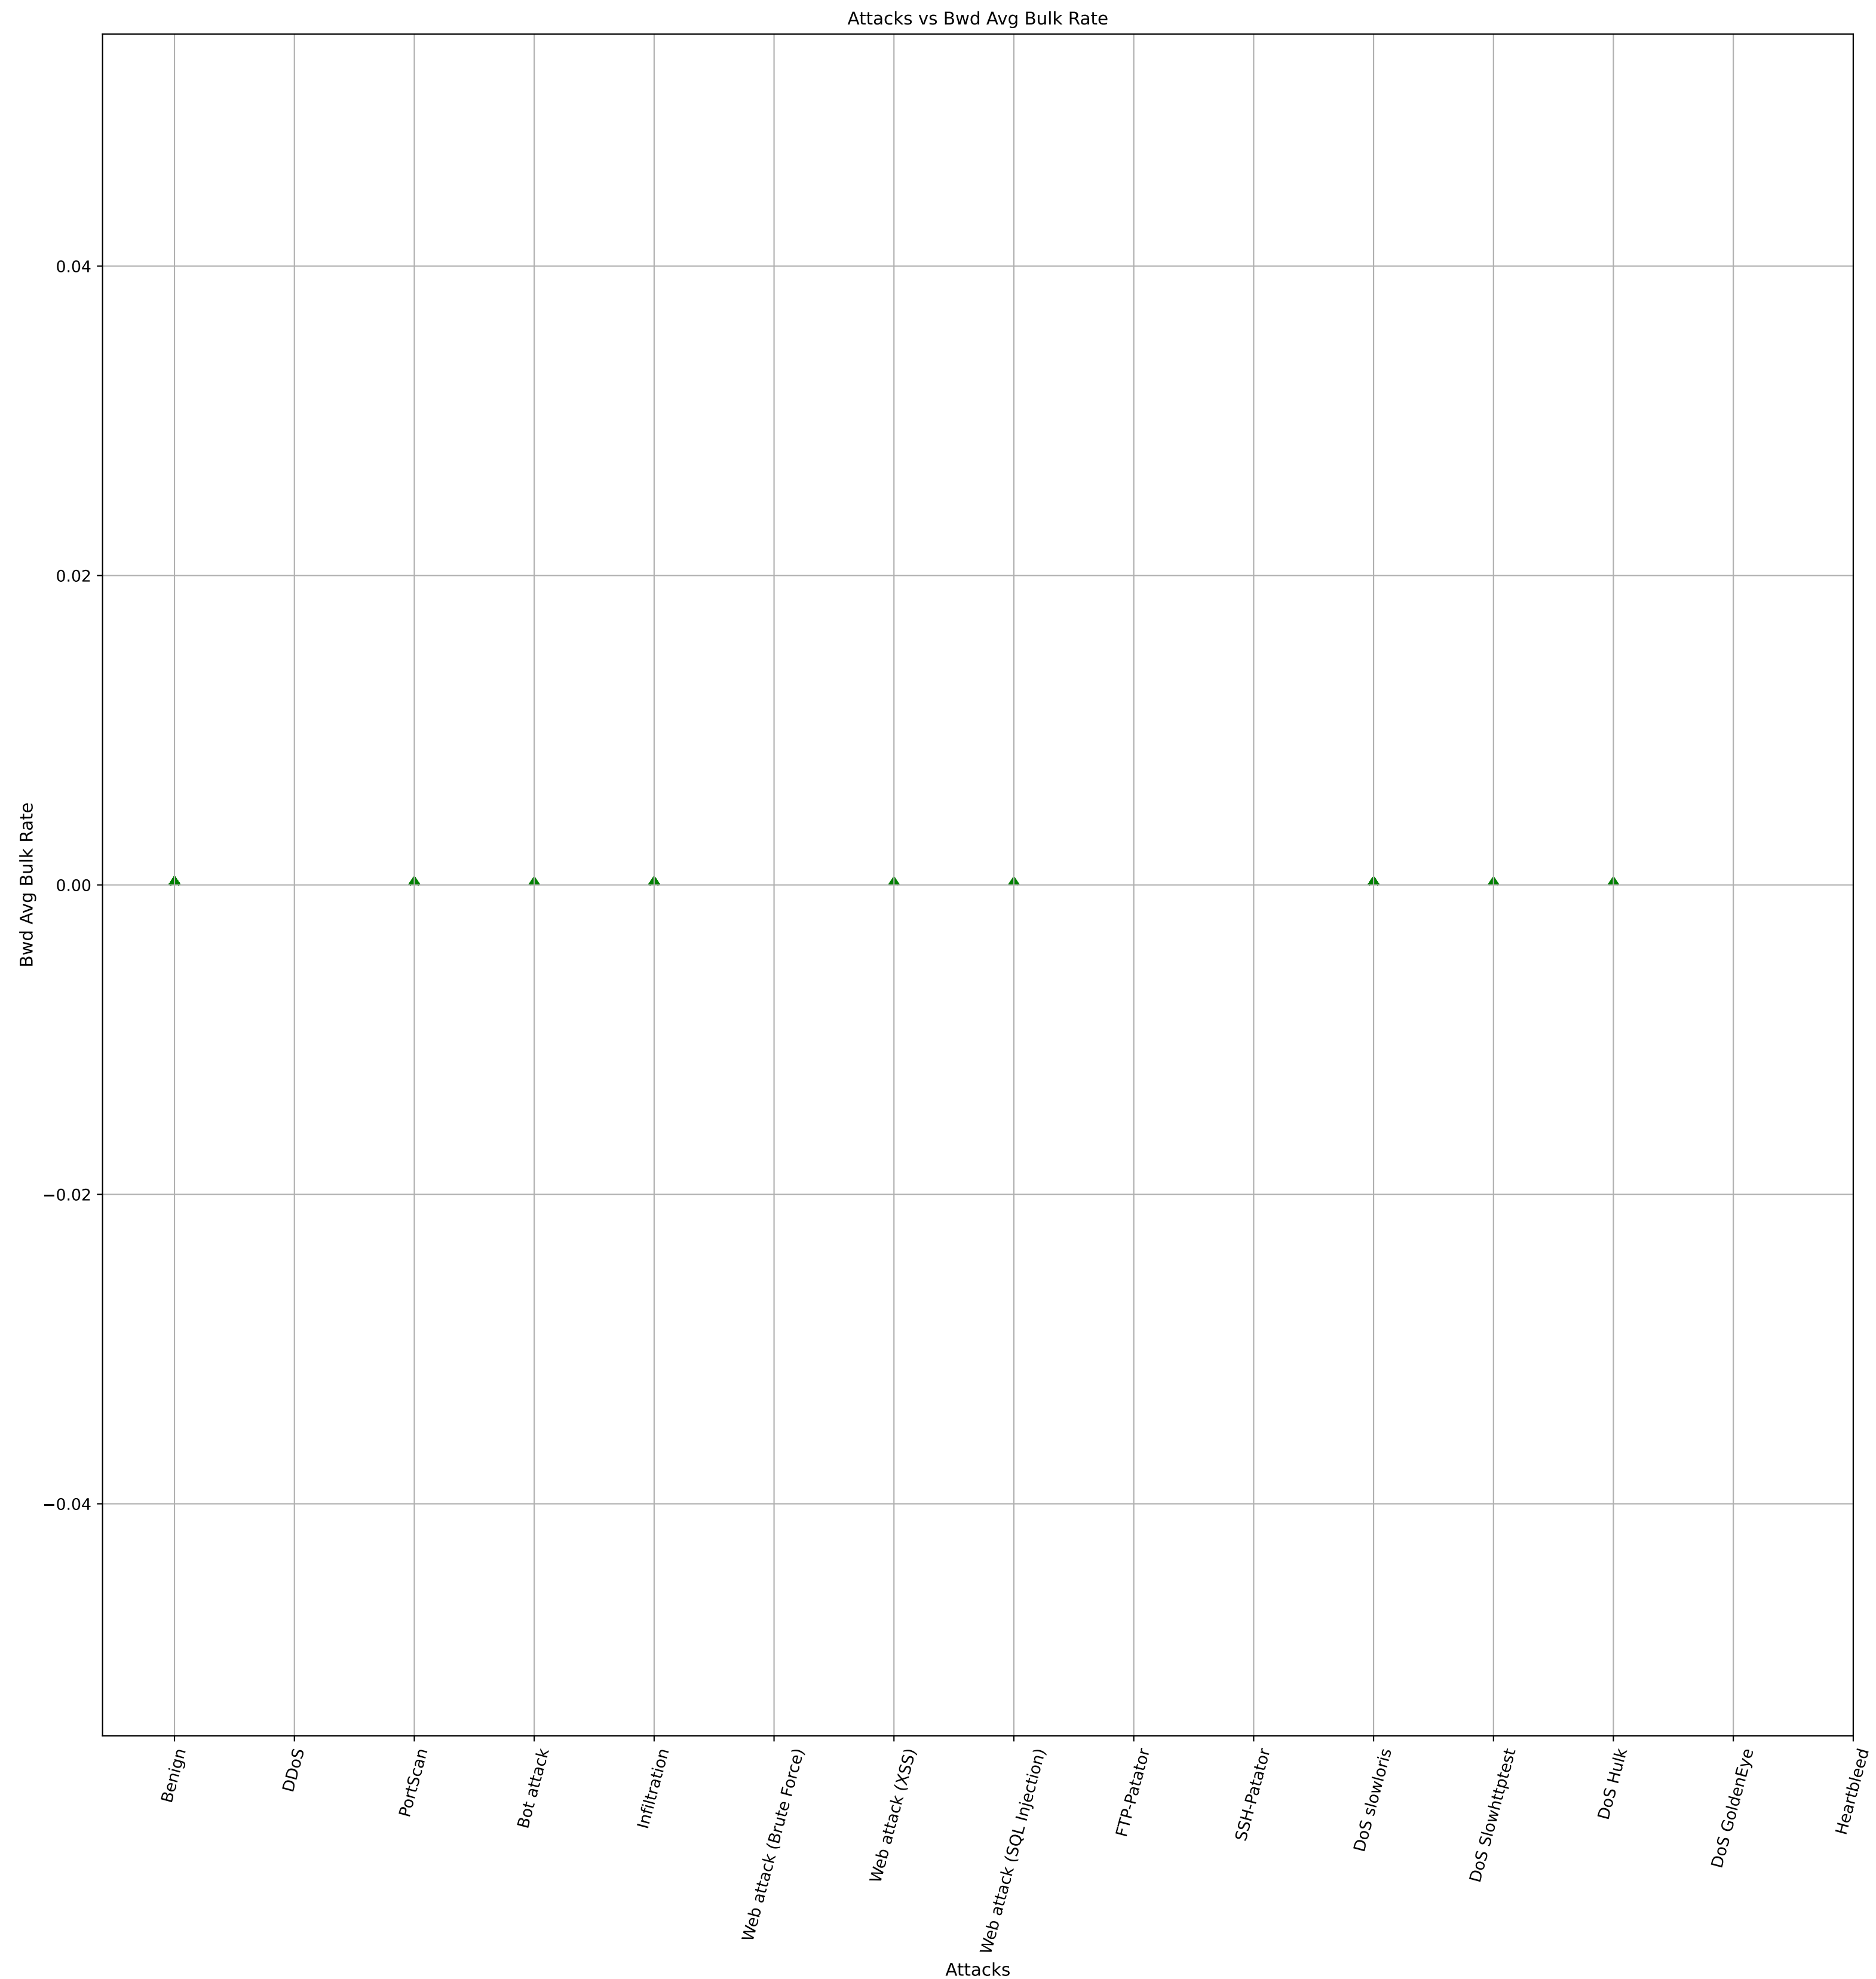


The most common value (mode) of Subflow Fwd Packets is 2

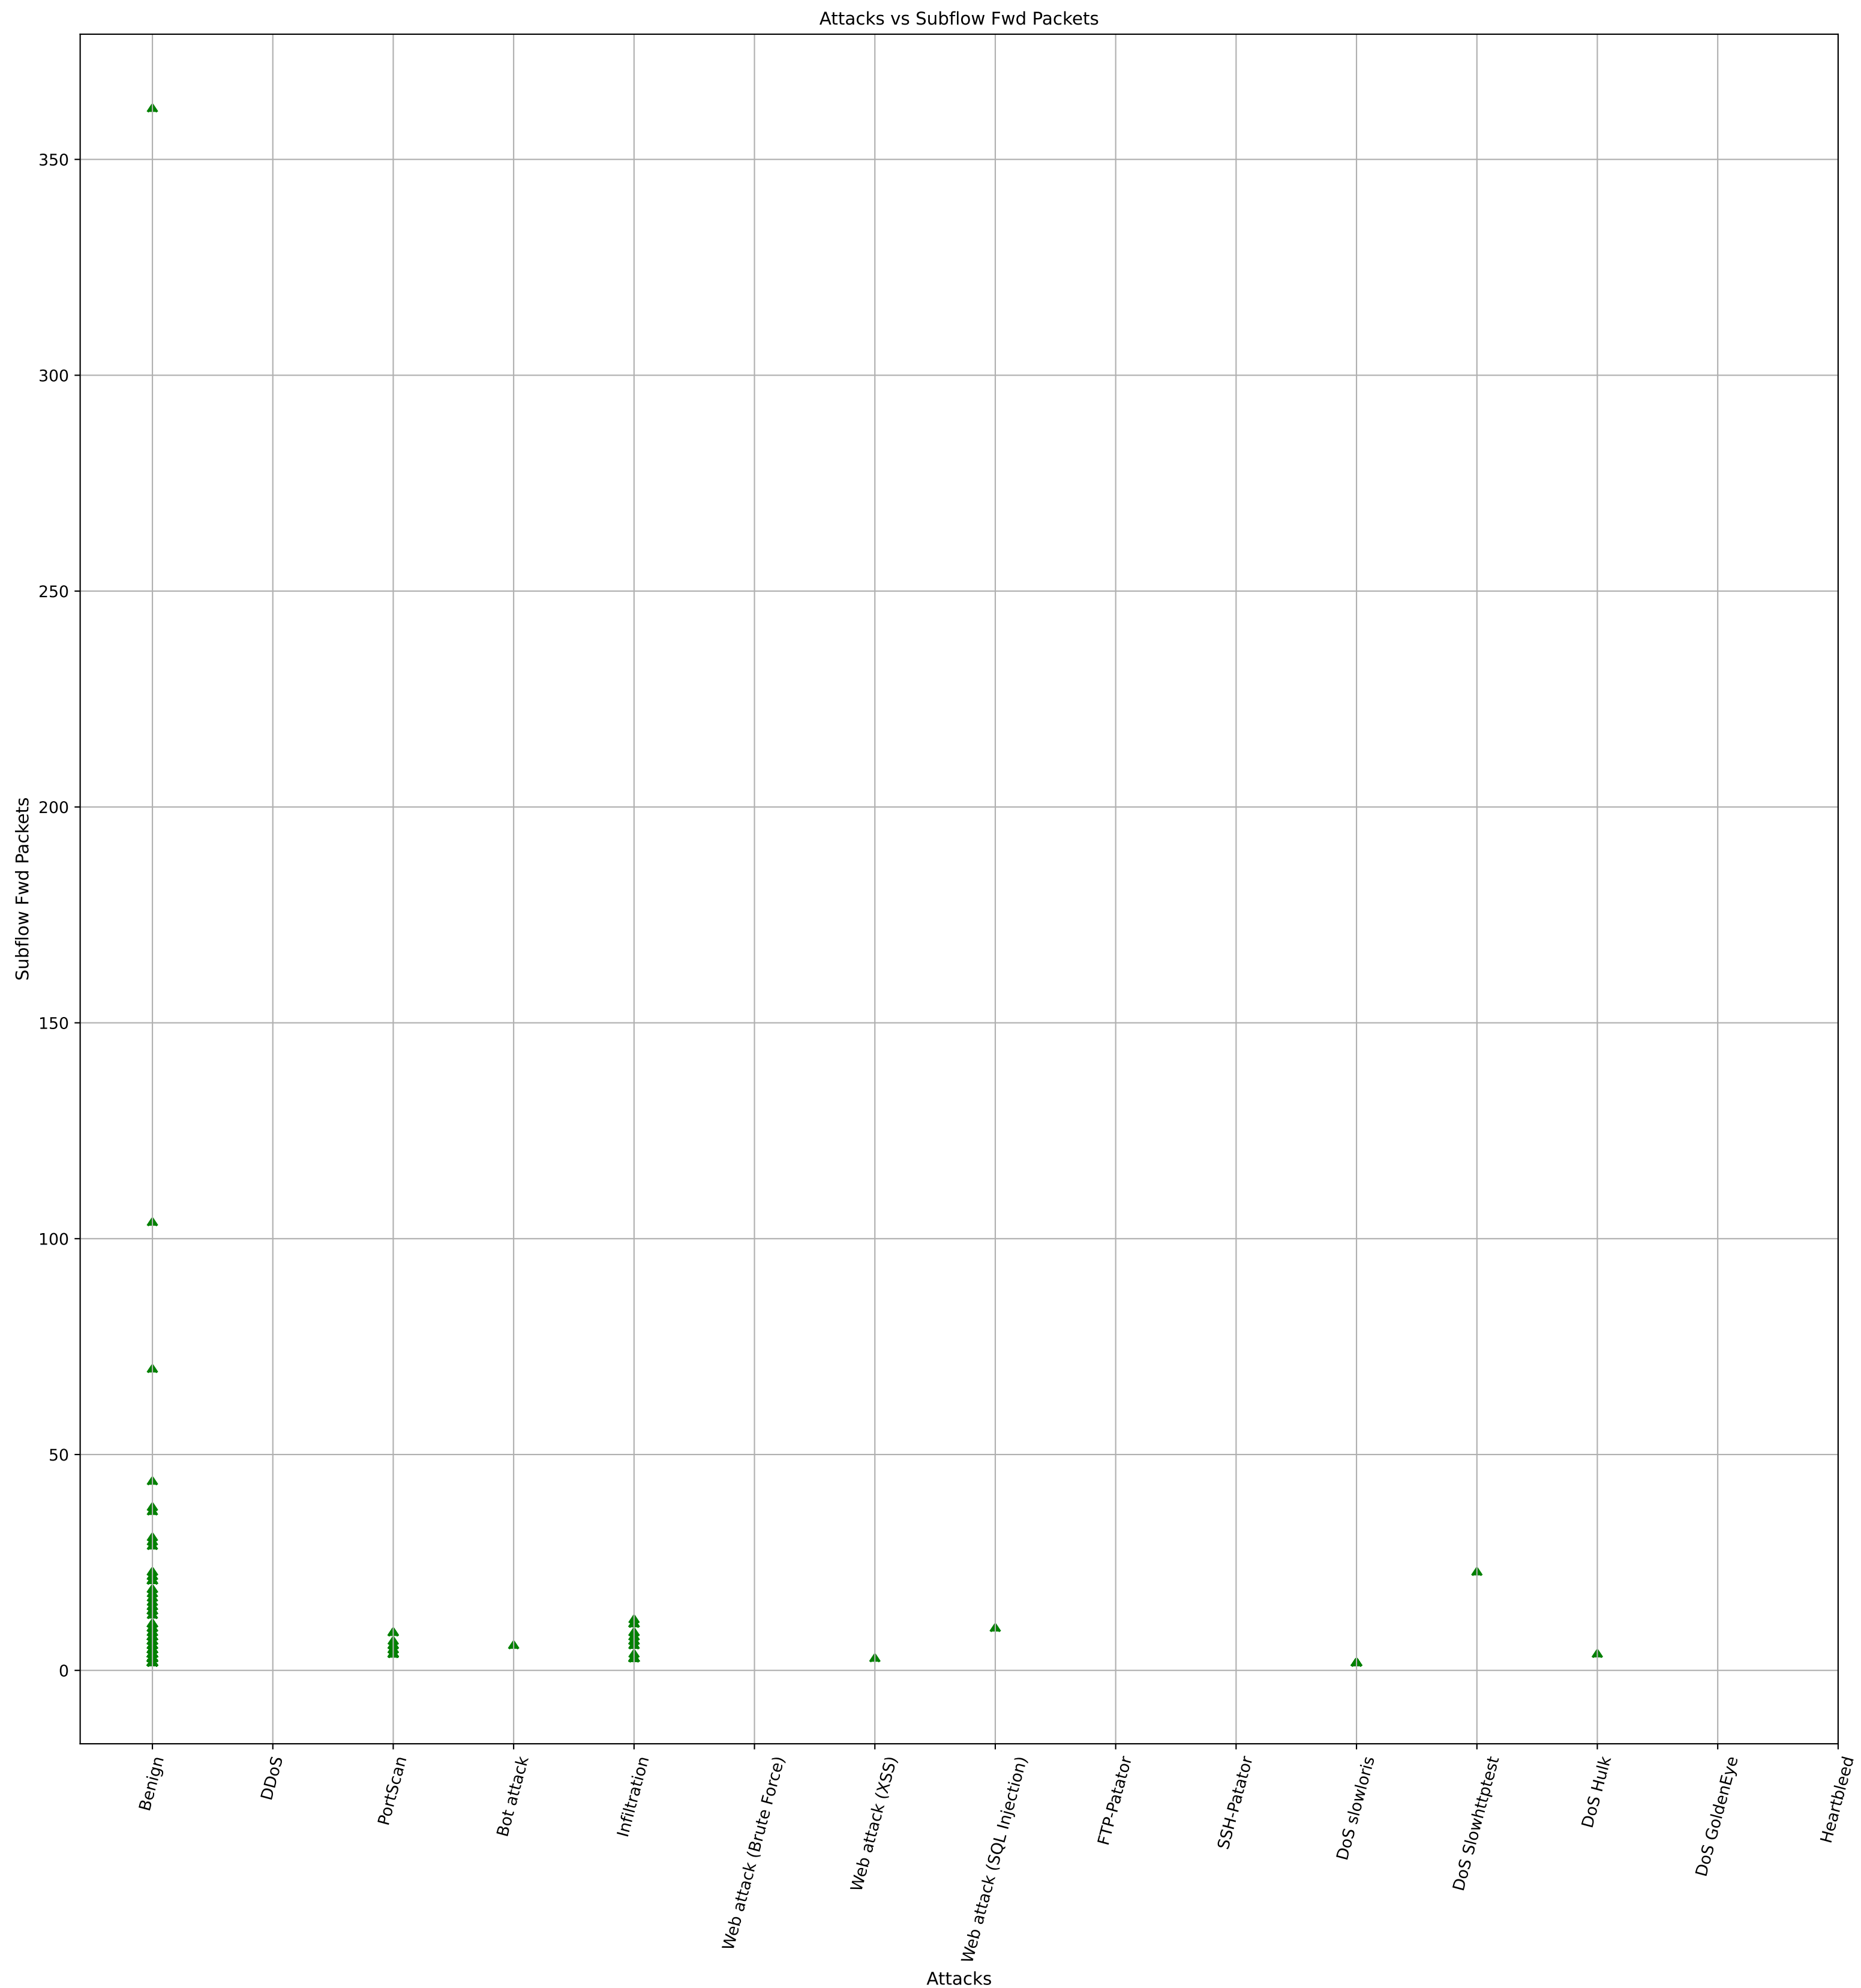


The most common value (mode) of Subflow Fwd Bytes is 0

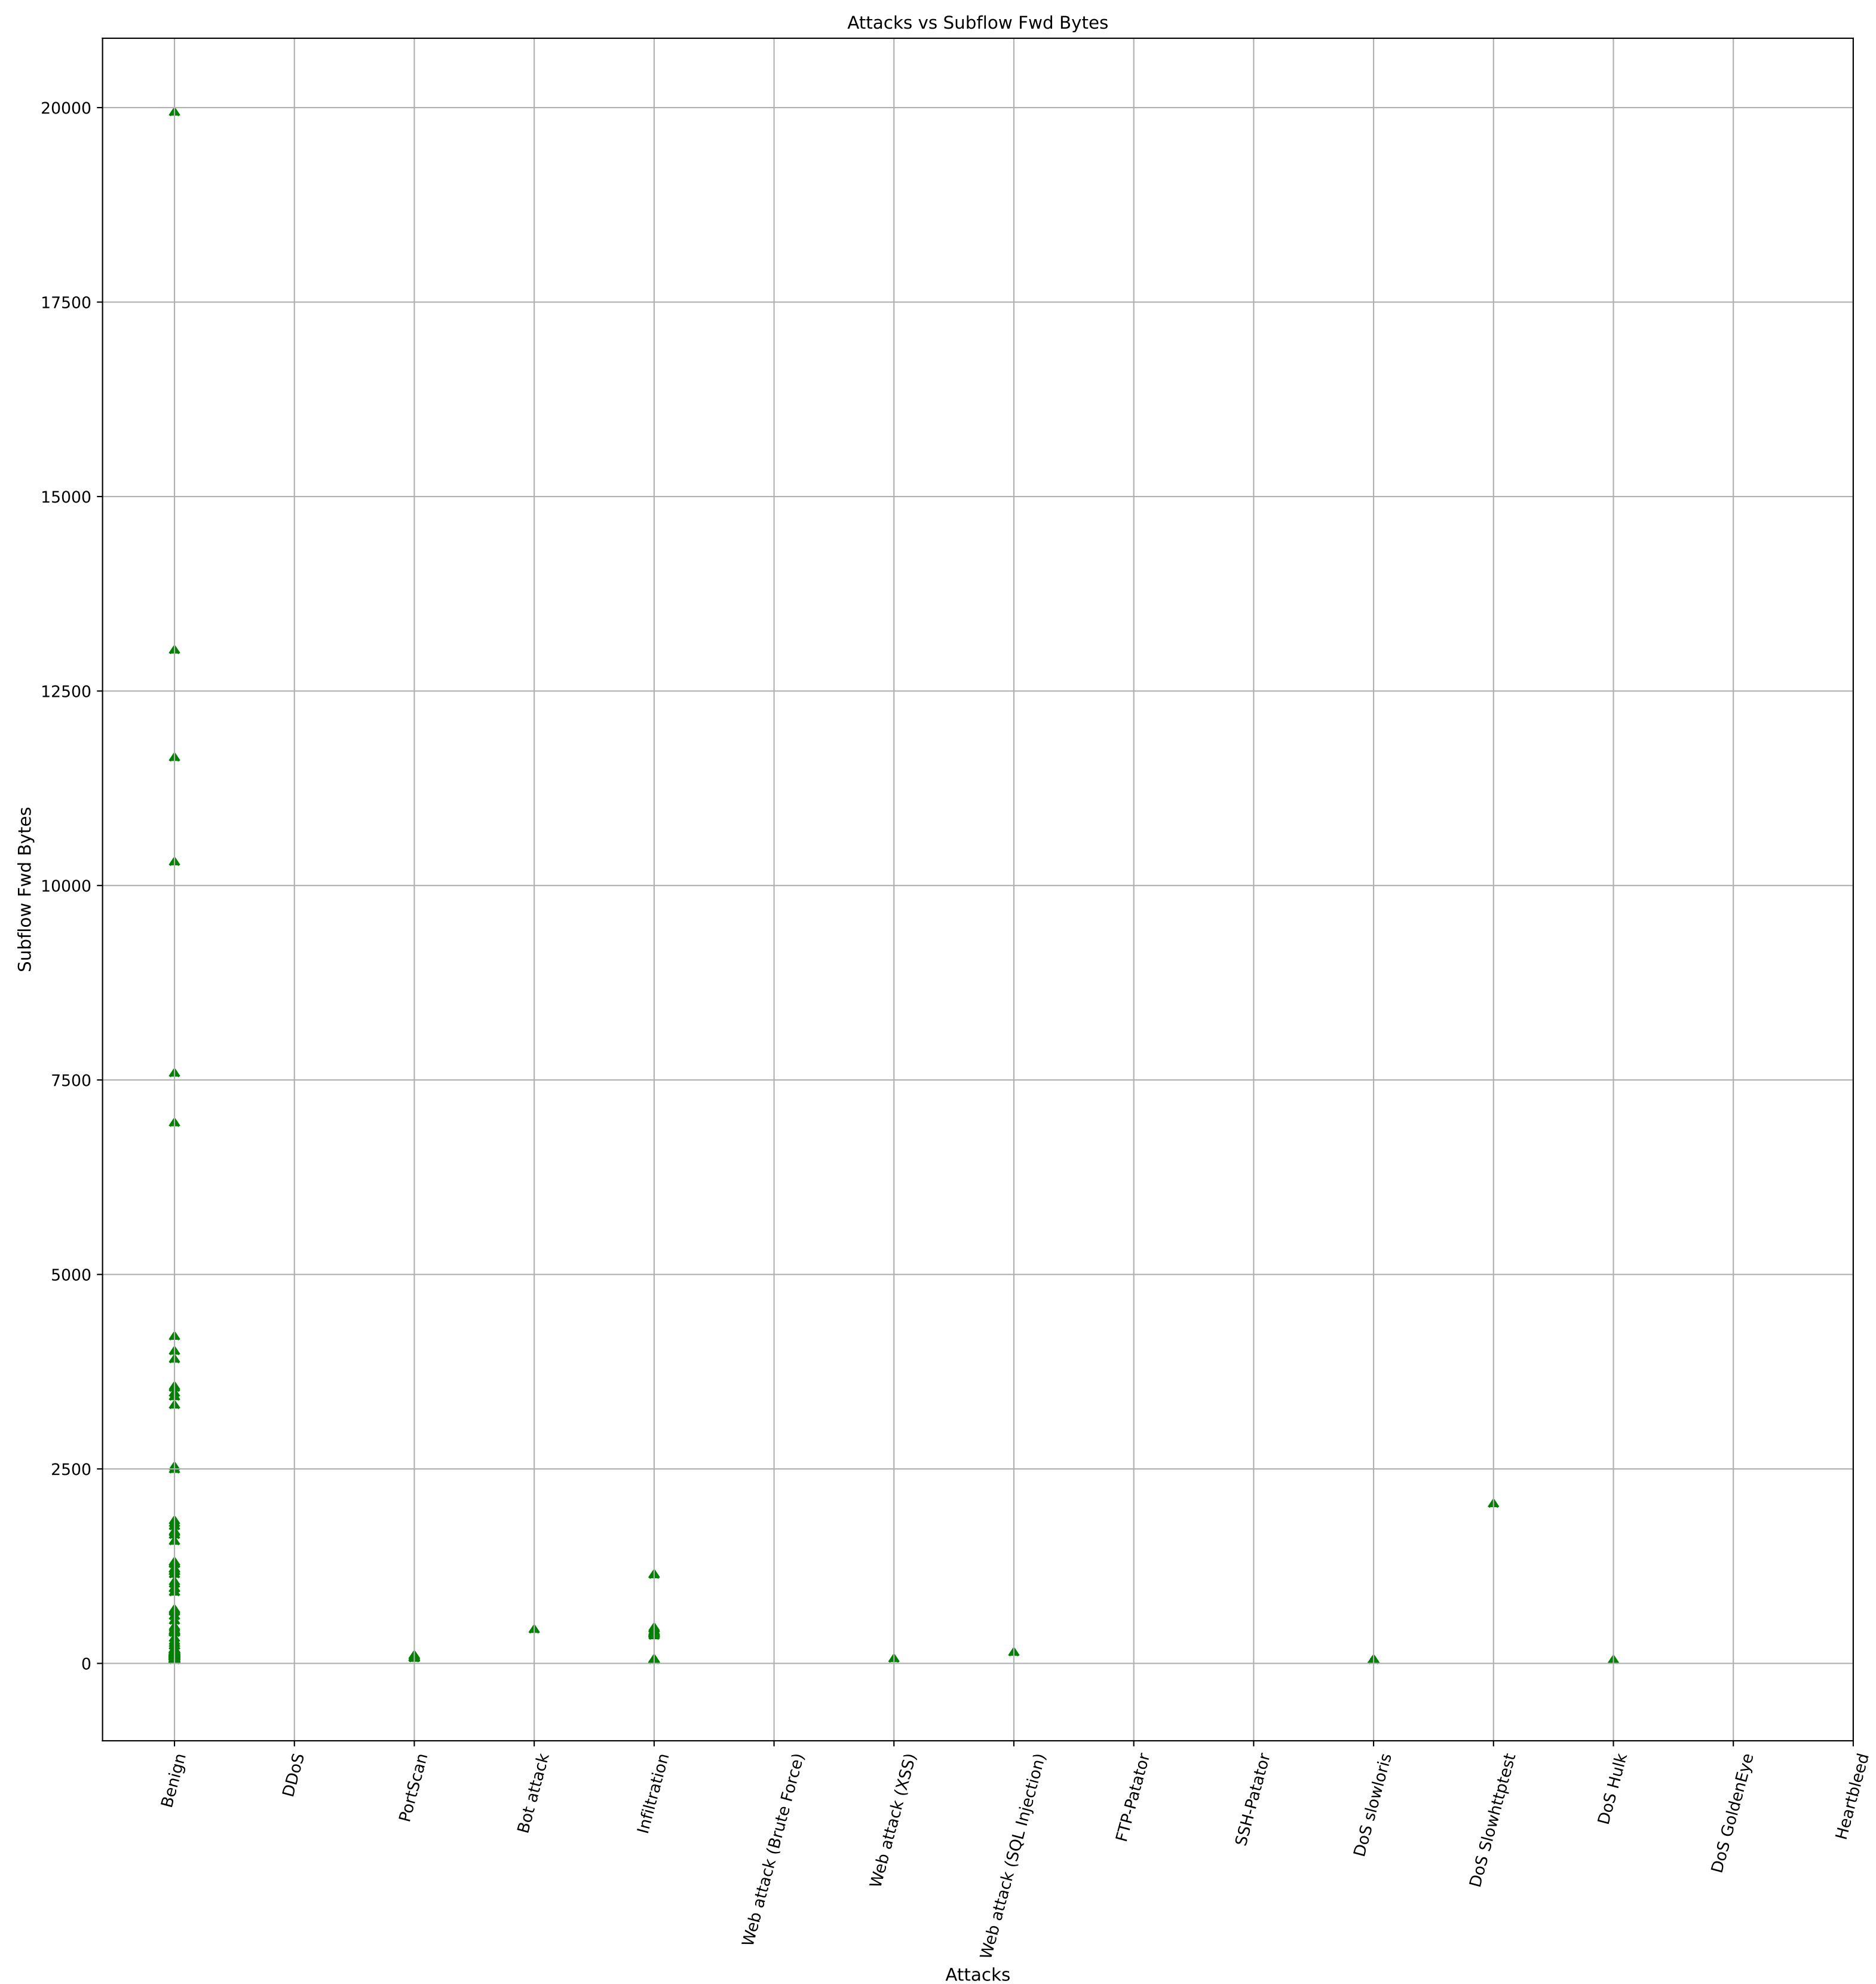


The most common value (mode) of Subflow Bwd Packets is 2

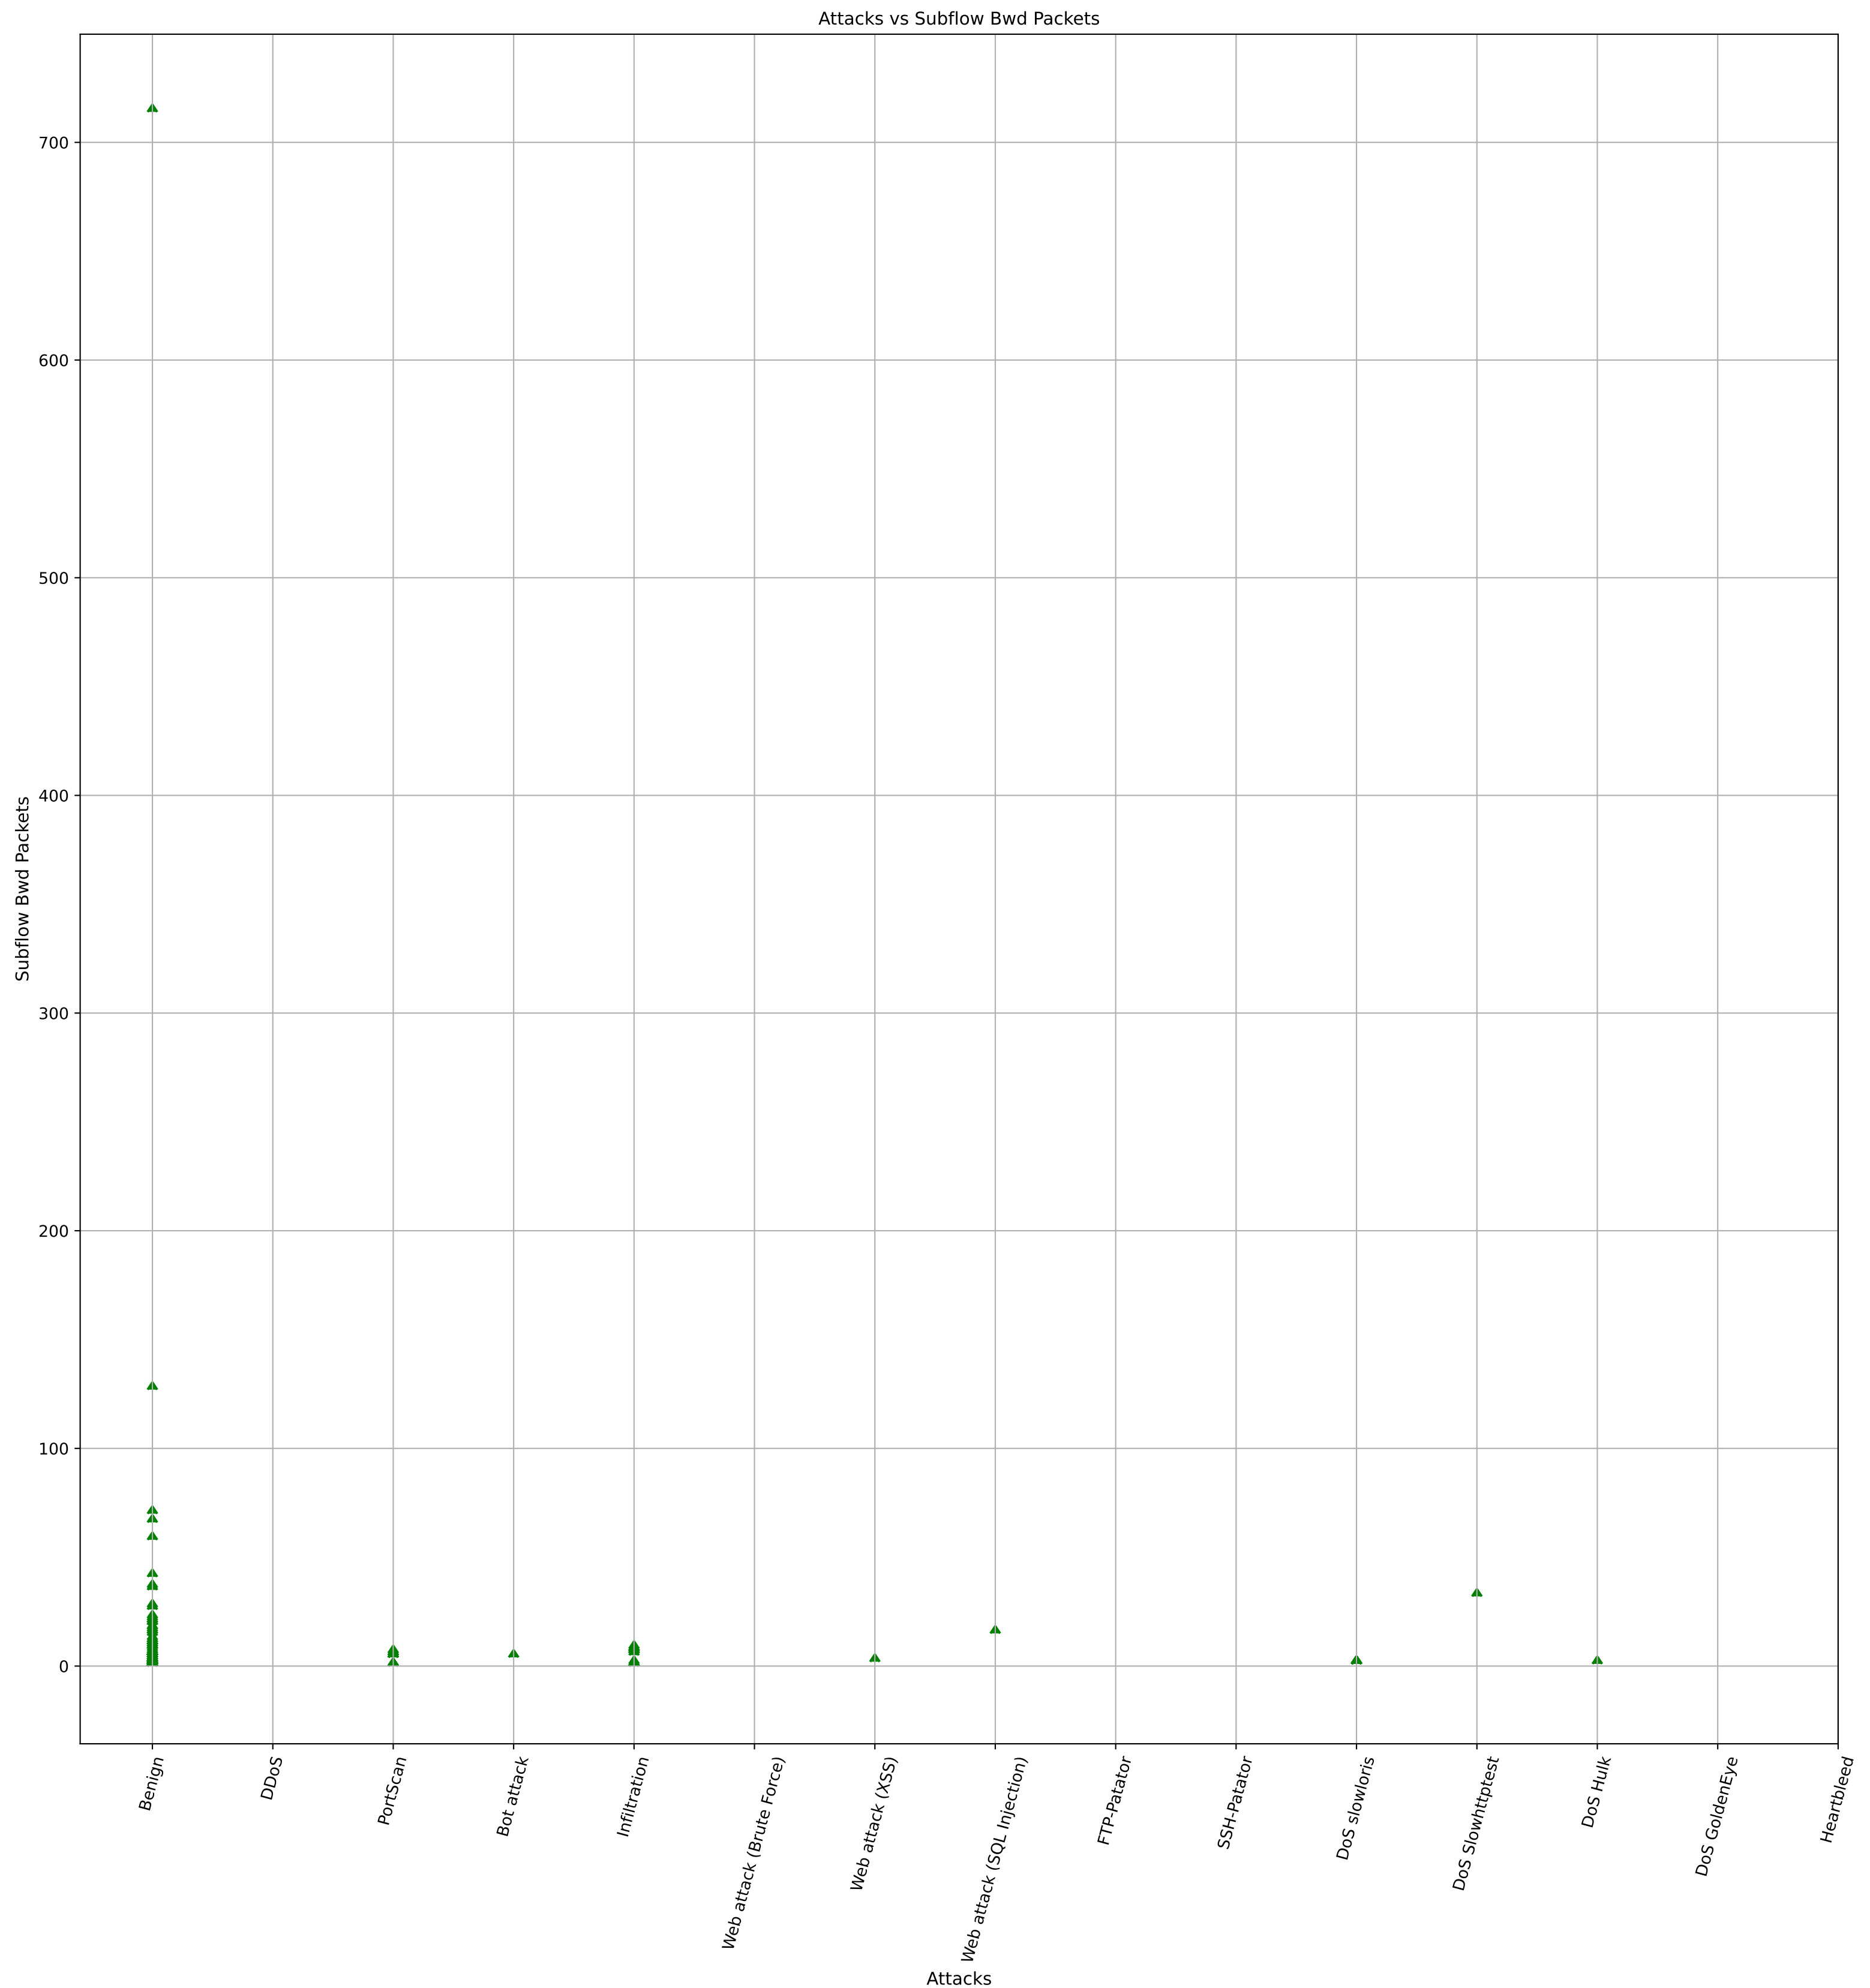


The most common value (mode) of Subflow Bwd Bytes is 0

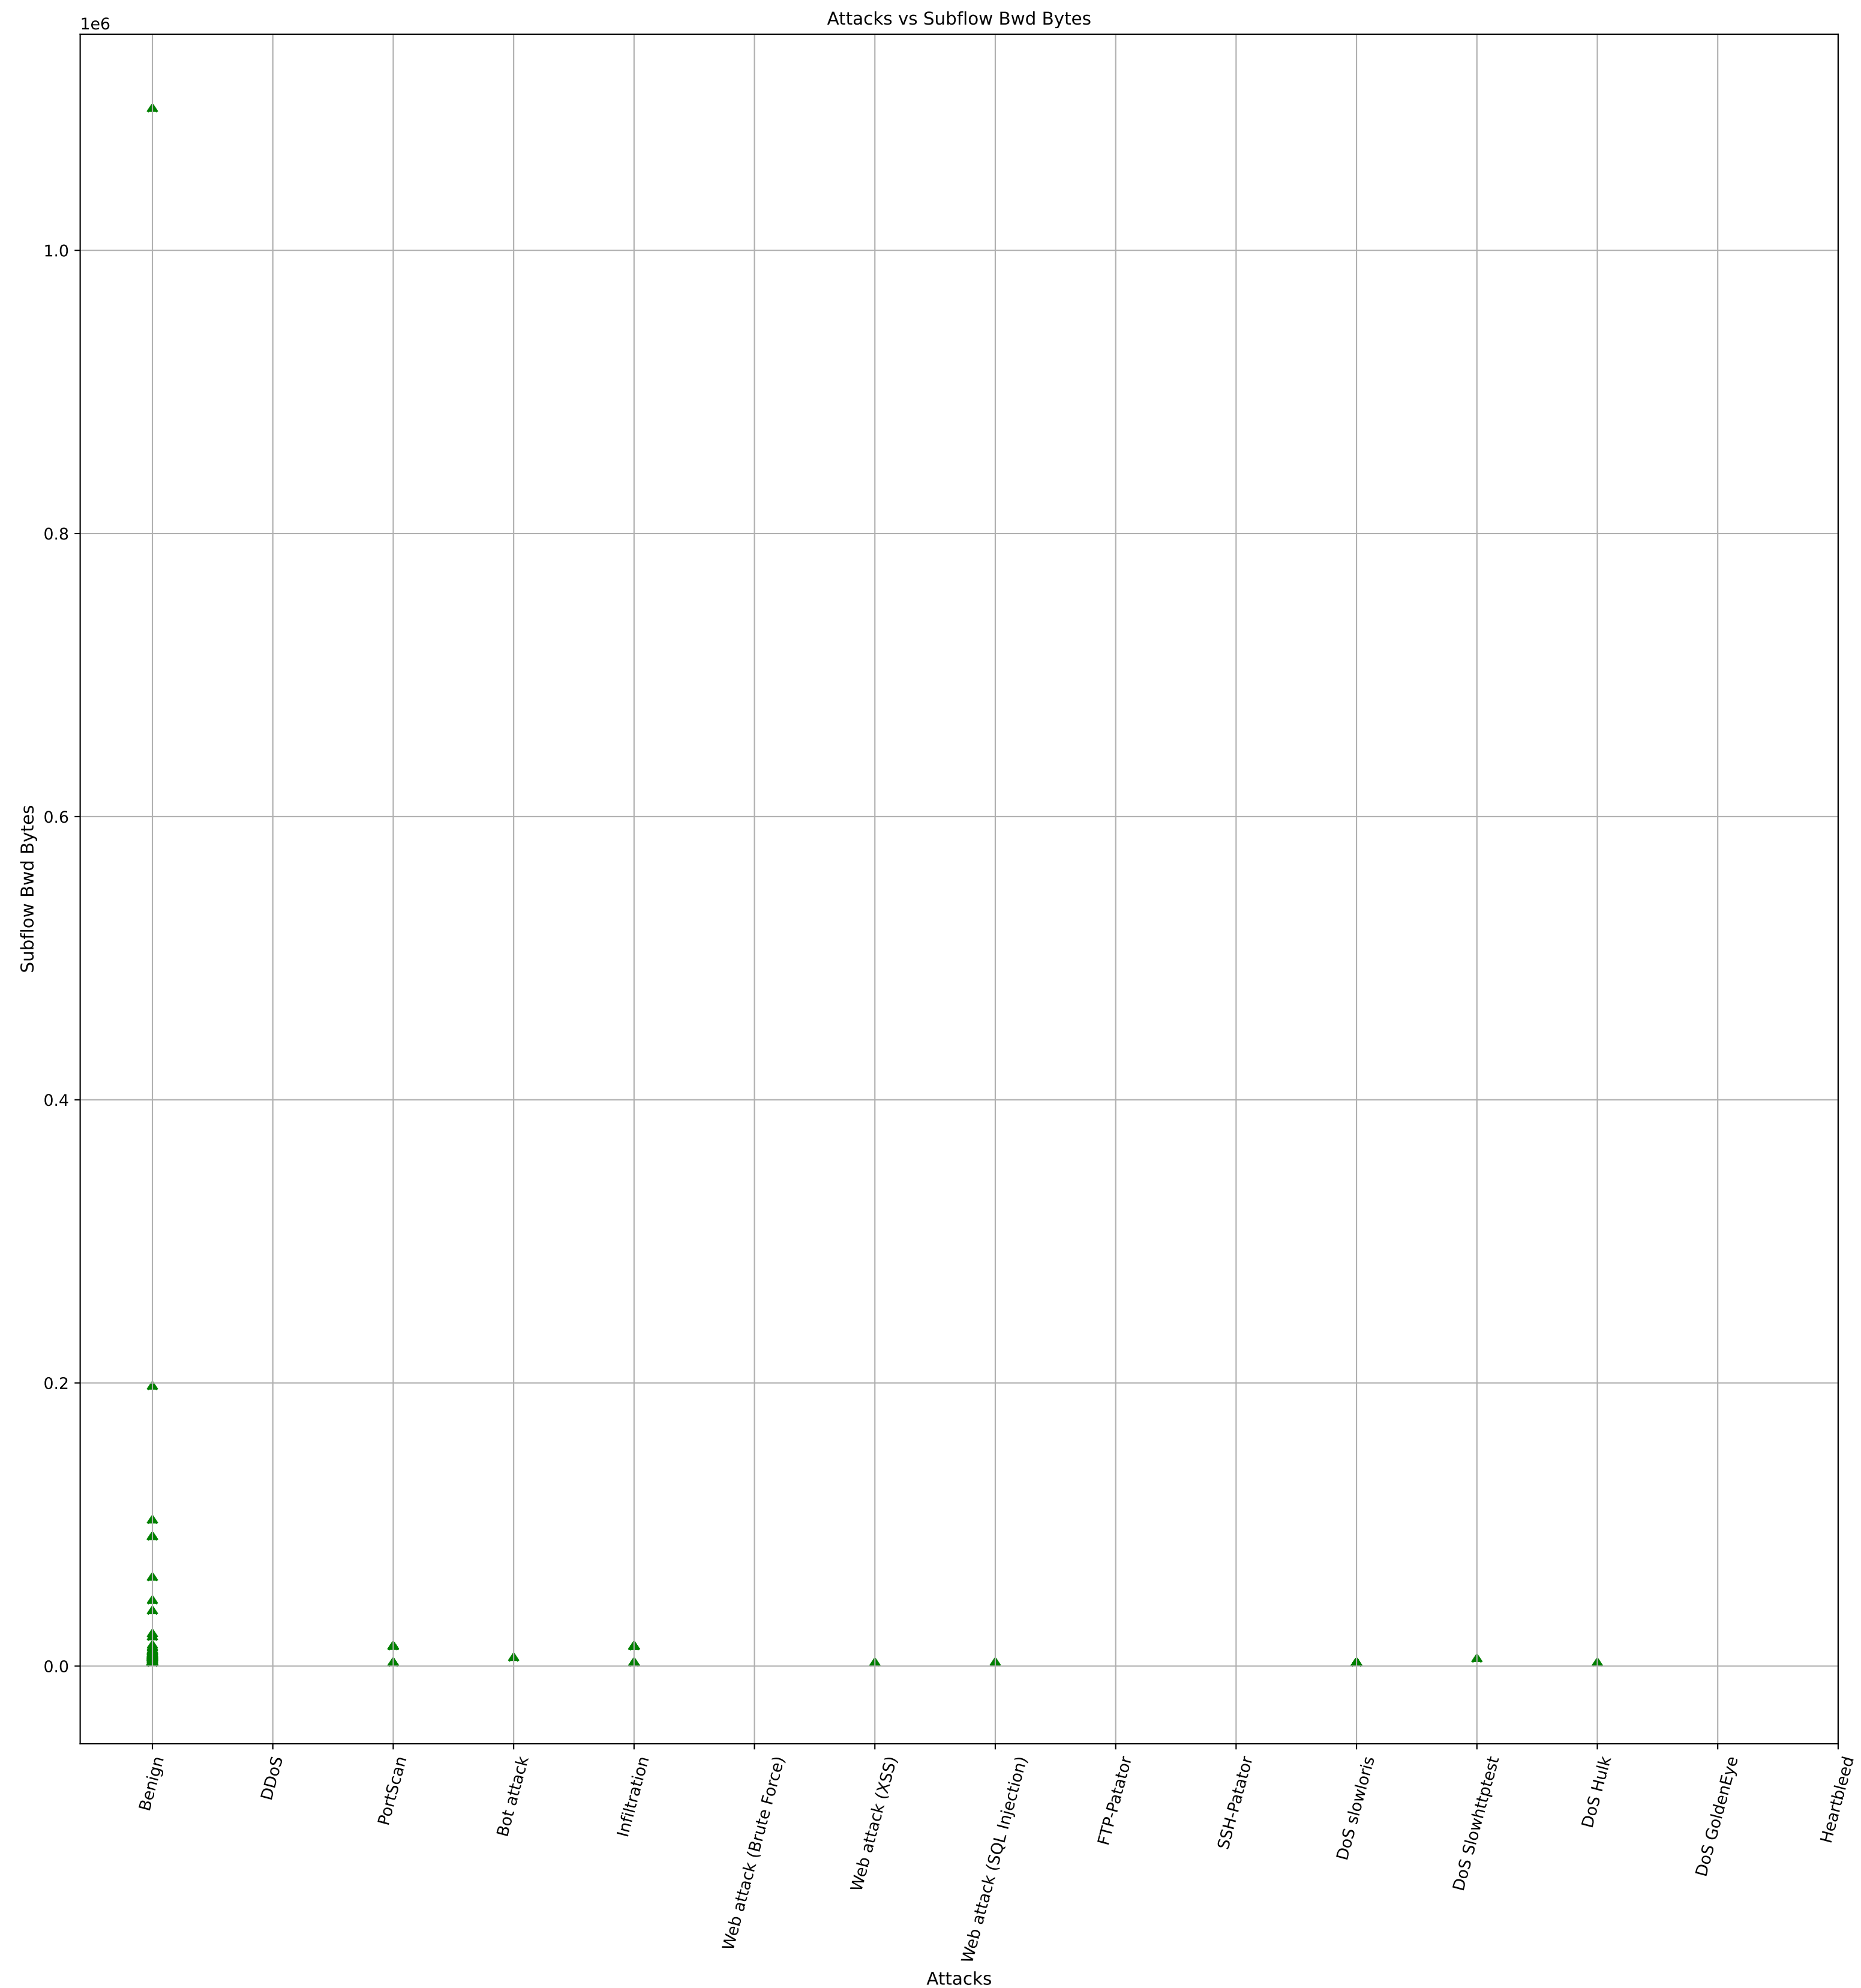


The most common value (mode) of `Init_Win_bytes_forward` is -1

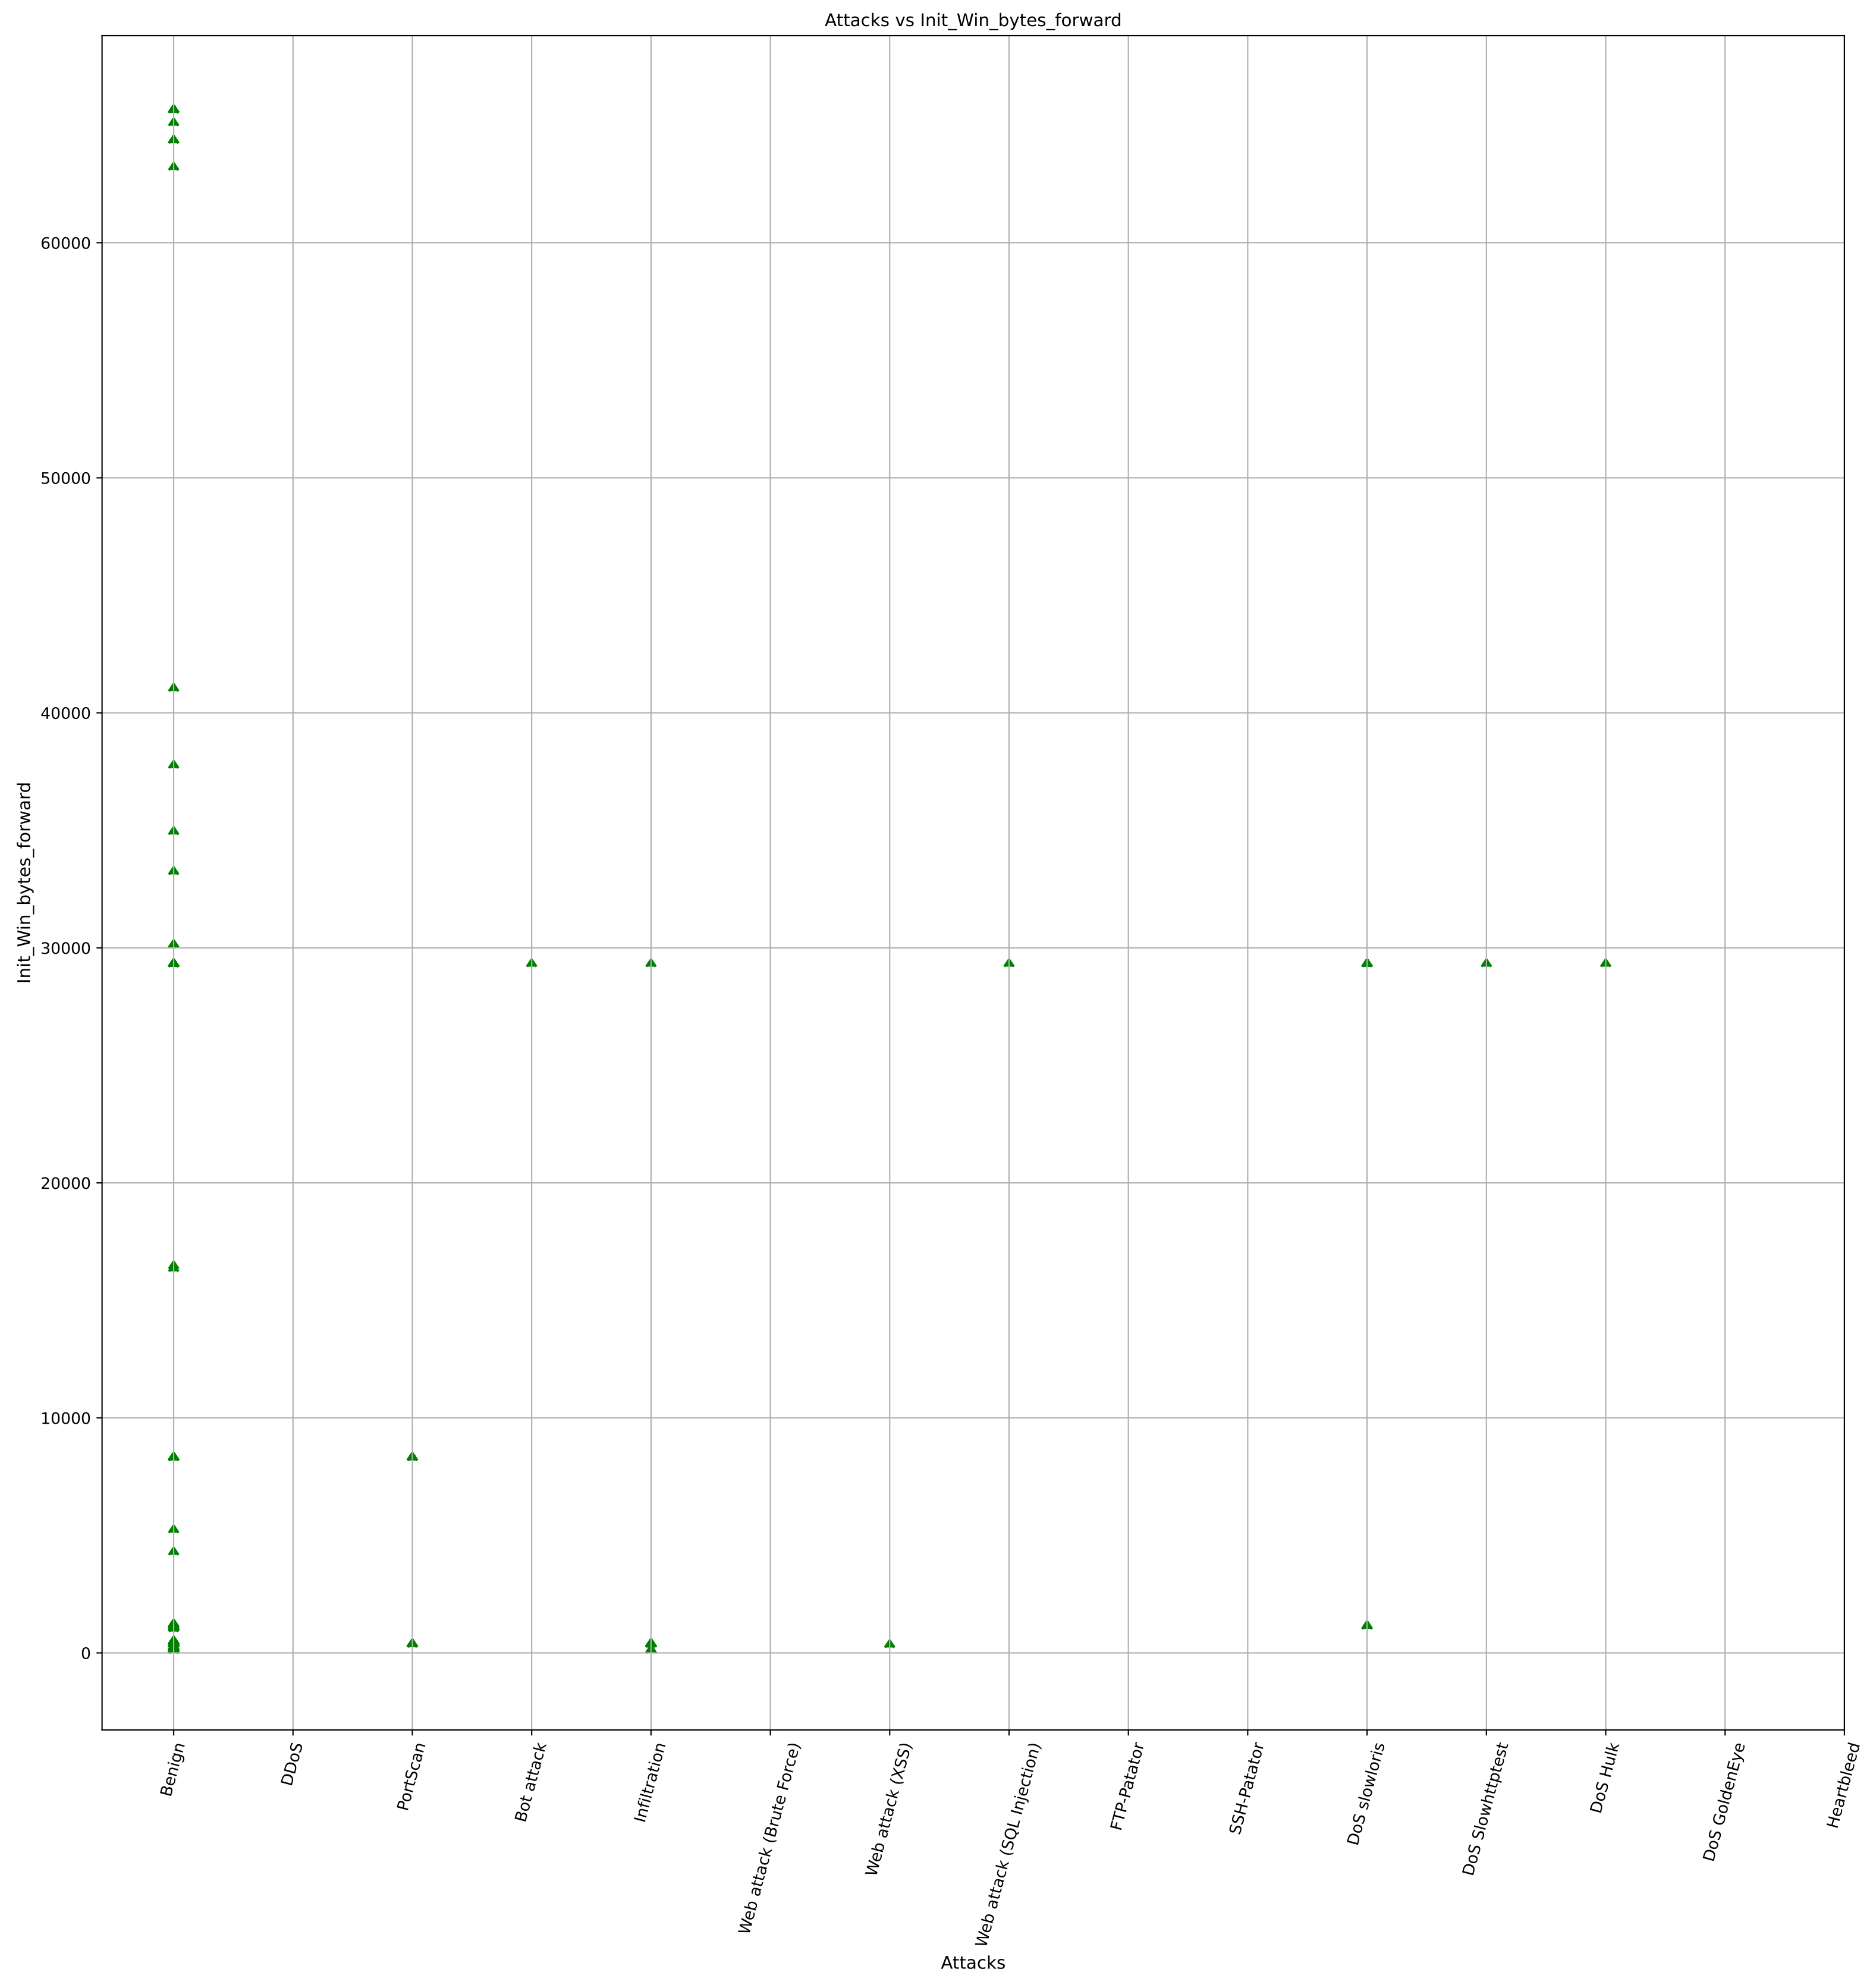


The most common value (mode) of Init_Win_bytes_backward is -1

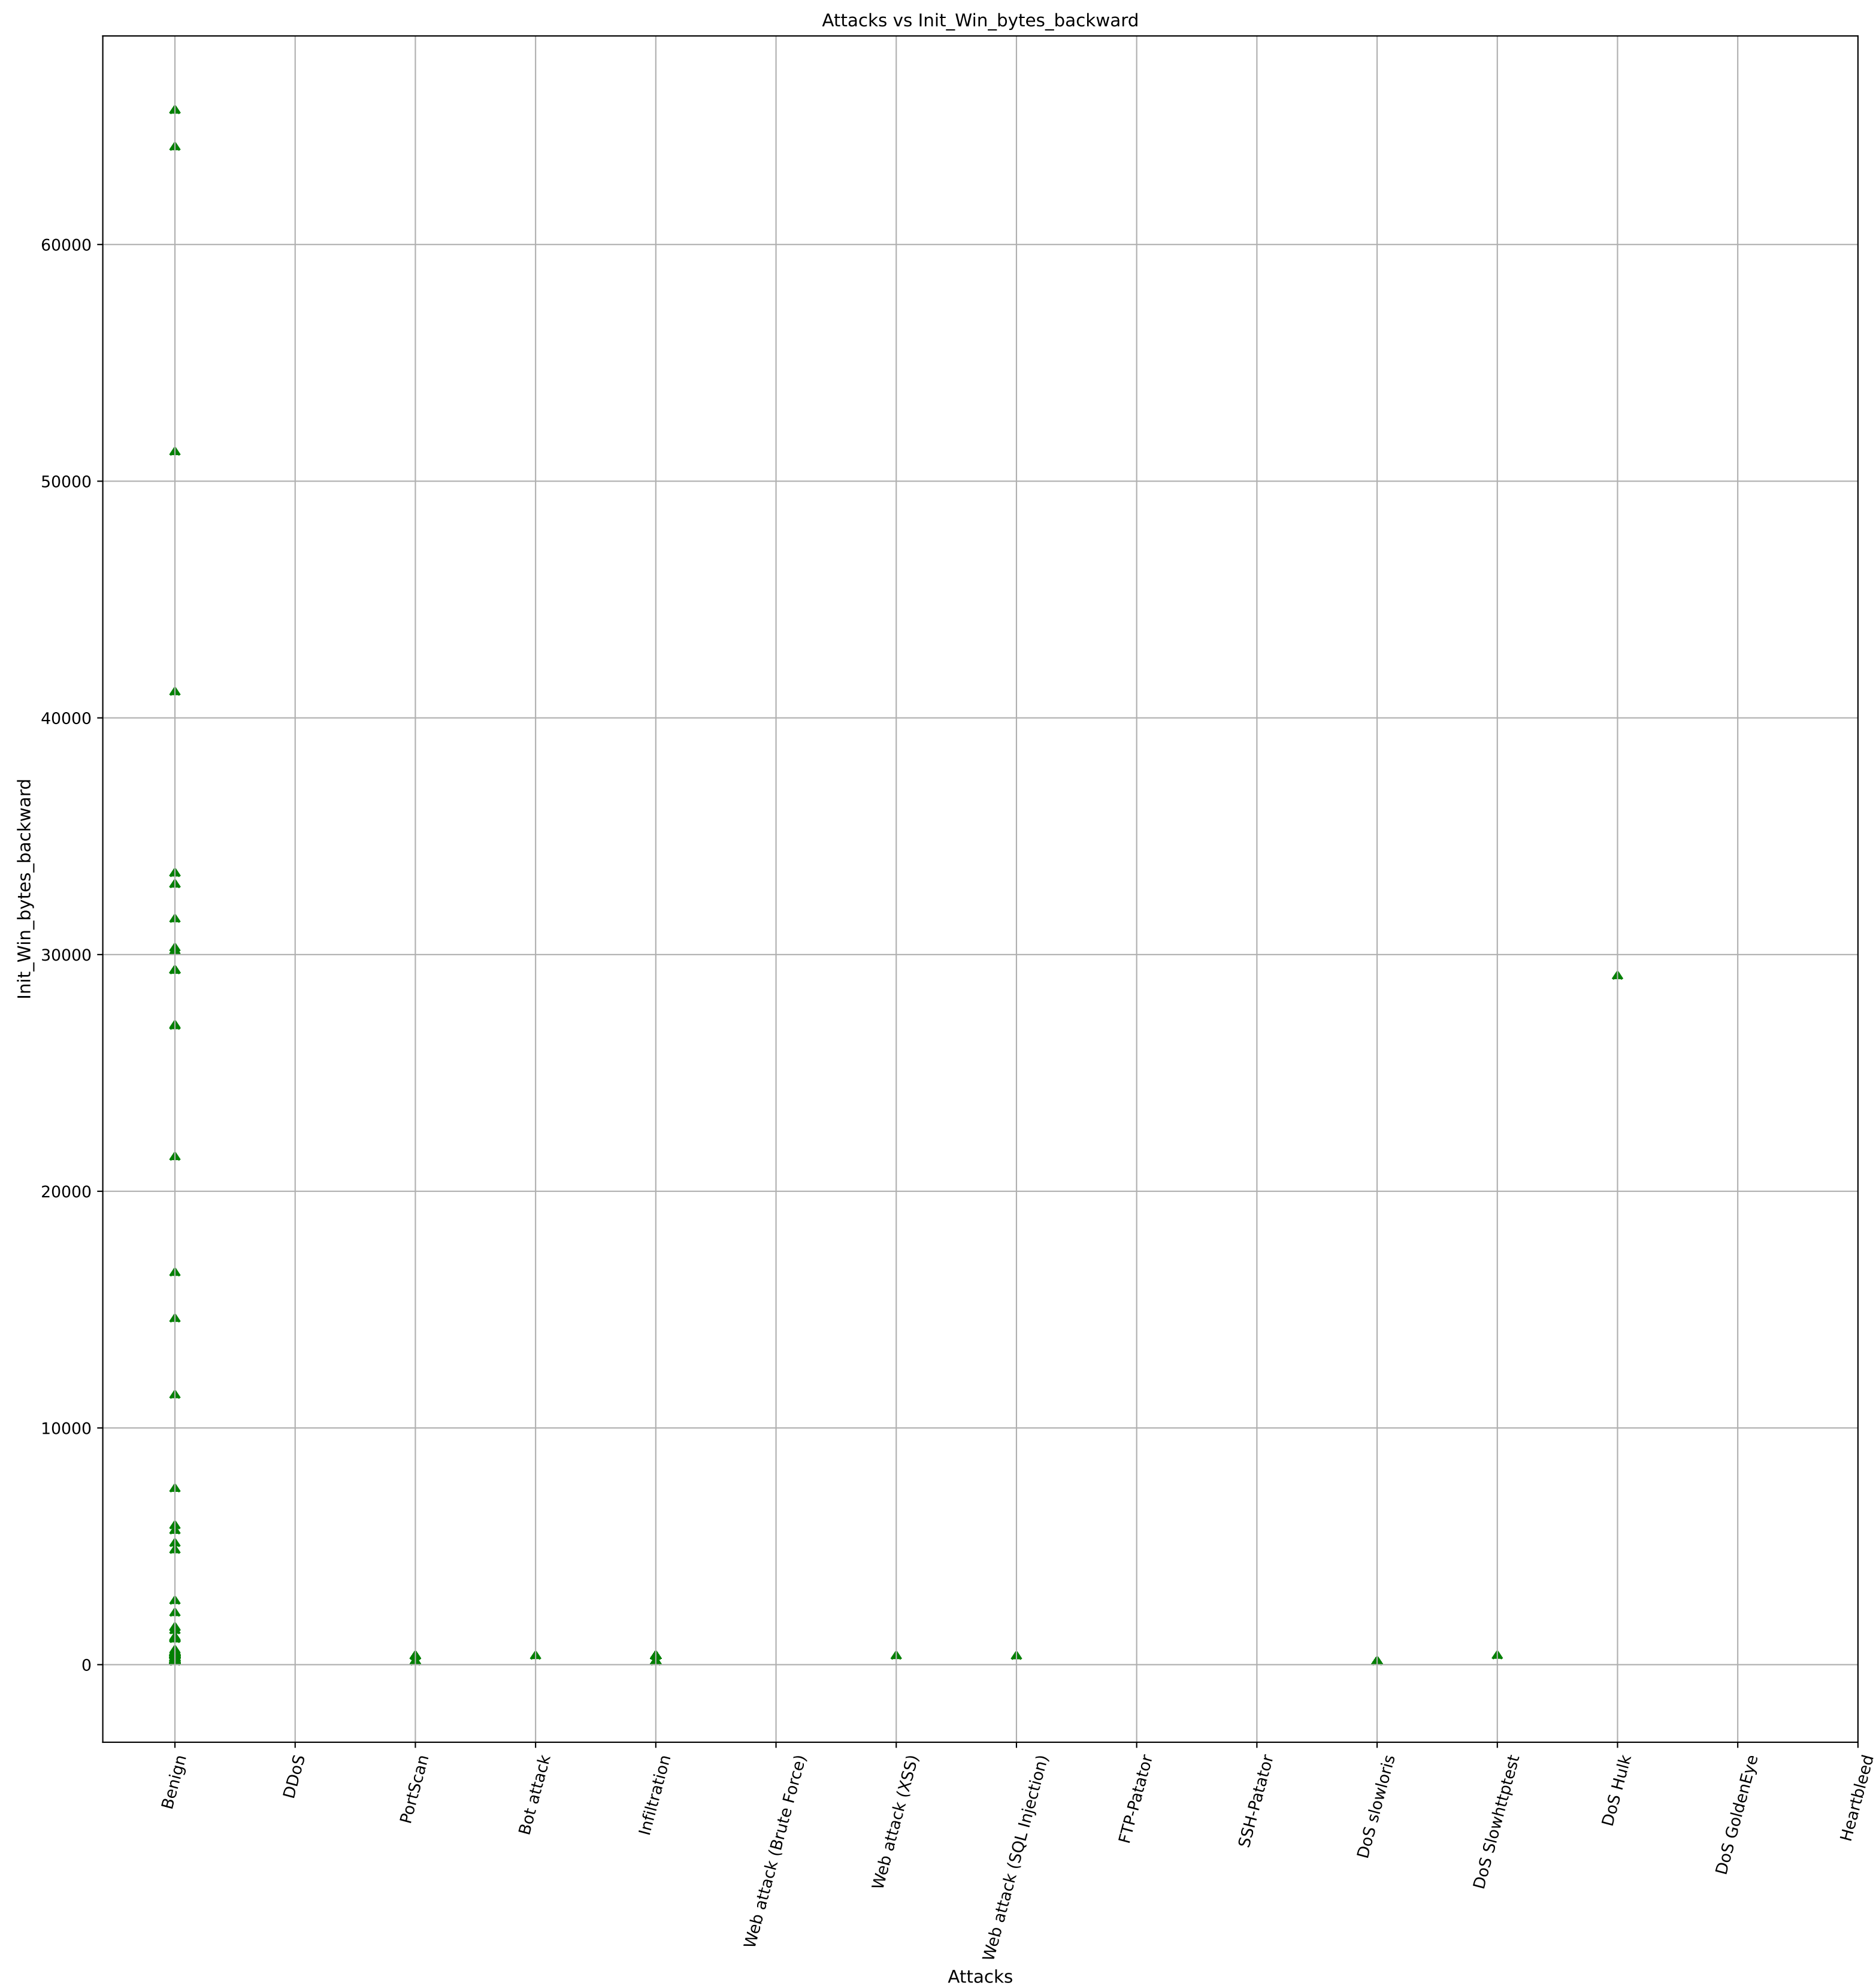


The most common value (mode) of act_data_pkt_fwd is 1

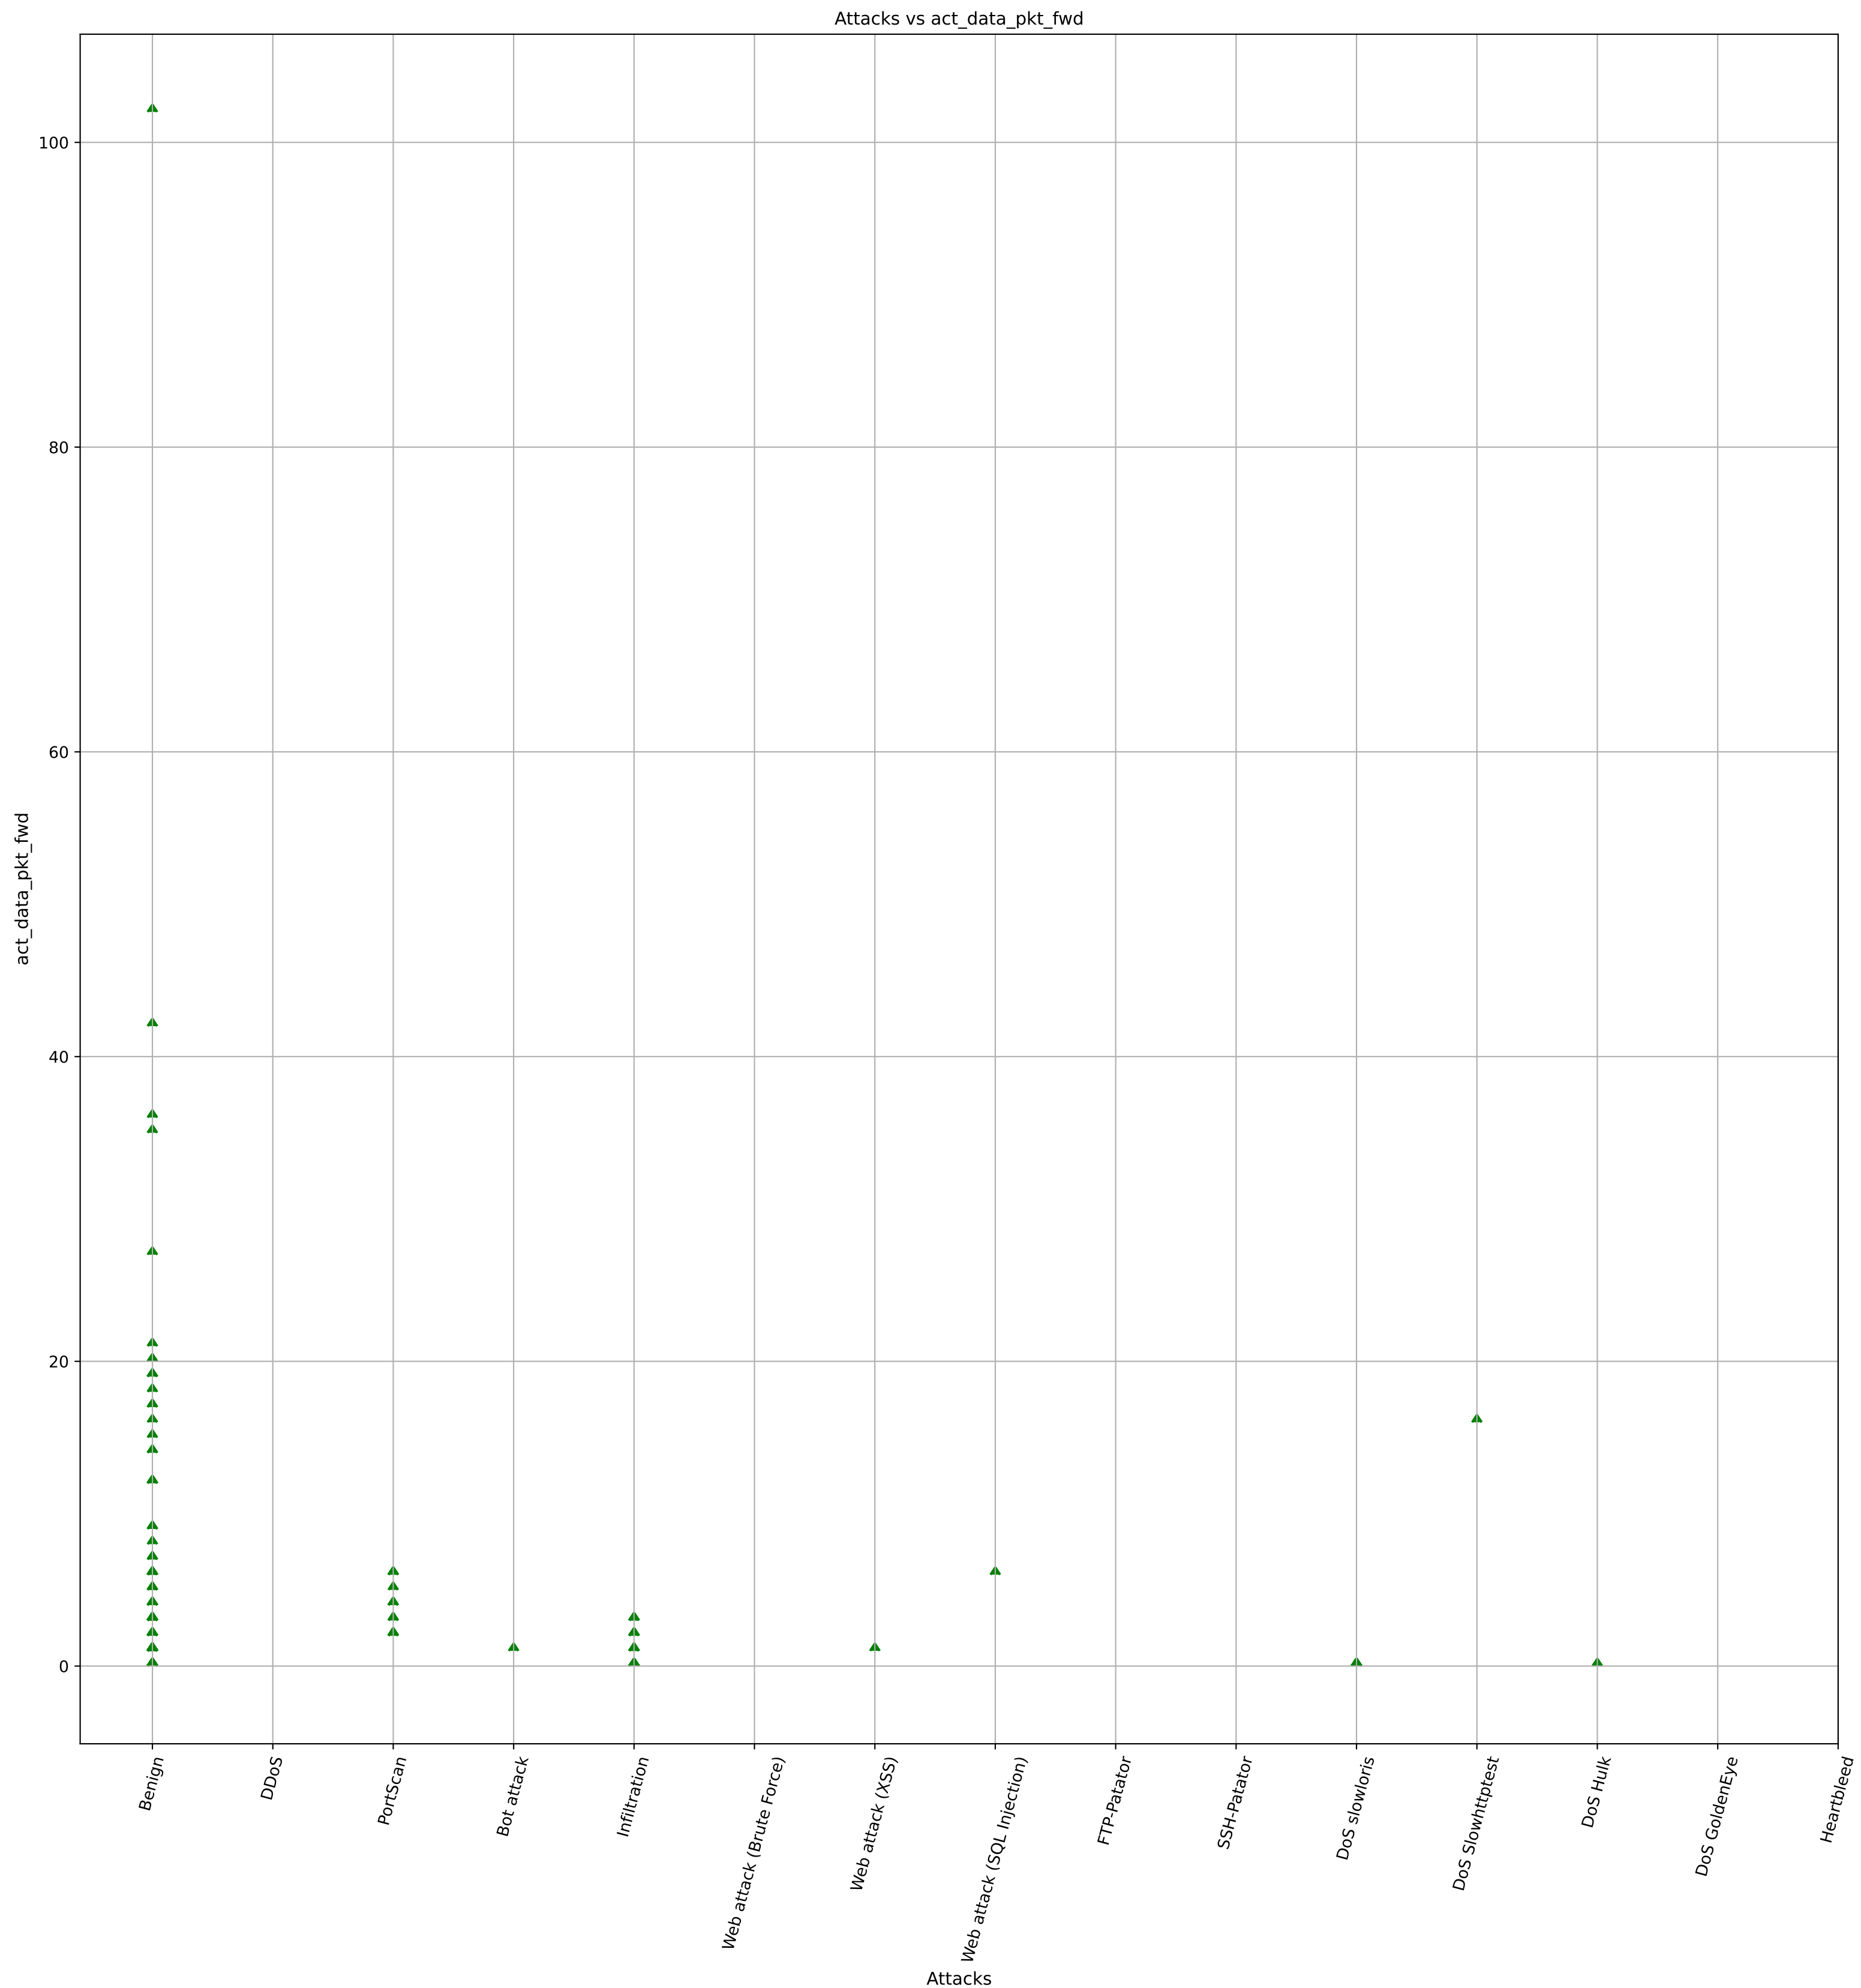


The most common value (mode) of min_seg_size_forward is 20

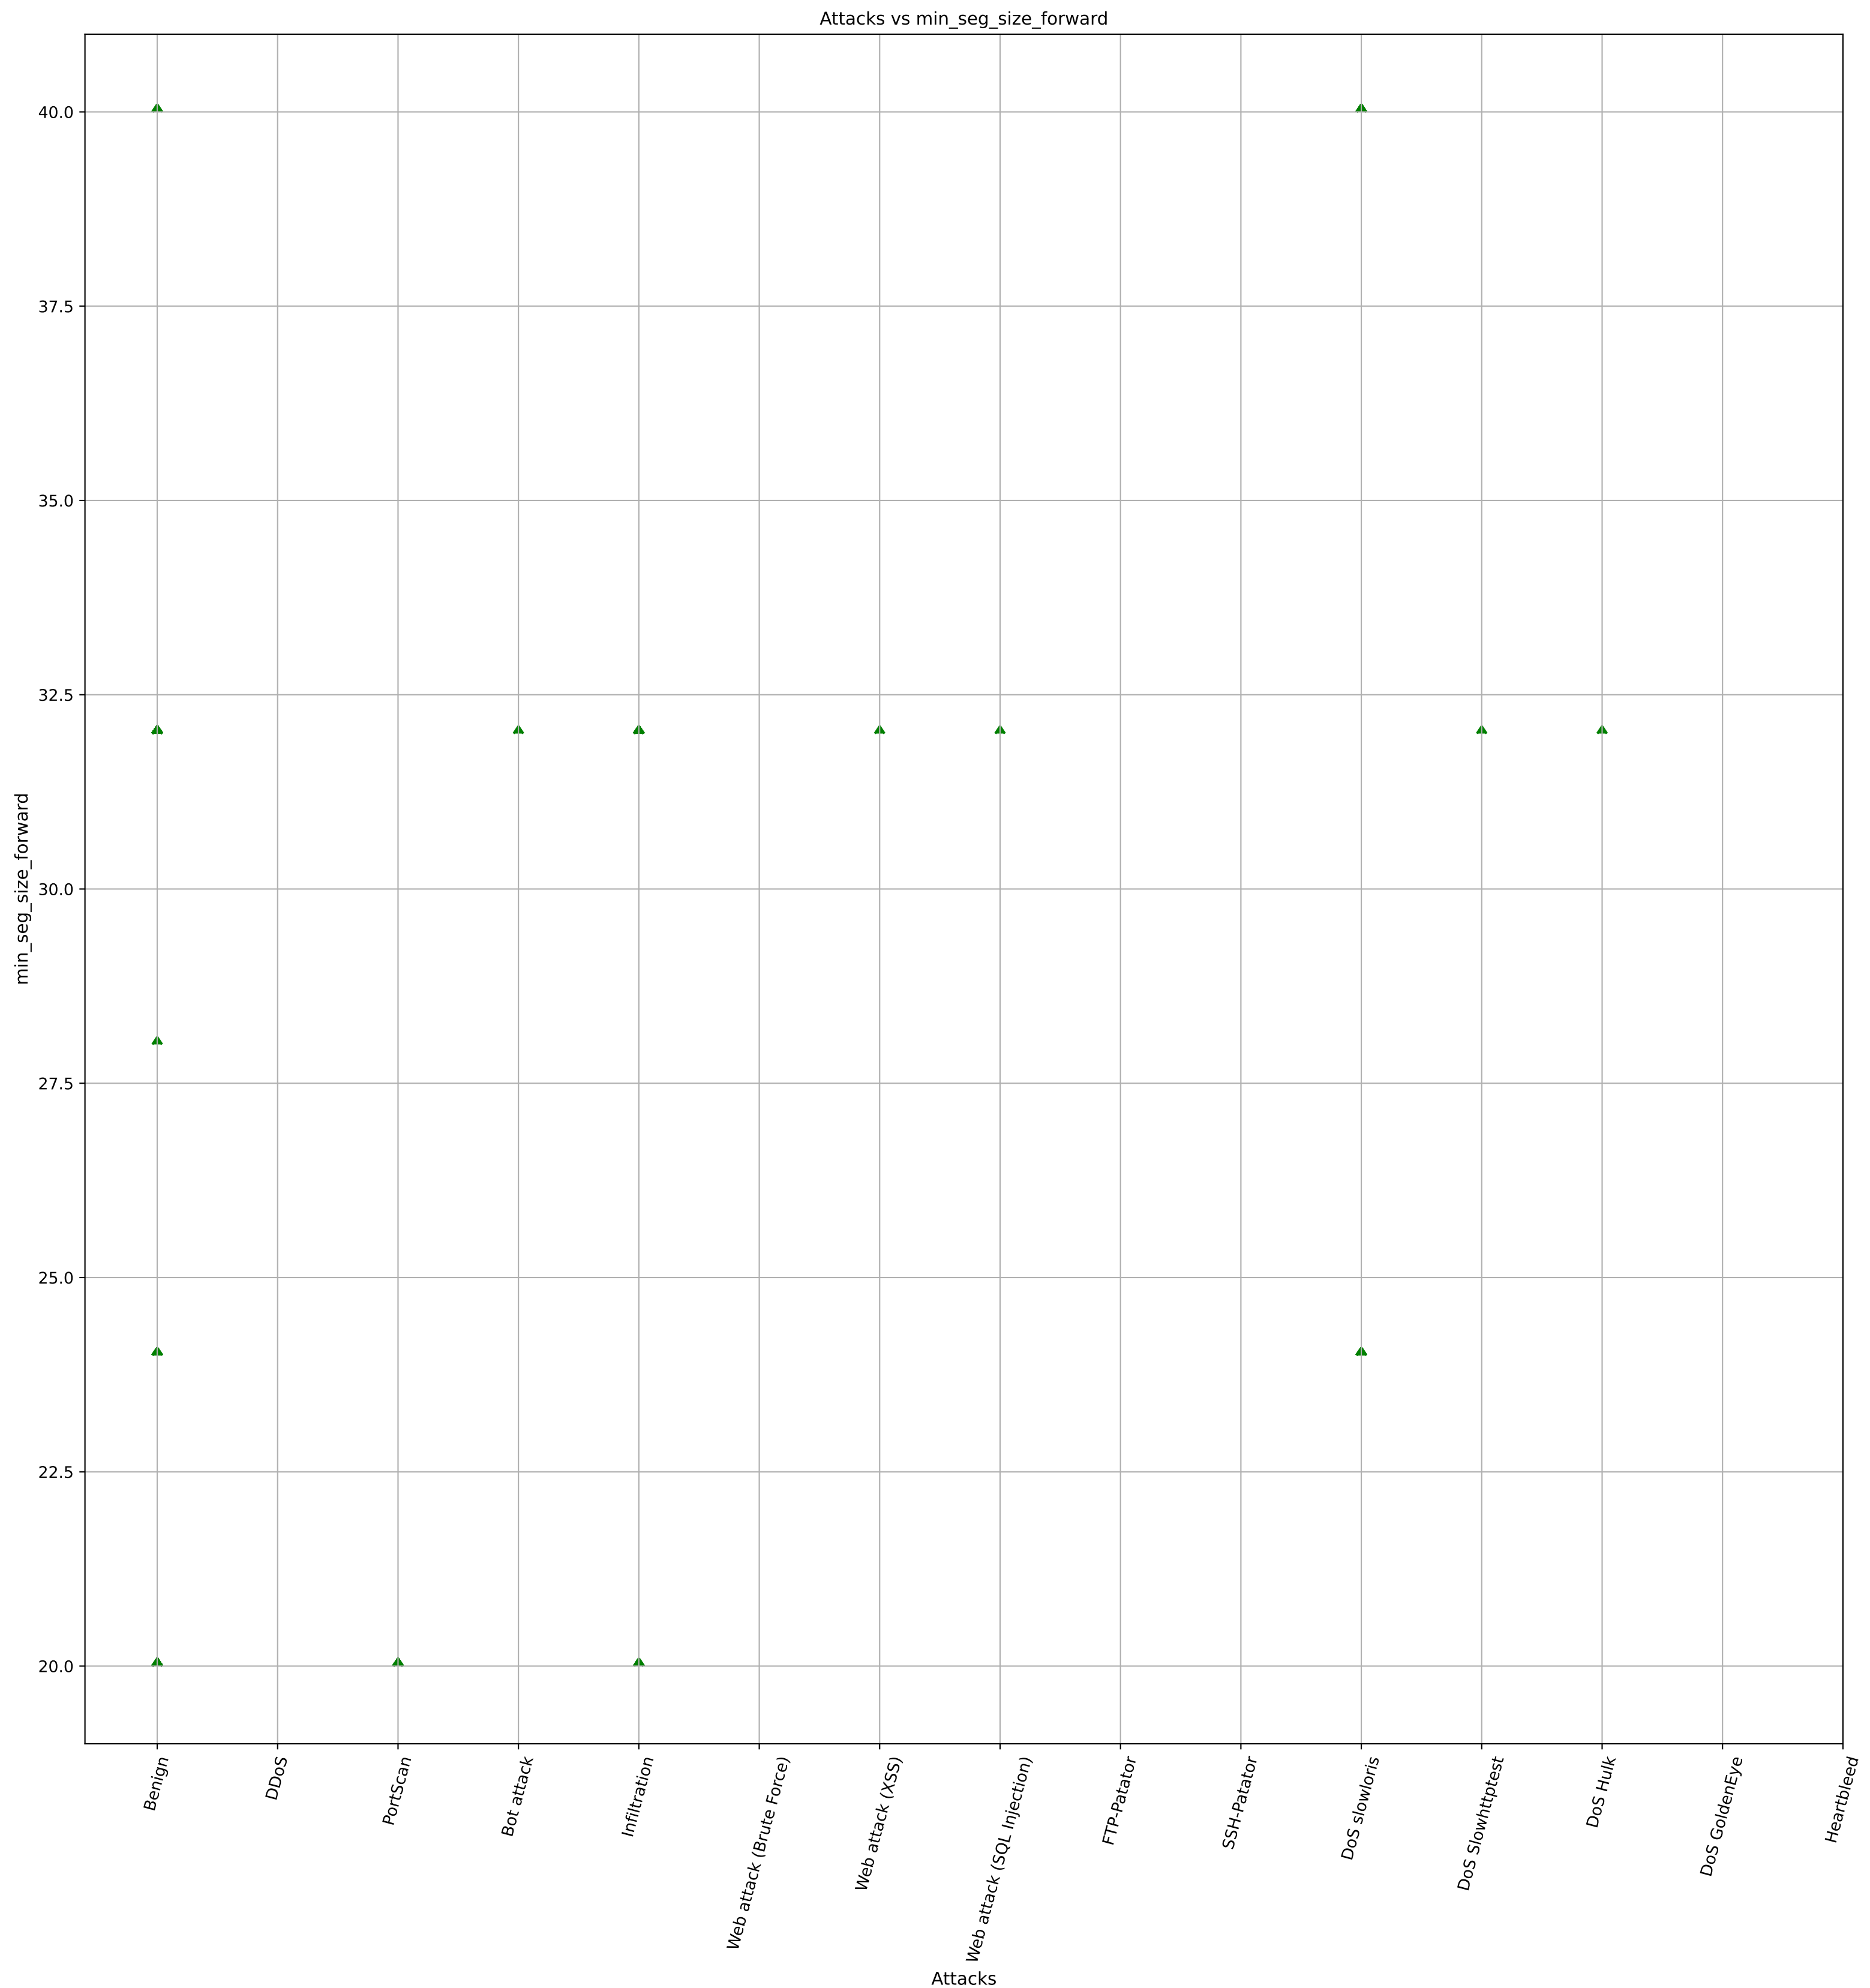


The most common value (mode) of Active Mean is 0.0

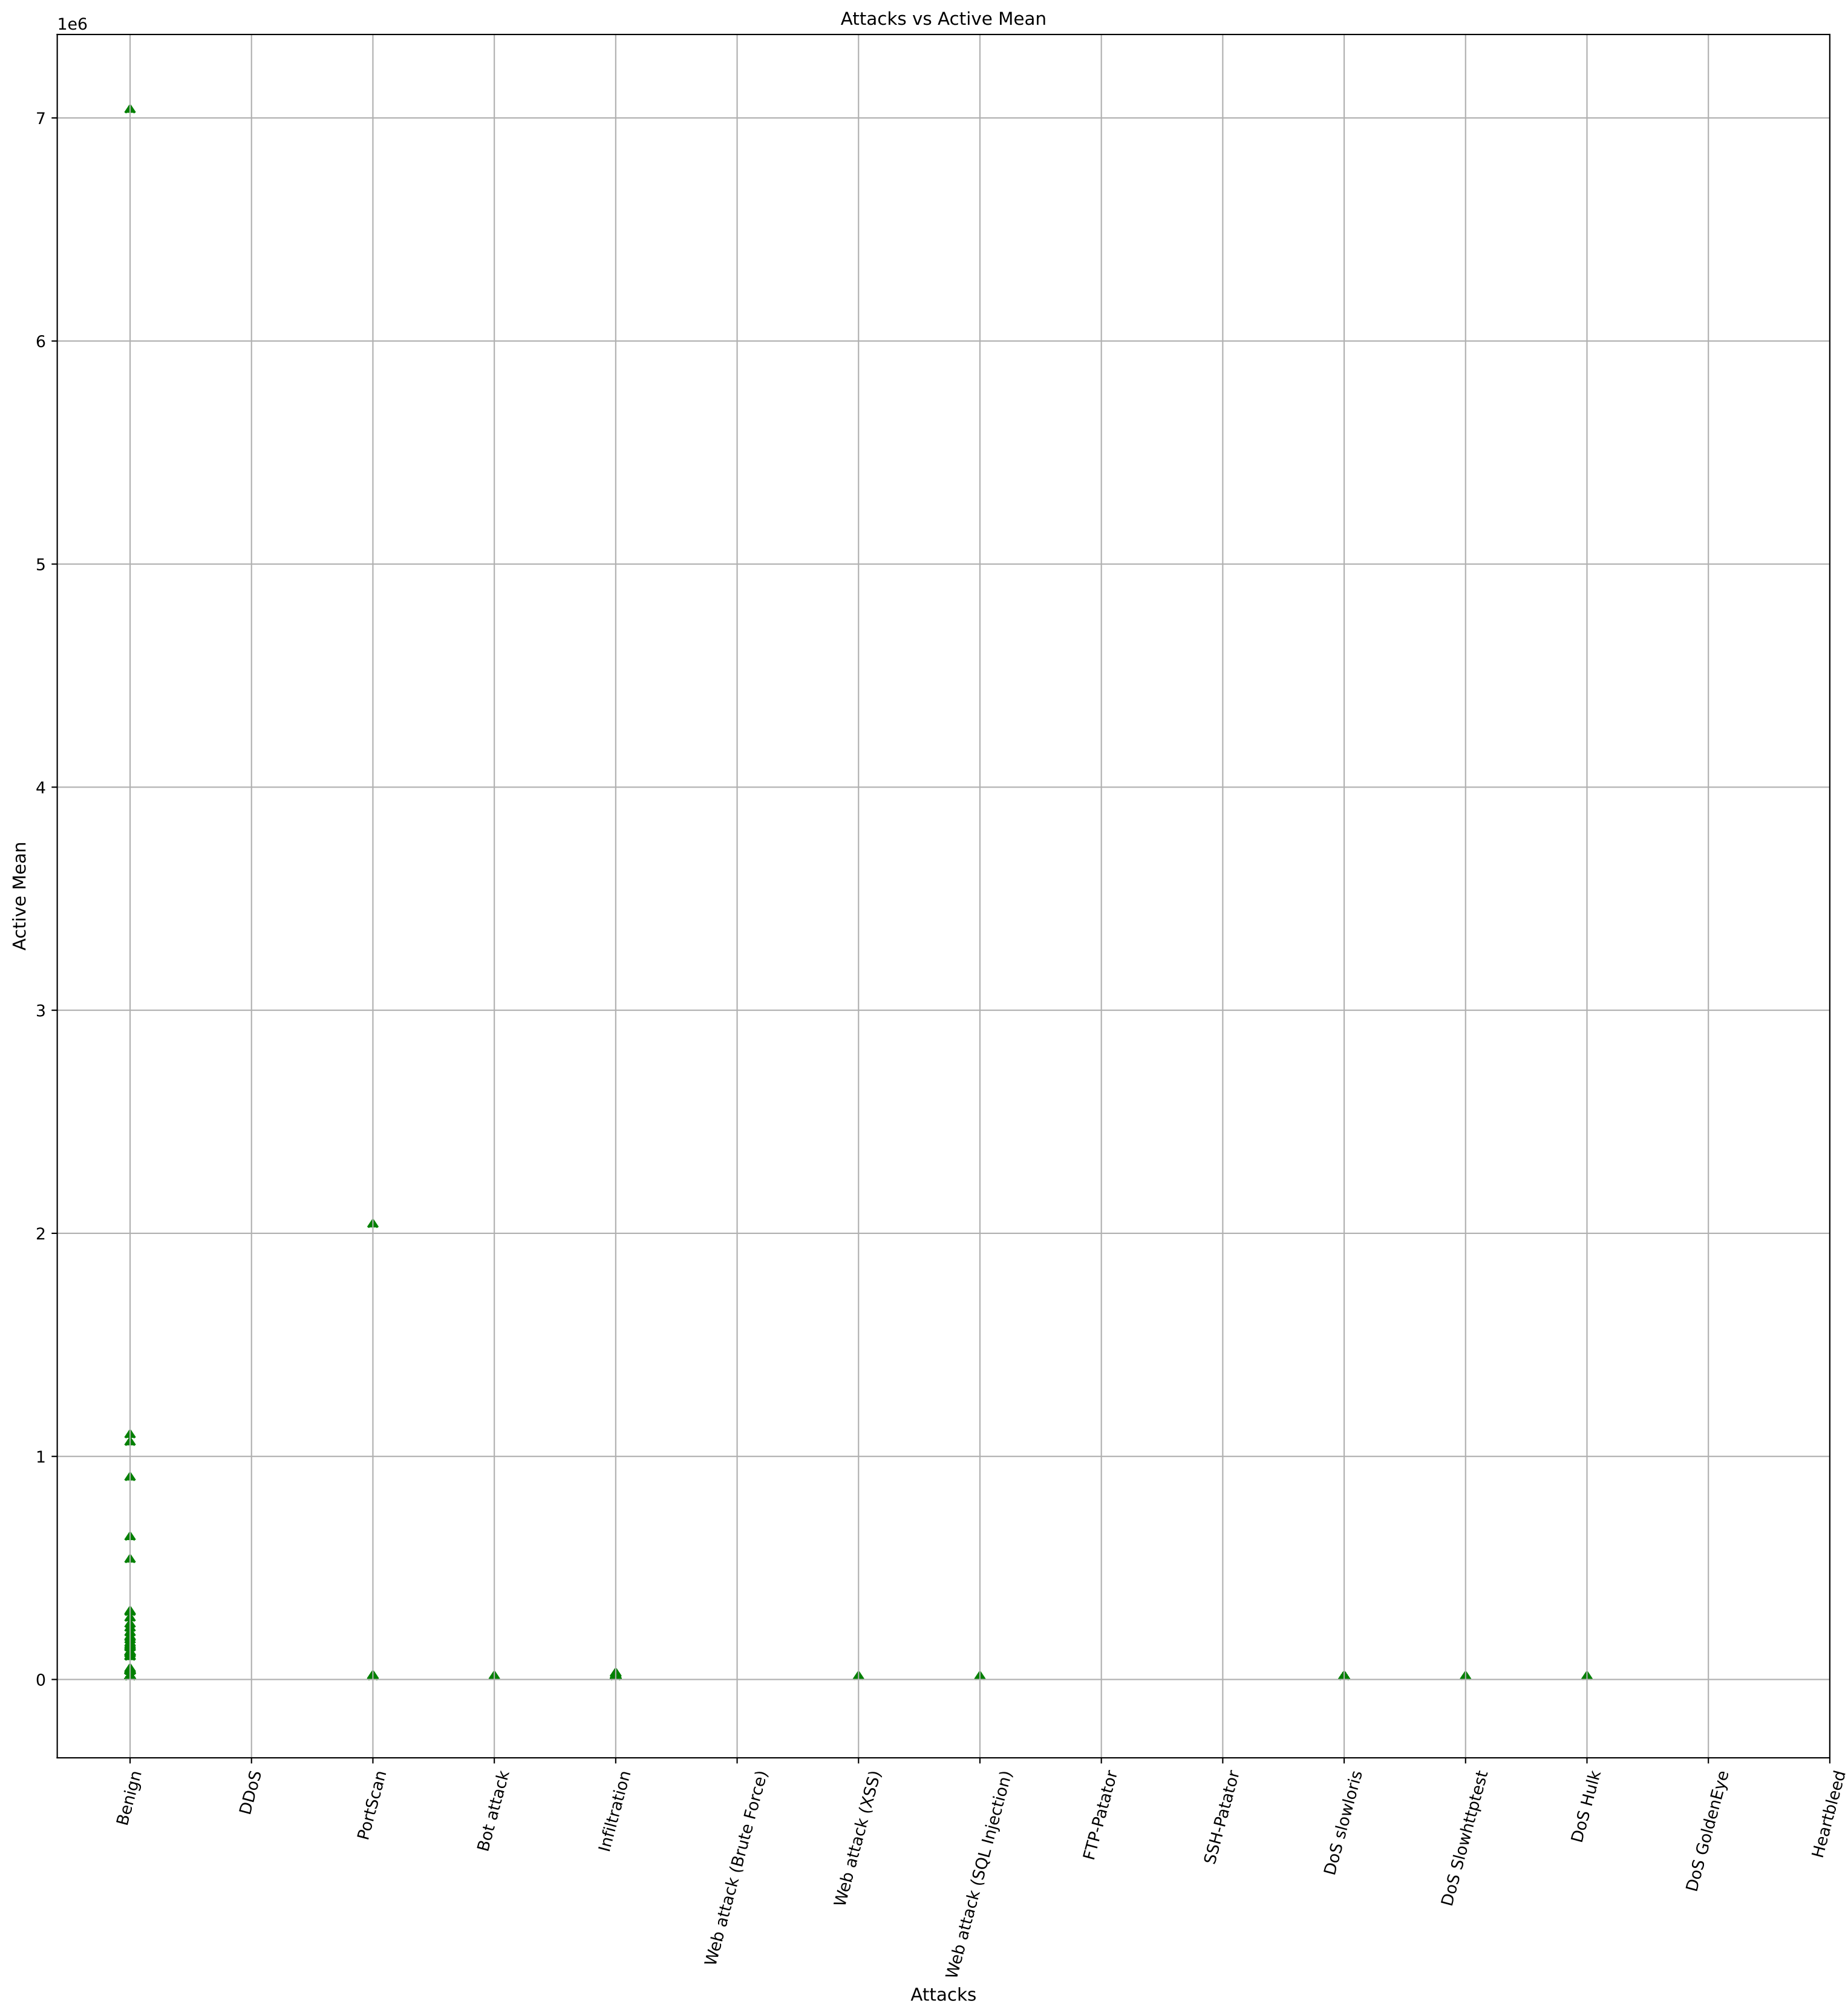


The most common value (mode) of Active Std is 0.0

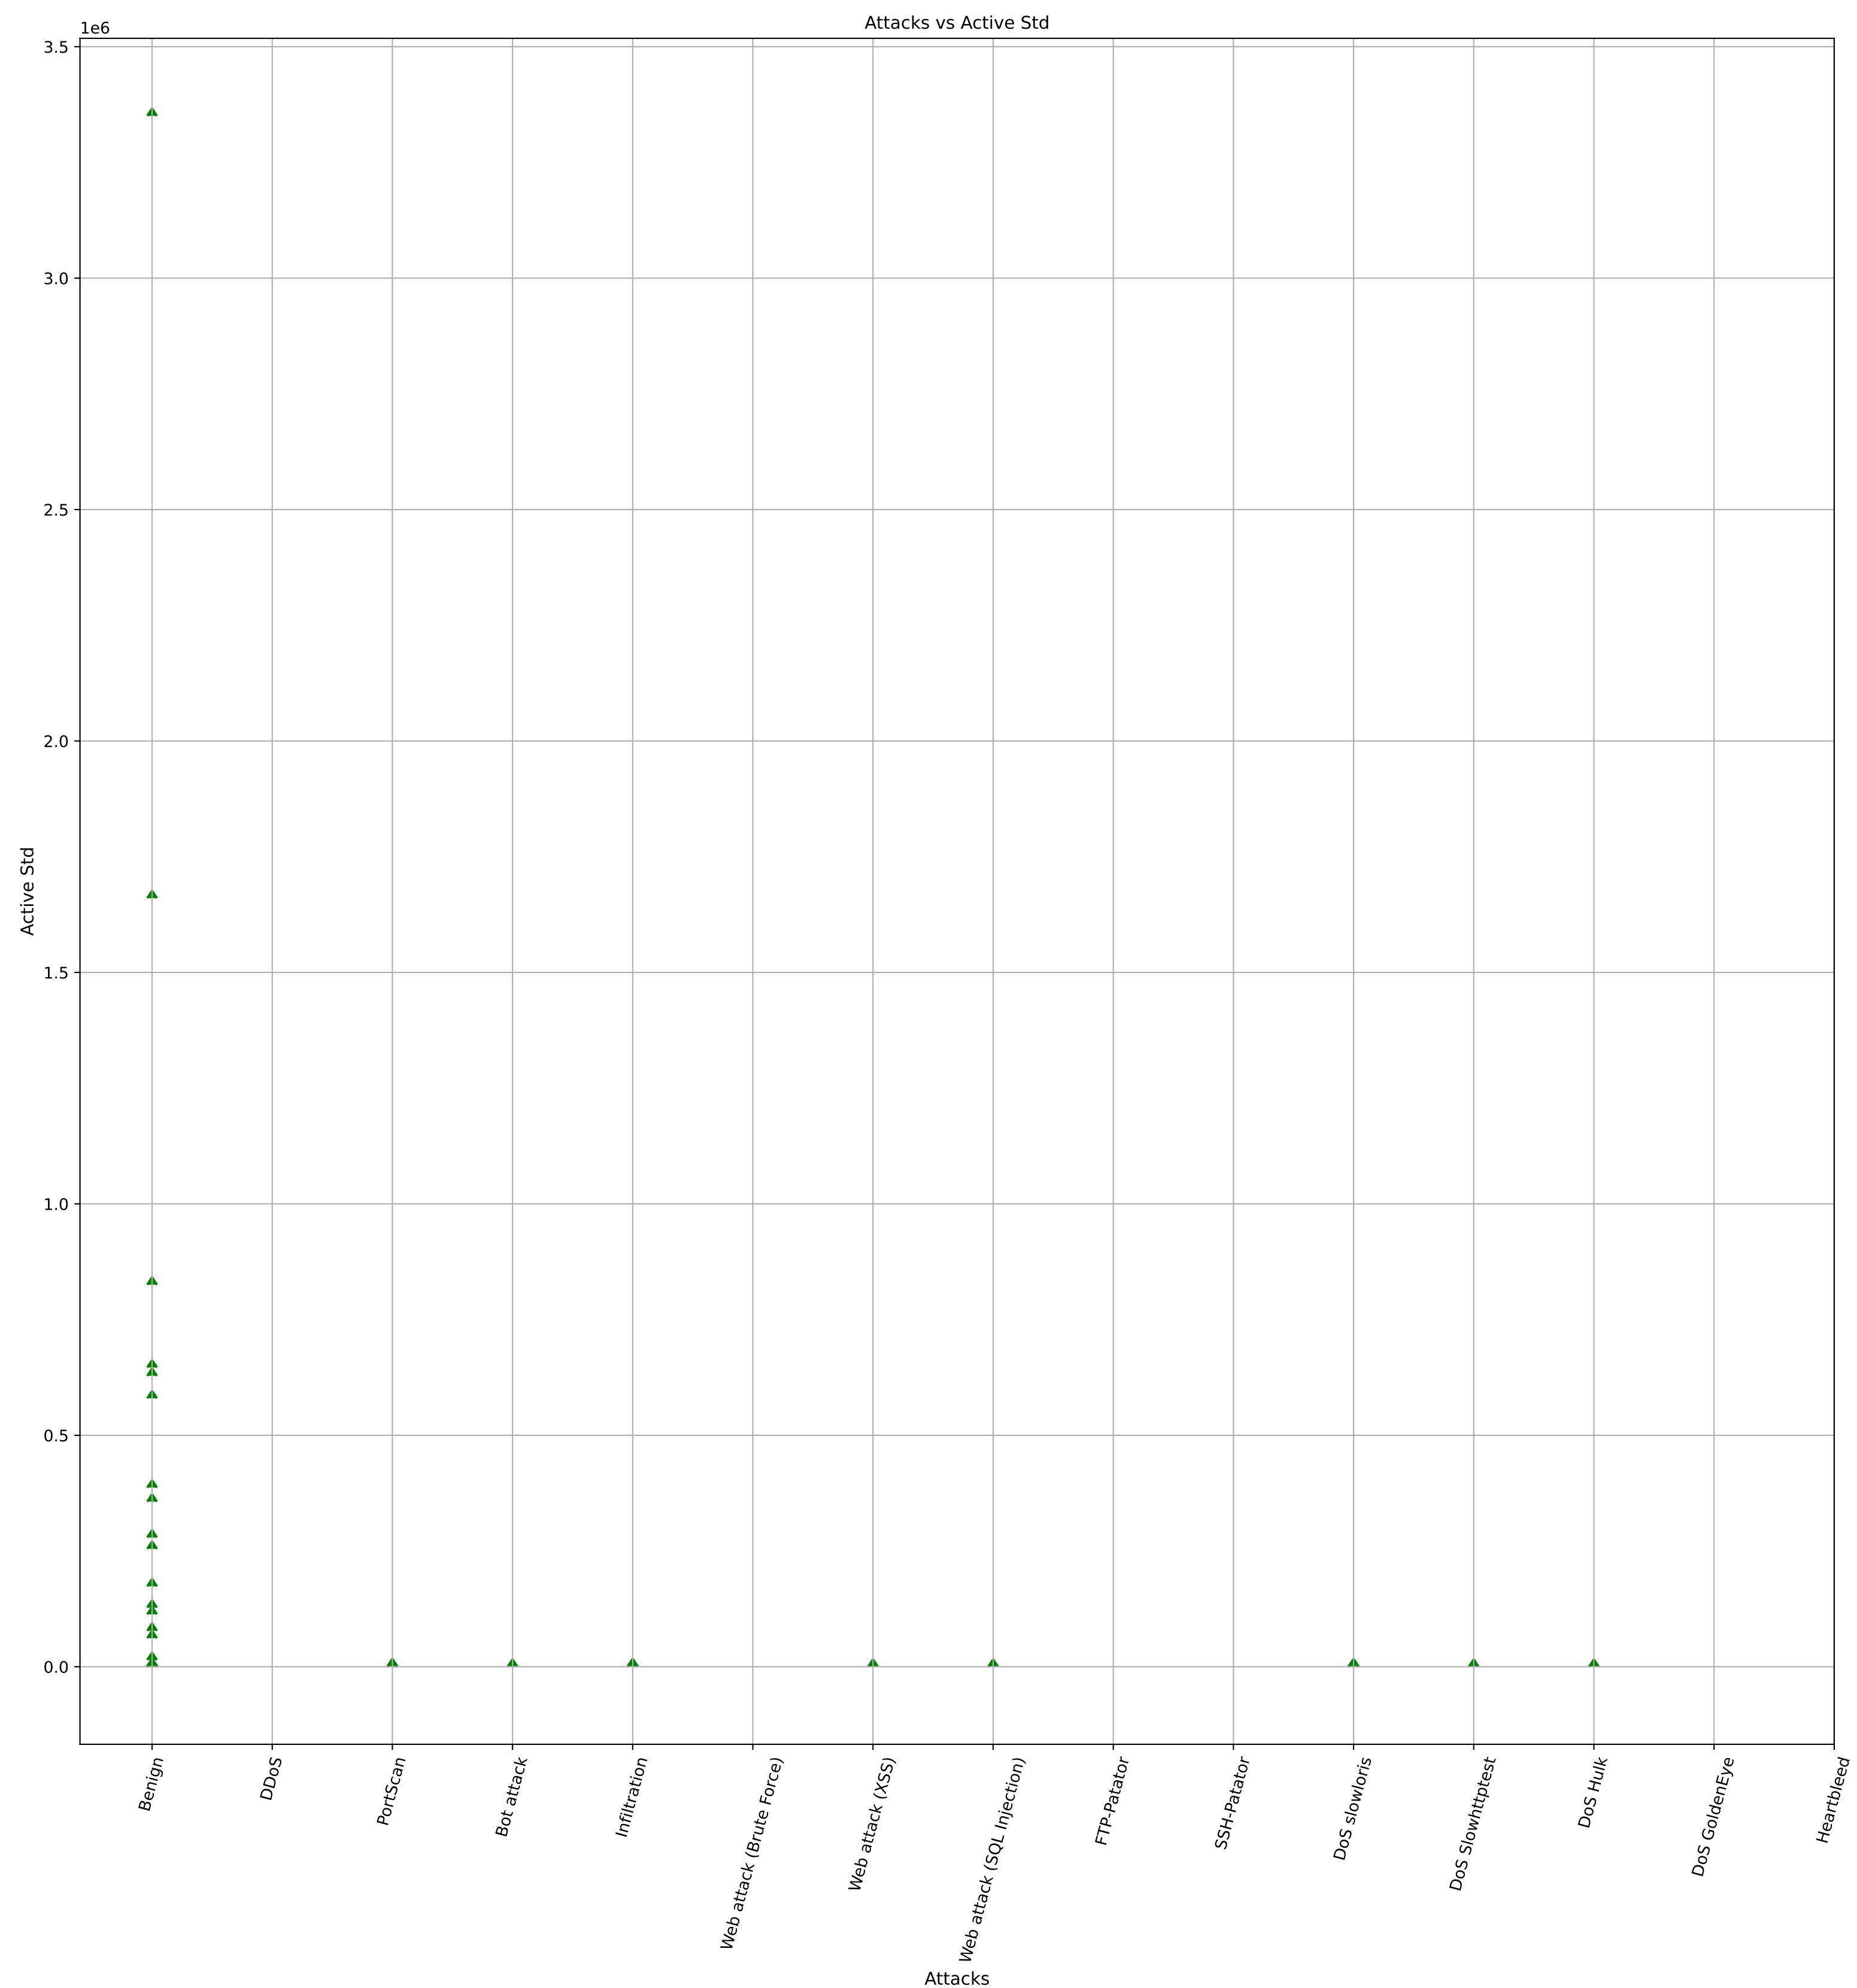


The most common value (mode) of Active Max is 0

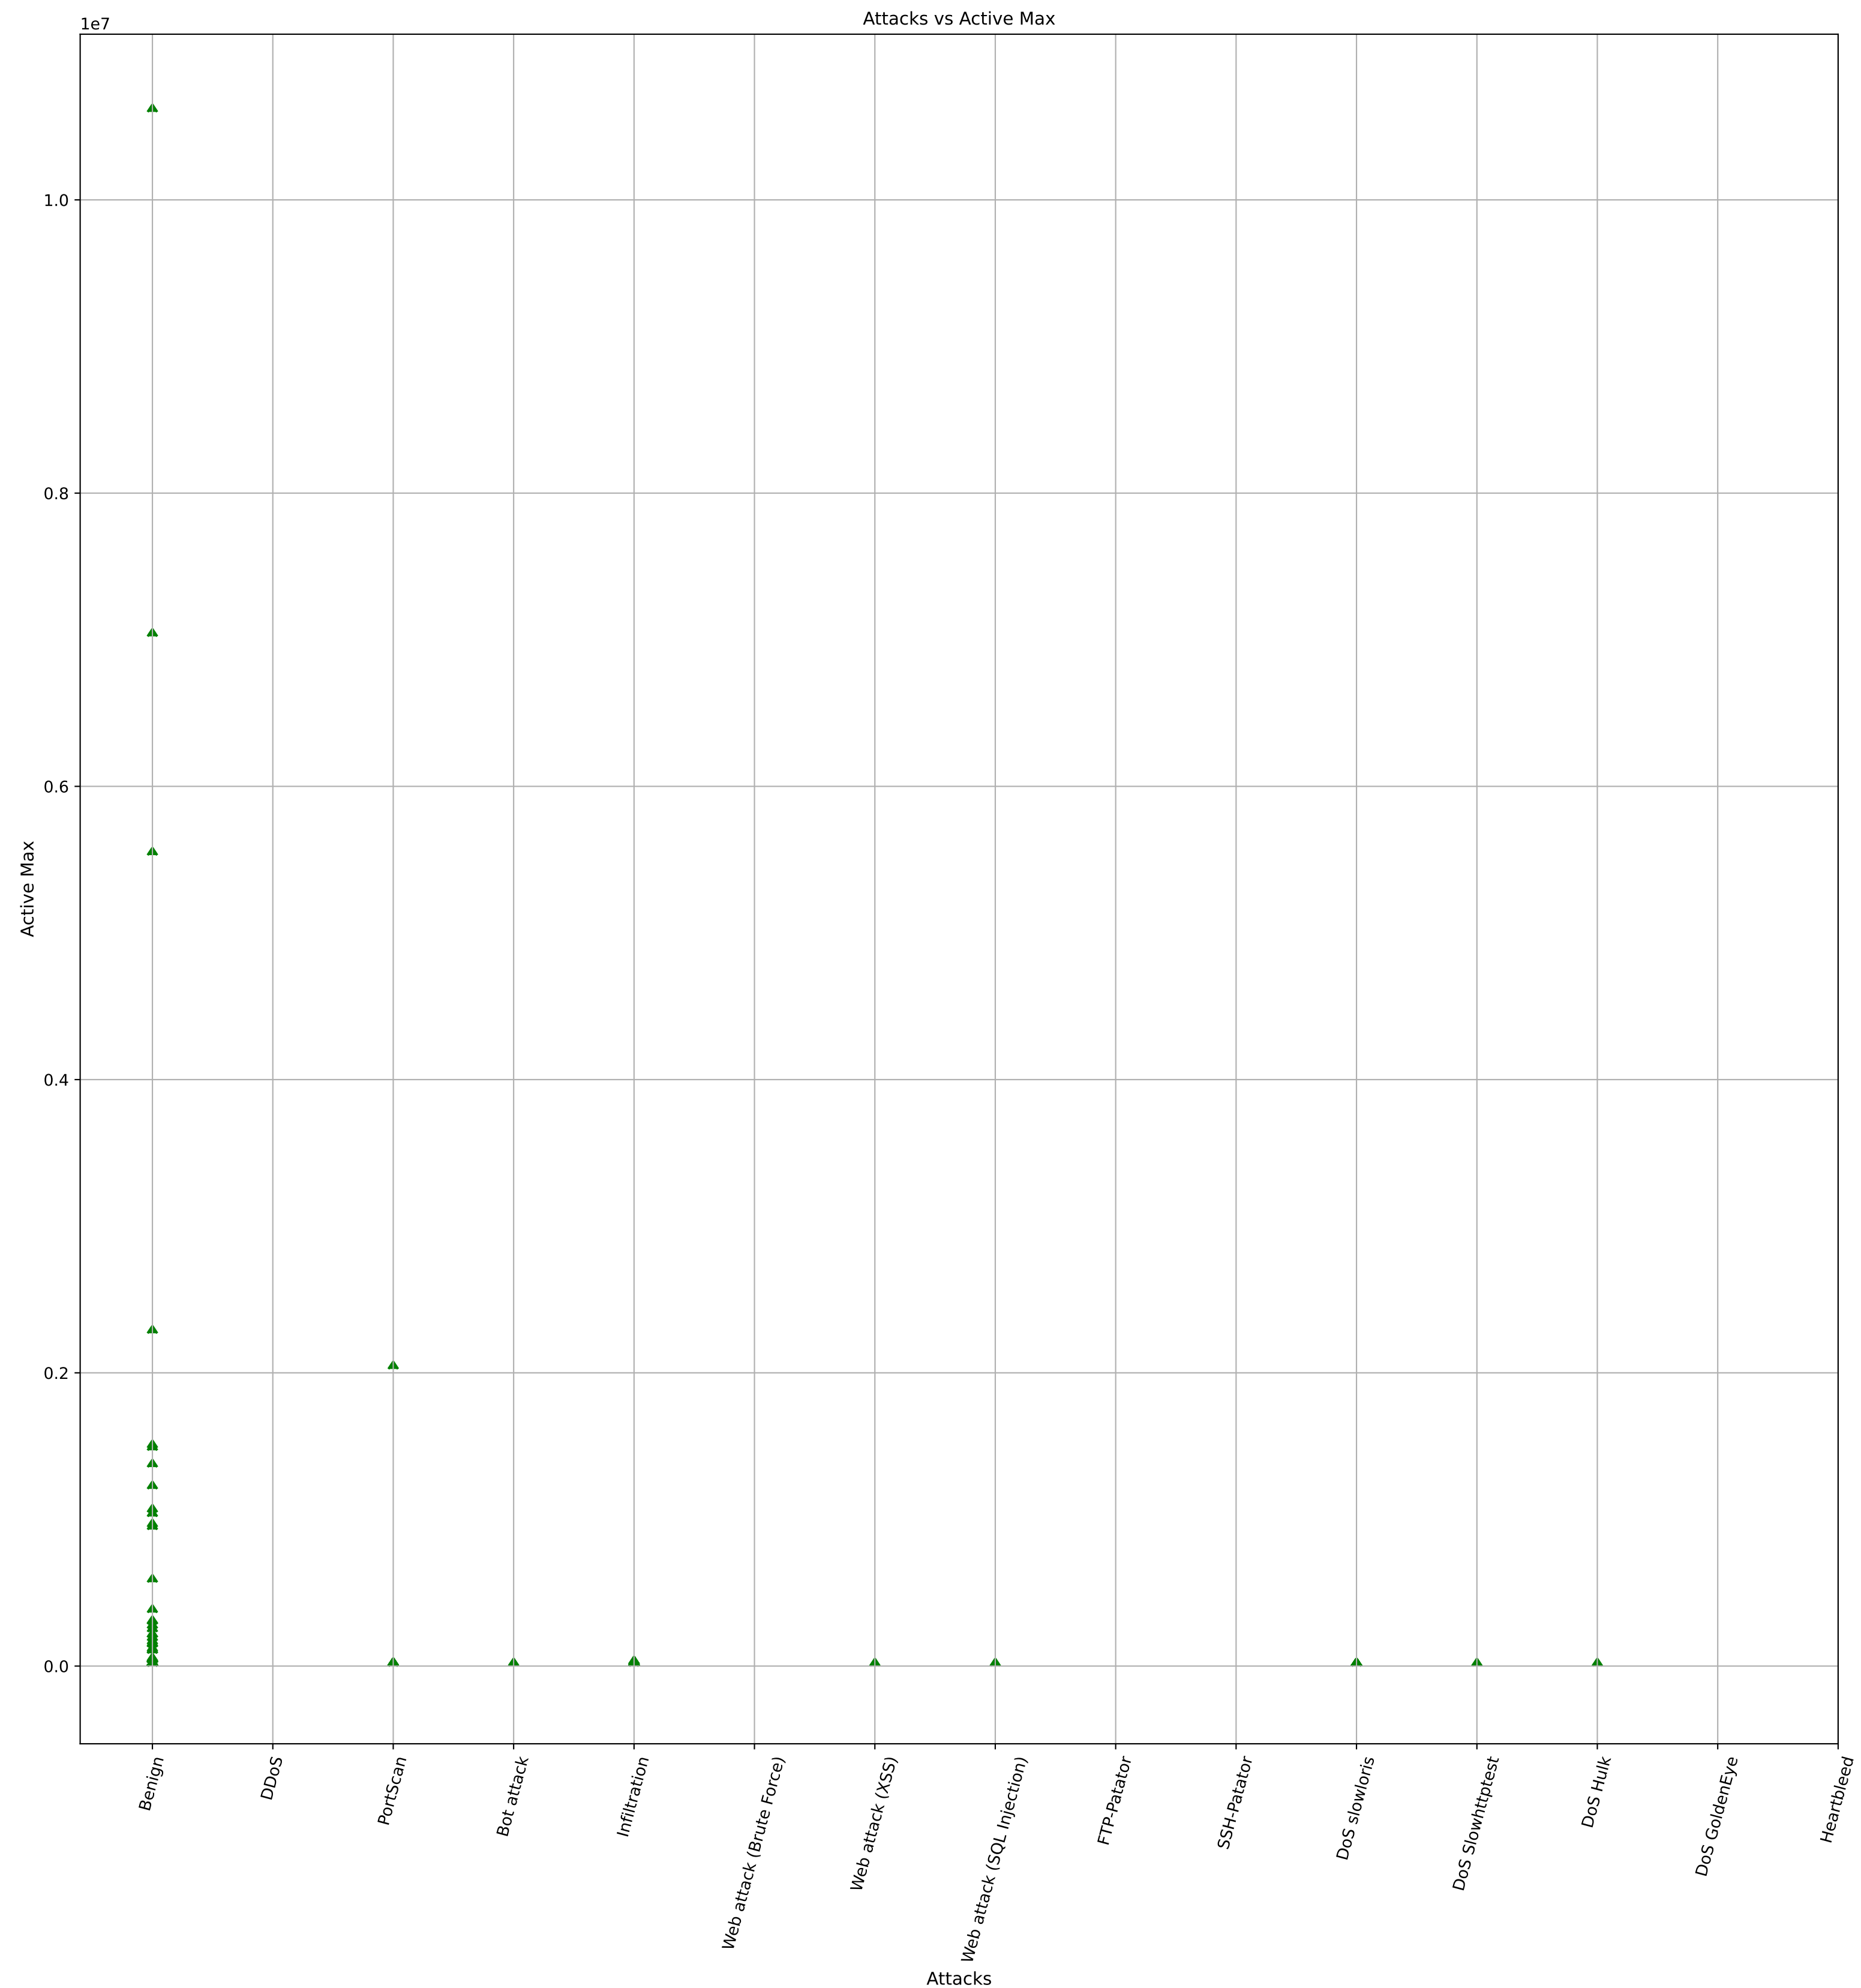


The most common value (mode) of Active Min is 0

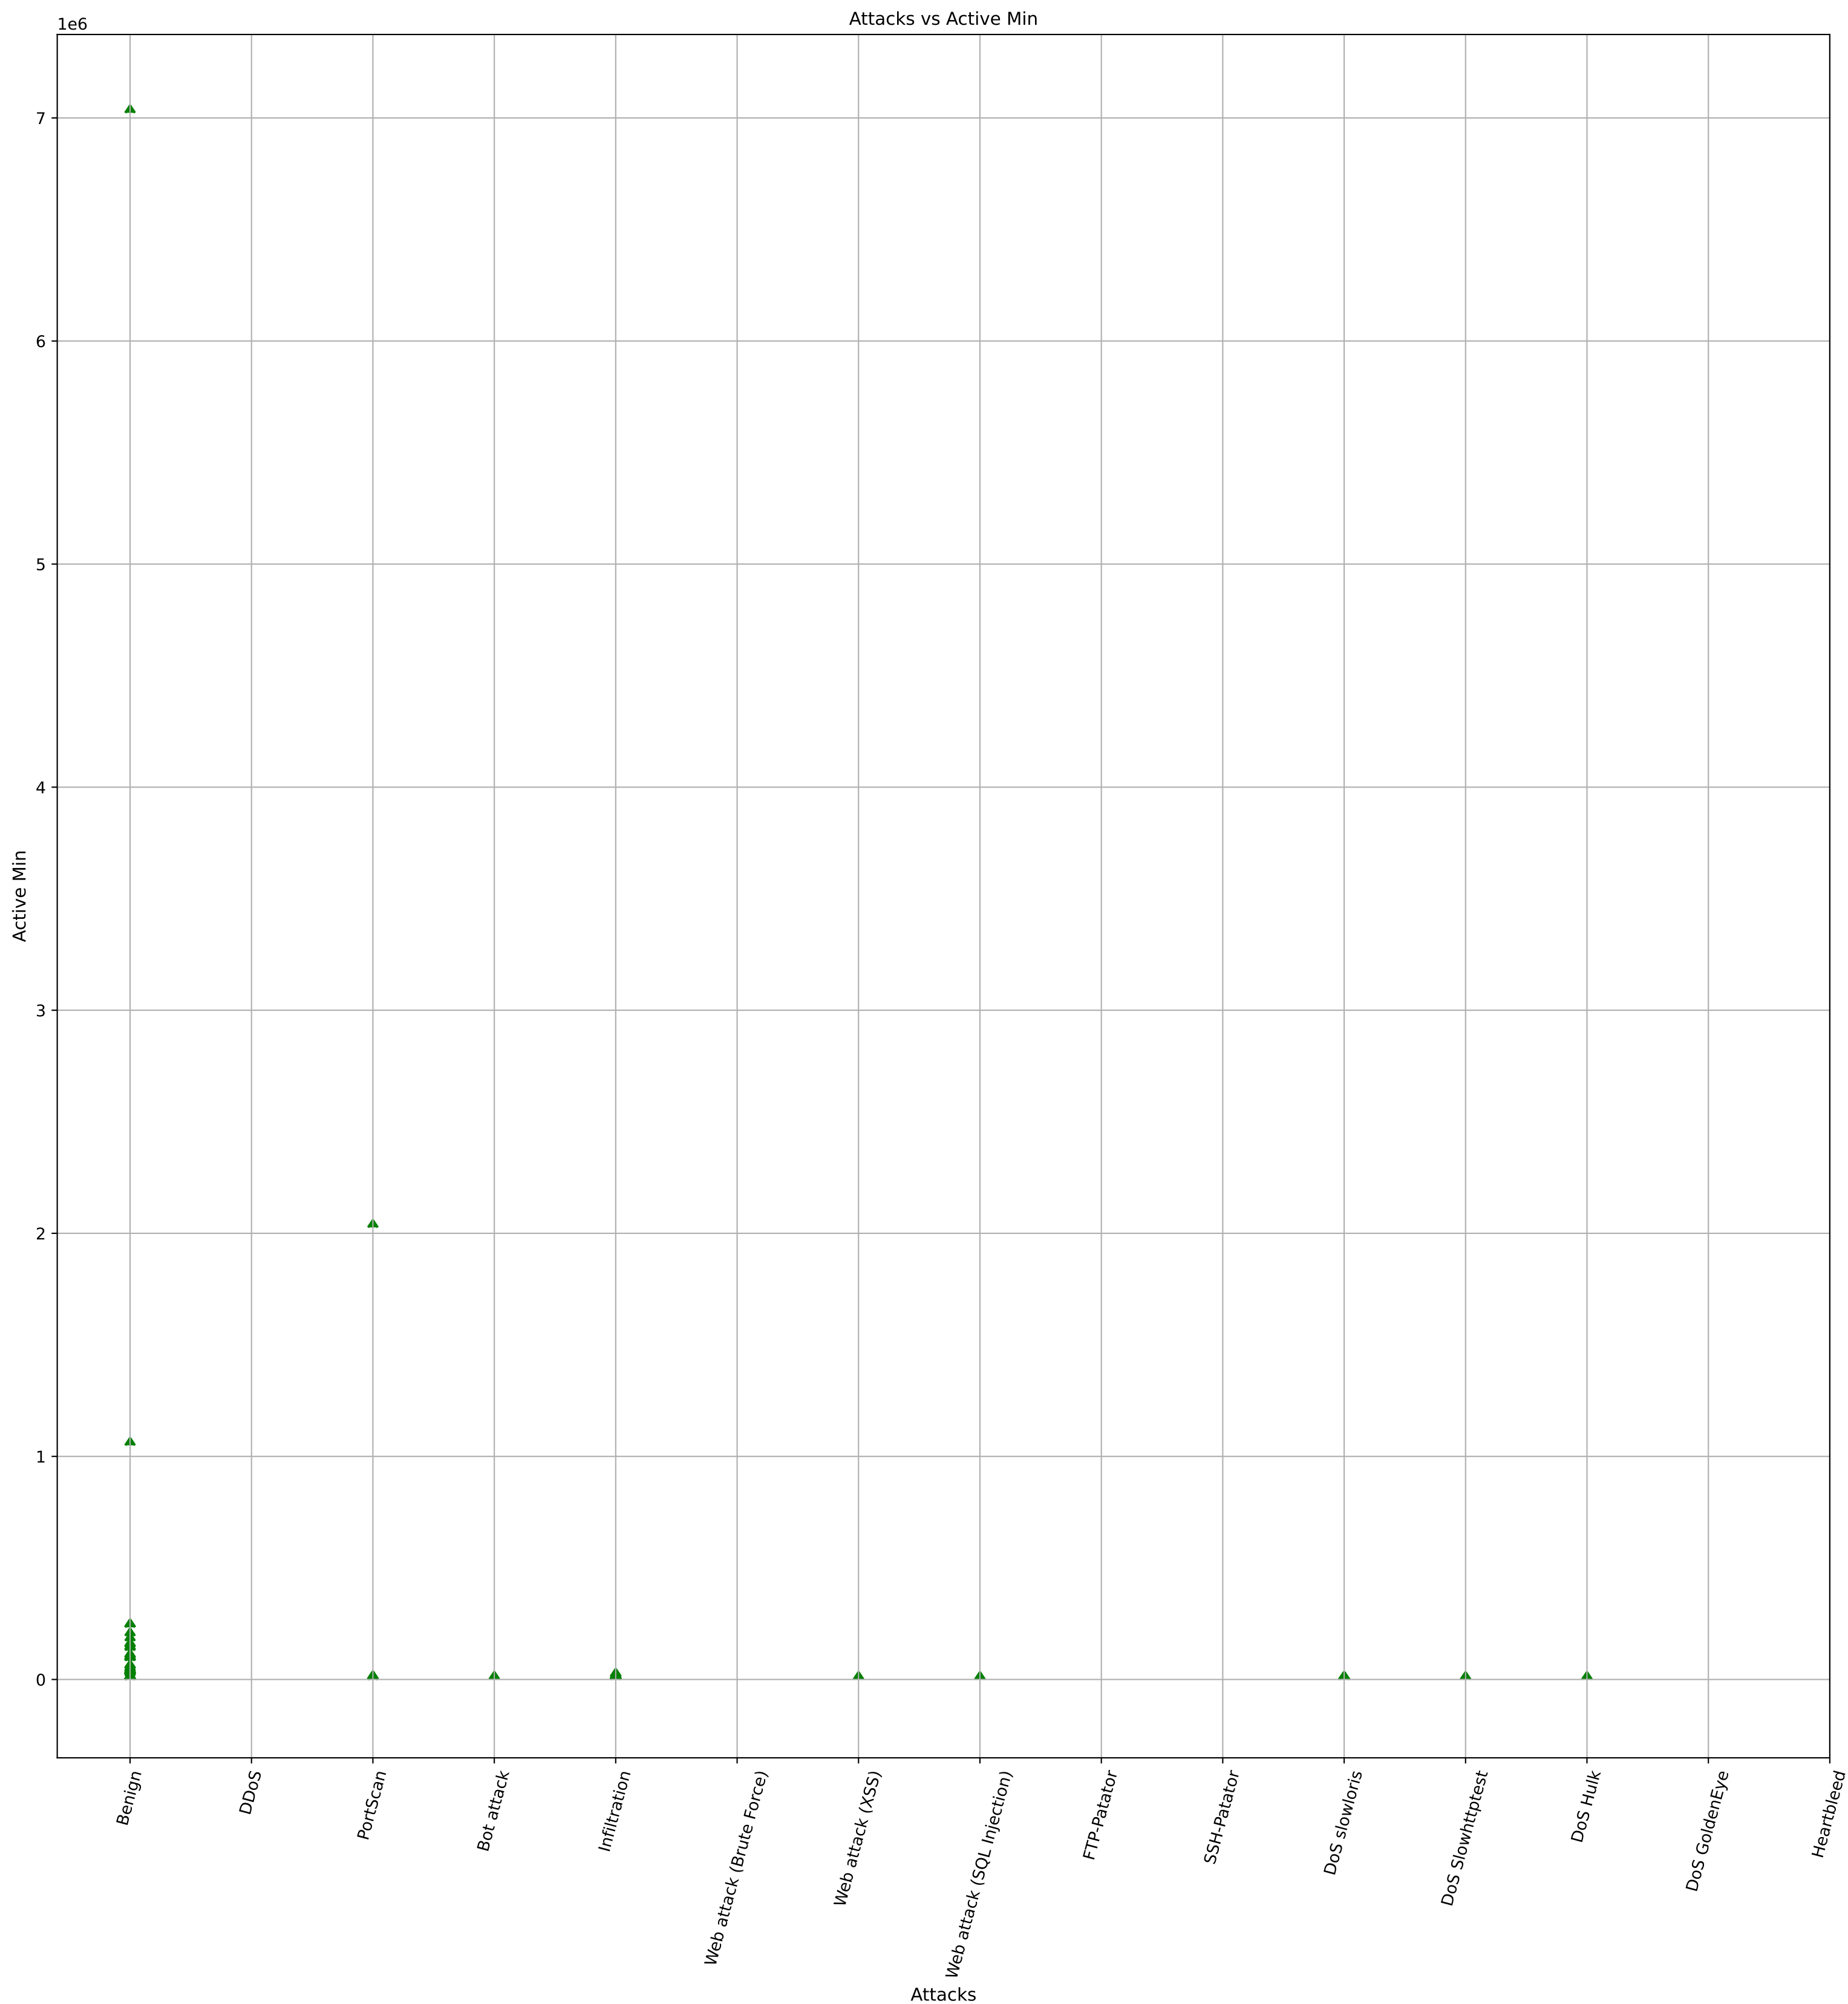


The most common value (mode) of Idle Mean is 0.0

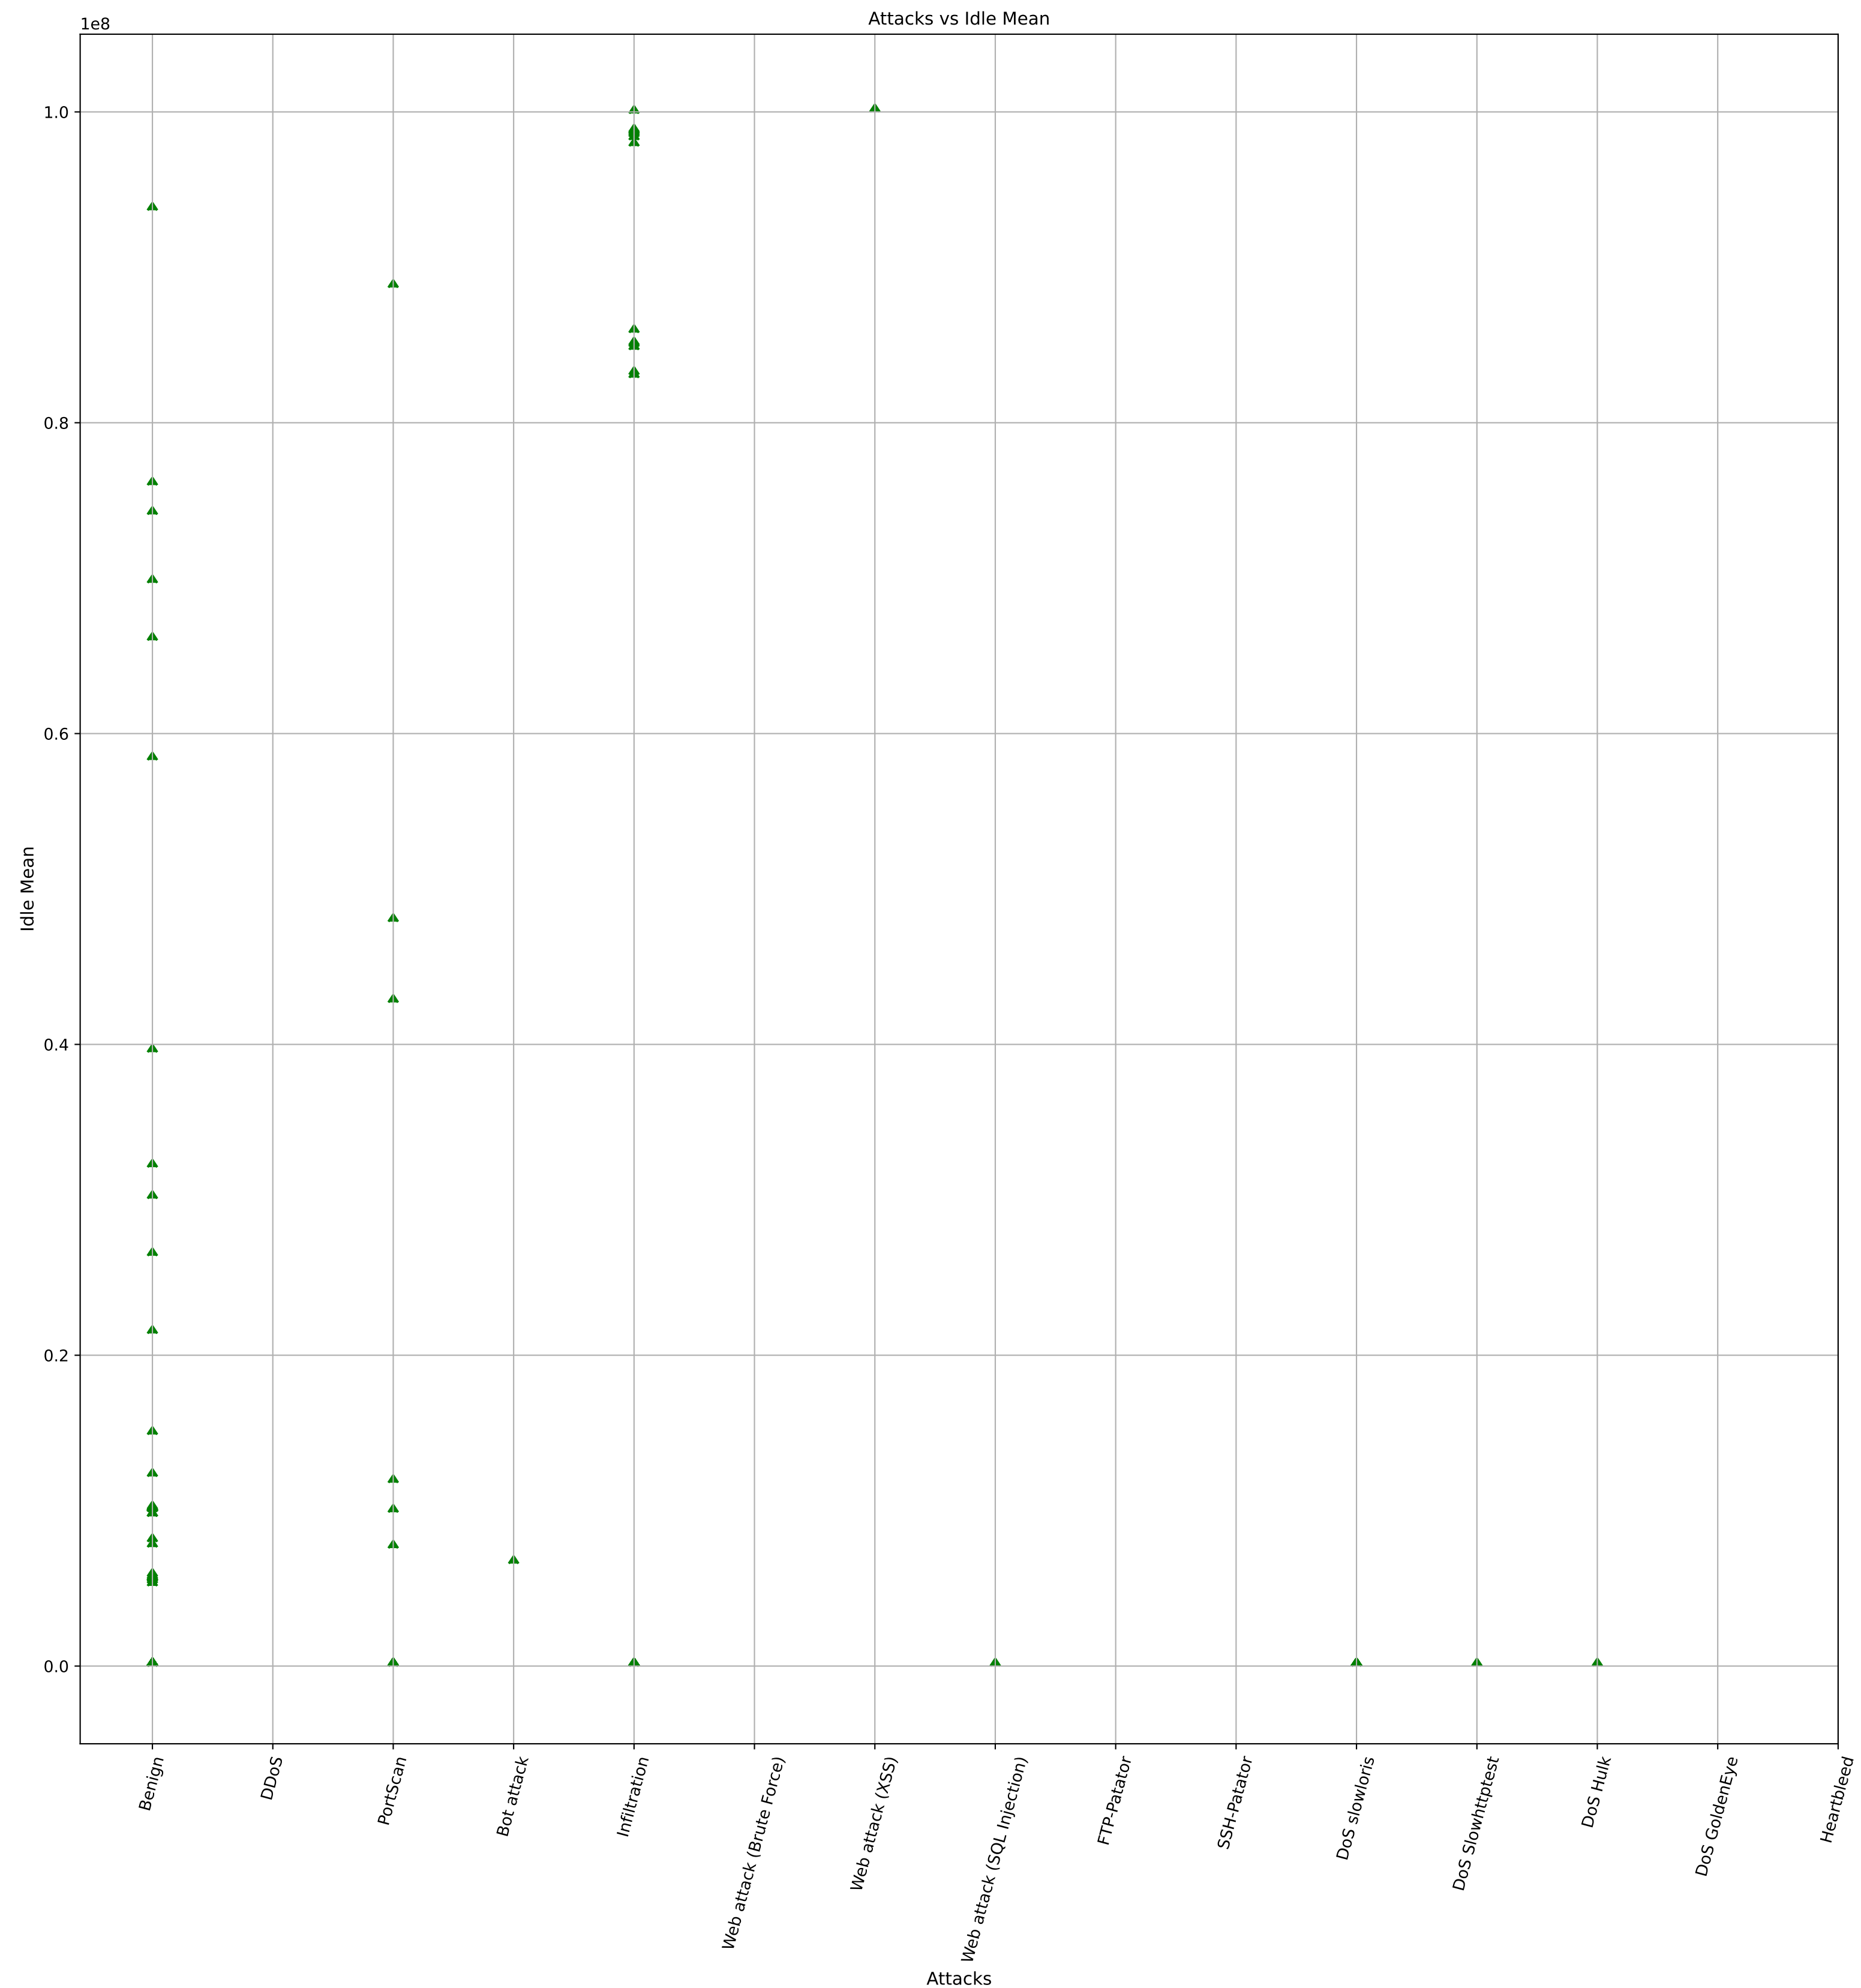

The most common value (mode) of Idle Std is 0.0

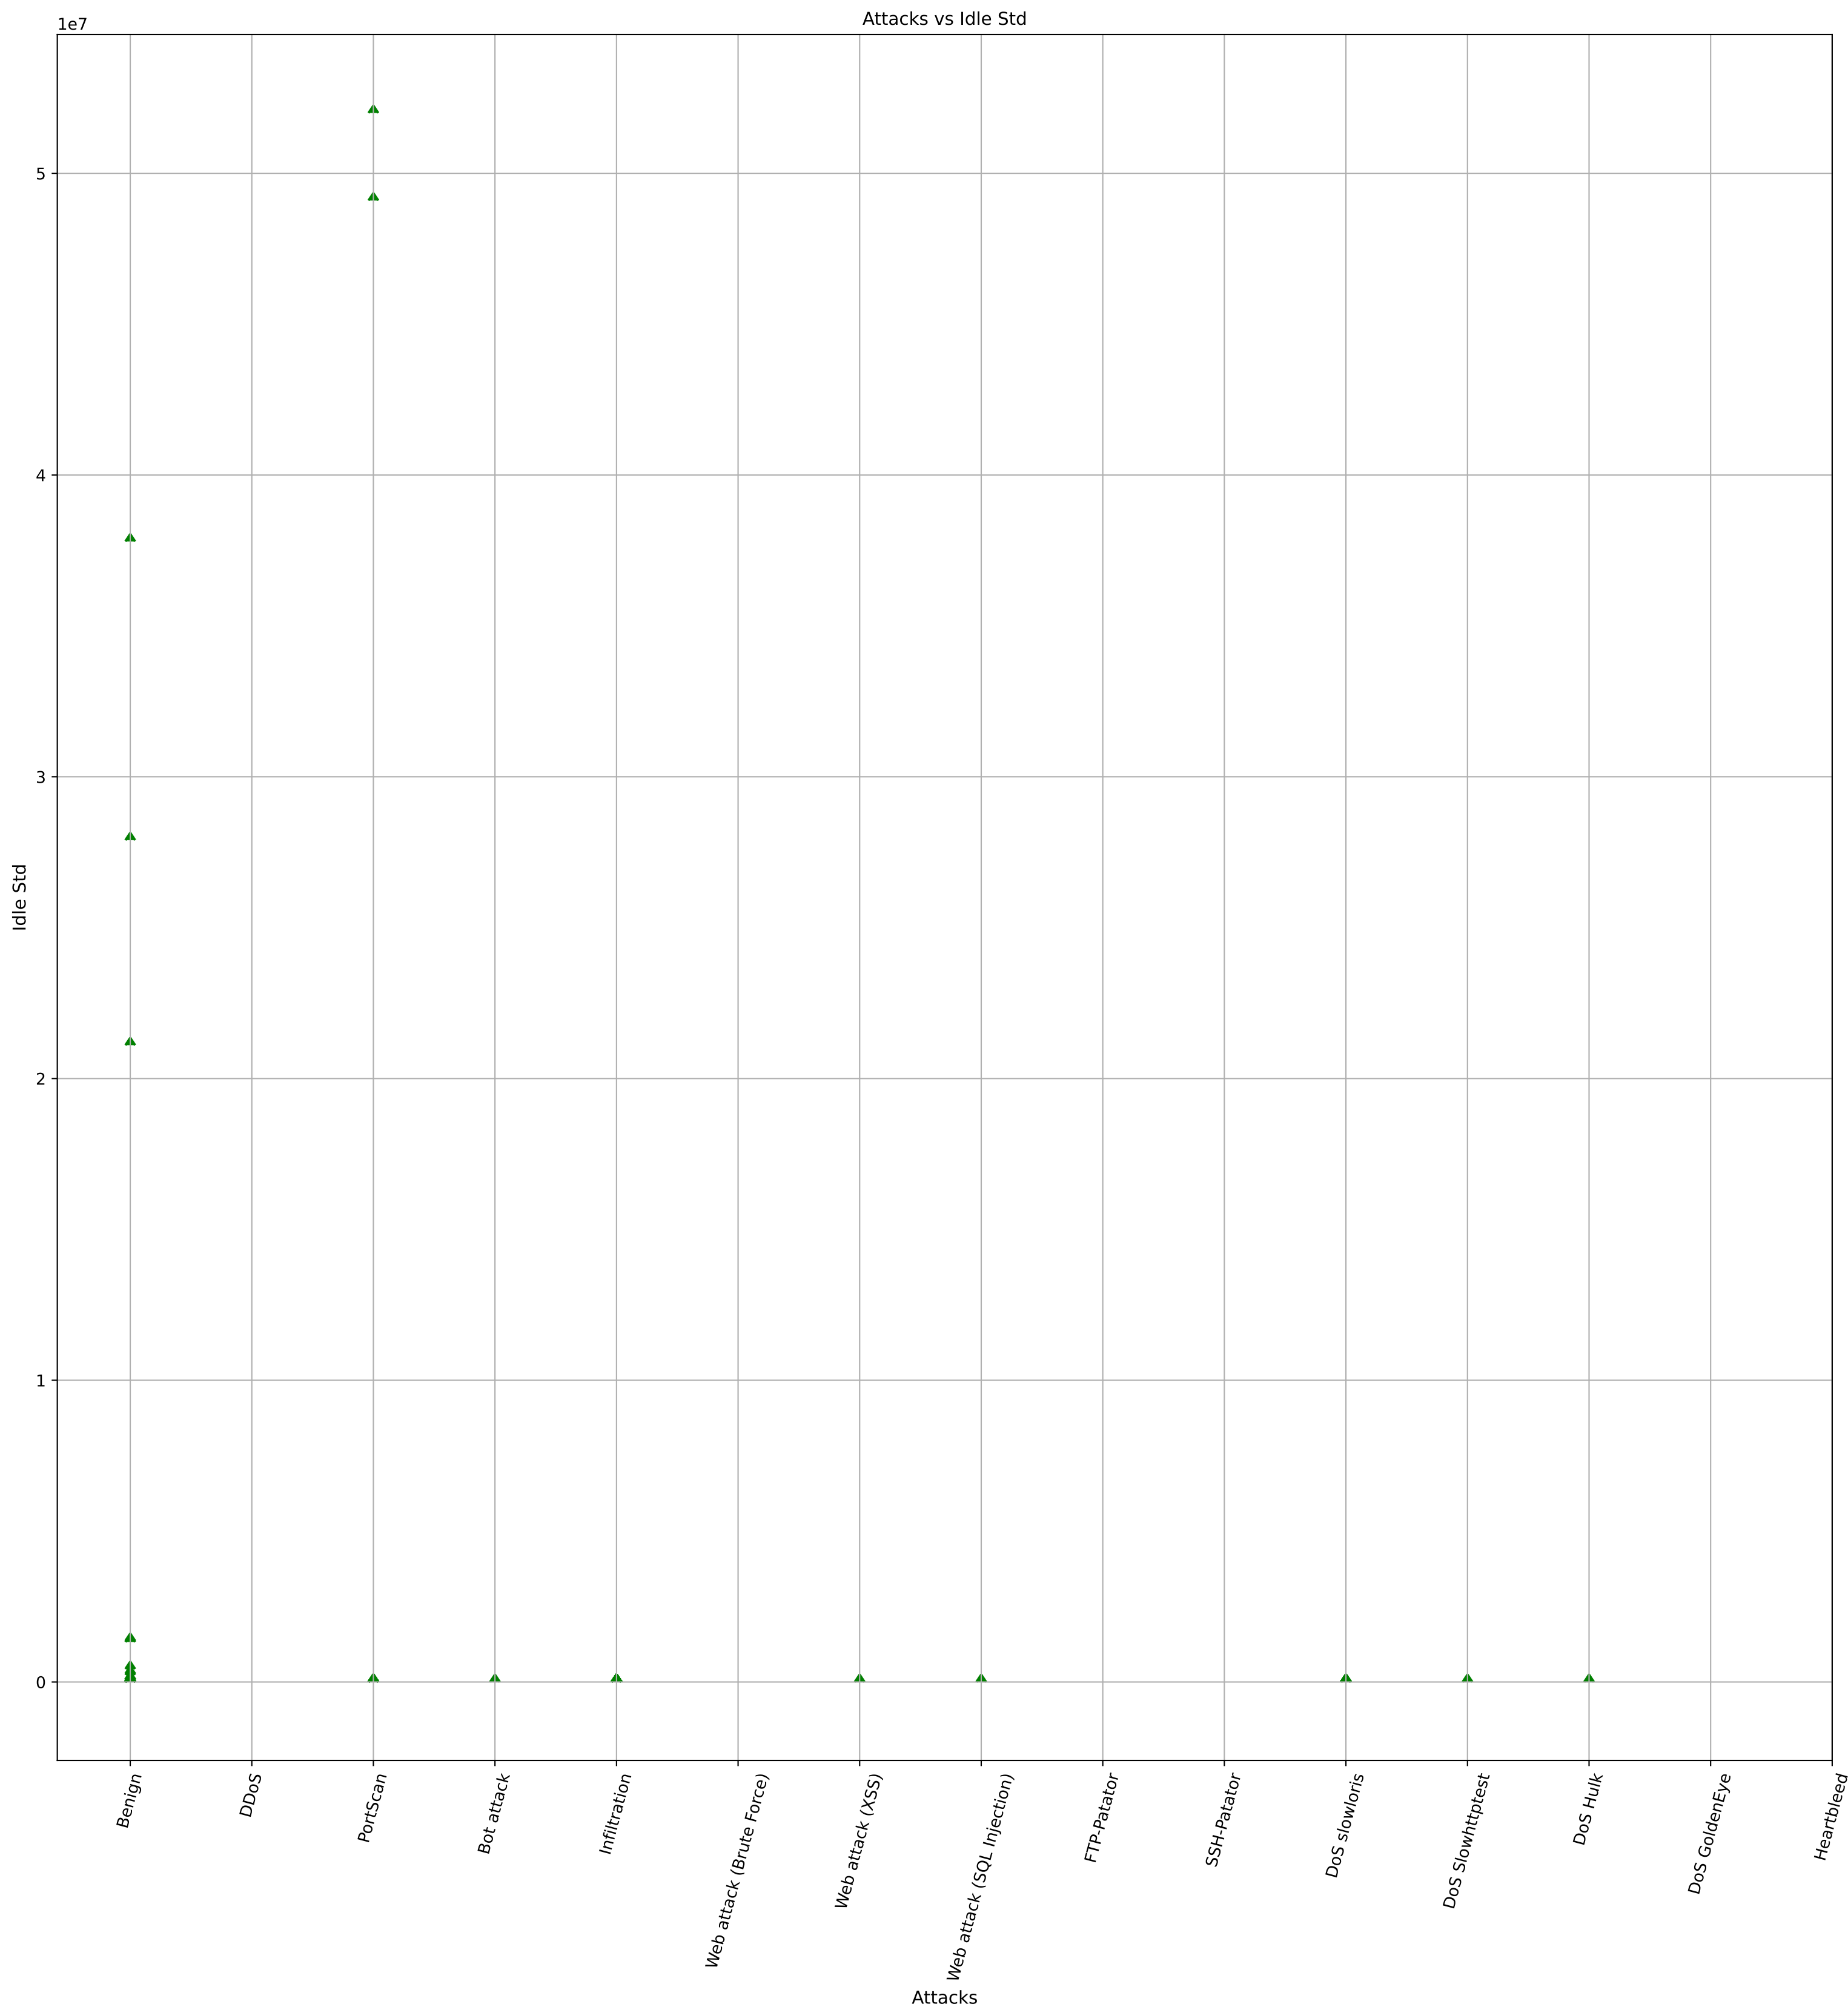

The most common value (mode) of Idle Max is 0

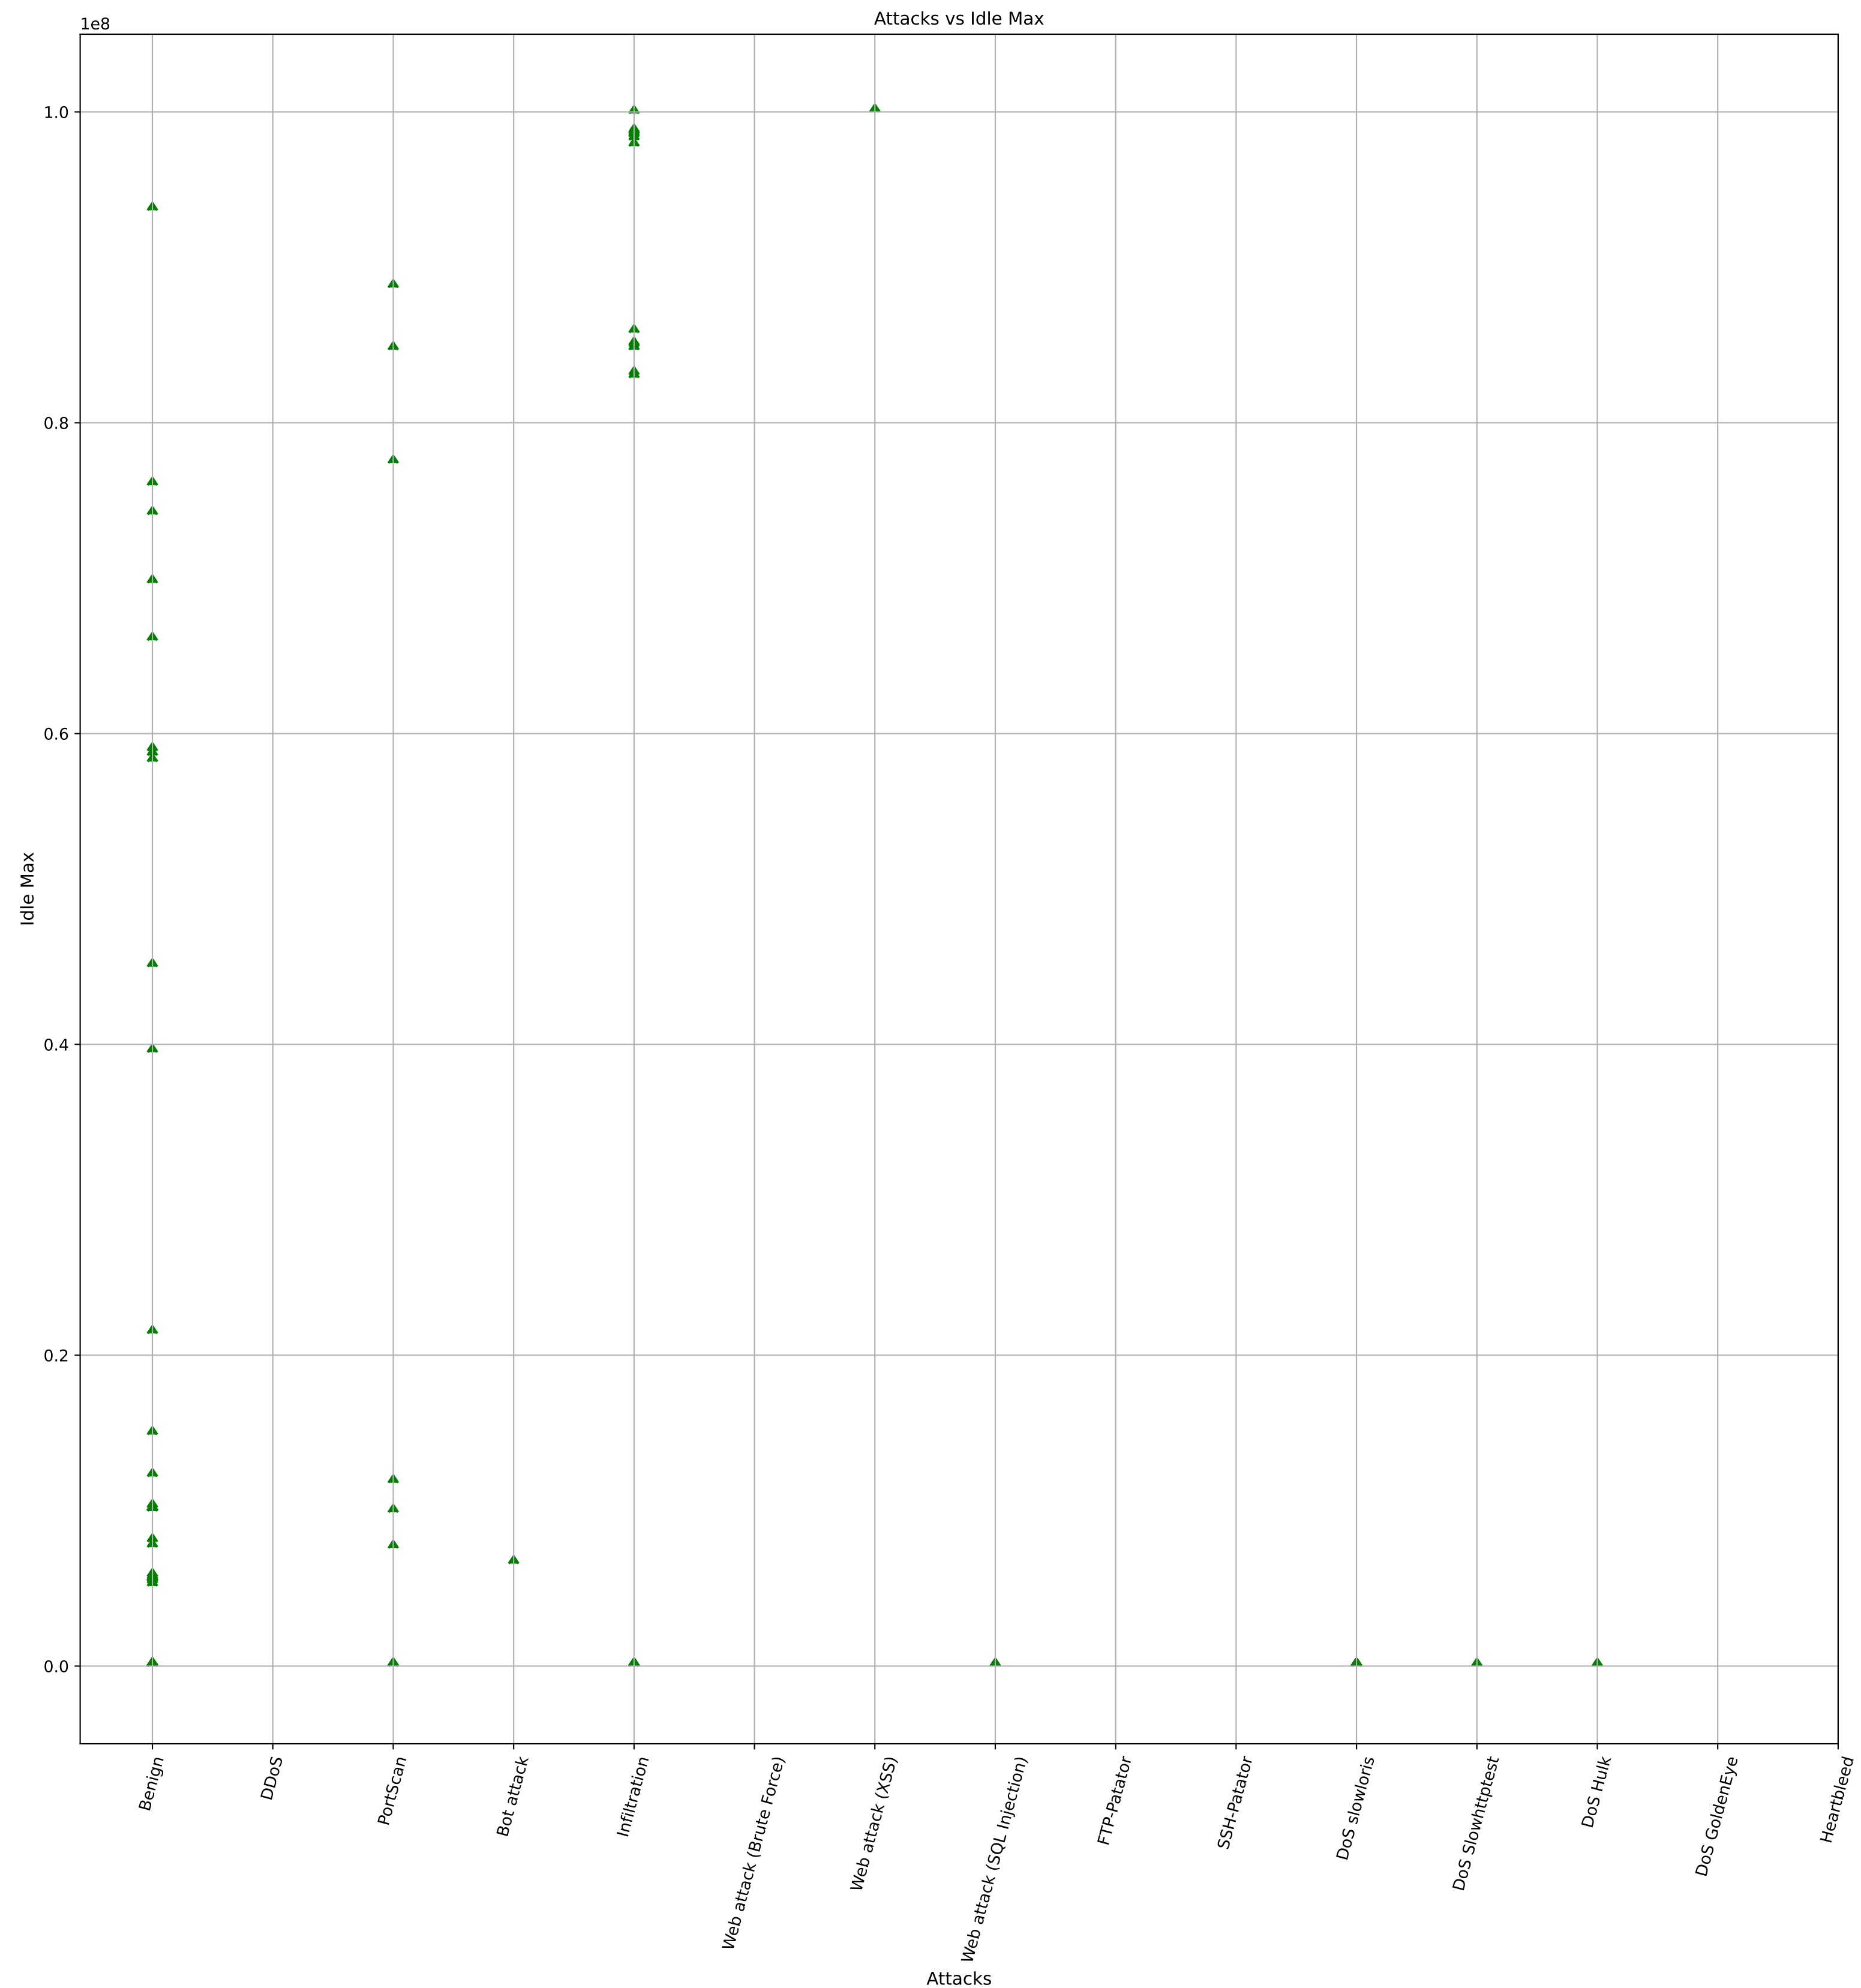

The most common value (mode) of Idle Min is 0

