CUI DEVICES

date 10/09/2019

page 1 of 3

SERIES: SJ1-352XN | DESCRIPTION: 3.5 MM AUDIO JACK


FEATURES

- low profile design
- switch options include:
- no switch
- tip switch
- tip and ring switch





PART NUMBER KEY

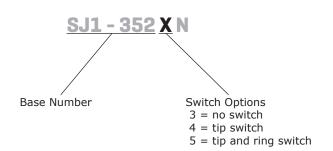

SPECIFICATIONS

| parameter | conditions/description | min | typ | max | units |
|---------------------------------|---|-----|-------|----------|----------|
| rated input voltage | | | 12 | | Vdc |
| rated input current | | | | 1 | А |
| contact resistance | between terminal and mating plug between terminal in a closed circuit* | | | 50 30 | mΩ mΩ |
| insulation resistance | at 500 Vdc | 100 | | | МΩ |
| voltage withstand | at 50/60 Hz for 1 minute | | | 500 | Vac |
| insertion/withdrawal force | | 0.3 | | 3 | kg |
| terminal strength | any direction for 10 seconds | | | 500 | g |
| operating temperature | | -25 | | 85 | °C |
| life | | | 5,000 | | cycles |
| flammability rating | UL94V-0 | | | | |
| RoHS | yes | | | | |
| Notes: *When measured at a curr | rent of less than 100 mA / 1 kHz | | | | |


SOLDERABILITY

| parameter | conditions/description | min | typ | max | units |
|----------------|---|-----|-----|-----|-------|
| wave soldering | dipped in solder pot for 5±0.5 seconds at | 255 | 260 | 265 | °C |


MECHANICAL DRAWING


TOLERANCE: $X.X \pm 0.2mm$ $X.XX \pm 0.1mm$ $X.XXX \pm 0.05mm$


units: mm[inches]





| | MATERIAL | PLATING |
|-------------|--------------|---------|
| terminal 1 | copper alloy | silver |
| terminal 2 | copper alloy | silver |
| terminal 3 | copper alloy | silver |
| terminal 10 | brass | silver |
| terminal 11 | brass | silver |
| bushing | brass | nickel |
| plastic | PBT | |
| | | |

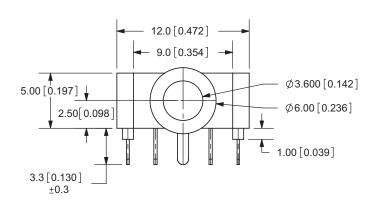

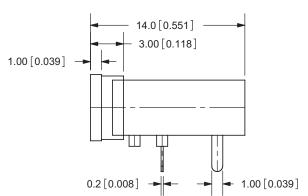

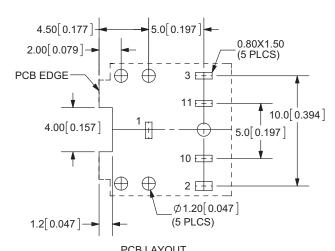

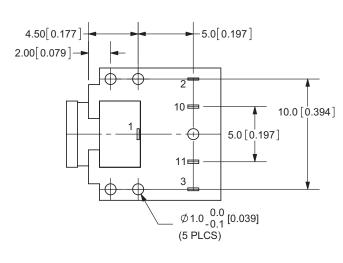



| Model No. | SJ1-3523N | SJ1-3524N | SJ1-3525N |
|-----------|----------------|------------|------------------------------|
| Schematic | °1 °3 °3 | °10 | 01 03 011 010 02 |
| PIN | | | |
| 1 | sleeve | sleeve | sleeve |
| 2 | tip | tip | tip |
| 3 | ring | ring | ring |
| 10 | NP | tip switch | tip switch |
| 11 | NP | NP | ring switch |

Additional Resources: Product Page | 3D Model | PCB Footprint

CUI Devices | SERIES: SJ1-352XN | DESCRIPTION: AUDIO JACK date 10/09/2019 | page 3 of 3

REVISION HISTORY

| rev. | description | date |
|------|------------------------------------|------------|
| 1.0 | initial release | 09/06/2006 |
| 1.01 | new template applied | 02/15/2012 |
| 1.02 | updated datasheet | 10/03/2017 |
| 1.03 | changed terminal plating to silver | 02/12/2019 |
| 1.04 | brand update | 10/09/2019 |

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CUI Devices:

SJ1-3523N SJ1-3524N SJ1-3525N