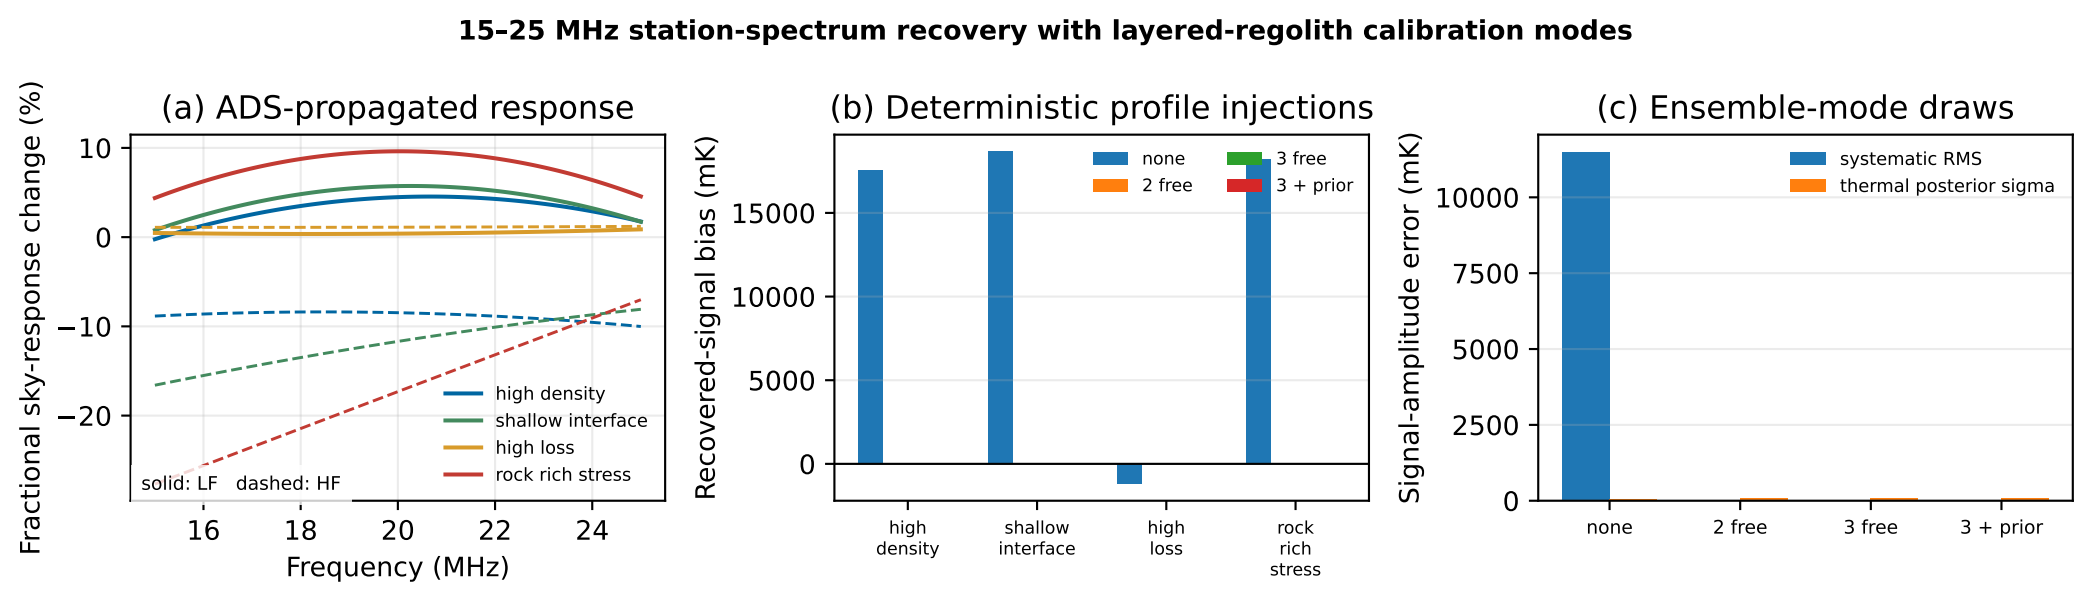
15–25 MHz station-spectrum recovery with layered-regolith calibration modes
(a) ADS-propagated response
Fractional sky-response change (%)
10
0
−10
−20
16
18
20
22
24
Frequency (MHz)
high density
shallow interface
high loss
rock rich stress
solid: LF dashed: HF
(b) Deterministic profile injections
Recovered-signal bias (mK)
15000
10000
5000
0
none
2 free
3 free
3 + prior
high density
shallow interface
high loss
rock rich stress
(c) Ensemble-mode draws
Signal-amplitude error (mK)
10000
7500
5000
2500
0
systematic RMS
thermal posterior sigma
none
2 free
3 free
3 + prior