HydroTech

# Smart H2O M100-G

*Monitor Smarter. Save Water.*

*Size 1/2 inch*

*Smart H2O is a mechanical IoT-enabled water meter designed for accurate monitoring of potable water consumption in residential, commercial, and municipal applications, supporting real-time analytics and remote system monitoring.*

## FEATURES

- *Mechanical flow measurement for reliable and stable performance*
- *Low pressure drop across the meter*
- *Real-time water consumption monitoring via GSM - 4G connectivity*
- *Continuous operation with mains power and 24-hour backup battery*
- *Designed for accurate monitoring across varying flow conditions*
- *Remote access through cloud-based dashboard*
- *Integrated LCD display for real-time local data viewing Historical data logging and consumption analytics*
- *Compact design for easy installation in existing pipelines*
- *Suitable for residential, commercial, and municipal applications*

### Reliable Connectivity

*Integrated **GSM - 4G** communication ensures real-time data transmission and remote access to consumption data, alerts, and system status for continuous monitoring.*

### Robust Construction

*Smart H2O is engineered for dependable operation in real-world environments. The device features a durable enclosure designed to protect internal electronics and measurement components from dust, moisture, and everyday operating conditions.*

*Its compact and sturdy design ensures long-term reliability while allowing easy installation in both indoor and outdoor applications. Built with quality components, Smart H2O delivers consistent performance with minimal maintenance requirements over its operational life*

### Intelligent Metering

*Accurate mechanical measurement combined with smart analytics provides reliable insights into water usage, enabling efficient monitoring and early leak detection.*

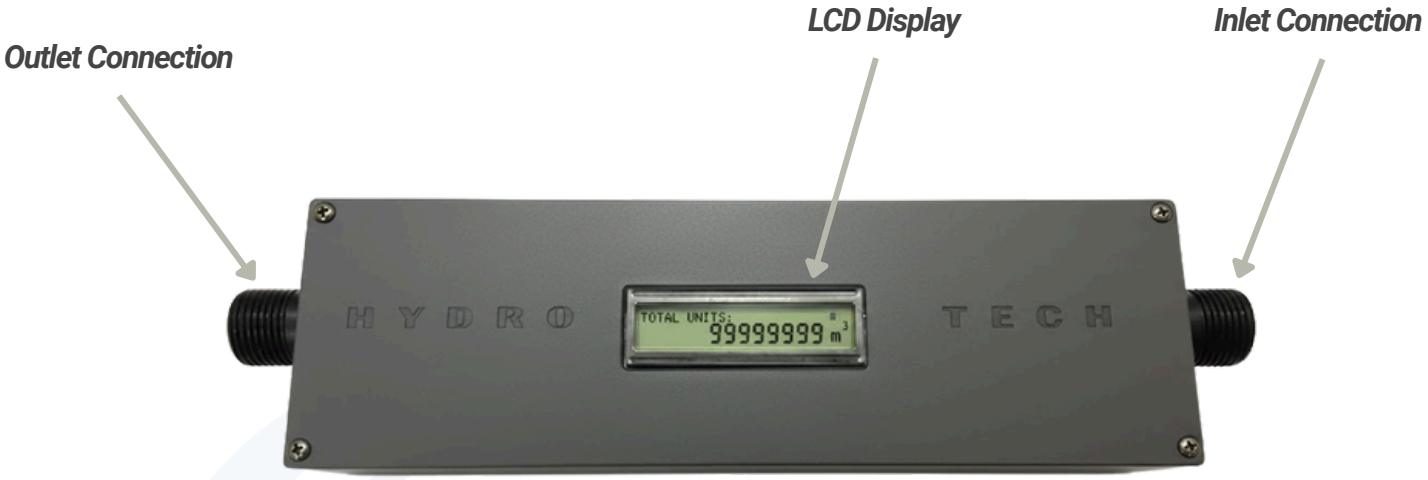


## Installation & Connection

*Smart H2O M100-G is designed for simple and secure installation within existing water distribution systems. Follow the steps below to ensure proper operation and accurate measurement.*

## Mechanical Connection

1. *Install the device inline with the water pipeline.*
2. *Ensure the inlet port is connected to the water supply line.*
3. *Connect the outlet port to the downstream pipeline.*
4. *Confirm the flow direction matches the arrow indicator on the device*
5. *Tighten fittings securely to prevent leakage.*

## Initial Check

1. *Confirm LCD display is active*
2. *Check for normal flow readings*
3. *Ensure no leaks at connections*
4. *Verify device appears online in the monitoring platform*

## Power Connection

1. *Connect the device to the external power supply using the provided adapter.*
2. *Ensure the power source is stable and within the specified (220v-240v AC) voltage range.*
3. *The internal backup battery will automatically provide power during outages (up to 24 hours).*

## LCD Display Indications

- *Total water consumption (Total Units)*
- *Monthly water consumption*
- *Daily water usage (Today's Usage)*
- *Instantaneous flow rate*
- *Pressure indication (if enabled)*
- *System status messages*
- *Communication status indicator*
- *Battery level indicator*

## Data logger - history values

***Hourly, daily, monthly values of the measured parameters are stored in internal memory.***

## Technical data

| | |
|---|---|
| Measurement Type | Mechanical flow measurement |
| Pipe Connection Size | 1/2 inch (inline installation) |
| Communication | GSM connectivity |
| Display | Integrated LCD display |
| Power Supply | External power adapter |
| Backup Power | Rechargeable battery (up to 24 hours) |
| Maximum Operating Pressure | ≤ 1.75 MPa |
| Operating Temperature Range | ≤ 80 °C |
| Operating Humidity Range | 35% – 90% RH (non-condensing) |
| Installation | Indoor or outdoor installation |
| Storage Temperature Range | −25 °C to +80 °C |
| Storage Humidity Range | 25% – 95% RH |
| Data Logging | Cloud storage with internal buffering |
| Application | Residential, commercial, and municipal |

## Recommended Additions to Troubleshooting

***If the Smart H2O device does not operate as expected, check the following before contacting support.***

1. *Check for leaks in the pipeline.*
2. *Verify the power supply connection.*
3. *Ensure the input voltage is within the specified range.*
4. *Inspect the power adapter and cable condition.*
5. *Confirm the LCD display is powered and visible.*
6. *Restart the device by turning the power off and on.*
7. *Ensure correct inlet and outlet installation.*
8. *Check for pipeline blockage or air in the pipe.*
9. *Check that the device appears online in the monitoring platform.*
10. *Do not open or attempt to repair the device.*

***If the issue persists after performing these checks, contact Smart H2O customer support and follow the instructions provided.***

## *Smart H2O Product Variants*

*Smart H2O is available in multiple configurations to suit different water monitoring and control requirements.*

| Model Designation | Configuration | Valve Control | Communication Interface | Backup Battery | Local Display |
|---|---|---|---|---|---|
| **M100-G** | Monitoring | Not Available | GSM | Up to 24 h | LCD |
| **C100-G** | Monitoring + Control | Available | GSM | Up to 24 h | LCD |
| **M100-L** | Monitoring | Not Available | LoRa | Up to 24 h | LCD |
| **C100-L** | Monitoring + Control | Available | LoRa | Up to 24 h | LCD |
| **M100-W** | Monitoring | Not Available | Wi-Fi | Up to 24 h | LCD |
| **C100-W** | Monitoring + Control | Available | Wi-Fi | Up to 24 h | LCD |

**Hydrotech Pvt Ltd**

riththikkansairam@gmail.com

+94 70 150 3330

1/1, 465/7, Galle road Colombo 06

Document: Smart H2O M100-G Datasheet
Version: Rev 1.0 | 2026

All rights reserved. The company follows a policy of continuous product improvement and reserves the right to modify specifications without prior notice. Products are manufactured using current technology and in accordance with applicable standards.