



Raspberry Pi B+

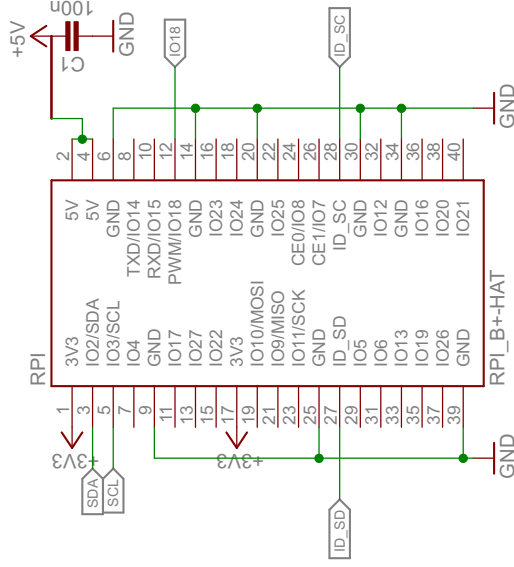

ID EEPROM

OnSemi CAT24C32 or Microchip 24LC32A

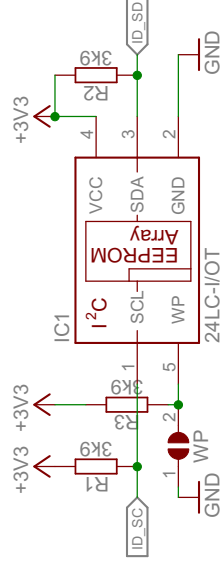

ATTiny85 AVR

The used USB-Bootloader on the ATtiny85 is Micronucleus
<https://github.com/micronucleus/micronucleus>

SDA+SCL are open-drain
outputs in I2C mode

