

USER MANUAL

ANALOG GUTAR EFFECTS UNIT



TABLE OF CONTENT

1.Introduction	3
2.Safety & Usage notes	4
3.Quick Start	5
4.Effects	
a.Preamplifier	6
b.Equalizer	7
c.Distortion	8
d.Tremolo	9
5.Technical Specifications	10

INTRODUCTION

Cybertrone Analog Guitar Effect Unit is made to add high-quality plugins for your guitar. It has 3 independent 100% analog effects that can be added separately with an inbuilt controllable preamplifier.

- 3-Band Equalizer (treble, mid, bass)
- Distortion
- Tremolo

SAFETY AND USER NOTES

- Keep away from water
- Don't use with wet hands
- Ensure safety when plugging and unplugging
- Use recommended power supply
- Disconnect when not in use
- Keep away from children
- Heavy shocks can damage the internal components.
- Do not open the enclosure
- Avoid long term exposure to direct sunlight

QUICK START

- Connect the guitar to the input
- Connect the output to the speakers.
- Switch on the unit
- Set all nobs to 12'00 o clock
- Play, enable and adjust each effect as necessary



EFFECTS

Preamplifier

- Boost and stabilize the guitar audio signal before applying further effects.

Gain: Adjusts the input level



! Higher gain can clip or distort the audio

EFFECTS

Equalizer

- Equalizer can be used to shape the tone in three frequency bands
 - Low : 85 Hz - 250 Hz
 - Mid : 250 Hz - 1 000 Hz
 - High : 1 kHz - 15 kHz



Higher gain can clip or distort the audio

EFFECTS

Distortion

- Make the tone heavier by intentionally clipping the Audio




Enable: Bypass or enable the plugin

Drive: Controls how hard the audio gets distorted

EFFECTS

Tremolo

- Periodically modulate the audio signal

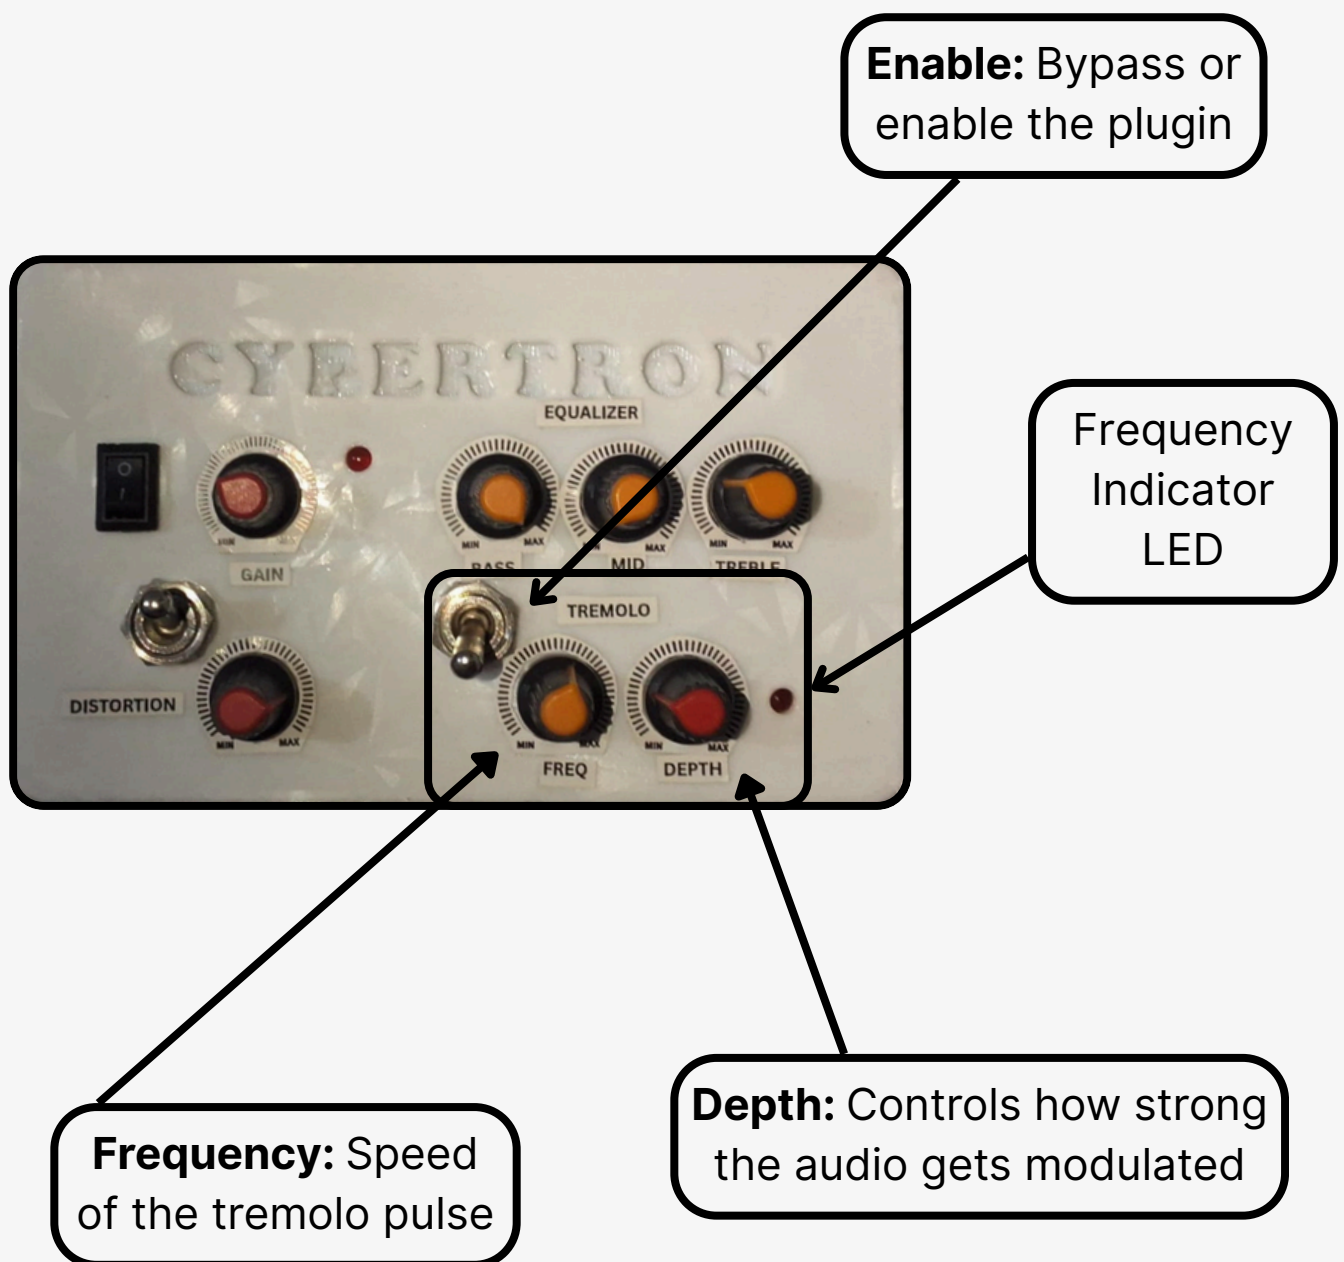

TECHNICAL SPECIFICATIONS

- Supply voltage: 12 V
- Maximum current: 150 mA
- Input impedance: 40 k Ω
- Average output impedance: 207 Ω
- Maximum power: 1.8 W
- Maximum gain: 9.58 dB
- Weight: 200g