IOTAFLOW
SYSTEMS PVT. LTD

ACRYLIC BODY
ROTAMETER

www.iotaflow.com

ACRYLIC BODY ROTAMETER

RANGE SPECIFICATION		DIMENSIONAL DETAIL		Maximum Pressure Rating
Maximum Flow Rate		Connection	CC Distance	
LPM AIR	LPH WATER	BSP 'F'		
50	100	¼"	114	2kg/cm²
150	250	¼"	110	
100	500	¼"	159	
500	1000	½"	200	3kg/cm²
1400	2500	¾"	194	

TECHNICAL SPECIFICATION

Meter Body	Crystal Clear Acrylic
Float	SS-316/PTFE/PVC etc
Scale	Engraved on Meter
Connection	Body Rear BSP/NPT 'M' or 'F'
Rated Temp.	60°C
Accuracy	± 3% on Full Scale
Reputability	0.5%
Range ability	10:1

RANGE SPECIFICATION		DIMENSIONAL DETAIL			Maximum Pressure Rating
Maximum Flow Rate		Connection	CC Distance		
LPM AIR	LPH WATER	BSP 'F' / Flanged	Threaded / Flanged		
50	100	¼"	190	NA	2kg/cm²
150	250	¼" & ½"	190	NA	
100	150	¼"	240	NA	5kg/cm²
600	1200	½"	250	275	
1500	2500	¾"	250	275	
2500	6000	1" & 1½"	300	325	
3000	8000	1" & 1½"	400	450	15kg/cm²
8000	15000	1 ½" & 2"	400	450	
NA	20000	1 ½" & 2"	400	450	
NA	40000	2" & 2 ½"	NA	450	
NA	50000	2 ½" & 3"	NA	450	
NA	80000	4"	NA	450	

TECHNICAL SPECIFICATION

Meter Body	Crystal Clear Acrylic
Float	SS-316/PTFE/PVC etc
Scale	Engraved on Meter Body
Connection	Top & Bottom Flanged or Threaded
Rated Temp.	60°C
Accuracy	±2% on Full Scale
Repeatability	0.5%'
Range ability	10:1

Contact Us

IOTAFLOW SYSTEMS PVT. LTD.

C-2/13, Mayapuri Industrial Area Phase-II,
New Delhi - 110064 (INDIA)

+91-9910693866/ +91-97790 85987

contact@iotaflow.com

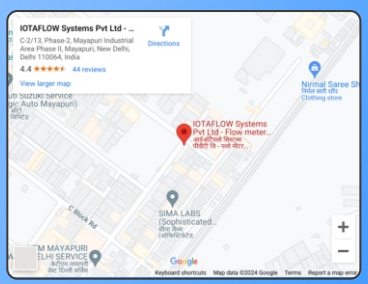

Specifications subject to change without prior notice. © Iotaflow Systems Pvt. Ltd.