



ACCUMAXTM INDIA

SCIENCE EQUIPMENTS FOR
RESEARCH EDUCATION, HOSPITAL & INDUSTRY

SCIENCE EQUIPMENTS

AI 101

BACTERIOLOGICAL INCUBATOR

Double Walled, Inside S.S., Temp. few deg. above ambient to 70°C. Microprocessor Based PID controller, adjustable shelves, circulating fan motor, work on 220 V AC.

Sizes: (WxDxH) 355x355x355mm
455x455x455mm
605x605x605mm
605x605x910mm

(OPTIONAL) 21 CFR Compliance.

**B.O.D INCUBATOR**

Double walled inside S.S. Temp. 5°C To 60°C. Microprocessor based PID controller, adjustable shelves, circulating fan motor, works on 220 V AC.

Sizes: (WxDxH) 4cu.ft. 455x410x610mm
6cu.ft. 505x415x830mm
10cu.ft. 570x550x875mm
12cu.ft. 650x580x900mm

(OPTIONAL) 21 CFR Compliance.

AI 102

AI 103

COOLING INCUBATOR

Double walled inside S.S. temp. 5°C - 50°C. Microprocessor based PID controller, adjustable shelves circulating fan motor, work on 220 V AC.

Size: (WDXH) 455x410x610mm
505x415x830mm
570x550x875mm
650x580x900mm

(OPTIONAL) 21 CFR Compliance.

**INCUBATOR SHAKER**

Mild steel powder coated, variable speed 30-250 rpm, platform size: 380x380mm, clamps to hold flask 250ml/500ml. Temp. ambient to 60°C. microprocessor based PID controller work on 220 V AC.

AI 104

AI 105

COOLING INCUBATOR SHAKER

Double walled inside S.S. Temp. 10°C - 60°C +/- 0.5°C microprocessor based PID controller, circulating fan motor work on 220 V AC.

Size: (WxDxH) 455x410x610mm
505x415x830mm
570x550x875mm
650x580x900mm

(OPTIONAL) 21 CFR Compliance.

**DRY BATH INCUBATOR**

Mild steel powder coated, anodized aluminium block holes for 1.5/2ml MCT tube, microprocessor based PID controller, temp. Few deg. Above ambient to 60°C. Work on 220 V AC.

AI 106

AI 107

HOT AIR OVEN

Double walled, inside S.S. Temp. 50°C. To 250°C. Microprocessor based PID controller, adjustable shelves, circulating fan motor, work on 220 V AC.

Sizes: (WxDxH) 355x355x355mm
455x455x455mm
605x605x605mm
605x605x910mm

(OPTIONAL) 21 CFR Compliance.

**INDUSTRIAL DRYING OVEN**

Triple walled, inside S.S. temp. 100°C to 300°C. Microprocessor based PID controller, adjustable shelves, circulating fan motor, work on 220 V AC / 415-440 V AC 3 phase

Sizes:- (WxDxH) 605x605x605mm
605x605x910mm
910x910x910mm
1500x1000x1000mm. or Customization

(OPTIONAL) 21 CFR Compliance, Trolley.

AI 108

AI 109

LABORATORY HIGH TEMP. OVEN

Triple walled, inside S.S. temp. 100°C to 400°C. Microprocessor based PID controller, circulating fan motor, work on 220 V AC / 415-440 V AC 3 phase
 Sizes: (WxDxH) 605x605x605mm
 605x605x910mm
 910x910x910mm
 1500x1000x1000mm
 2000x1500x2000mm or Customization

(OPTIONAL) 21 CFR Compliance, Trolley.



TRAY DRYING OVEN

Triple walled, inside S.S./M.S. temp. few deg. above ambient to 200°C. Microprocessor based PID controller, circulating fan motor, work on 220 V AC / 415-440 V AC 3 phase
 Sizes: (WxHxD) 12 Tray - 430x840x915mm
 24 Tray - 915x840x915mm
 48 Tray - 965x1275x1450mm
 96 Tray - 965x1700x1450mm

(OPTIONAL) 21 CFR Compliance.

AI 110

AI 111

THIN FILM OVEN

Double walled, microprocessor based PID controller, temperature required as per is : Astm is 163°C +/- 1°C, circulating fan motor, toughened glass view window, by a vertical shaft with rotating disc having 5-6 rpm, work on 220 V AC.
 Sizes: (WxDxH) 455x455x455mm



VACUUM OVEN RECTANGULAR

Double walled inside S.S. temp. 50°C to 250°C. Microprocessor based PID controller work on 220 V AC.

Sizes: (Dia x Depth) 250x250x250mm
 300x300x300mm
 350x350x350mm
 450x450x450mm

(OPTIONAL) Vacuum Pump

AI 112

AI 113

VACUUM OVEN CYLINDRICAL

Double walled, inside S.S., indicating lamps, temp. 50°C - 250°C, microprocessor based PID controller work on 220 V AC.

Size: (Dia x Depth) 250x250mm
 300x300mm
 350x350mm
 450x450mm

(OPTIONAL) Vacuum Pump



WATER BATH

Double walled, inside S.S. temp. ambient to 100°C. Thermostatic / microprocessor based PID controller. Work on 220 V AC.

Sizes: (LxBxD) 300x250x175mm,
 300x300x175mm,
 455x300x175mm,
 605x300x175mm.

AI 114

AI 115

WATER BATH 6 / 12 HOLES

Double Walled, Inside S.S., 75mm Concentric Rings, Inside S.S. Temp. Ambient to 100°C. Thermostatic / Microprocessor Based PID Controller, Work On 220 V AC

Inner Size (LxBxD) 300x250x100mm
 335x405x100mm



CHILLER WATER BATH

Double walled, inside S.S., microprocessor based PID digital temperature controller, circulation pump with 15 lpm capacity. Use absolute alcohol for temperature ranged below +5°C. Work on 220 V AC

Temperature Range	Bath Volume	Cooling Medium Above +5°C	Cooling Medium Below +5°C
Ambient To 0°C	13 L	Water	Absolute Alcohol
Ambient To -10°C	13 L	Water	Absolute Alcohol
Ambient To -20°C	13 L	Water	Absolute Alcohol
Ambient To -30°C	13 L	Water	Absolute Alcohol

AI 116

OVENS

BATHS

AI 117

SHAKING WATER BATH

Double walled, inside S.S. Microprocessor based PID digital temperature controller, work on 220 V AC.

Sizes: (LxBxD) 505x375x225mm

Shaking Tray Size: 405x300x150mm

Erlenmeyer Flasks of 250 ml/500ml Or 1000ml.

**ULTRASONIC CLEANING BATH**

Stainless steel tank, operating frequency 33 +/-3 KHz for all general purpose cleaning, microcontroller based temperature controller, timer range 0 to 30 minutes, work on 220 V AC.

Tank Size	Tanks Size LxBxD	Ultrasonic Power
3.0 Liters	240x135x100mm	80 Watts
4.5 Liters	300x150x100mm	100 Watts
6.5 Liters	300x100x150mm	150 Watts
10 Liters	300x238x150mm	250 Watts
14 Liters	300x238x300mm	300 Watts

AI 118

AI 119

OIL BATH

Double walled, inside S.S. temp. 50°C to 250°C, microprocessor based PID digital temperature controller, complete with stirrer. Work on 220 V AC.

Size of chamber (LxWxD) 250x250x250mm

300x300x300mm

355x355x355mm

**CIRCULATING WATER BATH**

Double walled, inside S.S. temp. Ambient to 100°C, microprocessor based PID digital temperature controller, work on 220 V AC.

Sizes: (LxWxD) 300x250x175mm

330x300x175mm

455x300x175mm

605x300x175mm

AI 120

AI 121

VORTEX MIXER

Meant for quick & thorough mixing of liquids in test tubes, rubber buffer on the top. The tube is held against the vibrating buffer, work on 220 V AC.

Speed : 0 - 2500 RPM (Variable)

Operation Modes : Touch Or Continuous

**ROLLER MIXER**

To make blood homogeneous. It is essential pre-process for perfect result of RBC, WBC and platelets counting on hematology analyzer. Work on 220/230 Volt AC

Roller Size 4 Nos. x 230 mm Long.

RPM 30 RPM/ 36 RPM

Mixing Time 15 To 20 Minutes

Capacity Vaccutainer 6 Nos.
(4ml) Or 5ml x15 Nos

Roller Size 4 Nos. x 340 Mm Long

RPM 30 RPM/ 36 RPM

Mixing Time 15 To 20 Minutes

Capacity Vaccutainer 12 Nos.
(4ml) Or 5ml x 24 Nos

AI 122

AI 123

ORBITAL SHAKER

Mild steel powder coated, lotus clamps to hold flask, variable speed by speed regulator knob. Available with the following configurations of platform size, capacity and number of flasks. Work on 220/230 volt AC

Platform size 300x300mm, 450x450mm

Moc Mild steel construction

Moc platform Stainless steel, spring loaded lotus clamps to hold flask

Speed control By speed regulator

Speed range 40 to 200 digital rpm indication

**VDRL ROTATOR**

Mild steel powder coated body, variable speed/fix speed 180 rpm. Works on 220 V AC

AI 124

AI 125

LABORATORY STIRRER/ TISSUE HOMOGENIZER

Laboratory stirrer fitted on stand with stainless steel shaft, 4000 rpm, variable speed. Work on 220/230 volt AC

**WRIST ACTION SHAKER**

Heavy cast iron base and two slide arms for holding flasks, with F.H.P. Heavy duty motor with variable speed, can hold flasks from 100ml to 1000 ml, work on 220/230 volt AC to hold 4 flasks / 8 flasks

AI 127

SEDIMENTATION SHAKER

For determination of sedimentation value of flour samples in order to measure protein quantity and quality based on swelling of protein globules as well as agglomeration of present starch into protein globules in a lactic acid medium, with 5-6 cylinders and each cylinder has capacity of 50-100 ml. These cylinders are placed on an acrylic tray which fixed horizontally and oscillate with the help of speed regulator, 40 oscillations / min, tilt angle 30°, work on 220/230 volt AC



A 126

AUTOCLAVE PORTABLE

Made from anodized aluminium, pressure gauge. Safety valve, steam release, work on 220 V AC.

Sizes: 300x300mm
300x350mm
300x400mm
300x500mm



AI 128

AI 129

VERTICAL AUTOCLAVE

Double walled, outer, inside chamber, lid S.S. Radial locking, microprocessor based PID temperature controller pressure control switch, pressure gauge, safety valve, low water cut off, vacuum breaker, digital temperature controller, timer, drain valve, silicone gasket, work on 220 V AC.

Sizes: (Dia x Depth) 250x450mm
300x500mm
350x550mm

Sizes: (Dia x Depth) 400x600mm
450x600mm
550x750mm

(OPTIONAL) 21 CFR Compliance.

**VERTICAL AUTOCLAVE (TRIPLE WALLED)**

Triple walled, outer, middle, inside chamber, lid S.S. Radial locking, microprocessor based PID temperature controller pressure control switch, pressure gauge, safety valve, low water cut off, vacuum breaker, timer, drain valve, silicone gasket, work on 220 V AC.

Inner Size (Dia x Depth) 250 x 450mm,
300 x 500mm,
350 x 550mm,

Inner Size (Dia x Depth) 400 x 600mm,
450 x 600mm,
550 x 750mm.

(OPTIONAL) 21 CFR Compliance.

AI 130

AI 131

AUTOCLAVE HORIZONTAL CYLINDRICAL

Triple walled, outer, middle, inside chamber, lid S.S. Radial locking, microprocessor based PID temperature controller pressure control switch, pressure gauge, safety valve, low water cut off, vacuum breaker, digital temperature controller, timer, drain valve, silicone gasket, steam stocking with a three way valve to control the sterilization cycle, insulated, steam generator, steam trap mounted on a tubular stand, work on 220 v ac / 415 v ac, 3 phase

Size inside the chamber : (DIA x DEPTH)

400x600mm | 400x1100mm | 500x900mm | 500x1200mm

(OPTIONAL) 21 CFR Compliance.

**AUTOCLAVE HORIZONTAL RECTANGULAR**

Triple walled, outer, middle, inside chamber, lid S.S. Radial locking, pressure control switch, pressure gauge, safety valve, low water cut off, vacuum breaker, digital temperature controller, timer, drain valve, silicone gasket, steam stocking with a three way valve to control the sterilization cycle, insulated, steam generator, steam trap mounted on a tubular stand. Work on 220 v ac / 415 V AC, 3 phase

Size inside the chamber (W x D x H) : 450 x 450 x 900mm, | 450 x 600 x 900mm,
600 x 600 x 900mm, | 600 x 600 x 1200mm

(OPTIONAL) 21 CFR Compliance.

AI 132

LAB SHAKERS

AUTOCLAVES

AI 133

HUMIDITY CHAMBER

Double walled, inside S.S. temp. 10°C to 60°C. Humidity 55% to 90%, microprocessor based PID temperature, humidity controller, work on 220 V AC.

Sizes: (WxDxH) (4.0 Cft.) 455x455x710mm
(6.1 Cft) 605x605x605mm
(10.0 Cft) 605x605x910mm
(12.0 Cft) 650x580x900mm or Customization

(OPTIONAL) 21 CFR Compliance.

**STABILITY CHAMBER**

Double walled, outer body M.S., inside S.S., temp. 20°C to 60°C, humidity 55% to 90%, microprocessor based PID digital temperature controller, work on 220 V AC.

Size (WxDxH) (4.0 Cft.) 455x410x610mm
(6.1 Cft) 505x415x830mm
(10.0 Cft) 570x550x875mm
(12.0 Cft) 650x580x900mm or Customization

(OPTIONAL) 21 CFR Compliance.

AI 134

AI 135

PLANT GROWTH CHAMBER

Double walled, inside S.S. temp. range: ambient 5°C - 60°C, humidity 55% to 90% + /- 5%. Microprocessor based PID temperature, humidity controller, external illumination, day night cyclic timer, work on 220 V AC.

Size Inner (WxDxH) (6.1cft.) 505x415x830mm
(10cft.) 570x550x875mm
(12cft.) 650x580x900mm

(OPTIONAL) 21 CFR Compliance.

**SEED GERMINATOR SINGLE CHAMBER**

Double walled, inside S.S., temp. 5°C to 60°C. Humidity range: 55% to 90% . Microprocessor based PID digital temperature, humidity controller, external illumination by day night cyclic timer, work on 220 V AC.

Size Inner (WxDxH) (14 Tray) 555x605x910mm

(OPTIONAL) 21 CFR Compliance

AI 136

AI 137

SEED GERMINATOR DUAL CHAMBER

Double walled, inside S.S., temp. 5°C to 60°C. Humidity range: 55% to 90%. Microprocessor based PID digital temperature, humidity controller, external illumination by day night cyclic timer, work on 220 V AC.

Size Inner (WxDxH) (14 Tray) 555x605x910mm,
Size Inner (WxDxH) (14 tray) 555x605x910mm,

(OPTIONAL) 21 CFR Compliance

**ENVIRONMENTAL CHAMBER**

Double walled, inside S.S. temp. -40°C to 60°C, humidity range (Rh) 55% - 95%. Microprocessor based PID digital temperature, humidity controller,

Size Inner : (WxDxH) (4.0 Cft.) 455x410x610mm,
(6.1 Cft.) 505x415x830mm,
(10.0 Cft.) 570x550x875mm,
(12.0 Cft.) 650x580x900mm.

(OPTIONAL) 21 CFR Compliance.

AI 138

AI 139

COLONY COUNTER

Digital colony counter 4 digit led display range 0-9999 with 125 memory, hold and count correction facility, data restored even after power failure, work on 220 V AC

**HEATING MANTLE**

Made of mild steel powder coated, mantle type heaters, temperature controlled by energy regulator, work on 220 V AC,

Available In Capacity

250ml, 500ml, 1000ml, 2000ml, 3000ml, 5000ml, 10000ml, 20000ml.

AI 140

AI 141

KJELDHAL DISTILLATION UNIT

Made of mild steel powder coated, mantle type heaters, with energy regulator, 6 tests with glass parts and condenser, 300 & 500ml capacity flasks. Supplied with clamps and tubing, work on 220 V AC

**KJELDHAL DIGESTION UNIT AI-142**

Made of mild steel powder coated, mantle type heaters, with energy regulator, 6 tests with glass parts and duct, 300 & 500ml capacity flasks. Supplied with clamps, work on 220 V AC

AI 142

AI 143

KJELDHAL DISTILLATION AND DIGESTION COMBINED UNIT

Made of mild steel powder coated, mantle type heaters, with energy regulator, 6 tests and duct. It is very useful for estimation of nitrogen content in the substance by digestion for 300 / 500ml capacity flasks, metal condenser, supplied with clamps and rubber tubing. Electric supply work on 220/230 volts, 50/60 Hz AC

**SOXHLET EXTRACTION UNIT**

Made of mild steel powder coated, mantle type heaters, with energy regulator, 6 tests with glass parts, 250 & 500ml capacity flasks. Supplied with clamps, work on 220 V AC

AI 144

AI 145

ROTARY VACUUM EVAPORATOR

With water bath, stand, manual / motorized quick action jack, digital rpm indicator, PID temperature controller for bath, glass parts, work on 220 V AC
 Sizes: 1000ml,
 3000ml,
 5000ml.

**VACUUM PUMP OIL FREE**

Diaphragm type, 100% oil free, max flow rate 10 lpm to 75 lpm. Single and double stage. 15 lpm, 45 lpm, 75 lpm, work on 220 V AC

AI 146

AI 147

UV CABINET

Made from metal body powder coated, for visualization of test objects under U.V. tubes having long wavelength (365nm) and short wavelength (254nm) and fluorescent tube is fitted to the unit, individual on off switches, viewing window, work on 220 V AC

**FRIABILITY APPARATUS**

Double drum measures obession strength of tablets with programmable timer, rotation speed 25 rpm +/-1, auto & manual mode of operation with 2 acrylic Drums , results are displayed on 3 digit led display and it has 3 digit presentable control, work on 220 V AC

AI 148

AI 149

TABLET DISINTEGRATION TEST APPARATUS

With 2 basket, measures disintegration time of 12 tablets / capsules at one time, time displayed on led display, work on 220 V AC.





MELTING POINT APPARATUS

With resolution 0.1°C to measure melting point/ boiling point of solid and liquid samples. Temp range $0-300^{\circ}\text{C}$ with 4" TFT screen & camera.

AI 150

AI 151

KARL FISHER TITRATOR

Micro processor K.F moisture titrator (graphical display) with built-in magnetic stirrer, auto computation of moisture in ppm, % age and mg H_2O ., simultaneous display of results in all three units, 1000 sample storage facility with batch no., Final result are flashed on 128×64 premium graphical lcd. Icon based menu for easy navigation. K.f reagent dispensing by moisture process, highly accurate & reliable.

Accessories on request

- a) Dual platinum electrode
- b) Durrett clear glass (10ml.)



FLOCCULATOR (JAR TEST APPARATUS)

Mild steel powder coated, digital rpm indicator & timer, variable speed, led illumination, 2/4/6 stirrers, work on 220 V AC.

AI 152

AI 153

POLARIMETER

Maximum length of tubes which this model can take is 400mm; smaller tubes can also be used, the tubes supplied have a bubble trap, polaroid sheets used for polarizing the incident light.

Glass circular scale finely marked in angular degrees and also in these degrees. The range on this scale is from -30° to $+130^{\circ}$, permanent focus: once the dividing line is focused for the eye. The focus is not disturbed by inserting tubes containing solutions, regardless of the nature of solution or of the length of the tube, rotating half shadow effect, provision for attaching lamp to the instrument thus keeping alignment correct at all times, supplied with sodium vapour lamp & assembly, transformer, work on 220 V AC.



MAGNETIC STIRRER

Mild steel powder coated, SS platform, with hot plate, variable speed, stirring paddle. Capacity 1 lt./2 lt/5 lt/10 lt., work on 220 V AC.

AI 154

AI 155

MAGNETIC STIRRER MULTISTATION

Mild steel powder coated, SS platform, with hot plate, multistation, variable speed, stirring paddle. Capacity 1 lt./2lt, work on 220 V AC. 4 stations, 6 stations.



HUMIDIFIER

Made up of stainless steel, unit is effective for an enclosed space of volume upto 40 cu. Mtrs. Provided with high speed 2800 rpm, the blades are aerodynamically balanced to ensure drop less fumigation, work on 220 V AC

AI 156

AI 157

MEMBRANE FILTRATION ASSEMBLY

Filtration flask 1000ml, and sintered glass funnel with clamp, vacuum pump 100% oil free, with gauge and regulator, tubing, work on 220 V AC



BALL MILL

Mild steel powder coated, capacity 1 kg, 2kg, 5kg, 10kg SS. Jar, with balls, fix 80 rpm speed. Work on 220 V AC.

AI 158

AI 159

WILLY MILL

Mild steel powder coated, SS Chamber, sizes: 40x25 mm, 65x25mm, 100x50mm, 200x75mm. Work on 220 V AC.



HOT PLATE ROUND

Cast iron top 200mm with energy regulator, temp. 300°C, work on 220 V AC.
(OPTIONAL) Microprocessor based PID temperature controller

AI 160

AI 161

HOT PLATE RECTANGULAR

Mild steel top with energy regulator, temp. 300°C, work on 220 V AC.

Sizes: 250x300x150mm
250x400x150mm
300x450x150mm
450x600x150mm

(OPTIONAL) Microprocessor based PID temperature controller



LEAK TEST APPARATUS

Made of stainless steel, 300mm desiccator, digital led display, programmable vacuum hold time up to 9999 seconds, extremely useful for packing industry and ideal for leak testing for strips, blisters & sachets, work on 220 V AC.

AI 162

AI 163

MUFFLE FURNACE

Made of mild steel powder coated. Heating element are made of kanthal a-1 wire, blanket wool insulation, microprocessor based PID temperature controller, working temp. Range 300-1150°C pilot lamps, work on 220 V AC.

(OPTIONAL) Profile Controller

Working Chamber Size:

Size of Chamber	Rating KW	Size of Chamber	Rating KW
100x100x225mm	2.5	150x150x300mm	4.0
125x125x250mm	3.0	200x200x300mm	5.0



MUFFLE FURNACE HIGH TEMPERATURE

Made of mild steel, powder coated. Heating element are of carbon sulphur rods, zirconium blanket wool insulation, microprocessor based PID digital temperature, working temp. Range 500-1350°C pilot lamps, work on 220 V AC.

(OPTIONAL) Profile Controller

Working Chamber Size:

Size of Chamber	Rating KW	Size of Chamber	Rating KW
100x100x225mm	2.5	150x150x300mm	4.0
125x125x250mm	3.0	200x200x300mm	5.0

AI 164

AI 165

C.O.D. DIGESTOR

Made of mild steel powder coated, aluminium blocks to accommodate 6 / 15 samples tests, digital temperature controller, timer, temp. Ambient + to 180°C, supplied with 6 / 15 bottles of 40mm dia. And air condensers, rack, work on 220 V AC.



LYOPHILIZER (FREEZE DRYER)

Made of mild steel powder coated, digital temperature controller, vacuum indicator, hermetically sealed compressor, fitted with 100 liters / min rotary vane type vacuum pump of double stage with air ballast, puf insulated, between outer and inner chamber for minimal thermal losses. Condenser trap all non-magnetic stainless steel fabricated, argon arc welded, (main drying chamber) made of stainless steel with perspex top cover, work on 220 V AC

Capacity	3.25 ltrs, 5.25 ltrs
Moc	Mild steel powder coated
Vacuum drum size (dia x height)	22.5 cm x 25.5 cm
Temperature range	Upto -80°C / -40°C (at ambient temperature of 20°C)
Temperature control	Microprocessor based digital temperature Controller cum indicator
Vacuum indicator	Electronic pirani gauge
Drying ports	6/12
Vacuum pump	Double stage ultimate vacuum 1 x 10 ⁻³ torr

AI 166

AI 167

DEEP FREEZER

Cooling coils are placed between foamed-in-place puf insulation and inner side of stainless steel chamber eliminating any chances of frost formation on the evaporator which leads to choking of compressor/condensing unit. Puf insulation for minimal cooling losses. Evenly spread evaporator accounts for higher temperature uniformities throughout the cooling chamber. Specially designed, outer made of powder coated CRC steel sheet. Inner chamber ss-304, caster wheel mounted for easy mobility, microprocessor based PID temperature controller, temperature up -80 Deg.C. 100 lt, 150 lt, 200 lt, 250 lt

**WATER STILL MANESTY TYPE**

Made of all stainless steel, wall mounted, output 4 lt / 6 litre / Hr. Approx. Work on 220 V AC.

AI 168

AI 169

WATER DISTILLATION SINGLE STAGE

All glass table top horizontal model, automatic, mounted on metal stand powder coated, borosilicate glass boiler & condenser, quartz glass heater tube, low water cut off device, work on 220 V AC.

Output 1.5/3.0/4.0/5.0/9.0 Litre / Hr

**WATER DISTILLATION DOUBLE STAGE**

All glass table top horizontal model, automatic, mounted on metal stand powder coated, borosilicate glass boiler & condenser, quartz glass heater tube, low water cut off device, work on 220 V AC.

Output 1.5/3.0/4.0/5.0/8.0 Litre / Hr

AI 170

AI 171

WATER DISTILLATION TRIPLE STAGE

All glass table top horizontal model, automatic, mounted on metal stand powder coated, borosilicate glass boiler & condenser, quartz glass heater tube, low water cut off device, work on 220 V AC.

Output 1.5/3.0/4.0 Litre/5.0 Litre / Hr

**WATER DISTILLATION TABLE / FLOOR MODEL**

Made of stainless steel 304 grade, argon arc welded, low water level cut-off device for general safety of heating elements, control panel fitted with on/off switch, low water cut-off probe, mains, heating indicators, work on 220 V AC / 415-440 V AC, 3 Phase.

Output 7.0 Litres/Hr 6 KW | 10.0 Litres/Hr 9 KW

AI 172

AI 173

WATER DISTILLATION HEAVY DUTY

Made of stainless steel 304 grade, mounted on stand, argon arc welded, low water level cut-off device for general safety of heating elements, control panel fitted with on/off switch, low water cut-off probe, mains, heating indicators, work on 415-440 V AC, 3 Phase.

Output 25.0 Litres/Hr 18 KW | 50.0 Litres/Hr 40 KW



AI 174

LAMINAR AIR FLOW CABINET HORIZONTAL

Made of board sunmica clad / mild steel powder coated/stainless steel. Side panels are made out of plexiglass, fitted with pre- filter & HEPA filter. Air is drawn through pre- filter and is made to pass through HEPA filters having efficiency rating 99.99%, thus retaining air borne particles of size 0.3 μ and larger. The blower and the motor assembly is statically and dynamically balanced motor of 1/4 h.p, stainless steel work table, manometer/magnahelic gauge, UV Tube, led tube, work on 220 V AC
Size : 600x600x600mm, 900x600x600mm, 1200x600x600mm, 1800x600x600mm

**LAMINAR AIR FLOW CABINET VERTICAL**

Made of board sunmica clad / mild steel powder coated/stainless steel. Side panels are made out of plexiglass, fitted with pre- filter & HEPA filter. Air is drawn through pre- filter and is made to pass through HEPA filters having efficiency rating 99.99%, thus retaining air borne particles of size 0.3 μ and larger. The blower and the motor assembly is statically and dynamically balanced motor of 1/4 h.p, stainless steel work table, manometer/magnahelic gauge, UV Tube, led tube, work on 220 V AC
Size : 600x600x600mm, 900x600x600mm, 1200x600x600mm, 1800x600x600mm

AI 175



AI 176

FUME HOOD

Fume hoods are designed to function as an enclosed ventilated workspace- can provide a substantial degree of protection to user. It is designed so as to throw-out all toxic harmful vapour, acidic/alkaline fumes, chemical vapors, removal of odour from the hood working area.

MOC	GI Powder Coated / Stainless Steel / Polypropylene
Type	Floor Standing Model / Table Top Model
Working Area WxDxH	600x600x900mm, 600x600x1200mm, 600x600x1800mm
Bottom Arrangements	Cabinets, With Cupboard With One Horizontal Partition and Shutters, Locking Arrangements.
Baffles	Aerodynamic Shape Fully Made Of 3mm FRP.
Work Top	Black Granite 18mm.
Sash (Shutter)	Single, Vertical Sliding, Balanced With Counter Weight.
Blower Type	Centrifugal Blower
Powered By	1 HP 1440 RPM Single Phase.
Exhaust Duct	PVC/FRP Duct Pipe
Electrical Arrangements	2 Nos. 15/5 Amps 3 Pin Socket
Illumination	By 4 Feet Tube Light.
Sink & Tap	Sink With Outlet Nipple Single Way / Three Way Swan Neck Tap.



BIOLOGICAL SAFETY CABINET TYPE A-2, CLASS II

Made of stainless steel, reticulation 70%, and exhaust 30% takes places inside workspace and the blower will exhaust all the 30% of the filtered air, surrounds the work zone having negative pressure while a microprocessor controls cabinet functions. Further, a lcd panel is there to display the monitoring of the cabinet air flow and a blower run meter is there to track operating life. Pre filter washable and HEPA filters made of mini pleated non-woven fabric. The filters deliver an efficiency rating which is better than 99.99% at DOP (cold) and 99.97% at DOP (hot), can hold particles of greater than 0.3 micron. Fitted balanced motor and blower.

MOC	GI Powder Coated/Stainless Steel
Cleanliness	Class 100
Hepa Filter	Media Glass Fiber Paper-Imported
Efficiency	99.999 %
Pressure Drop	23mm WG
Size-At Exhaust	6"x 6"x 6"
Pre-Filter	Non Woven-Synthetic Polyester
Particle Retention	10 -15 Micron
Efficiency	90%
Pressure Drop	6mm WG
Blower Assembly	¼ HP, 1440 RPM Motor, Directly Coupled With A Pair Of
Exhaust Assembly	By Motor of ¼ HP
Ultra Violet Lamp	Philips/Osram Make
Illumination	LED
Standard Accessories	Pressure Manometer, Power Point, Gas Inlet, Nozzle, And Floor Levelling Screws.
Working Area	WxDxH 900x600x600mm, 1200x600x600mm, 1800x600x600mm
Work On	220 V AC



AI 177

FUME HOOD

AI 176

BIOLOGICAL SAFETY CABINET CLASS III, CLASS 2 TYPE B2, 100% EXHAUST

Made of stainless steel, no circulation takes places inside workspace and the blower will exhaust all the 100% of the filtered air, surrounds the work zone having negative pressure while a microprocessor controls cabinet functions. A lcd panel to display the monitoring of the cabinet air flow and a blower run meter is there to track operating life. Pre filter washable and HEPA filters made of mini pleated non-woven fabric. The filters deliver an efficiency rating which is better than 99.99% at DOP (cold) and 99.97% at DOP (hot), can hold particles of greater than 0.3 micron, fitted balanced motor and blower, work on 220-230v ac, 50 Hz


Internal Size (WxHxD)	600x600x600mm, 900x600x600mm, 1200x600x600mm, 1800x600x600mm
Outer Wall, Inner Wall	Stainless Steel
Side Walls	Acrylic Sheets
Exhaust	100%
Exhaust Filter & Down Flow Filter	Filter With Efficiency 99.99% at 0.3 Micron
Ultra Violet Tube Light	Germicidal
Static Pressure Measurement	Magnetic Gauge



BIO SAFETY

- (OPTIONAL) • Fuzzi Logic Profile Controllers, HMI, Data Recording Facility With PLC Controls.
• IQ, OQ, PQ, DQ Validation GMP Models Available.

Specialization In Customized Designs.

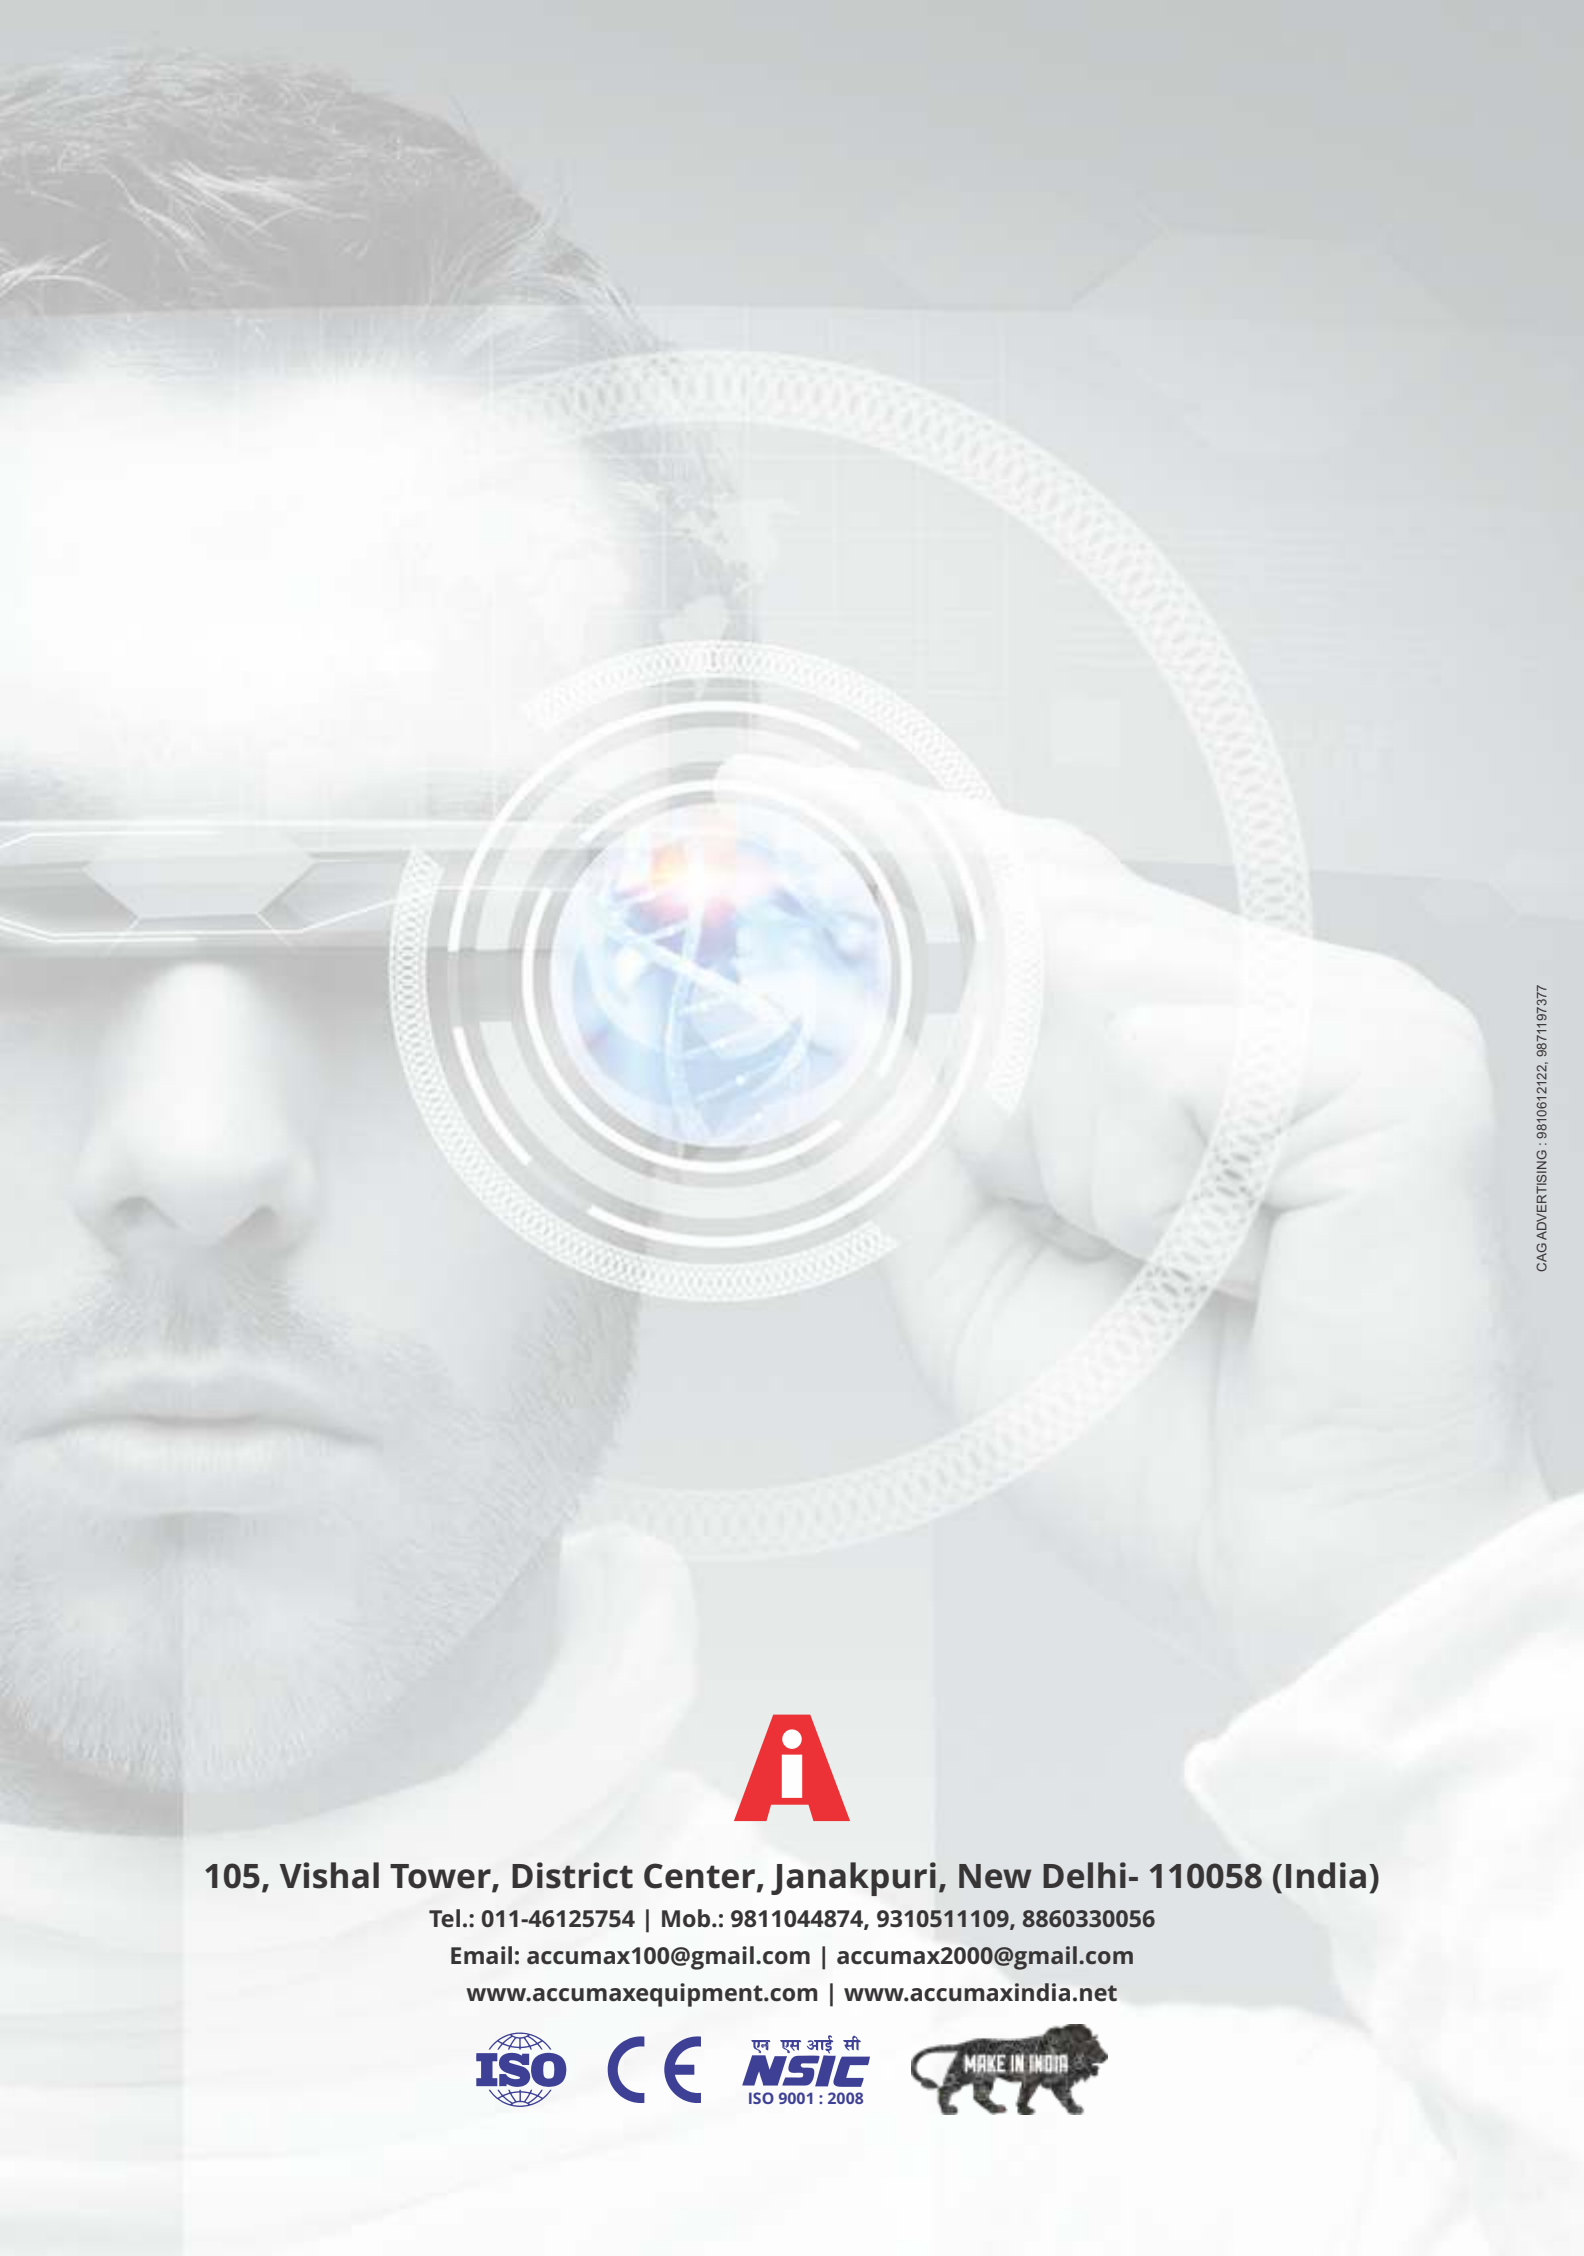

105, Vishal Tower, District Center, Janakpuri, New Delhi- 110058 (India)

Tel.: 011-46125754 | Mob.: 9811044874, 9310511109, 8860330056

Email: accumax100@gmail.com | accumax2000@gmail.com

www.accumaxequipment.com | www.accumaxindia.net

