


Implementation of Star Topology using CISCO Packet Tracer
Done by Samip Khadka

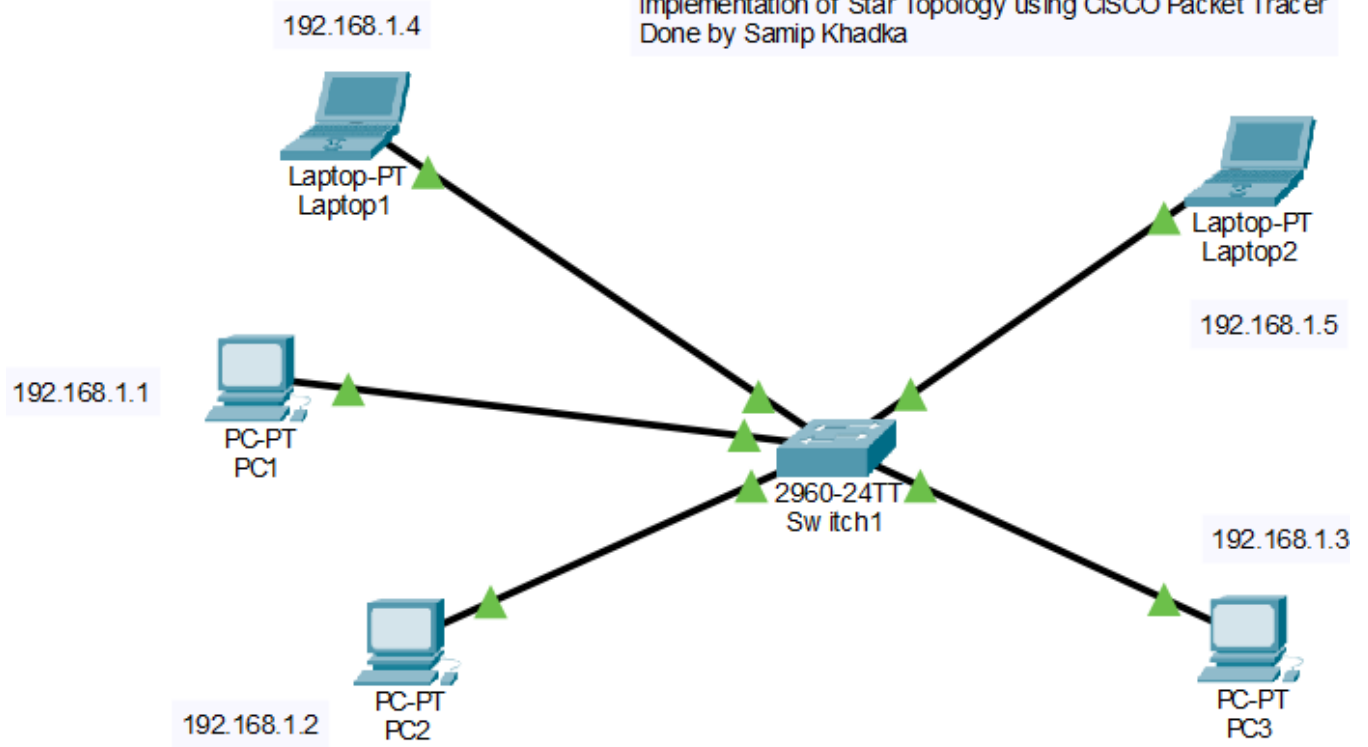

PC1

Physical Config **Desktop** Programming Attributes

IP Configuration [X]

Interface: FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address: 192.168.1.1

Subnet Mask: 255.255.255.0

Default Gateway: 0.0.0.0

DNS Server: 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address: /

Link Local Address: FE80::260:70FF:FEE8:2184

Default Gateway:

DNS Server:

Laptop1

Physical	Config	Desktop	Programming	Attributes
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP ☒ Static				
IPv4 Address		192.168.1.4		
Subnet Mask		255.255.255.0		
Default Gateway		0.0.0.0		
DNS Server		0.0.0.0		

PC3

Physical	Config	Desktop	Programming	Attributes
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP ☒ Static				
IPv4 Address		192.168.1.3		
Subnet Mask		255.255.255.0		
Default Gateway		0.0.0.0		
DNS Server		0.0.0.0		

PC2

Physical	Config	Desktop	Programming	Attributes
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP ☒ Static				
IPv4 Address		192.168.1.2		
Subnet Mask		255.255.255.0		
Default Gateway		0.0.0.0		
DNS Server		0.0.0.0		

Laptop2

Physical	Config	Desktop	Programming	Attributes
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP ☒ Static				
IPv4 Address		192.168.1.5		
Subnet Mask		255.255.255.0		
Default Gateway		0.0.0.0		
DNS Server		0.0.0.0		

PC2

Physical	Config	Desktop	Programming	Attributes
Command Prompt				
<pre> Cisco Packet Tracer PC Command Line 1.0 C:\>ping 192.168.1.1 Pinging 192.168.1.1 with 32 bytes of data: Reply from 192.168.1.1: bytes=32 time<1ms TTL=128 Reply from 192.168.1.1: bytes=32 time<1ms TTL=128 Reply from 192.168.1.1: bytes=32 time<1ms TTL=128 Reply from 192.168.1.1: bytes=32 time<1ms TTL=128 Ping statistics for 192.168.1.1: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 0ms, Maximum = 0ms, Average = 0ms </pre>				

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time=11ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 11ms, Average = 2ms

C:\>ping 192.168.1.5

Pinging 192.168.1.5 with 32 bytes of data:

Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```