


Connecting Two LANs with Different Topologies and Configurations Using a Router in Cisco Packet Tracer
Done by Samip Khadka

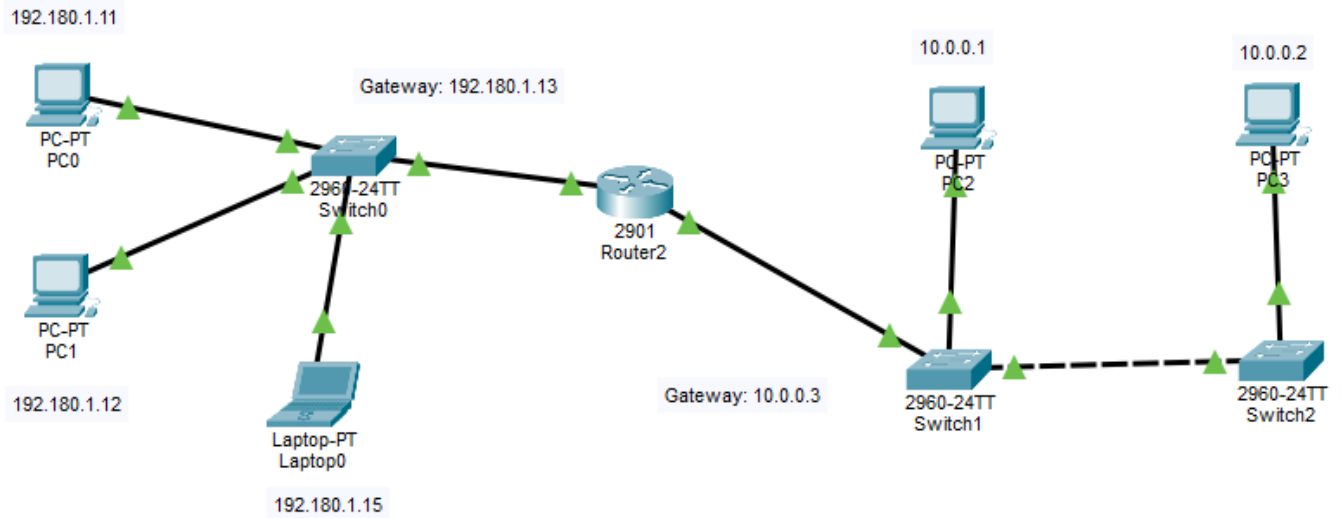

PC0

Physical	Config	Desktop	Programming	Attributes
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		192.180.1.11		
Subnet Mask		255.255.255.0		
Default Gateway		192.180.1.13		
DNS Server		0.0.0.0		

PC1

Physical	Config	Desktop	Programming	Attributes
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		192.180.1.12		
Subnet Mask		255.255.255.0		
Default Gateway		192.180.1.13		
DNS Server		0.0.0.0		

PC2

Physical	Config	Desktop	Programming	Attributes
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		10.0.0.1		
Subnet Mask		255.255.255.0		
Default Gateway		10.0.0.3		
DNS Server		0.0.0.0		

PC3

Physical	Config	Desktop	Programming	Attributes
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		10.0.0.2		
Subnet Mask		255.0.0.0		
Default Gateway		10.0.0.3		
DNS Server		0.0.0.0		

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.180.1.15

Subnet Mask 255.255.255.0

Default Gateway 192.180.1.13

DNS Server 0.0.0.0

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

GigabitEthernet0/0

GigabitEthernet0/1

GigabitEthernet0/0

Port Status ☒ On

Link Speed ☐ 1000 Mbps ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 00E0.8F33.1A01

IP Configuration

IPv4 Address 192.180.1.13

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

GigabitEthernet0/0

GigabitEthernet0/1

GigabitEthernet0/1

Port Status ☒ On

Link Speed ☐ 1000 Mbps ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 00E0.8F33.1A02

IP Configuration

IPv4 Address 10.0.0.3

Subnet Mask 255.0.0.0

Tx Ring Limit 10

Physical

Config

Desktop

Programming

Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
```

```
C:\>ping 10.0.0.1
```

```
Pinging 10.0.0.1 with 32 bytes of data:
```

```
Reply from 10.0.0.1: bytes=32 time=14ms TTL=127
```

```
Reply from 10.0.0.1: bytes=32 time<1ms TTL=127
```

```
Reply from 10.0.0.1: bytes=32 time<1ms TTL=127
```

```
Reply from 10.0.0.1: bytes=32 time<1ms TTL=127
```

```
Ping statistics for 10.0.0.1:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
```

```
Approximate round trip times in milli-seconds:
```

```
    Minimum = 0ms, Maximum = 14ms, Average = 3ms
```

```
C:\>ping 10.0.0.2
```

```
Pinging 10.0.0.2 with 32 bytes of data:
```

```
Reply from 10.0.0.2: bytes=32 time=1ms TTL=127
```

```
Reply from 10.0.0.2: bytes=32 time<1ms TTL=127
```

```
Reply from 10.0.0.2: bytes=32 time<1ms TTL=127
```

```
Reply from 10.0.0.2: bytes=32 time<1ms TTL=127
```

```
Ping statistics for 10.0.0.2:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
```

```
Approximate round trip times in milli-seconds:
```

```
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

Command Prompt

Cisco Packet Tracer PC Command Line 1.0

C:\>ping 192.180.1.11

Pinging 192.180.1.11 with 32 bytes of data:

Reply from 192.180.1.11: bytes=32 time=1ms TTL=127

Reply from 192.180.1.11: bytes=32 time<1ms TTL=127

Reply from 192.180.1.11: bytes=32 time<1ms TTL=127

Reply from 192.180.1.11: bytes=32 time<1ms TTL=127

Ping statistics for 192.180.1.11:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.180.1.12

Pinging 192.180.1.12 with 32 bytes of data:

Request timed out.

Reply from 192.180.1.12: bytes=32 time<1ms TTL=127

Reply from 192.180.1.12: bytes=32 time<1ms TTL=127

Reply from 192.180.1.12: bytes=32 time=2ms TTL=127

Ping statistics for 192.180.1.12:

Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 2ms, Average = 0ms

C:\>ping 192.180.1.15

Pinging 192.180.1.15 with 32 bytes of data:

Reply from 192.180.1.15: bytes=32 time<1ms TTL=127

Reply from 192.180.1.15: bytes=32 time<1ms TTL=127

Reply from 192.180.1.15: bytes=32 time<1ms TTL=127

Reply from 192.180.1.15: bytes=32 time=8ms TTL=127

Ping statistics for 192.180.1.15:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 8ms, Average = 2ms