


VLAN Configuration
Done By Samip Khadka

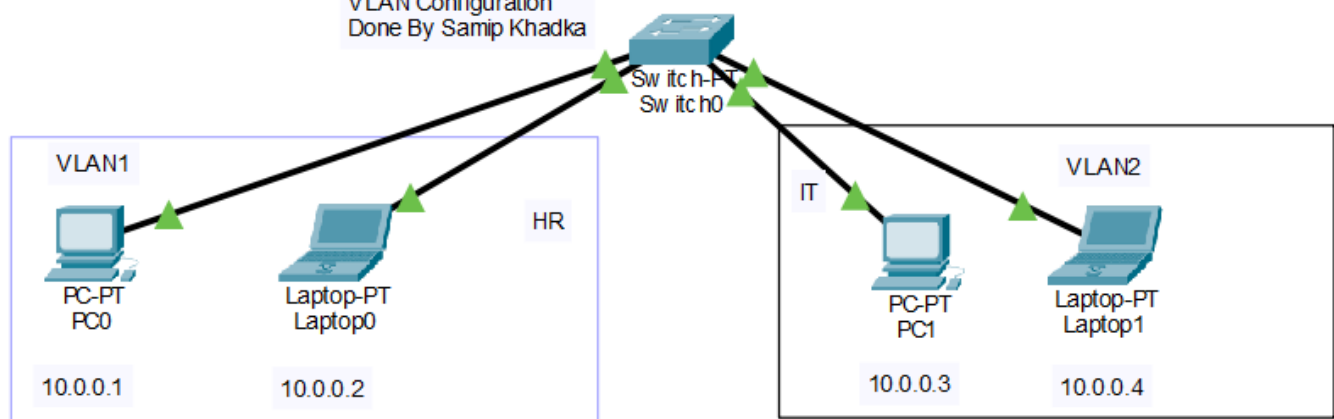

PC0

Physical	Config	Desktop	Programming	Attrib
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		10.0.0.1		
Subnet Mask		255.0.0.0		
Default Gateway		0.0.0.0		
DNS Server		0.0.0.0		

Laptop0

Physical	Config	Desktop	Programming	Attrib
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		10.0.0.2		
Subnet Mask		255.0.0.0		
Default Gateway		0.0.0.0		
DNS Server		0.0.0.0		

PC1

Physical	Config	Desktop	Programming	Attrib
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		10.0.0.3		
Subnet Mask		255.0.0.0		
Default Gateway		0.0.0.0		
DNS Server		0.0.0.0		

Laptop1

Physical	Config	Desktop	Programming	Attrib
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		10.0.0.4		
Subnet Mask		255.0.0.0		
Default Gateway		0.0.0.0		
DNS Server		0.0.0.0		

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINK-3-UPDOWN: Interface FastEthernet1/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/1, changed state to down
%LINK-5-CHANGED: Interface FastEthernet1/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/1, changed state to up

Switch>enable
Switch#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#vlan 1
Switch(config-vlan)#name HR
Default VLAN 1 may not have its name changed.
Switch(config-vlan)#exit
Switch(config)#vlan 2
Switch(config-vlan)#name IT
Switch(config-vlan)#exit
Switch(config)#interface FastEthernet0/1
Switch(config-if)#switchport access vlan 1
Switch(config-if)#exit
Switch(config)#interface FastEthernet0/2
%Invalid interface type and number
Switch(config)#interface FastEthernet0/2
%Invalid interface type and number
Switch(config)#interface FastEthernet1/1
Switch(config-if)#exit
Switch(config)#interface FastEthernet1/1
Switch(config-if)#switchport access vlan 1
Switch(config-if)#exit
Switch(config)#interface FastEthernet2/1
Switch(config-if)#switchport access vlan 2
Switch(config-if)#exit
Switch(config)#interface FastEthernet3/1
Switch(config-if)#switchport access vlan 2
Switch(config-if)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console
```